




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G08B 5/22	A1	(11) International Publication Number: WO 00/05691 (43) International Publication Date: 3 February 2000 (03.02.00)
(21) International Application Number: PCT/EP99/04770 (22) International Filing Date: 7 July 1999 (07.07.99) (30) Priority Data: 09/119,571 20 July 1998 (20.07.98) US (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventor: KLEIN, Thomas; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: DEGUELLE, Wilhelmus, H., G.; Internationaal Oc- trooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eind- hoven (NL).		(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: ALPHANUMERIC RADIO PAGER WITH MULTILINE DISPLAY AND SYSTEM OR MESSAGE SELECTIVE ZOOM WITH HORIZONTAL SCROLLING

(57) Abstract

A radio pager device includes a display having a zoomed-out multiline mode and a zoomed-in single line mode for display of at least a portion of a series of characters at a time extracted from a message having an address or identification code which is among those from which the pager is authorized to extract message data. The zoom mode is selectable on either a system basis, by default, or a message basis. The message specific zoom mode is determined by accessing display per address information stored in volatile memory and programmable by the user. In the single line mode, continuous horizontal character by character scrolling may be selected by the user and controlled by key actuation to toggle between a stationary paused state and a continuously scrolling state.

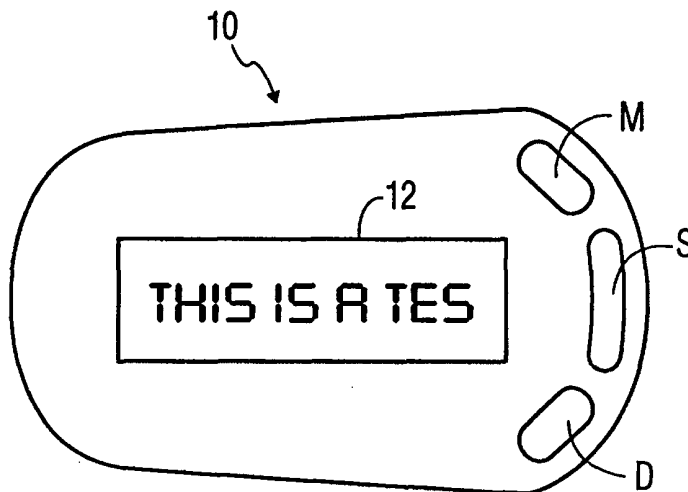

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**ALPHANUMERIC RADIO PAGER WITH MULTILINE DISPLAY AND
SYSTEM OR MESSAGE SELECTIVE ZOOM
WITH HORIZONTAL SCROLLING**

1. Field of the Invention

The present invention relates to a device, such as a radio pager, a cellular phone or a cordless phone for receiving, demodulating and decoding wireless broadcast messages including a series of characters from a predetermined character set, and displaying the message as a few lines on a display. The present invention also relates to such a device wherein messages of different types are broadcast and the device is programmed to recognize one or more addresses or identification codes in extracting message data.

2. Description of the Related Art

Radio pagers presently in use have multi-line LCD displays for received text or alphanumeric numeric messages, which displays have a fixed small number of lines, typically two to four lines, each with a fixed width of about 15 to 20 characters. The messages can vary over a wide range in length, ranging from those which fit on one line, such as a telephone number or a stock quote, to long data messages of up to for example 6,400 characters. When a received message contains more characters than can be displayed simultaneously, the message can be advanced line by line to achieve a vertical scrolling of the message.

Further, pagers may receive a plurality of different types of messages as a result of being preprogrammed with a plurality of respective different addresses or identification codes used to extract messages. Typically, the different addresses include an individual address for messages directed exclusively to the specific pager, and thereby to the individual user thereof, one or more group addresses for messages directed to a group of pagers or users, and one or more mail-drop addresses for subscription services of messages pertaining to news, sports, weather, stocks, etc, respectively.

The inventor herein has become aware that users frequently have difficulty in reading displayed messages on a multiline display of a modern pager, due to the relatively small size of the characters.

While the concepts of zooming and panning a display are well known for computer graphics displays, and have also been suggested for personal communicators

including graphics displays (see e.g. U.S. Patent No. 5,615,384 to Allard et al.), such concepts are not generally applicable to radio pagers of a type having only a few lines of display for characters.

5

It is an object of the present invention to improve the readability of displayed messages on radio pager having a multiline display mode by providing for a zoom function in which the displayed characters are increased in size either selectively or in dependence on the message, albeit that pixels of the display for display of the message are reorganized into a
10 single line of characters having fewer characters per line than in the multiline mode.

It is a further object of the present invention to provide display control means for advancement of the displayed portion of a long message in a manner which improves readability.

It is yet another object of the present invention to provide a radio pager in
15 which a zoom display mode or other display modes for displaying message data are settable either on a system basis or on a message basis.

Briefly, the aforementioned and other objects are satisfied by providing a radio pager device including means for controlling the display of the pager device to display a series of characters extracted from a received, demodulated and decoded message, wherein the
20 display controlling means is configured for causing selective display of at least a portion of the extracted series of characters at a time in either a multiline mode or a single line mode. In accordance with one aspect of the present invention, the display controlling means is configured for selective horizontal character by character scrolling of the displayed portion of the extracted series of characters under the control of a user when displayed in a single line
25 mode. Preferably, the user control of horizontal character by character scrolling includes start/continue and pause control.

In accordance with other aspects of the invention the display may be selectively placed by the user in the one-line mode or the multiline mode on a system basis, and/or the mode used to display a message may be adapted automatically in dependence on the nature or
30 source of the message. In order to provide for such automatic adaption of display mode on a message basis, the usual memory means for storing a plurality of different addresses or identification codes with respect to which the pager is authorized to extract associated message data, also stores message configuration information indicating display modes in correspondence with the different addresses or identification codes, and the display controlling

means is configured for causing selective display of the extracted message data in a display mode selected in dependence upon the stored message configuration information associated with the address or identification information corresponding to the message containing the message data. In this way, the zoom display mode, or other display mode such as font or character set, can be selected in dependence on the stored message configuration information, allowing for an optimum display mode based upon the source or nature of the message.

Other objects, features and advantages of the present invention will become apparent upon perusal of the following detailed description when taken in conjunction with the appended drawing, wherein:

Figure 1A is a simplified front view of a radio pager in accordance with the present invention including a display showing an illustrative message in a multiline display mode;

Figure 1B is a front view of the radio pager which is similar to Figure 1A except that the display is in a single line display mode and shows a beginning portion of the illustrative message;

Figure 2 is a schematic block diagram of the circuitry of radio pager of the present invention; and

Figure 3 is flow chart pertaining to control of the display of a message on the pager carried out by the pager circuitry shown in Figure 2.

Referring first to Figures 1A and 1B of the drawing, a multiline alphanumeric radio pager 10 in accordance with present invention is shown including a rectangular LCD bit mapped display of suitable size and number of pixels consistent with the intended display modes and character sizes. For example, where both two line and single line modes are possible, an illustrative size of display 12 is 1.5 cm high by 4.0 cm wide and about 45 pixels high by 120 pixels wide. Where the multiline mode is more than two lines, such as three or four lines, the height of display 12 would be larger in both dimension and number of pixels. Also shown are a "menu" key M, "select" key S and "do" key D or other suitable assortment of keys provided for the user to actuate in setting user configurable or settable data, features or modes of pager 10, including the display mode, and also used to recall pages or messages and manipulate the view thereof as shown on display 12. Such manipulation of the view includes

selectively advancing or scrolling a message which is too long to be seen at one time in the current display mode. Display 12 also typically shows icons (not shown) indicative of the status or number of messages, or which serve as changeable or highlightable objects providing visual feedback when manipulating the aforementioned keys.

5 In the two line mode shown in Figure 1A, when a monospace font is employed, each character may be 7 pixels high by 5 pixels wide with a one pixel wide separator between adjoining characters and at least a one pixel high separator between adjoining lines. A proportional font could also be employed, in which case the case the indicated character size pertains to the widest characters thereof. Further, for appropriate readability, the text of the
10 message is formatted such that words are not split between lines. If the message were longer than could be displayed simultaneously, the displayed message could be advanced or vertically scrolled two lines at a time in a conventional manner using an appropriate key or key sequence.

 In the single line or zoom mode shown in Figure 1B, the characters are larger in
15 both horizontal and vertical dimension than in the two line mode, for example 10 pixels high by 7 pixels wide or 14 pixels high by 10 pixels wide for a monospace font, but the horizontal separators between adjoining characters are preferably maintained at one pixel wide. As will become clearer from the later discussion, in the single line mode either horizontal character by character scrolling or vertical line by line scrolling may be selectively employed to advance a
20 message which is longer than can be displayed at one time. When horizontal scrolling is employed, partial words may at times appear at either or both ends of a line, as illustrated in Figure 1B, but the result is readable since the scrolling is done at a steady user selectable rate.

 The internal circuitry of pager 10 is shown in Figure 2, and includes an RF receiver and detector section 32 which receives broadcast RF paging signals from antenna 30
25 in a predetermined standard frequency band. The received paging signals, which are formatted in accordance with a predetermined paging protocol, e.g. FLEX (a trademark of Motorola) or APOC, are decoded in decoder 34, and provided to microprocessor 36 as pages. Microprocessor 36 provides a bitmap to LCD driver section 38a of LCD display system 38 which controls LCD display section to display alphanumeric characters and/or icons indicative
30 of messages or pages, configuration states of pager 10, or other data such as the time, alarms or canned messages.

 As is conventional, the pages include address or identification code portions which the microprocessor examines to determine if the page is intended for pager 10 or the pager has the right to extract the message data therein, by comparing them to addresses or

identification codes stored generally in section 40c of nonvolatile memory system 40 which microprocessor 36 has read only access to. Memory section 40c is typically implemented as an EEPROM so that the addresses or identification codes can be programmed therein when the pager is issued to the user. Nonvolatile memory system 40 further includes a section 40a for the programs and program related data used by the microprocessor, and a section 40b for font and icon data indicating for a fundamental rectangular array of pixels making up each particular character or icon, which pixels are black and which are white. Canned messages (not shown) may also be stored in nonvolatile memory system 40. Memory system sections 40a and 40b are typically implemented as ROMs, the programs and data stored therein constituting firmware.

In determining whether pager 10 has authority to extract a received, detected and decoded message, microprocessor 36 examines message fields specifically provided for addresses or identification codes, as well as data in extended address fields or predetermined message data fields in accordance with the particular standard paging protocol utilized. The addresses or identification codes of messages which the pager 10 has access rights to include at least one or more assigned to pager 10 exclusively, possibly one or more for messages directed to a group of pagers or users, and possibly one or more for mail-drop subscription services of messages pertaining to news, sports, weather, stocks, etc, respectively, which are essential assigned to the information provider.

Microprocessor 36 has read/write access to a volatile memory system or RAM 42, which includes a section 42a for system configuration data indicating among other things the instantaneous system configuration states of pager 10, a section 42b for message data extracted by microprocessor 36 from received, detected and demodulated messages which it determines pager 10 has the right to extract, and also a section 42c which contains a table indicating on an address by address basis, the display configuration to be used for message data contained in messages having that address. The message specific display configuration includes notably whether or not the display is to be zoomed, i.e. whether multiline or single line mode is to be used, and may include other information, such as the particular font or character set to be used.

The microprocessor also receives input from keys 44, which refers collectively to "menu" key M, "select" key S, and "do" key D, and controls a conventional alert means 46 including flashing light (not shown), speaker (not shown) as for producing a beeping noise, and vibrator (not shown) which are selectively used to alert the user to a received message or a

programmed alarm, in dependence on the instantaneous system configuration states indicated by the data stored in memory section 42a.

The operation of pager 10 in relation to the selection of a zoom state for displaying a message will be best understood with reference to the flowchart shown in Figure

5 3, which indicates steps performed by microprocessor 36 under program control. Therein, firstly in step 52 a message or page is received or a desired message or page number is recalled from memory section 42b by suitable manipulation of at least one of keys 44, in particular "do" key D. Then, in step 54a, memory section 42a is checked to determine the system display configuration, and memory section 42b is checked using the address or
10 identification information of the message from which the message data was extracted as an index to determine if there is a stored display configuration therefor. The system display configuration is utilized as a default unless a message specific display configuration is stored in memory section 42c for the address or identification code associated with the particular address, in which case the message specific display configuration is used. Further, the system
15 display configuration may be changed by the user at any time in step 54b utilizing keys 44. An illustrative manipulation of keys 44 for such purpose include actuation of "menu" key M until a "ZOOM IN/OUT" display appears with icons such as "+" and "-" indicating zoom in or out direction which icons are selectable in response to actuation of the "select" key, and then actuation of the "do" key with respect to the selected zoom direction.

20 Execution of the display control procedure branches at step 56 in dependence on whether the multiline mode or single line mode for a particular message has been determined in the preceding steps 54a, 54b on a system basis by default, or based upon the message. When the multiline mode is to be used, then step 58 is reached wherein to view a long message vertical line advance is implemented in response to user actuation of one or
25 more of keys 44, such as "do" key D. Preferably, for good readability, in response to each actuation of "do" key D the message is instantaneously advanced by as many lines as there are on the display. If desired, an advance of the message by a single line may be implemented in response to each actuation of one of keys 44 to achieve a vertical scrolling effect.

When, on the other hand, the single line mode is to be used, execution of the
30 procedure branches from step 56 to a step 60 wherein either a horizontal scroll speed is selected or line by line vertical advance is selected. The selection is made by appropriate manipulation of keys 44. For example, actuation of the "menu" key may cause the display of a "SCROLL SPEED" menu including icons representing slow, medium or fast continuous horizontal character by character scrolling, or line by line vertical advance. The icons are

navigated between by actuation of the "select" key S, and a selected icon corresponding to a desired horizontal scrolling speed or to vertical line by line advance is chosen by actuation of the "do" key D.

Execution of the display control procedure branches in dependence upon
5 whether a horizontal scrolling speed or vertical line by line advance has been selected in step 60 for the single line mode. If line by line advance has been chosen, then step 58 is reached where the message is caused to advance instantaneously by one line in response to each actuation of a particular one of keys 44, specifically the "do" key. If however a horizontal scrolling speed has been chosen in step 60, then the branching causes step 64 to be reached in
10 which continuous horizontal character by character scrolling at the chosen speed is controlled in response to actuation of one or more of keys 44. Preferably, a toggle between a stationary paused state and a horizontal scrolling state of the displayed message is implemented in response to sequential actuations of a single one of keys 44, such as the "do" key D. Thus pressing "do" key D when the message is in a stationary paused state causes horizontal
15 scrolling to start or begin, whereas pressing "do" key D when the message is scrolling continuously horizontally at the chosen speed will pause the horizontal scrolling so that a displayed portion of the message is stationary.

Memory section 42c is preferably programmable by the user by a procedure employing key actuations and menus similar to those used in step 54b after cycling through
20 each different source type of message in response to actuation of an appropriate one or more of keys 44. Alternatively, the zoom configuration for each address may be programmed into nonvolatile memory system 40 when authorized addresses or identification codes are programmed therein.

It should be appreciated that the objects of the present invention have been
25 satisfied by providing a pager whose display configuration can be chosen on a system or message basis.

While the present invention has been described in particular detail, it should also be appreciated that numerous modifications are possible within the intended spirit and scope of the invention. For example, the specific display configuration for particular messages
30 may be stored with or appended to the messages.

CLAIMS:

1. A wireless communication device comprising:

means (30,32,34) for receiving and demodulating an RF signal, and for decoding messages from the received and demodulated RF signal, which messages contain at least one address or identification code and associated message data corresponding to a series of characters to be displayed;

memory (40,42,) means for storing one or more addresses or identification codes with respect to which the wireless communication device is authorized to extract associated message data; and

means (36) for extracting from the decoded messages the series of characters corresponding to message data associated with the stored addresses or identification codes;

a display means (38) having a multiline mode and a single line mode for display of at least a portion of the series of characters at a time; and

means (36,38a) for controlling said display means to display the series of characters extracted from a message;

wherein said display controlling means (36,38a) is configured for causing selective display of at least a portion of the extracted series of characters at a time in either said multiline mode or said single line mode, and for selective horizontal character by character scrolling of the displayed portion of the extracted series of characters under the control of a user when displayed in a single line mode.

2. The device as claimed in Claim 1, wherein said memory means (40,42) is for storing a plurality of different addresses or identification codes with respect to which the pager is authorized to extract associated message data, and for storing message configuration information indicating respective multiline or single line display modes corresponding with said different addresses or identification codes, and wherein said display controlling means (36,38a) is configured for causing selective display of the extracted message data in either said multiline mode or said single line mode, in dependence upon the stored message configuration information corresponding to the address or identification code of the message containing the extracted message data.

3. The device as claimed in Claim 1, wherein said user control of horizontal character by character scrolling includes start/continue and pause functions(64).

4. The device as claimed in Claim 2, wherein said user control of horizontal
5 character by character scrolling includes a single key (D) toggling between start/continue and pause functions.

5. A wireless communication device comprising:

means (30,32,34,) for receiving and demodulating an RF signal, and for
10 decoding messages from the received and demodulated RF signal, which messages contain at least one address or identification code and associated message data corresponding to a series of characters to be displayed;

memory means (40,42) for storing one or more addresses or identification codes with respect to which the wireless communication device is authorized to extract associated
15 message data; and

means (36) for extracting from the decoded messages the series of characters corresponding to message data associated with the stored addresses or identification codes;

a display means (38) having a plurality of different display modes for display of at least a portion of the series of characters at a time, each display mode providing a different
20 appearance of a displayed series of characters; and

means (36,38a) for controlling said display means to display the series of characters extracted from a message;

wherein said memory means (40,42) is for storing a plurality of different addresses or identification codes with respect to which the pager is authorized to extract
25 associated message data, and for storing message configuration information indicating respective display modes in correspondence with said different addresses or identification codes, and wherein said display controlling means (36,38a) is configured for causing selective display of the extracted message data in a display mode selected in dependence upon the stored message configuration information associated with the address or identification code of
30 the message containing the extracted message data.

1/3

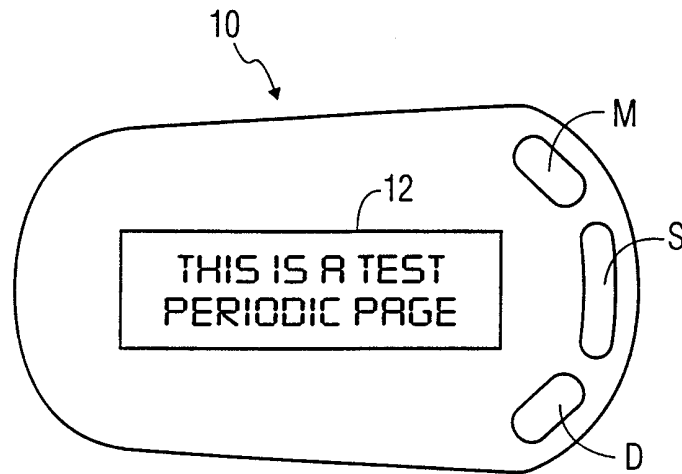


FIG. 1A

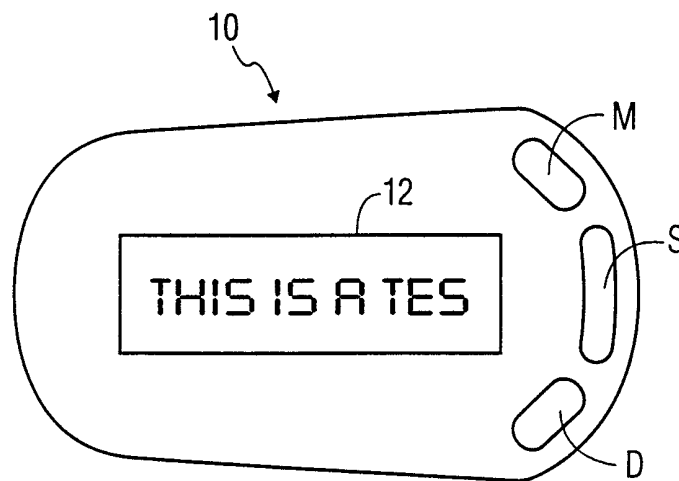


FIG. 1B

2/3

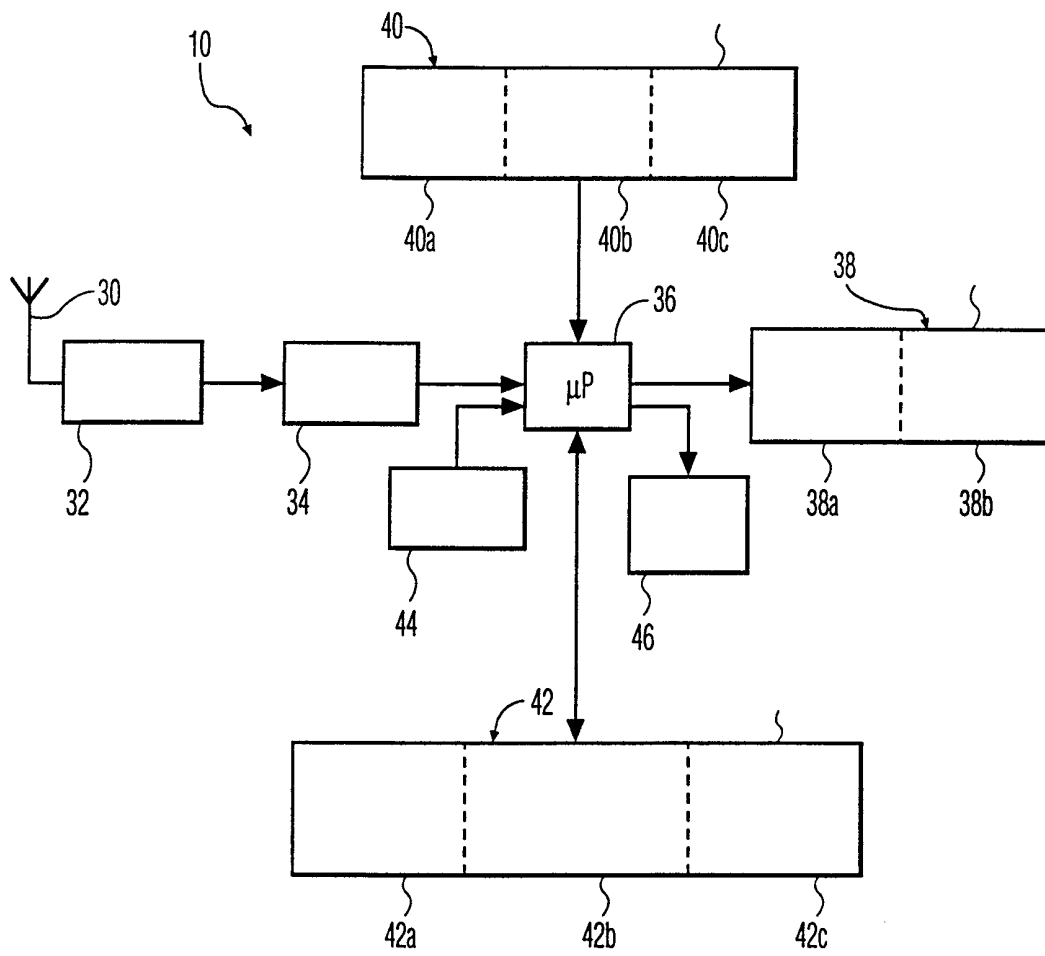


FIG. 2

3/3

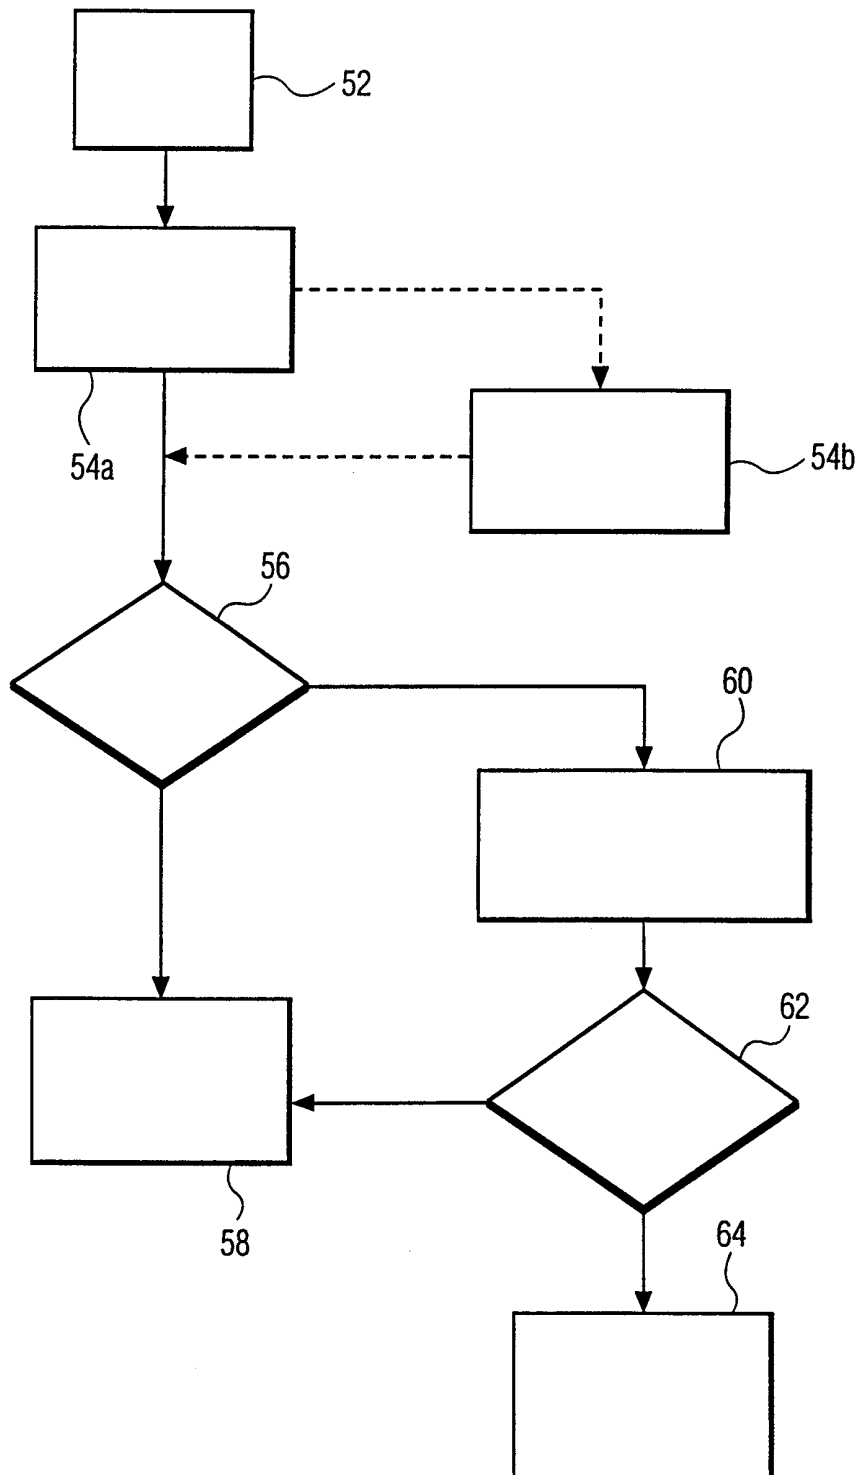


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04770

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G08B5/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 780 819 A (NIPPON ELECTRIC CO) 25 June 1997 (1997-06-25) column 1, line 38 -column 2, line 20 column 4, line 6 - line 25 figure 1 figure 4	1-3,5
Y	EP 0 561 435 A (POLYGRAM GMBH ;PHILIPS ELECTRONICS NV (NL); POLYGRAM INT HOLDING () 22 September 1993 (1993-09-22)	1-3,5
A	abstract column 10, line 40 -column 11, line 44	4
A	US 5 107 259 A (KUNG PATRICK S ET AL) 21 April 1992 (1992-04-21) column 3, line 25 - line 35 column 3, line 58 -column 4, line 9	1-5
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 October 1999

Date of mailing of the international search report

26/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De la Cruz Valera, D

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/EP 99/04770

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	EP 0 883 056 A (SHARP KK) 9 December 1998 (1998-12-09) column 6, line 48 -column 8, line 4 ----	1-5
A	EP 0 646 900 A (KOECHLER ERIKA FA) 5 April 1995 (1995-04-05) column 3, line 23 - line 29 column 4, line 30 - line 34 -----	1-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/04770

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0780819	A	25-06-1997	JP 2771498 B	02-07-1998
			JP 9172663 A	30-06-1997
			US 5802455 A	01-09-1998
EP 0561435	A	22-09-1993	AT 180099 T	15-05-1999
			CA 2089632 A	20-08-1993
			CN 1076568 A	22-09-1993
			DE 69324843 D	17-06-1999
			HU 214126 B	29-12-1997
			MX 9300810 A	01-12-1993
			SG 48107 A	17-04-1998
			JP 8274654 A	18-10-1996
US 5107259	A	21-04-1992	WO 9016052 A	27-12-1990
EP 0883056	A	09-12-1998	JP 10333665 A	18-12-1998
EP 0646900	A	05-04-1995	NONE	