

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/029480 A1

(51) International Patent Classification⁷: F16H 13/14

(21) International Application Number:
PCT/US2003/030127

(22) International Filing Date:
25 September 2003 (25.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/414,134 27 September 2002 (27.09.2002) US

(71) Applicant: THE TIMKEN COMPANY [US/US]; 1835
Dueber Avenue S.W., Canton, OH 44706 (US).

(72) Inventor: AI, Xiaolan; 4480 Noble Loon Street NW, Mas-
sillon, OH 44646 (US).

(74) Agent: WARREN, Douglas, E.; Polster, Lieder, Woodruff
& Lucchesi, L.C., 12412 Powerscourt Drive, Suite 200, St.
Louis, MO 63131-3615 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WEDGE LOADING MECHANISM FOR TRACTION DRIVES

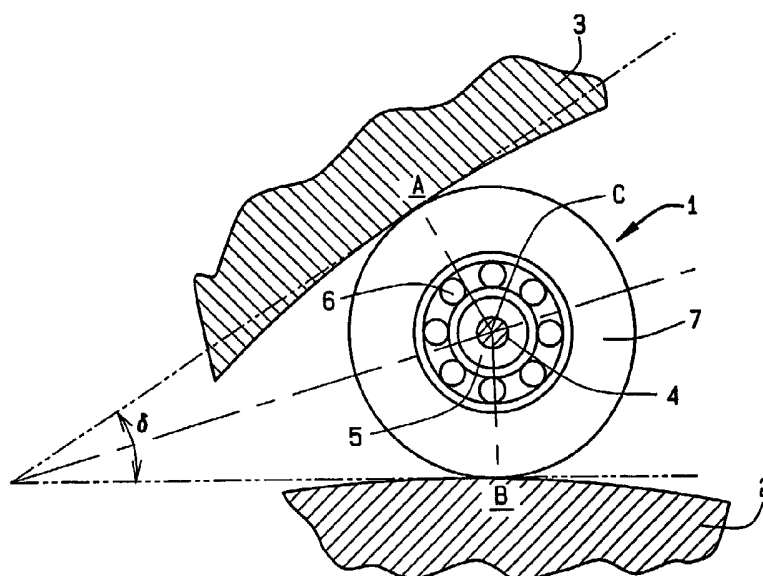

(57) **Abstract:** A wedge loading mechanism (1) for an eccentric planetary traction drive in which a roller having a flexibly mounted shaft (4) is positioned between two raceways (2 & 3) forming a convergent wedge. Rotation of either of the two raceways (2 & 3) wedges the roller within the convergent wedge squeezing the roller between the two raceways (2 & 3) thereby transmitting rotational motion and torque between the two raceways (2 & 3). The flexibly mounted shaft (4) generates differences between an effective supporting stiffness of the roller and an contact effective stiffness at the points where the roller contacts the two raceways (2 & 3). The difference in the effective stiffness allow the roller to operate efficiently at smaller convergent wedge angles.

WO 2004/029480 A1

WEDGE LOADING MECHANISM FOR TRACTION DRIVES

Cross-Reference to Related Applications

This application is related to United States Provisional Patent Application No. 60/414,134 filed September 27, 2002 from which priority
5 is claimed.

Technical Field

This invention relates in general to a wedge loading mechanism for traction drives, and, more particularly, to a wedge loading mechanism having an increased normal force for the contact points of a loading
10 roller wedged between two raceways that form a convergent wedge.

Background Art

Traction drives use frictional force to transmit torque and power. Because the power is transmitted between two smooth surfaces, often through a thin layer of lubricant, a traction drive possesses unique
15 characteristics that are not readily attainable by gear drives. These characteristics include quietness, high-efficiency, high rotational accuracy, and zero-backlash.

Generating adequate normal force at the contact is essential for traction drives. Various loading mechanisms have been proposed.
20 These mechanisms have lead to a host of designs. Perhaps the simplest means to generate torque responsive load is using eccentric planetary drives as was disclosed by Dieterich U.S. Patent Number 1,093,922 in 1914. Over the years, various improvements have been proposed. See for example, U.S. Patent Numbers 3,945,270,
25 4,481,842, 4,555,963, and foreign patent numbers JP10-311398, EP 0,856,462 A2. However, these devices sometimes tend to overload rollers and raceways when the wedge angle is small resulting in inefficient transmission of torque and power.

A common practice is to use tapered surfaces along the axial
30 direction. By moving these surfaces axially, a radial displacement and thus normal force are generated. Examples of such designs are disclosed in U.S. Patent Numbers 3,475,993 and 3,375,739.

Since the envelopes of the tapered surfaces in most designs do not necessarily converge to a common point, this results in a so-called spin motion at contacting surfaces. The spin motion not only offsets the high-efficiency otherwise provided by the traction drive, but also causes component wear and high break away torque.

Recently, a design of zero-spin planetary traction drive has been proposed by Ai as disclosed in the U.S. Patent Number 6,095,940. This design employs the on-apex concept similar to that of tapered roller bearings. Two rows of planetary rollers are used to balance the internal axial force on the planetary rollers. This design offers torque actuated loading mechanism and greater torque capability.

The cylindrical planetary traction drive is also able to achieve zero-spin motion. However, generating sufficient normal force at the contacts has been a challenge. Designs proposed in the past have offered various means to pre-load the drive either by mechanically deforming the outer rings or by thermal assembling the drive. The pre-load generated by such means, in general, can not be adjusted during operation. For partial load application, traction drives are unnecessarily overloaded. This has negative impacts on transmission efficiency and service life.

As mentioned above, wedge loading provides a simple means to generate normal force. Most of the wedge loading arrangements in prior art were based on a specified friction coefficient, requiring a certain wedge angle corresponding to the friction coefficient. This imposes a restriction to the traction drive design.

Therefore, it is desirable to provide a simple loading mechanism that relieves the restriction on wedge angles, thereby giving improved flexibility for traction drive design.

Summary of the Invention

The present invention relates to a wedge loading mechanism for traction drives, and, more particularly, to a wedge loading mechanism in the form of a uniquely designed roller wedged between two races that

provides increased normal loads at the contact points between the loading roller and the races.

An eccentric planetary traction drive often contains a loading roller that is wedged between an outer ring member and an eccentrically located sun roller member. Either the ring member or the sun member can serve as the driving member. As the driving member rotates, it drives the loading roller into the converged wedge formed between outer ring and the sun roller, thus generating normal forces at contacts between the loading roller and the sun roller and between the loading roller and the outer ring.

To ensure an adequate normal load at the contacts, the following relationship is often required,

$$\tan \frac{\delta}{2} \leq \mu \quad (1)$$

where δ is the wedge angle (Fig. 1(b)) and μ is the maximum available friction coefficient at the contacts.

For traction drives restricted to operate under small wedge angles, the drive is unnecessarily overloaded. This could lead to a low transmission efficiency and short service life.

To obtain the highest possible efficiency of the traction drive, the wedge angle δ has to be large enough to make $\tan \frac{\delta}{2}$ close to the maximum available friction coefficient μ . Ideally, it requires,

$$\delta = 2 \cdot \arctan \mu \quad (2a)$$

In the past, however, this may put an undesirable geometry constraint on previous traction drive designs.

In accordance with the new present invention, for eccentric planetary traction drive it can be shown (Fig. 1(b)) that wedge angle δ is determined by the internal geometry (R_1 , R_2 , and e) of a traction drive and by the azimuth position α of the loading roller as,

-4-

$$\delta = \arccos \left[\frac{(R_1 + r)^2 + (R_2 - r)^2 - e^2}{2(R_1 + r)(R_2 - r)} \right] \quad (3a)$$

where

R_1 is the radius of the first cylindrical raceway of the sun roller member;

5 R_2 is the radius of the second cylindrical raceway of the outer ring member;

e represents the eccentricity between the first cylindrical raceway and the second cylindrical raceway; and

10 r is the effective radius of the loading roller at this azimuth position and is expressed in terms of α as:

$$r = \frac{R_2^2 - R_1^2 - e^2 + 2eR_1 \cos \alpha}{2(R_2 + R_1 - e \cos \alpha)} \quad (3b)$$

As can be appreciated in the following example, for a normal
 15 friction coefficient of $\mu = 0.06$, the optimal wedge angle is about $\delta = 7$ degrees. If it is assumed that $R_1 = 10$ mm and $R_2 = 50$ mm and $e = 10$ mm, then the required azimuth position of the loading load is at about $\alpha = 18$ degrees. This can be excessive for some applications particularly for applications where the drive is used in bi-directional operation and a
 20 single loading roller is used for loading in both directions. In addition, traction drives designed under constraint of equation (1) have no overload protection. The normal load at the contacts continues to increase in proportion to the traction force at contact as the applied torque increases.

25 The present invention provides a loading mechanism that allows for a traction drive to operate under a small wedge angle without having the traction drive become unnecessarily loaded thereby improving the efficiency of the traction drive. The present traction drive also provides a

loading mechanism that improves the dynamic stability of the traction drive and which offers protection when the drive is overloaded.

Brief Description of Drawings

FIG. 1 is a front view of a typical eccentric planetary traction drive
5 that would incorporate the present invention.

FIG. 2 is a generally longitudinal sectional view of the typical eccentric planetary traction drive.

FIG. 3 is a generally transverse sectional view of the typical eccentric planetary traction drive.

10 FIG. 4 is a diagram showing the geometric relationship between the wedge angle and the rollers in the form of an eccentric planetary traction drive embodiment of the present invention.

FIG. 5 is a diagram showing the present invention of a wedge loading mechanism in the form of an eccentric planetary traction drive
15 embodiment of the present invention.

FIG. 6 is a force diagram showing the relationship between the contact load and the geometry/traction coefficient of the present invention.

20 FIG. 7 is a chart showing the relationship between the effective stiffness ratio and the wedge angle of the present invention.

Corresponding reference characters indicate corresponding parts throughout the several views of the drawings.

Best Mode for Carrying Out the Invention

Now, referring to the drawings, FIG. 1, FIG. 2, and FIG. 3 depict a
25 typical eccentric planetary traction drive having an eccentric sun roller and three planetary rollers, at least one of which is a loading planetary roller. In this typical traction drive, the present invention of a wedge loading mechanism 1 is a planetary roller that acts as the loading roller in this typical eccentric planetary traction drive. The wedge loading
30 mechanism 1 is located between a first raceway 2, and a second raceway 3. The wedge loading mechanism 1 comprises a supporting shaft 4 (FIG. 5), a rubber insert 5, a bearing 6, and a loading roller ring

7. Shaft 4 is fixed to the wedge loading mechanism 1. The wedge loading mechanism 1 is positioned between and in contact with the first and second raceways 2 and 3. In FIG. 6, the tangential line \underline{OA} at contact point A between the second raceway 3 and the wedge loading
5 mechanism 1 lies at an angle of δ with respect to the tangential line \underline{OB} at contact point B between the first raceway 2 and the wedge loading mechanism 1. Thus the two tangent lines form a converged wedge AOB .

Raceway 2 is the driving member and the contact point B on
10 raceway 2 has a tendency to move along the tangent line \underline{BO} toward point O with respect to the contact point B on the loading roller ring 7 during the operation of the wedge mechanism 1. A friction force F is thus generated at contact point B . The friction force tends to rotate the roller ring 7, making the contact point A on the loading roller ring 7 move
15 along the tangent line \underline{OA} from point O with respect to the corresponding contact point A on the second raceway 3. Similarly, a friction force F at contact A is generated. The friction forces at contact points A and B both drives the loading roller ring 7 further into the converged wedge, making the loading roller ring 7 push firmly against the raceways at the contact
20 points A and B and against the supporting shaft 4.

The friction forces F at contact points A and B are balanced by normal contact forces N at contact points A and B and a supporting force F_0 at supporting shaft 4.

The overall deflection, including surface and structural
25 deflections, normal to the contact surface under normal load can be characterized by an effective stiffness at the contact. The effective stiffness at contact points A and B is denoted by K_R and the effective stiffness at the contact area between the loading roller ring 7 and supporting shaft 4 is denoted by K_s . Thus as the loading roller ring 7 is
30 driven by the friction forces F at contact points A and B into the converged wedge along \underline{OC} , the normal contact forces N and supporting contact F_0 are estimated as:

-7-

$$F_0 = K_S \cdot l \quad (4)$$

$$N = K_R \cdot l \sin \frac{\delta^*}{2} \quad (5)$$

Where $\sin \frac{\delta^*}{2}$ is a mean value when δ is a variable that varies with l ,

5 that is,

$$\sin \frac{\delta^*}{2} = \frac{1}{l} \int_b^l \sin \frac{\delta}{2} dl \quad (5a)$$

and where l is the distance that the center C of loading roller ring 7 (not the center of the supporting shaft 4) moves along line OC under the friction forces at contact points A and B . FIG. 7 is a chart showing the relationship between the stiffness ratio K_S/K_R and the wedge angle δ^* .

10 The operating friction coefficient at the contact is μ_0 , the friction force is expressed as

$$F = \mu_0 \cdot N \quad (6)$$

15

Under static equilibrium conditions,

$$\frac{F_0}{2N} = \mu_0 \cdot \cos \frac{\delta}{2} - \sin \frac{\delta}{2} \quad (7)$$

20 This equation can be expressed in terms of effective stiffness K_S and K_R by substituting equations (4) and (5) into this equation.

$$\frac{K_S}{K_R} = 2 \left(\mu_0 \cos \frac{\delta}{2} - \sin \frac{\delta}{2} \right) \sin \frac{\delta^*}{2} \quad (8a)$$

25 In cases where variation in δ is small, then $\delta \propto \delta^*$ and equation (8a) becomes

-8-

$$\frac{K_S}{K_R} = \mu_o \cdot \sin \delta - 2 \sin^2 \left(\frac{\delta}{2} \right) \quad (8)$$

Figure 7 shows effective stiffness ratio K_S/K_R as a function of wedge angle δ for different operating friction coefficients μ_o .

- 5 A zero stiffness ratio at a non-zero wedge angle indicates no supporting force F_o , which leads to the following condition

$$\delta = 2 \cdot \arctan \mu_o \quad (2b)$$

- 10 Negative stiffness ratio means direction change in force F_o . In other words, shaft 4 is now pushing the loading roller ring 7 into the converged wedge.

- It can be appreciated that a traction drive with the current wedge loading mechanism 1 can be operated under any small wedge angle δ while still having the traction drive being operated at or close to the maximum available friction coefficient μ so long as the stiffness ratio is appropriately chosen. That is,

$$\frac{K_S}{K_R} = 2 \left(\mu_o \cos \frac{\delta}{2} - \sin \frac{\delta}{2} \right) \sin \frac{\delta^*}{2} \leq \mu \sin \delta - 2 \sin^2 \left(\frac{\delta}{2} \right) \quad (9)$$

20

- The proper support stiffness K_S of the wedge loading mechanism 1 is achieved through rubber insert 5 (FIG. 5), bearing 6, and shaft 4. Other means are also possible. For instance, the supporting shaft can be mounted to the traction drive through deflectable mounting devices such as springs, and/or washers. In this case, the loading roller ring 7 may take the form of a solid roller.

- The flexible support of the wedge loading mechanism 1 can also serve as a device to provide a necessary force pushing loading roller into the wedge contacts thus to improve system dynamic stability.

With predetermined allowable travel range of the loading roller, the wedge loading mechanism 1 can also serve as an overload protecting device. When driving torque is at its maximum allowable level, the wedge loading mechanism 1 is pushed into the wedge toward
5 the limit of the predetermined travel range. Any additional increase in torque cannot further push the wedge loading mechanism 1 into the wedge, thus limiting the maximum available friction forces. Under such conditions, slippage occurs at contacts between the wedge loading mechanism 1 and raceways 2 and 3.

10 While the above description describes various embodiments of the present invention, it will be clear that the present invention may be otherwise easily adapted to fit any configuration where a wedge mechanism for traction drives may be utilized. As various changes could be made in the above constructions without departing from the
15 scope of the invention, it is intended that all matter contained in the above description or shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

Claims

1. A wedge loading mechanism for a planetary traction drive comprising a roller positioned between and in frictional contact with two raceways that form a convergent wedge such as to communicate motion
 5 between the two raceways, wherein the roller includes a flexible mounting that generates a difference between an effective supporting stiffness K_S of the roller and an effective contact stiffness K_R at a contact point A where the roller contacts at one of the two raceways and at a contact point B where the roller contacts the other of the two raceways.

10 2. The wedge loading mechanism of Claim 1 further comprising a loading roller ring and wherein the flexible mounting comprises a supporting shaft, an elastic insert, and a bearing.

3. The wedge loading mechanism of Claim 2 where, as the loading roller ring is driven by friction forces F at contact points A and B
 15 into a converged wedge between the two raceways, a normal contact force N and a supporting force F_0 are characterized by:

$$F_0 = K_S \cdot l$$

$$N = K_R \cdot l \sin \frac{\delta}{2} = K_R \int_b^l \sin \frac{\delta}{2} dl$$

where l is the distance that the center of loading roller ring moves within
 20 the converged wedge in response to the friction forces at contact points A and B, and δ is the wedge angle between the two raceways measured at the contact points.

4. The wedge loading mechanism of Claim 3 where an operating friction coefficient at a contact is μ_0 and a supporting force
 25 under static equilibrium conditions is characterized by:

$$\frac{F_0}{2N} = \mu_0 \cdot \cos \frac{\delta}{2} - \sin \frac{\delta}{2}$$

5. The wedge loading mechanism of Claim 4 wherein under static equilibrium conditions an effective stiffness ratio between K_S and K_R as characterized by:

$$\frac{K_S}{K_R} = 2 \left(\mu_0 \cos \frac{\delta}{2} - \sin \frac{\delta}{2} \right) \sin \frac{\delta^*}{2} \leq \mu \sin \delta - 2 \sin^2 \left(\frac{\delta}{2} \right)$$

where μ is the maximum available friction coefficient at the contacts.

6. The wedge loading mechanism of Claim 5 where in the situation where the stiffness ratio has a negative value, there is a direction change in the force F_0 indicating the supporting shaft is pushing the loading roller ring into the converged wedge.

7. The wedge loading mechanism of Claim 6 wherein wedge loading mechanism incorporated into the planetary traction drive can be operated under any small wedge angle δ while still having the traction drive being operated at or close to the maximum available friction coefficient μ so long as the stiffness ratio is appropriately chosen, as characterized by:

$$\frac{K_S}{K_R} = 2 \left(\mu_0 \cos \frac{\delta}{2} - \sin \frac{\delta}{2} \right) \sin \frac{\delta^*}{2} \leq \mu \sin \delta - 2 \sin^2 \left(\frac{\delta}{2} \right)$$

8. A wedge loading mechanism for a planetary traction drive comprising a planetary roller positioned between and in frictional contact with an outer ring member and a sun roller member of a planetary traction drive such as to communicate rotational motion between the outer ring member and the sun roller member, wherein the planetary roller includes means for flexibly mounting a support shaft within the planetary roller such that said means generates an effective supporting stiffness K_S of the planetary roller and an effective contact stiffness K_R at a contact point A where the planetary roller contacts the sun roller member and at a contact point B where the planetary roller contacts the outer ring member, wherein the ratio of K_S to K_R results in a more efficient transmission of power and torque between the two raceways than other ratios of K_S to K_R .

9. The wedge loading mechanism of Claim 8 wherein the said means for flexibly mounting a support shaft within the planetary roller

comprises a elastic insert and a bearing, wherein the supporting shaft is located in the elastic insert and the elastic insert is located in the bearing.

5 10. A method of transmitting rotational motion and torque within a traction drive device comprising the steps of:

manufacturing a wedge loading mechanism having a flexibly mounted supporting shaft;

10 installing the wedge loading mechanism into a traction device having a sun roller member into an outer ring member such that the sun roller member is eccentric to the outer ring member and a wedge gap is formed between the sun roller member and the outer ring member and the wedge loading mechanism is located within the wedge gap;

15 installing the planetary roller member into the wedge gap such that the planetary roller member is between and in contact with the sun roller member and the outer ring member; and

20 wedging the wedge loading mechanism between the outer ring member and the sun roller member by rotation of at least one of either the sun roller member or the outer ring member such that rotation and torque is transmitted from the outer ring member and the sun roller member.

1/4

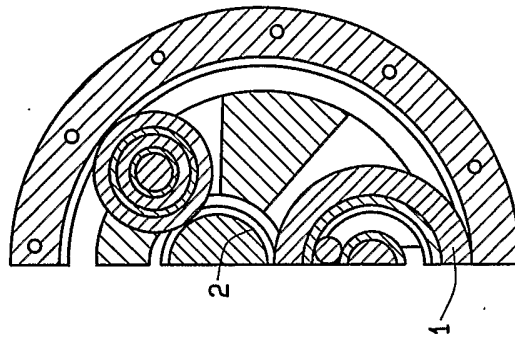


FIG. 3

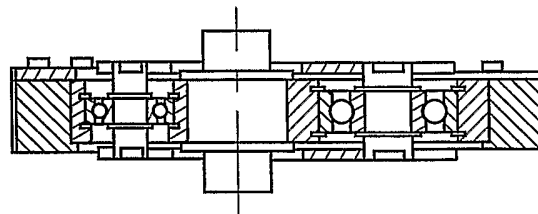


FIG. 2

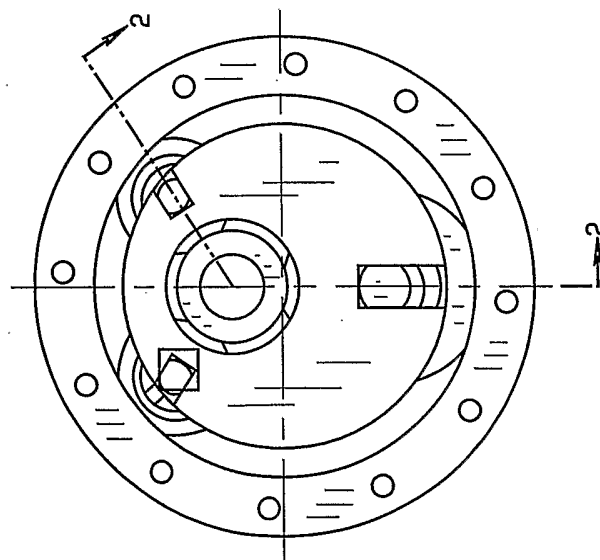


FIG. 1

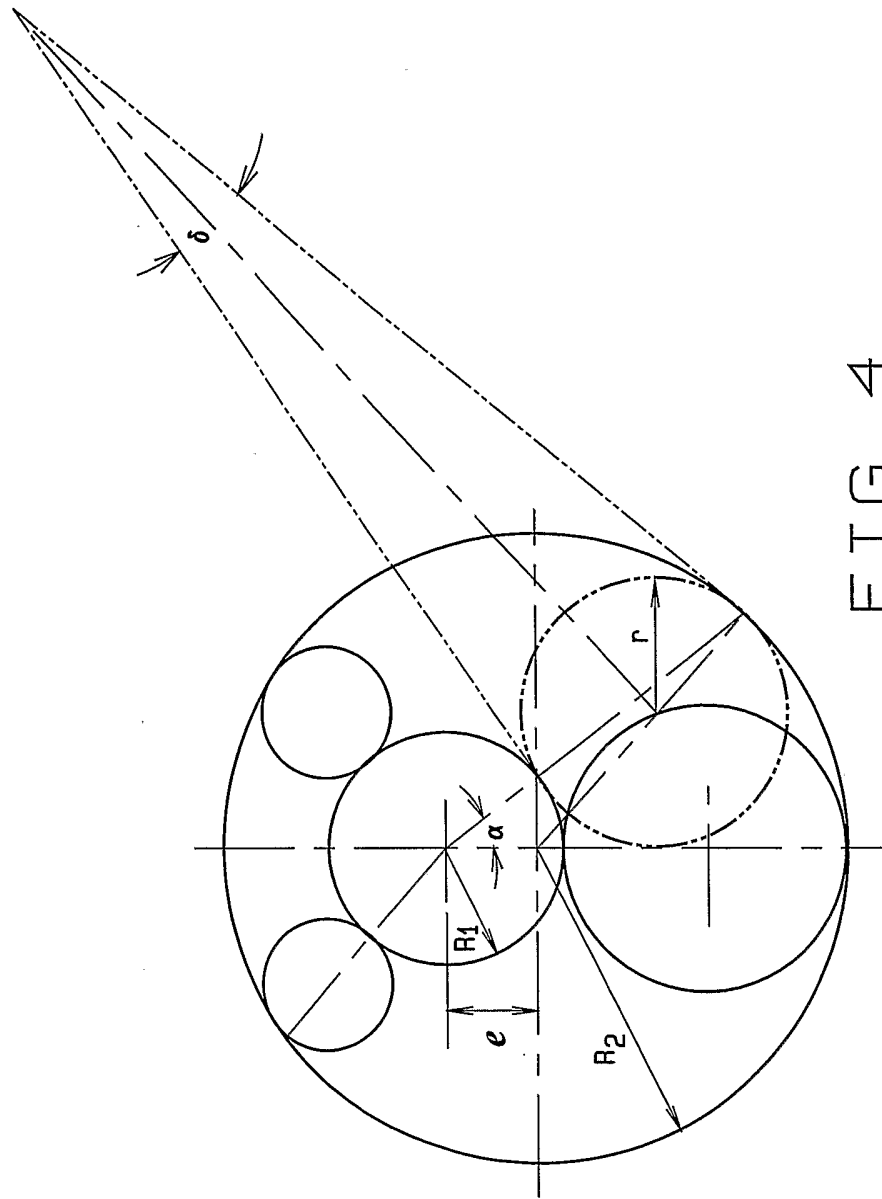


FIG. 4

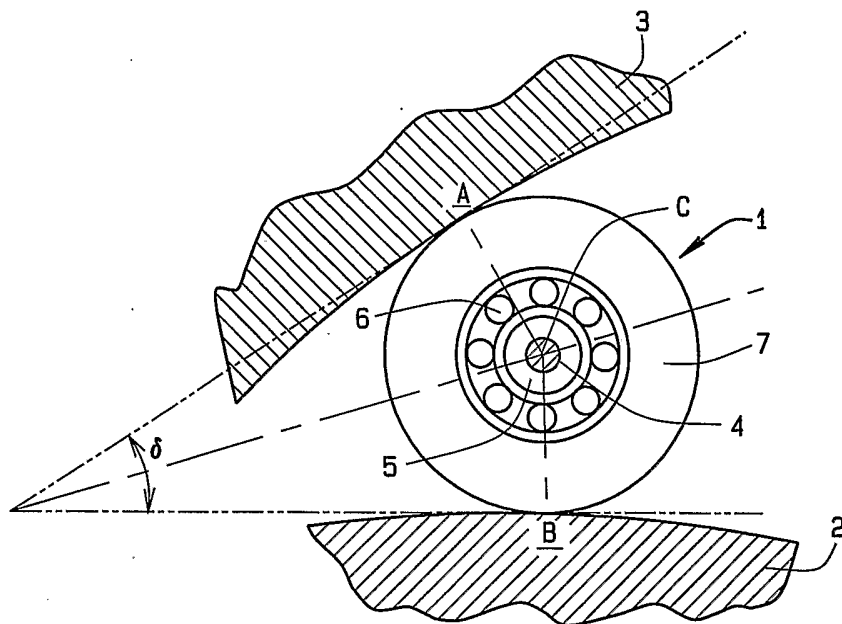


FIG. 5

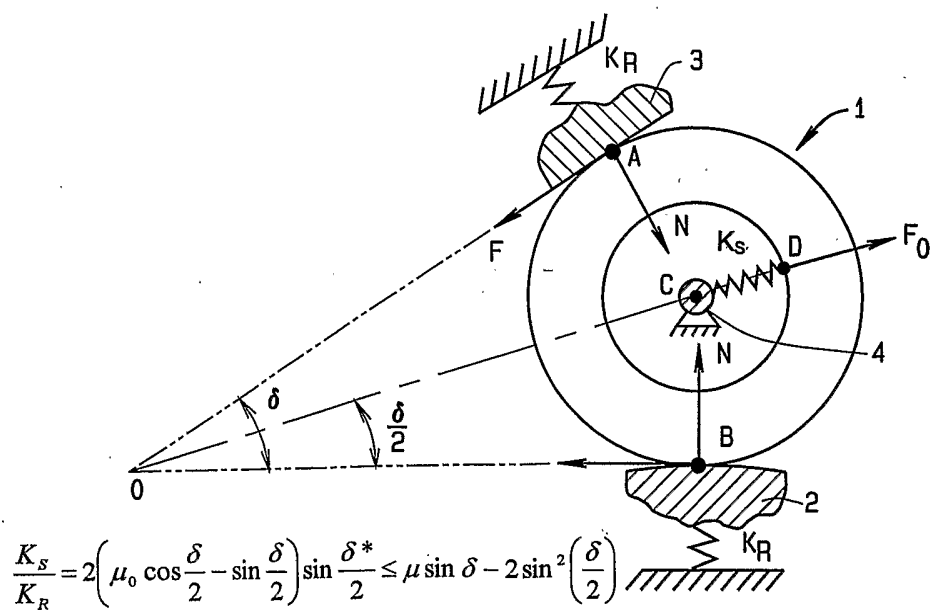


FIG. 6

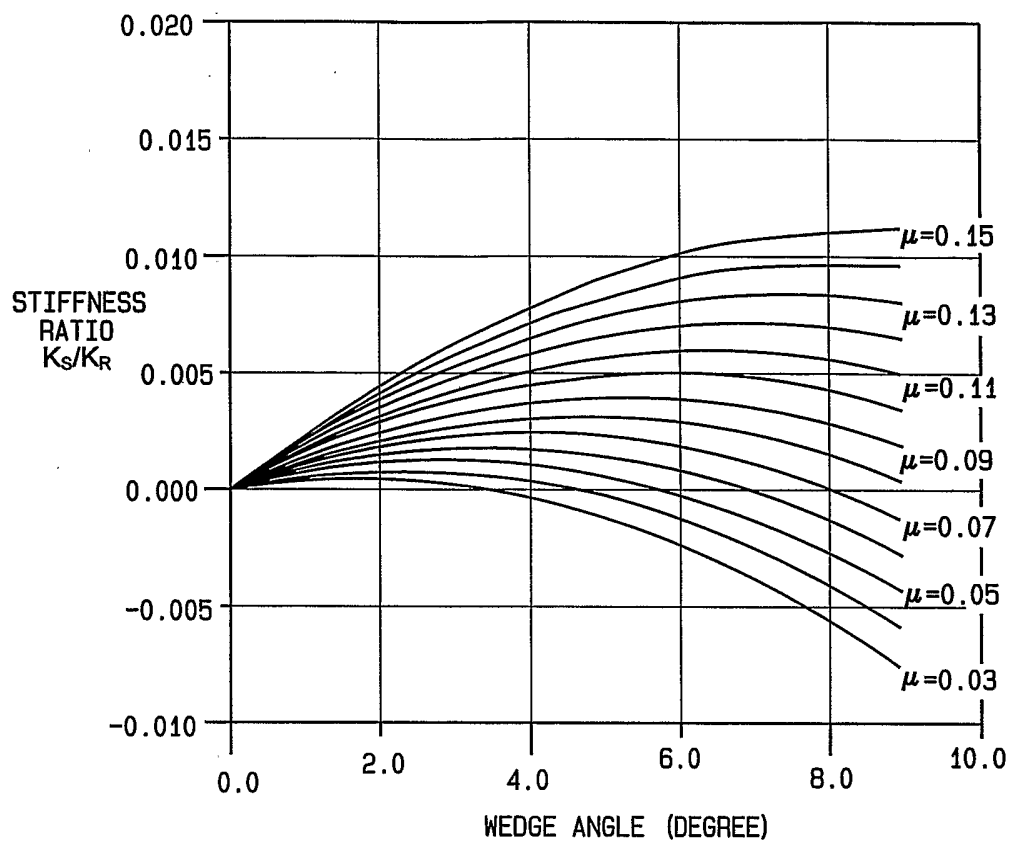


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/30127

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F16H13/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1 093 922 A (DIETERICH) 21 April 1914 (1914-04-21) cited in the application page 2, line 111,112 ---	1-4, 8-10
X	US 3 945 270 A (NELSON BERTEL S ET AL) 23 March 1976 (1976-03-23) cited in the application figure 3 ---	1-4, 8, 10
X	EP 0 877 181 A (NSK LTD) 11 November 1998 (1998-11-11) cited in the application abstract ---	1-4, 8, 10
X	US 4 709 589 A (KRAUS CHARLES E) 1 December 1987 (1987-12-01) figure 3 ---	1-4, 8, 10
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

27 January 2004

Date of mailing of the international search report

05/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Goeman, F

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/30127

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 92759 A (BUTSCH MICHAEL ;ALPHA GETRIEBEBAU GMBH (DE)) 6 December 2001 (2001-12-06) figure 3 -----	1-4,8,10
X	US 3 380 312 A (WILLI BARSKE ULRICH MAX) 30 April 1968 (1968-04-30) figure 5 -----	1-4,8,10
A	US 4 481 842 A (NELSON BERTEL S) 13 November 1984 (1984-11-13) cited in the application -----	

INTERNATIONAL SEARCH REPORT

 International: ublication No
 PCT/US 03/30127

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 1093922	A		NONE	
US 3945270	A	23-03-1976	NONE	
EP 0877181	A	11-11-1998	JP 10311398 A JP 10325449 A DE 69807777 D1 DE 69807777 T2 EP 0877181 A1 US 5931759 A	24-11-1998 08-12-1998 17-10-2002 30-01-2003 11-11-1998 03-08-1999
US 4709589	A	01-12-1987	JP 2085804 C JP 7122453 B JP 63072961 A	23-08-1996 25-12-1995 02-04-1988
WO 0192759	A	06-12-2001	WO 0192759 A1 DE 10192284 D2 EP 1285183 A1 JP 2003535286 T	06-12-2001 15-05-2003 26-02-2003 25-11-2003
US 3380312	A	30-04-1968	GB 1118782 A CH 457067 A DE 1500337 A1	03-07-1968 31-05-1968 04-06-1969
US 4481842	A	13-11-1984	US 4555963 A	03-12-1985