




(86) Date de dépôt PCT/PCT Filing Date: 2016/07/15
(87) Date publication PCT/PCT Publication Date: 2017/02/02
(45) Date de délivrance/Issue Date: 2022/07/26
(85) Entrée phase nationale/National Entry: 2018/01/15
(86) N° demande PCT/PCT Application No.: US 2016/042445
(87) N° publication PCT/PCT Publication No.: 2017/019332
(30) Priorité/Priority: 2015/07/27 (US62/197,224)

(51) Cl.Int./Int.Cl. *A61F 2/32* (2006.01),
A61B 17/58 (2006.01), *A61B 17/60* (2006.01),
A61F 2/00 (2006.01)
(72) Inventeurs/Inventors:
TERMANINI, ZAFER, US;
VANHIEL, BRIAN, US;
AMBRECHT, ADAM, US
(73) Propriétaire/Owner:
HIP INNOVATION TECHNOLOGY, LLC, US
(74) Agent: DEETH WILLIAMS WALL LLP

(54) Titre : EXTRACTEUR DE COTYLE
(54) Title: ACETABULAR CUP EXTRACTOR

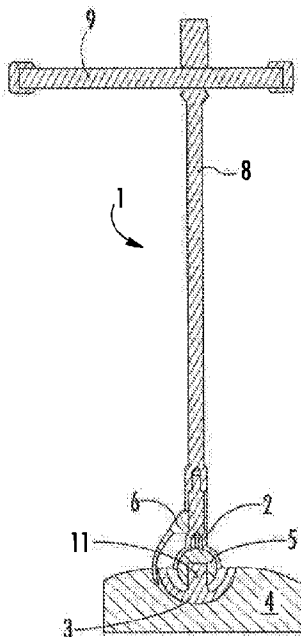

(57) Abrégé/Abstract:

A surgical tool and method used to extract an acetabular cup from an acetabulum with minimal or no bone damage even if there has been significant bone ingrowth prior to the extraction process. The tool is designed for use with a reverse hip prosthesis wherein the acetabular cup comprises a stem extending from its concave surface and an acetabular ball is affixed to the stem. The tool is rotated on the ball and a blade is thereby caused to rotate adjacent or in close proximity to a convex surface of the cup in a position between the acetabular bone and the cup, thereby separating the cup from the bone.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2017/019332 A1

(43) International Publication Date
2 February 2017 (02.02.2017)

(51) International Patent Classification:

A61F 2/32 (2006.01) *A61B 17/60* (2006.01)
A61B 17/58 (2006.01) *A61F 2/00* (2006.01)

(21) International Application Number:

PCT/US2016/042445

(22) International Filing Date:

15 July 2016 (15.07.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/197,224 27 July 2015 (27.07.2015) US

(71) Applicant: **HIP INNOVATION TECHNOLOGY, LLC**
[US/US]; 6579 Northwest 13th Court, Plantation, Florida
33313 (US).


(72) Inventors: **TERMANINI, Zafer**; 7922 Steeple Chase Ct.,
Port Saint Lucie, Florida 34986 (US). **VANHIEL, Brian**;
3993 Plum Crest Circle, Smyrna, Georgia 30082 (US).
AMBRECHT, Adam; 2124 Ector Place, Kennesaw, Georgia
30152 (US).

(74) Agent: **ROBINSON, William**; 721 Route 202-206, Suite
200, Bridgewater, New Jersey 08807 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

[Continued on next page]

(54) Title: ACETABULAR CUP EXTRACTOR

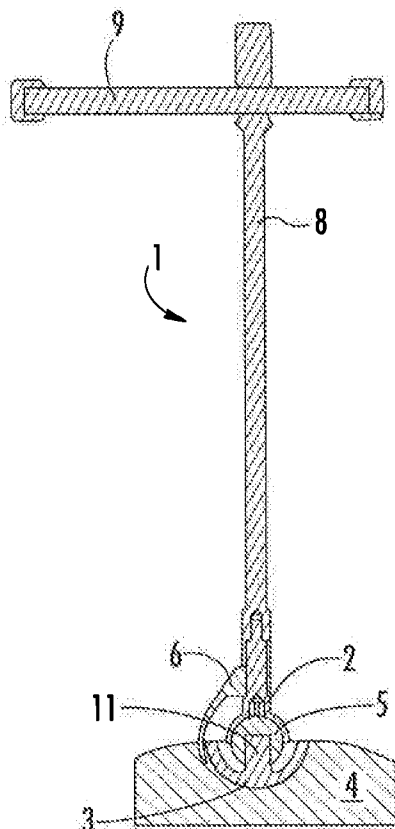**FIG. 2**

(57) Abstract: A surgical tool and method used to extract an acetabular cup from an acetabulum with minimal or no bone damage even if there has been significant bone ingrowth prior to the extraction process. The tool is designed for use with a reverse hip prosthesis wherein the acetabular cup comprises a stem extending from its concave surface and an acetabular ball is affixed to the stem. The tool is rotated on the ball and a blade is thereby caused to rotate adjacent or in close proximity to a convex surface of the cup in a position between the acetabular bone and the cup, thereby separating the cup from the bone.

WO 2017/019332 A1

WO 2017/019332 A1

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

— *with international search report (Art. 21(3))*

ACETABULAR CUP EXTRACTOR

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to surgical instruments used in connection with a reverse hip prosthesis. More particularly, the invention has to do with a surgical tool for extracting an acetabular cup from an acetabulum.

The Related Art

[0002] A reverse hip prosthesis is described in U.S. Patents Nos. 8,313,531 B2 and 8,540,779 B2. The prosthesis and a revision surgery method also are described in U.S. Patent No. 8,992,627 B2.

SUMMARY OF THE INVENTION

[0003] As described in the patents referenced above, an acetabular ball is affixed on a stem extending from the bottom of the concave surface of the acetabular cup. The surgical tool of the invention enables a surgeon to remove the acetabular cup by pressing the distal end of the tool against the acetabular ball while carefully rotating the tool on the ball to cause a blade to separate the cup from the acetabulum. In the present disclosure, we use the term "acetabular cup extractor" from time to time to describe the surgical tool of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Fig. 1 is an elevation view of the surgical tool of the invention positioned on an implanted acetabular cup.

[0005] Fig. 2 is a section view of Fig. 1.

[0006] Fig. 3 is an elevation view of the surgical tool of the invention.

[0007] Fig. 4 is a perspective view of the surgical tool of the invention.

[0008] Fig. 5 is an elevation view of a driver used with the surgical tool of the invention.

[0009] Fig. 6. Is an elevation view of a handle used with the surgical tool of the invention.

[0010] Fig. 7 is an elevation view of a blade used with the surgical tool of the invention.

[0011] Fig. 8 is an elevation view of an extractor cup used with the surgical tool of the invention.

[0012] Fig. 9 is a section view of the acetabular cup extractor of Fig. 3 and the driver of Fig. 5.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] The acetabular cup extractor 1 is illustrated in elevation in Fig. 3 and in perspective in Fig. 4. In Figs. 1 and 2, elevation and section views, respectively, the extractor 1 is positioned on an acetabular ball 5 which is affixed to the stem 11 of acetabular cup 3. The acetabular cup 3 is implanted in acetabular bone 4. The extractor cup 2 is in articulating contact with acetabular ball 5 and the distal end of blade 6 is positioned between the convex outer surface of cup 3 and bone 4. In the surgical method of the invention, the extractor cup 2 is carefully rotated on acetabular ball 5 to cause blade 6 to move along or in close proximity to the convex surface of acetabular cup 3, thereby

rotating the blade 6 around the convex surface and adjacent or in close proximity to said surface so that the blade is between the acetabular cup 3 and the acetabulum. This movement causes the bone 4 of the acetabulum to be separated from the cup 3. Thus, the surgeon pushes the acetabular cup extractor 1 downwardly so that the extractor cup 2 contacts the acetabular ball 5 and a distal portion of blade 6 is caused to move into acetabular bone 4 in a position adjacent or in close proximity to the convex surface of acetabular cup 3. The depth of the distal portion of blade 6 in bone 4 is maintained as the acetabular cup extractor 1 is rotated. Blade 6 comes in various sizes such that the portion of the blade designated as "L" in Fig. 7 varies in length. Multiple blades of different lengths can be used, always starting with the shortest blade length, then using the next longest length, etc. For example, if three blades are used, the shortest length blade is used first and at least one complete rotation of the blade between the acetabular cup 3 and the bone 4 is completed. In other words, the blade 6 is rotated at least 360 degrees around the cup. Then the next longest blade length is used and at least one complete rotation of the blade between the acetabular cup 3 and bone 4 is completed. This process is repeated with the next longest blade, i.e. the longest of the three blades, thereby loosening the connection between the acetabular cup 3 and bone 4 so that the acetabular cup 3 is sufficiently loosened that it can be lifted out of bone 4. Since blade 6 moves adjacent or in close proximity to the convex surface of acetabular cup 3, bone damage is minimized even if there has been significant bone

ingrowth prior to the removal process. The process is conducted carefully in order to minimize the risk of damage to the bone.

[0014] In addition to the extractor cup 2 and blade 6, the acetabular cup extractor 1 is comprised of a handle 7 made of a shaft 8 and a movable lever arm 9 as shown in Fig. 6. The lever arm facilitates rotation of extractor 1 while maintaining downward pressure on extractor 1.

[0015] Driver wrench 10, illustrated in elevation in Fig. 5, is used to fasten and unfasten the extractor cup 2a to and from shaft 8 of handle 7. Extractor cup 2a is an optional embodiment which is threaded into shaft 8a as illustrated in section in Fig. 9 (The extractor cup 2 of Fig. 8 is snap fit into shaft 8.) A section view illustrating the position of these elements in the fastening and unfastening operations is provided in Fig. 9.

[0016] In the surgical method of the invention, any screws or other connectors extending from acetabular cup 3 into bone 4 are removed. If necessary, acetabular ball 5 is removed in order to gain access to the screws. Then acetabular ball 5 is placed back on the stem of the acetabular cup and the cup removal process is continued. Blade 6 is then pushed into the bone adjacent the convex surface of the acetabular cup until the extractor cup 2 is in contact with acetabular ball 5. While pressing the extractor cup 2 against the acetabular ball 5, the acetabular cup extractor 1 is rotated on acetabular ball 5, thereby causing blade 6 to loosen the connection between acetabular cup 3 and the bone 4. When the acetabular cup 3 is sufficiently loosened from bone 4 after using

blades 6 of increasing length as explained above, the acetabular cup is lifted out of the bone.

[0017] The acetabular cup removal tool of the invention may be included in a kit comprising other surgical tools and/or implants.

CLAIMS

1. A surgical tool adapted for removing an acetabular cup from an acetabulum wherein the acetabular cup is a component of a reverse hip prosthesis and comprises an acetabular ball affixed to a stem which extends from a concave surface of the acetabular cup, the surgical tool comprising:

a shaft;

an extractor cup affixed at its proximal end to a distal end of the shaft, the extractor cup having at its distal end a concave surface sized to articulate on the acetabular ball;

a blade having a proximal end affixed to the shaft and a distal portion sized to move adjacent or in close proximity to a convex surface of the acetabular cup, the convex surface of the acetabular cup being in contact with the acetabulum; and

a detachable driver wrench adapted to affix the extractor cup to the shaft.

2. The surgical tool of claim 1 further comprising a lever arm movably positioned in the shaft and adapted to facilitate rotation of the tool while maintaining downward pressure on the tool.

3. A kit containing the surgical tool of claim 1.

4. A surgical tool adapted for removing an acetabular cup from an acetabulum wherein the acetabular cup is a component of a reverse hip prosthesis and comprises an acetabular ball affixed to a stem which extends from a concave surface of the acetabular cup, the surgical tool comprising:

a shaft;





an extractor cup concentrically affixed at its proximal end to a distal end of the shaft, with the extractor cup having at its distal end a concave surface sized to articulate on the acetabular ball;

a blade having a proximal end affixed to the shaft and a distal portion sized to move adjacent or in close proximity to a convex surface of the acetabular cup, the convex surface of the acetabular cup being in contact with the acetabulum; and,

a detachable driver wrench adapted to affix the extractor cup to the shaft.

5. The surgical tool of claim 4, wherein the extractor cup is mounted onto distal end of the shaft with a snap fit fitting.
6. The surgical tool of claim 4, wherein the extractor cup is mounted onto the distal end of the shaft with a threaded fitting.
7. A surgical tool adapted for removing an acetabular cup from an acetabulum wherein the acetabular cup is a component of a reverse hip prosthesis and comprises an acetabular ball affixed to a stem which extends from a concave surface of the acetabular cup, the surgical tool comprising:
 - a handle having a shaft and a moveable lever arm which facilitates rotation of the shaft while maintaining downward pressure on an extractor cup which is affixed at its proximal end to a distal end of the shaft, with the extractor cup having at its distal end a concave surface sized to articulate on the acetabular ball; and
 - a blade having a proximal end affixed to the shaft and a distal portion sized to move adjacent or in close proximity to a convex surface of the acetabular cup, the convex surface of the acetabular cup being in contact with the acetabulum; and,
 - detachable driver wrench adapted to affix the extractor cup to the shaft.
8. The surgical tool of claim 7, wherein the extractor cup is mounted onto distal end of the shaft with a snap fit fitting.
9. The surgical tool of claim 7, wherein the extractor cup is mounted onto the distal end of the shaft with a threaded fitting.
10. Use of the surgical tool of any one of claims 1 to 9 for removing an acetabular cup from an acetabulum.

1/3

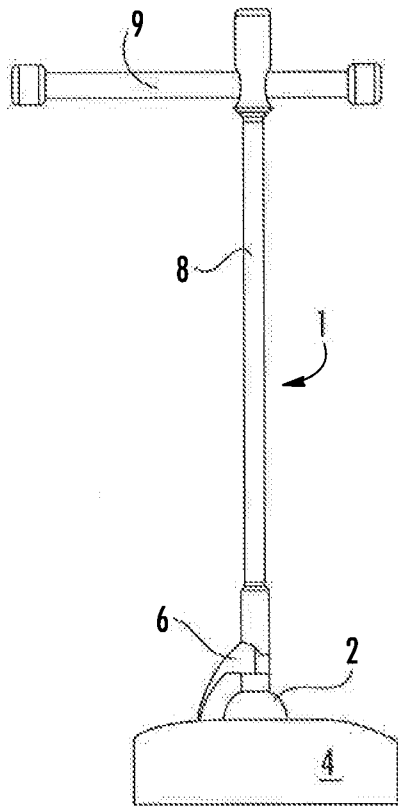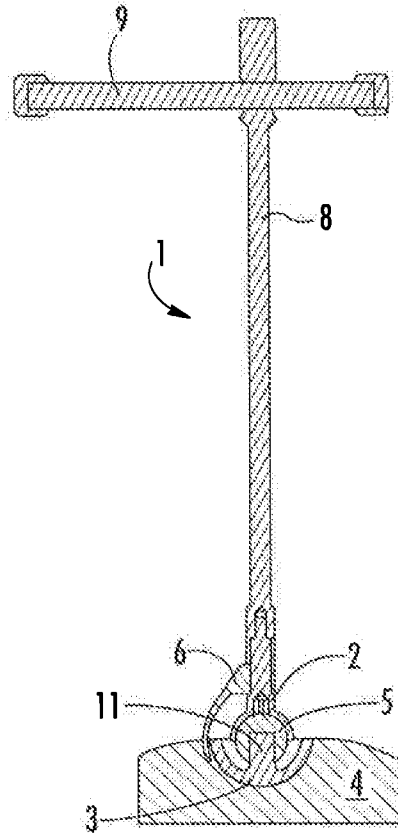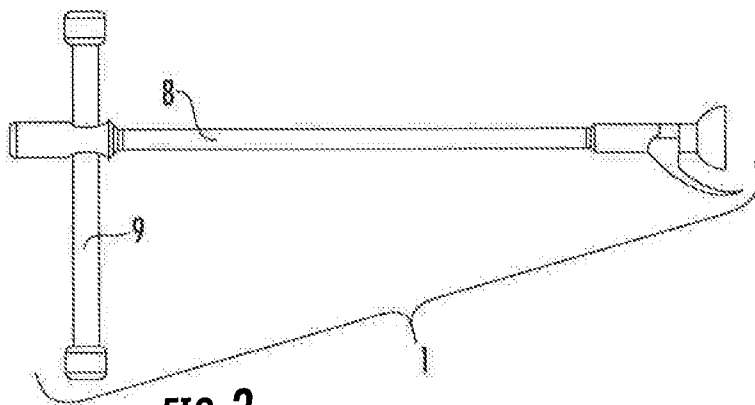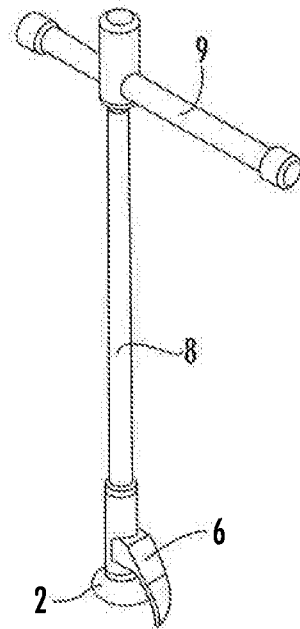**FIG. 1****FIG. 2****FIG. 3****FIG. 4**

2/3

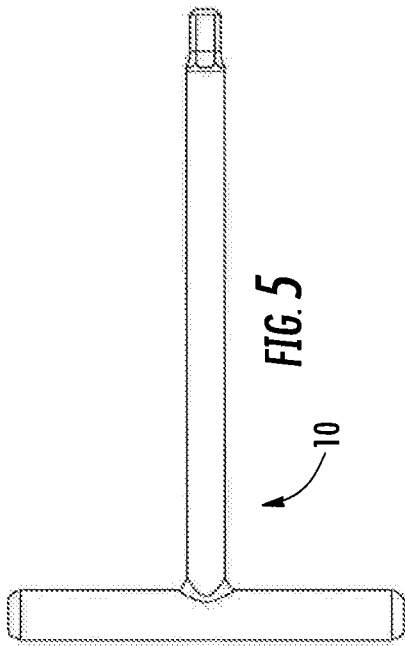


FIG. 5

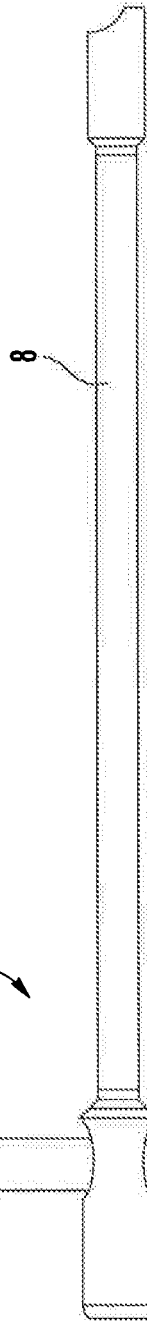


FIG. 6


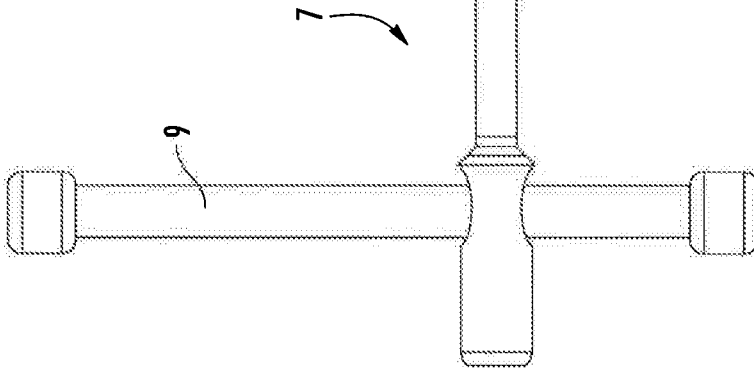


FIG. 8




FIG. 9

3/3

