

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

11 June 2020 (11.06.2020)



(10) International Publication Number

WO 2020/115133 A1

(51) International Patent Classification:

C10L 1/14 (2006.01) C10L 1/19 (2006.01)
C10G 29/20 (2006.01) C10L 1/233 (2006.01)
C10L 3/10 (2006.01)

(21) International Application Number:

PCT/EP2019/083680

(22) International Filing Date:

04 December 2019 (04.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201841045742 04 December 2018 (04.12.2018) IN
19305060.6 17 January 2019 (17.01.2019) EP

(71) Applicant: TOTAL MARKETING SERVICES

[FR/FR]; 24 Cours Michelet, 92800 PUTEAUX (FR).

(72) Inventors: MONDKAR, Hemant Surendra; 802, KU-

MAR PURAB, OFF PUNE-SOLAPUR HADAPSAR,
PUNE, MAHARASHTRA 411028 (IN). TORT, Frédéric;
N°2 Clos de La Pinette, 69530 BRIGNAIS (FR).

(74) Agent: AUGUST DEBOUZY; 6 / 8 avenue de Messine,

75008 Paris (FR).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HYDROGEN SULPHIDE AND MERCAPTANS SCAVENGING COMPOSITIONS

(57) Abstract: The present invention relates to a composition for scavenging hydrogen sulphide and/or mercaptans in hydrocarbon streams, the composition comprising an oxazolidine compound and a synergistic additive.



WO 2020/115133 A1

HYDROGEN SULPHIDE AND MERCAPTANS SCAVENGING COMPOSITIONS

TECHNICAL FIELD

The present invention pertains to a novel hydrogen sulphide and mercaptans scavenging composition comprising an oxazolidine compound and a specific additive. The present invention also pertains to the use of the additive to improve the efficiency of an oxazolidine compound for scavenging hydrogen sulphide and mercaptans in hydrocarbon streams. The present invention also relates to a method for scavenging hydrogen sulphide and/or mercaptans comprising contacting a hydrocarbon stream such as crude oil, fuel or natural gas with the scavenging composition of the invention.

BACKGROUND OF THE INVENTION

Hydrogen sulphide is a colourless and fairly toxic, flammable and corrosive gas which also has a characteristic odour at a very low concentration. Hydrogen sulphide dissolves in hydrocarbon and water streams and is also found in the vapour phase above these streams and in natural gas. The hydrogen sulphide emissions can therefore be a nuisance to workers operating in the drilling, production, transport, storage, and processing of crude oil and in the storage of fuel. Hydrogen sulphide may also react with hydrocarbon components present in fuel. It would therefore be desirable for the workers' comfort and safety to reduce or even eliminate the hydrogen sulphide emissions during the manipulation of said products.

Legislation has been in place for years, imposing strict regulations on hydrogen sulphide levels of hydrocarbon streams pipelines, and in storage and shipping containers. A variety of chemical scavengers are available to reduce both the concentration and corresponding hazard of hydrogen sulphide in produced gas, crude oil and refined products. Some of the most common methods for treating hydrogen sulphide include triazine, glyoxal, as well as metal-based scavengers. Glyoxal has been used extensively as hydrogen sulphide scavenger but suffers from a major drawback since aqueous glyoxal solutions are highly corrosive and cannot be used for a gas tower application. Triazines have recently become a more common chemical scavenger used for treating hydrogen sulphide from hydrocarbon streams. However, many drawbacks are reported that are linked to the use of triazines.

Others hydrogen sulphide scavengers have been developed, and among them scavengers based on oxazolidine, like 3,3'-methylenebis(5-methyloxazolidine), known as MBO. A method for scavenging hydrogen sulphide from sour hydrocarbon substrates has been described in WO 98/02501. MBO presents the advantage to be less toxic and to create no scales in the conditions where triazine does.

However, this technology requires an important contact time in order to be efficient in sulphur removal and thus involves injection of higher doses.

Formulations of MBO with promoters, also named boosters, have been developed to enhance the efficiency of MBO. For example, WO 2017/102693 describes a composition comprising MBO and one or more additive selected among urea, urea derivatives, amino acids, guanidine, guanidine derivatives or 1,2-diols, said composition being used in the removal of sulphur compounds from process streams.

It would be useful to provide a composition enhancing the H₂S scavenging properties of MBO.

SUMMARY OF THE INVENTION

The present invention relates to a composition for scavenging hydrogen sulphide and mercaptans from hydrocarbon streams, said composition comprising an oxazolidine compound and an additive selected from partial polyol esters comprising x ester units, y hydroxylated units and z ether units, x, y and z being integers such that x varies from 1 to 10, y varies from 1 to 10, and z varies from 0 to 50.

The present invention also relates to composition for scavenging hydrogen sulphide and mercaptans from hydrocarbon streams, said composition comprising an oxazolidine compound and an additive selected from partial polyol esters comprising x ester units, y hydroxylated units and z ether units, x, y and z being integers such that x varies from 1 to 10, y varies from 1 to 10, and z varies from 0 to 6.

According to a particular embodiment, the oxazolidine compound is a bisoxazolidine compound.

According to a particular embodiment, the polyols are chosen from the group comprising erythritol, xylitol, D-arabitol, L-arabitol, ribitol, sorbitol, malitol, isomalitol, lactitol, sorbitan, volemitol, mannitol, pentaerythritol, 2-hydroxymethyl-1,3-propanediol, 1,1,1-tri(hydroxymethyl) ethane, trimethylolpropane and carbohydrates such as sucrose, fructose, maltose, glucose and saccharose, preferably sorbitan.

According to a particular embodiment, the additive is selected from partial sorbitan ester of an unsaturated fatty acid comprising from 10 to 24 carbon atoms, preferably from optionally alkoxylated sorbitan oleate.

According to a particular embodiment, the composition comprises from 19 to 99%wt of oxazolidine compound(s) and from 1 to 50%wt of said additive(s), based on the total weight of the composition.

According to a particular embodiment, the weight ratio of oxazolidine compound(s) to said additive(s) ranges from 1 to 50, preferably from 2 to 30, more preferably from 4 to 20.

According to a particular embodiment, the composition further comprises a solvent, preferably in an amount ranging from 1 to 80%wt, based on the total weight of the composition.

According to a particular embodiment, the composition comprises:

- From 19 to 80%wt of oxazolidine compound(s),
- From 1 to 30%wt of said additive(s), and
- From 1 to 80%wt of solvent(s),

based on the total weight of the composition.

The present invention also relates to a use of the additive for improving the efficiency of an oxazolidine compound for scavenging hydrogen sulphide and/or mercaptans in hydrocarbon streams.

The present invention also relates to a hydrocarbon stream comprising hydrocarbons and a composition according to the invention.

According to a particular embodiment, the hydrocarbons are selected from crude oil, fuel oil, fuel, Light Petroleum Gas and natural gas.

The present invention also relates to a method for scavenging hydrogen sulphide and/or mercaptan in hydrocarbon streams, comprising contacting the hydrocarbon stream with the composition according to the invention.

According to a particular embodiment of the method, the weight ratio between hydrogen sulphide contained in the hydrocarbon stream before the step of contacting and the composition ranges from 1:2 to 1:0.05, preferably from 1:1 to 1:0.1, more preferably from 1:0.9 to 1:0.2, even more preferably from 1:0.7 to 1:0.3 and advantageously from 1:0.8 to 1:0.4.

The composition of the present invention enables to reduce the treat rate, i.e. reduce the amount of MBO necessary to scavenge a given amount of hydrogen sulphide from the sulphur containing stream.


DETAILED DESCRIPTION OF THE INVENTION

The present invention concerns a hydrogen sulphide and mercaptans scavenging composition comprising at least one oxazolidine compound and at least one additive.

According to the present invention, the additive is selected from partial polyol ester(s), said polyol esters comprising x ester units, y hydroxylated units and z ether units, x, y and z being integers such that x varies from 1 to 10, y varies from 1 to 10, and z varies from 0 to 50.

According to a particular embodiment, the oxazolidine compound is selected from bisoxazolidines, i.e. compounds comprising two oxazolidine cycles.

According to a particular embodiment, the oxazolidine compound replies to formula (I):

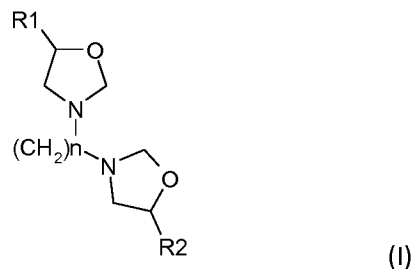

wherein

n is an integer ranging from 1 to 6, preferably from 1 to 2;

R1 and R2, identical or different, are selected from a hydrogen atom and a linear, branched or cyclic alkyl or alkenyl groups having from 1 to 6 carbon atoms, preferably from 1 to 2 carbon atoms.

Preferably, the oxazolidine compound is 3,3'-methylenebis(5-methyloxazolidine).

According to the invention, the "additive" used in combination with the oxazolidine compound is also referred to by the expression the "synergistic additive".

The additive or synergistic additive of the invention is preferably selected from partial polyol ester(s), said polyol esters comprising x ester units, y hydroxylated units and z ether units, x, y and z being integers such that x varies from 1 to 4, y varies from 2 to 7, and z varies from 0 to 4.

According to an embodiment, the additive or synergistic additive of the invention is selected from partial polyol ester(s), said polyol esters comprising x ester units, y hydroxylated units and z ether units, x, y and z being integers such that x varies from 1 to 4, y varies from 2 to 7, and z varies from 0 to 50.

Preferably, z varies from 1 to 30, more preferably from 2 to 20.


Within the meaning of the present invention, a partial polyol ester refers to a compound comprising at least one ester function and at least one hydroxyl function.

The synthesis of partial polyol esters is known per se; they can for example be prepared by esterification of fatty acid(s) and linear and/or branched polyols optionally comprising (hetero)cycles of 5 to 6 atoms bearing hydroxyl functions. The product(s) originating from this esterification reaction comprise(s) a distribution of ester units, hydroxylated units and ether units such that x varies from 1 to 4, y varies from 1 to 7 and z varies from 1 to 3. Generally this type of synthesis leads to a mixture of mono-,

di-, tri- and optionally tetra-esters as well as small quantities of fatty acid(s) and polyols which have not reacted.


According to an embodiment, the polyol esters are obtained by esterification of fatty acid(s) and of linear and/or branched polyols optionally comprising heterocycles of 4 to 5 carbon atoms and an oxygen atom, bearing hydroxyl functions. Within the framework of the present invention, the polyols will be chosen from the linear polyols comprising more than three hydroxyl functions and the polyols comprising at least one (hetero)cycle of 5 or 6 atoms, preferably heterocycles of 4 to 5 carbon atoms and an oxygen atom, optionally substituted by hydroxyl groups, these polyols being able to be used alone or in a mixture. In the remainder of the present discussion, these polyols are referenced R in the formulations mentioned below.

Among the polyols R, the polyols with linear or branched hydrocarbon chains comprise at least four units represented in formula (II) below:




With p and q being integers, p being equal to or greater than 0, q is greater than 2, these numbers not being able to exceed 10.

Among the polyols R, the polyols with linear or branched hydrocarbon chains comprise at least four units represented in formula (II) below:



With p and q being integers, p being equal to or greater than 0, q is greater than 1, these numbers not being able to exceed 5, R₃ and R₄ are identical or different and represent either the hydrogen atom, or a -CH₃ or -C₂H₅ group or a -CH₂-OH group.

Among the polyols R, some comprise at least one (hetero)cycle of 4 or 5 carbon atoms and an oxygen atom, optionally substituted by hydroxyl groups and correspond to general formula (IV) below:



with s and t being integers, and when s is equal to 1, t is equal to 3 and when s is zero, t is equal to 4.

Among the polyols R, some comprise at least two heterocycles of 4 or 5 carbon atoms and one oxygen atom connected by the formation of an acetal bond between a hydroxyl function of each ring, those heterocycles being optionally substituted by hydroxyl groups. Preferably, the polyols are chosen

from the group comprising erythritol, xylitol, D-arabitol, L-arabitol, ribitol, sorbitol, malitol, isomalitol, lactitol, sorbitan, volemitol, mannitol, pentaerythritol, 2-hydroxymethyl-1,3-propanediol, 1,1,1-tri(hydroxymethyl) ethane, trimethylolpropane and carbohydrates such as sucrose, fructose, maltose, glucose and saccharose, preferably sorbitan. According to a preferred variant, the partial polyol esters are
5 chosen from the partial sorbitan esters, preferably sorbitan monooleate, used alone or in a mixture.

The fatty acids from which the esters according to the invention originate can be chosen from the fatty acids the chain length of which varies from 10 to 24 carbon atoms and/or at least one diacid substituted by at least one polymer, for example poly(iso)butene comprising from 8 to 100 carbon atoms. They are preferably chosen, in the case of the mono acids, from the stearic, isostearic, linolenic, oleic,
10 linoleic, behenic, arachidonic, ricinoleic, palmitic, myristic, lauric and capric acids, and mixtures thereof and, in the case of the diacids from the alkyl- or alkenylsuccinic, alkyl- or alkenylmaleic acids. The fatty acids can originate from the transesterification or the saponification of vegetable oils and/or animal fats. The preferred vegetable oils and/or animal fats are chosen according to their oleic acid concentration. Reference may be made for example to Table 6.21 of Chapter 6 of the publication Carburants & Moteurs
15 by J. C. Guibet and E. Faure, 2007 edition in which the compositions of several vegetable oils and animal fats are given. The fatty acids can also originate from tall oil fatty acids which comprise a majority of fatty acids, typically greater than or equal to 90% by mass as well as resin acids and unsaponifiables in a minority, i.e. in quantities generally less than 10%.

According to a particular embodiment, the synergistic additive is a partial sorbitan ester of an
20 unsaturated fatty acid comprising from 10 to 24 carbon atoms or a sorbitan ester of an unsaturated fatty acid comprising from 10 to 24 carbon atoms comprising ether units, such as ethoxy groups, preferably a partial sorbitan oleate or an ethoxylated sorbitan oleate. Within the meaning of the present invention, the expression "sorbitan oleate" covers notably sorbitan monooleate, sorbitan dioleate and sorbitan trioleate.

According to an embodiment, the H₂S and mercaptans scavenging composition comprises from
25 19 to 99%wt, preferably from 40 to 98%wt, more preferably from 55 to 79%, more preferably from 60 to 95%wt, even more preferably from 70 to 90%wt of oxazolidine compound(s) and from 0.5 to 50 %wt, preferably from 1 to 45%wt, even more preferably from 1.5 to 40%wt, more preferably from 2 to 30%wt
30 of synergistic additive(s), based on the total weight of the H₂S and mercaptans scavenging composition. Preferably, the weight ratio of oxazolidine compound(s) to synergistic additive(s) ranges from 1 to 100, preferably from 1 to 50, more preferably from 2 to 30, even more preferably from 4 to 20.

According to an embodiment, the H₂S and mercaptans scavenging composition further comprises at least one solvent.

Preferably, the solvent is selected from poly alkyl ethers, aliphatic or aromatic solvents, such as N-methylpyrrolidone, butyl carbitol, xylene, toluene, and benzene. It has been observed that the scavenging efficiency of the compositions of the invention is not dependent on the solvent. However, depending on the final use of the scavenging composition, a solvent having a dual solubility, i.e. a water solubility and a solubility in hydrocarbons, can be preferred. Butyl carbitol is a suitable solvent since it has this dual solubility.

According to this embodiment, the solvent represents from 1 to 80 % of the composition, preferably from 5 to 70%wt, more preferably from 10 to 60%wt, even more preferably from 20 to 50%wt of the composition.

According to a particular embodiment of the invention, the composition comprises:

- From 10 to 98%wt, preferably from 30 to 80%wt, more preferably from 40 to 60%wt of oxazolidine compound(s),
- From 0.5 to 30%wt, preferably from 1 to 20%wt, more preferably from 2 to 15%wt, even more preferably from 3 to 10%wt of the additive(s) defined in the invention, and
- From 1.5 to 80%wt, preferably from 5 to 65%wt, more preferably from 15 to 55%wt of solvent(s),

based on the total weight of the composition.

According to a particular embodiment of the invention, the composition comprises:

- From 19 to 80%wt, preferably from 30 to 70%wt, more preferably from 40 to 60%wt of oxazolidine compound(s),
- From 1 to 30%wt, preferably from 1.5 to 20%wt, more preferably from 2 to 10%wt of the additive(s) defined in the invention, and
- From 1 to 80%wt, preferably from 15 to 65%wt, more preferably from 25 to 55%wt of solvent(s),

based on the total weight of the composition.

According to an embodiment of the invention, the composition comprises:

- From 19 to 80%wt, preferably from 30 to 70%wt, more preferably from 40 to 60%wt of a bisoxazolidine,
 - From 1 to 30%wt, preferably from 1.5 to 20%wt, more preferably from 2 to 10%wt of additive(s) selected from partial sorbitan ester of an unsaturated fatty acid comprising from 10 to 24 carbon atoms, and
 - From 1 to 80%wt, preferably from 15 to 65%wt, more preferably from 25 to 55%wt of solvent(s),
- based on the total weight of the composition.

According to a particular embodiment of the invention, the composition comprises:

- From 10 to 98%wt, preferably from 30 to 80%wt, more preferably from 40 to 60%wt of oxazolidine compound(s),
- From 0.5 to 30%wt, preferably from 1 to 20%wt, more preferably from 2 to 15%wt, even more preferably from 3 to 10%wt of the additive(s) selected from partial sorbitan ester of an unsaturated fatty acid comprising from 10 to 24 carbon atoms and sorbitan ester of an unsaturated fatty acid comprising from 10 to 24 carbon atoms comprising ether units, such as ethoxy groups, and
- From 1.5 to 80%wt, preferably from 5 to 65%wt, more preferably from 15 to 55%wt of solvent(s),

based on the total weight of the composition.

According to an embodiment of the invention, the composition comprises:

- From 10 to 98%wt, preferably from 30 to 80%wt, more preferably from 40 to 60%wt of bisoxazolidine compound(s),
- From 0.5 to 30%wt, preferably from 1 to 20%wt, more preferably from 2 to 15%wt, even more preferably from 3 to 10%wt of the additive(s) selected from sorbitan oleate and ethoxylated sorbitan oleate, and
- From 1.5 to 80%wt, preferably from 55 to 65%wt, more preferably from 15 to 55%wt of solvent(s),

based on the total weight of the composition.

The present invention also concerns the use of the synergistic additive defined above for improving the efficiency of the oxazolidine compound defined above for scavenging hydrogen sulphide (H_2S) and/or mercaptans in hydrocarbon streams.

By hydrocarbon stream is meant either a single-phase hydrocarbon stream or a multiphase system comprising oil/water or oil/water/gas or gas/water.

Preferably, the weight ratio oxazolidine compound(s) to synergistic additive(s) ranges from 1 to 50, preferably from 2 to 30, preferably from 4 to 20.

Hydrocarbon streams contain H_2S and/or mercaptans, in an amount for example ranging from 1 to 10 000 ppm. Mercaptans that can be removed from hydrocarbon streams within the framework of the present invention may be C_1 - C_6 mercaptans, such as C_1 - C_4 mercaptans.

The present invention also concerns the use of the composition defined above as a H_2S and/or mercaptans scavenger in hydrocarbon streams, said hydrocarbon streams being preferably selected from crude oil, fuel and natural gas. The composition of the invention is contacted with hydrocarbon streams such as crude oil, fuel or natural gas in order to reduce the amount of hydrogen sulphide (H_2S) and mercaptans. Hydrocarbon streams may be selected from crude oils and fuels which typically comprise more than 60%wt of paraffins, preferably more than 70%wt of paraffins and even more preferably more than 75%wt of paraffins, based on the total weight of the crude oils and fuels. Hence, hydrocarbon streams may be selected from crude oils and fuels which typically comprise less than 30%wt of aromatics, preferably less than 10%wt of aromatics and even more preferably less than 5%wt of aromatics, based on the total weight of the crude oils and fuels.

Hydrocarbon streams contain H_2S and/or mercaptans, in an amount for example ranging from 1 to 10 000 ppm. Mercaptans that can be removed from hydrocarbon streams within the framework of the present invention may be C_1 - C_6 mercaptans, such as C_1 - C_4 mercaptans.

According to an embodiment of the present invention, the weight ratio H_2S :scavenging composition ranges from 1:2 to 1:0.05, preferably from 1:1 to 1:0.1, more preferably from 1:0.9 to 1:0.2, even more preferably from 1:0.7 to 1:0.3 and advantageously from 1:0.8 to 1:0.4. In this ratio, H_2S represents the amount of hydrogen sulphide in the hydrocarbon streams, before contacting with the scavenging composition of the invention.

The present invention also concerns hydrocarbon streams comprising hydrocarbons and the composition of the invention. The hydrocarbon streams considered in the present invention may be either

single-phase hydrocarbon streams or multiphase systems comprising oil/water or oil/water/gas or gas/water.

Hydrocarbons may be selected from crude oil, fuel oil, fuel, Light Petroleum Gas and natural gas. Hydrocarbon streams may be selected from crude oils and fuels which typically comprise more than 60%wt of paraffins, preferably more than 70%wt of paraffins and even more preferably more than 75%wt of paraffins, based on the total weight of the crude oils and fuels. Hence, hydrocarbon streams may be selected from crude oils and fuels which typically comprise less than 30%wt of aromatics, preferably less than 10%wt of aromatics and even more preferably less than 5%wt of aromatics, based on the total weight of the crude oils and fuels.

Hydrocarbon streams contain H₂S and/or mercaptans, in an amount for example ranging from 1 to 10 000 ppm. Mercaptans that can be removed from hydrocarbon streams within the framework of the present invention may be C₁-C₆ mercaptans, such as C₁-C₄ mercaptans.

The composition of the invention may represent from 0.0005 to 5 % by weight of the total weight of the hydrocarbon streams.

According to an embodiment of the present invention, the weight ratio H₂S:scavenging composition ranges from 1:2 to 1:0.05, preferably from 1:1 to 1:0.1, more preferably from 1:0.9 to 1:0.2, even more preferably from 1:0.7 to 1:0.3 and advantageously from 1:0.8 to 1:0.4. In this ratio, H₂S represents the amount of hydrogen sulphide of the hydrocarbon streams, before contacting with the scavenging composition of the invention.

EXAMPLES

The invention is now described with the help of following examples, which are not intended to limit scope of the present invention, but are incorporated to illustrate advantages of the present invention and best mode to perform it. The following examples also demonstrated effectiveness of scavenging compositions of the present invention, which can be a composition comprising of MBO (3,3'-methylenebis(5-methyloxazolidine) and sorbitan oleate or a composition comprising of MBO (3,3'-methylenebis(5-methyloxazolidine) and ethoxylated sorbitan trioleate.

EXAMPLE 1: Protocol of measurement of H₂S scavenging ability of the scavenging compositions of the invention under modified ASTM D-5705 conditions, as detailed below.

ASTM D-5705 is recommended for measurement of Hydrogen sulfide in a vapor phase above the residual fuel oils. Performance evaluation of the various products and formulations developed as Hydrogen Sulfide Scavengers were evaluated using modified ASTM D-5705 test method.

5 In typical experiment, 1 liter tin metal bottles with inner and outer caps were used to prepare and hold the test media. Dearomatized hydrocarbon solvents (with high boiling range i.e. $>120^{\circ}\text{C}$ and flash point above 65°C with aromatic content less than 0.1%) is used for the tests.

10 In a representative experimental set, a defined amount of H_2S saturated hydrocarbon solvent, typically between 2000 and 7000 ppm by weight of H_2S , was inserted in a well-sealed plastic drum containing 10 liters of dearomatized hydrocarbon solvent. The plastic drum was then kept on a reciprocating shaking machine for 5 min to allow proper mixing of the H_2S gas. 500 mL of the H_2S containing dearomatized hydrocarbon solvent were then transferred to first tin metal bottle and sealed with inner and outer caps. The tin metal bottle was then kept in a water bath at 60°C for two hours. After
15 two hours, the tin metal bottle was taken out and cooled down to room temperature under running tap water and kept aside. An H_2S detecting tube (Dräger tube, with typical detection limit ranging from 100 to 70 000 ppm by weight) was inserted in a rubber cork through a hole having the same diameter as the detecting tube. The sealed ends of the H_2S detecting tube were opened with an appropriate opener, one end of the tube being attached to Dräger pump. The inner and outer caps of the tin metal bottles were
20 opened and very quickly the rubber cork with H_2S detector tube was inserted inside the opening of the tin metal bottle. The H_2S gas in the vapor phase of the tin metal bottle was then pulled through the H_2S measuring tube using Dräger pump attached at the other end of the tube. The detector tube was removed after complete decompression of the pump. H_2S concentration was read from the tubes calibration scale (typically color change from colorless to brown). This reading was noted as a reference Blank reading of
25 H_2S amount.

Further, remaining H_2S containing dearomatized hydrocarbon solvent was transferred into other tin metal bottles, each with 500 mL of the dearomatized hydrocarbon, all bottles being pre-charged with the H_2S scavengers at different ratios of scavenger against H_2S , based on the Blank reading. Typical
30 H_2S :scavenger ratios employed were 1:1, 1:0.8, 1:0.6, 1:0.4, 1:0.2 and 1:0.1. All the metal bottles were kept in a water bath for two hours at 60°C . Similar protocol was employed to measure the H_2S in the vapor phase of all the bottles as used to make the Blank reading. The difference between the Blank H_2S

concentration and H₂S concentration observed with different concentrations of the scavenging products and formulations are noted as % scavenging. A higher % Scavenging with lower concentration of the scavenging product is considered as better H₂S scavenger for the set of experiment.

- 5 The protocol of measurement was repeated three times with each scavenging composition and the indicated percentage was calculated based on the average of the measurements.

EXAMPLE 2: Measurement of H₂S scavenging ability of the scavenging compositions of the invention under modified ASTM D-5705 conditions, as detailed in Example 1.

10

- Table 1 below summarizes the scavenging compositions that were tested. The synergistic additive used in Examples I1, I2 and I3 according to the invention was sorbitan oleate. This product is available from Oleon under the commercial name Radasurf®. A sample of Radasurf® 7348 was used in the following examples, at a dilution rate of about 50 wt% in xylene. The concentration of additive reported in Table 1 corresponds to the actual amount of active ingredient in the scavenging composition. As such, composition I1 comprises 10 wt% of additive solution at 45-55 wt% of active content, which correspond to 4.5-5.5 wt% of active ingredient in the scavenging composition.

Table 1: scavenging compositions (in wt% based on the total weight of the composition)

H ₂ S scavenging composition	MBO (wt%)	Synergistic additive (wt% of active ingredient) Radasurf® 7348	Solvent (wt%) xylene
C1 (comparative)	50	0	50
C2 (comparative)	100	0	0
I1	50	4.5-5.5	44.5-45.5
I2	50	2.25-2.75	47.25-47.75
I3	45	2.25-2.72	52.25-52.75

20

Table 2 below shows the percentage of H₂S reduction based on the measured H₂S amount in vapour phase after treatment with comparative MBO compositions (C1 and C2) and H₂S scavenging compositions of the invention (I1, I2 and I3).

Table 2: Scavenging efficiency (% of H₂S reduction) of the scavenging compositions

H ₂ S scavenging composition	Sample1 (blank)	Sample2 [1:0.1]	Sample3 [1:0.2]	Sample4 [1:0.4]	Sample5 [1:0.6]	Sample6 [1:0.8]	Sample7 [1:1]
C1 (50% MBO)	0	3	12	43	74	92	100
C2 (100% MBO)	0	15	45	93	100	100	100
I1 (50% MBO; 4.5-5.5% additive)	0	12	25	86	98	100	100
I2 (50% MBO; 2.25-2.75% additive)	0	20	40	82	95	100	100
I3 (45% MBO; 2.25-2.75% additive)	0	10	30	76	98	100	100

The results in Table 2 clearly show that the scavenging compositions of the present invention are much more efficient than the scavenging compositions of the prior art.

If we refer for example to sample 4 wherein the weight ratio H₂S:scavenging composition is 1:0.4, we can observe that 86% of the H₂S have been scavenged with the scavenging composition I1 according to the invention and even 82% of the H₂S with the scavenging composition I2 comprising twice less additive than I1, whereas only 43% of the H₂S have been scavenged with the scavenging composition C1 of prior art.

EXAMPLE 3: Measurement of H₂S scavenging ability of the synergistic additive under modified ASTM D-5705 conditions, as detailed in Example 1.

The synergistic additive of the invention was also tested alone for its ability to scavenge hydrogen sulphide using the modified ASTM D-5705 method. The aim was to determine the contribution of the synergistic additive to the total scavenging ability of the composition.

The protocol of measurement was repeated three times with each composition of synergistic additive and the indicated percentage was calculated based on the average of the measurements.

Table 3 below shows the percentage of H₂S reduction based on the measured H₂S amount in vapour phase after treatment with the additive in a solvent. The tested comparative composition C3 comprises 5% by weight of sorbitan oleate and 95% by weight of xylene. Similarly C4 comprise 10% by weight of sorbitan oleate and 90% by weight of xylene.

Table 3: % Scavenging efficiency (% of H₂S reduction) of the synergistic additive

synergistic additive composition	Sample1 (blank)	Sample2 [1:0.1]	Sample3 [1:0.2]	Sample4 [1:0.4]	Sample5 [1:0.6]	Sample6 [1:0.8]	Sample7 [1:1]
C3 (5% additive)	0	0	0	0	0	0	0
C4 (10% additive)	0	0	0	0	0	0	0

The results in Table 3 clearly show that the synergistic additive has no direct effect on the scavenging of hydrogen sulphide. This confirms that said additive cannot itself scavenge H₂S but has a boosting effect when used together with an H₂S scavenging compound.

EXAMPLE 4: Measurement of H₂S scavenging ability of the scavenging compositions of the invention under modified ASTM D-5705 conditions

The following protocol has been followed:

ASTM D-5705 is recommended for measurement of Hydrogen sulfide in a vapor phase above the residual fuel oils. Performance evaluation of the various products and formulations developed as Hydrogen Sulfide Scavengers were evaluated using modified ASTM D-5705 test method.

In a typical experiment, 1 liter tin metal bottles with silicon septa were used to prepare and hold in the two test media:

- Test media 1 : a dearomatized hydrocarbon solvent having an initial boiling point higher than 120°C, a final boiling point lower than 250°C (the difference between the final boiling point and the initial boiling point ranges from 20 to 35°C) and a flash point above 65°C with aromatic content less than 0.1%wt and a paraffin content of more than 75%wt,
- Test media 2: a dearomatized hydrocarbon solvent having an initial boiling point higher than 120°C, a final boiling point higher than 250°C (the difference between the final boiling point and the initial boiling point ranges from 40 to 50°C) and a flash point above 100°C with aromatic content less than 0.05%wt and a paraffin content of more than 75%wt.

In a representative experimental set, a defined amount of H₂S saturated hydrocarbon solvent, typically between 2000 and 7000 ppm by weight of H₂S, was injected in 1 liter tin metal bottle pre-filled with 500 ml of dearomatized hydrocarbon solvent through the silicon septa fixed at the opening of the bottle using micro-syringe. The metal bottle was then kept on a reciprocating shaking machine for 5 min to allow proper mixing of the H₂S gas. The tin metal bottle was then kept in a water bath at 60°C for two

hours. After two hours, the tin metal bottle was taken out and cooled down to room temperature under running tap water and kept aside. An H₂S detecting tube (Dräger tube, with typical detection limit ranging from 100 to 70 000 ppm by weight) was inserted in a rubber cork through a hole having the same diameter as the detecting tube. The sealed ends of the H₂S detecting tube were opened with an appropriate opener, one end of the tube being attached to Dräger pump. The silicon septa mounted at the opening of the tin metal bottles was removed and very quickly the rubber cork with H₂S detector tube was inserted inside the opening of the tin metal bottle. The H₂S gas in the vapor phase of the tin metal bottle was then pulled through the H₂S measuring tube using Dräger pump attached at the other end of the tube. The detector tube was removed after complete decompression of the pump. H₂S concentration was read from the tubes calibration scale (typically color change from colorless to brown). This reading was noted as a reference Blank reading of H₂S amount.

Further, same amount of H₂S containing dearomatized hydrocarbon solvent was injected into other tin metal bottles, which are pre-filled with 500 mL of the dearomatized hydrocarbon, and H₂S scavengers at different ratios of scavenger against H₂S, based on the Blank reading. Typical H₂S:scavenger ratios employed were 1:1, 1:0.8, 1:0.6, 1:0.4, 1:0.2 and 1:0.1. All the metal bottles were kept in a water bath for two hours at 60°C. Similar protocol was employed to measure the H₂S in the vapor phase of all the bottles as used to make the Blank reading. The difference between the Blank H₂S concentration and H₂S concentration observed with different concentrations of the scavenging products and formulations are noted as % scavenging. A higher % Scavenging with lower concentration of the scavenging product is considered as better H₂S scavenger for the set of experiment.

The protocol of measurement was repeated three times with each scavenging composition and the indicated percentage was calculated based on the average of the measurements.

Table 4 below summarizes the scavenging compositions that have been tested. The synergistic additive used in Examples I4, I5 and I6 is identical to the additive used in example 2, except that additive Radasurf® has not been diluted and the solvent used is butyl carbirol (instead of xylene). The concentration of additive reported in Table 4 corresponds to the actual amount of active ingredient in the scavenging composition.

Table 4: scavenging compositions (in wt% based on the total weight of the composition)

H ₂ S scavenging composition	MBO (wt%)	Synergistic additive (wt% of active ingredient) Radasurf® 7348	Solvent (wt%) Butyl carbitol
C5	50	0	50
I4	50	5	45
I5	50	2.5	47.5
I6	50	1	49

Table 5 below shows the percentage of H₂S reduction based on the measured H₂S amount in vapour phase after treatment with a comparative MBO composition (C5) and H₂S scavenging compositions of the invention (I4, I5 and I6).

Table 5 : Scavenging efficiency (% of H₂S reduction) of the scavenging compositions

H ₂ S scavenging composition in Test media	Sample1 (blank)	Sample2 [1:0.1]	Sample3 [1:0.2]	Sample4 [1:0.4]	Sample5 [1:0.6]	Sample6 [1:0.8]	Sample7 [1:1]
C5 in Test Media 1	0	5	12	43	74	92	100
C5 in Test Media 2	0	10	26	78	85	100	100
I4 in Test Media 1	0	18	40	86	98	100	100
I4 in Test Media 2	0	24	56	94	100	100	100
I5 in Test Media 1	0	12	32	82	95	100	100
I6 in Test Media 1	0	12	25	72	88	100	100

The results in Table 5 clearly show that the scavenging compositions of the present invention are much more efficient than the scavenging compositions of the prior art, in both hydrocarbon streams that have been used as test media.

EXAMPLE 5: Measurement of H₂S scavenging ability of the scavenging compositions of the invention under modified ASTM D-5705 conditions

Similar experiments as example 4 have been performed, except that another synergistic additive has been used and the solvent used is xylene. The synergistic additive used is an ethoxylated trioleate sorbitan comprising 15%mol of ethoxy groups, commercially available as a composition comprising 100% of active matter. Table 6 below summarizes the scavenging compositions that have been tested.

Table 6: scavenging compositions (in wt% based on the total weight of the composition)

H ₂ S scavenging composition	MBO (wt%)	Synergistic additive (wt% of active ingredient)	Solvent (wt%) xylene
C1 (comparative)	50	0	50
I7	50	5	45
I8	50	2.5	47.5
I9	50	1	49

Table 7 below shows the percentage of H₂S reduction based on the measured H₂S amount in vapour phase after treatment with comparative MBO composition (C1) and H₂S scavenging compositions of the invention (I7, I8 and I9).

Table 7 : Scavenging efficiency (% of H₂S reduction) of the scavenging compositions

H ₂ S scavenging composition in Test media	Sample1 (blank)	Sample2 [1:0.1]	Sample3 [1:0.2]	Sample4 [1:0.4]	Sample5 [1:0.6]	Sample6 [1:0.8]	Sample7 [1:1]
C1 in Test Media 1	0	5	12	43	74	92	100
C1 in Test Media 2	0	10	26	78	85	100	100
I7 in Test Media 1	0	18	36	80	96	100	100
I7 in Test Media 2	0	18	50	90	95	100	100
I8 in Test Media 1	0	12	28	74	92	100	100
I9 in Test Media 1	0	10	24	67	90	100	100

The results in Table 7 clearly show that the scavenging compositions of the present invention are much more efficient than the scavenging compositions of the prior art, in both hydrocarbon streams that have been used as test media.

CLAIMS

1. A composition for scavenging hydrogen sulphide and mercaptans from hydrocarbon streams, said composition comprising an oxazolidine compound and an additive selected from partial polyol esters comprising x ester units, y hydroxylated units and z ether units, x, y and z being integers such that x varies from 1 to 10, y varies from 1 to 10, and z varies from 0 to 50.
2. The composition according to claim 1, wherein the oxazolidine compound is a bisoxazolidine compound.
3. The composition according to any of claim 1 or 2, wherein the polyols are chosen from the group comprising erythritol, xylitol, D-arabitol, L-arabitol, ribitol, sorbitol, malitol, isomalitol, lactitol, sorbitan, volemitol, mannitol, pentaerythritol, 2-hydroxymethyl-1,3-propanediol, 1,1,1-tri(hydroxymethyl) ethane, trimethylolpropane and carbohydrates such as sucrose, fructose, maltose, glucose and saccharose, preferably sorbitan.
4. The composition according to any of claims 1 to 3, wherein the additive is selected from partial sorbitan ester of an unsaturated fatty acid comprising from 10 to 24 carbon atoms, preferably from sorbitan oleate optionally alkoxyated.
5. The composition according to any of claims 1 to 4, wherein the composition comprises from 19 to 99%wt of oxazolidine compound(s) and from 1 to 50%wt of said additive(s), based on the total weight of the composition.
6. The composition according to any of claims 1 to 5, wherein the weight ratio of oxazolidine compound(s) to said additive(s) ranges from 1 to 100, preferably from 1 to 50, more preferably from 2 to 30, even more preferably from 4 to 20.
7. The composition according to any of claims 1 to 6, further comprising a solvent, preferably in an amount ranging from 1 to 80%wt, based on the total weight of the composition.
8. The composition according to any of claims 1 to 7, comprising:

- From 19 to 80%wt of oxazolidine compound(s),
 - From 1 to 30%wt of said additive(s), and
 - From 1 to 80%wt of solvent(s),
- based on the total weight of the composition.
9. Use of the additive defined in any of claims 1 to 8, for improving the efficiency of an oxazolidine compound for scavenging hydrogen sulphide and/or mercaptans in hydrocarbon streams.
 10. Hydrocarbon stream comprising hydrocarbons and a composition according to any of claims 1 to 8.
 11. Hydrocarbon streams according to claim 10, wherein the hydrocarbons are selected from crude oil, fuel oil, fuel, Light Petroleum Gas and natural gas.
 12. A method for scavenging hydrogen sulphide and/or mercaptan in hydrocarbon streams, comprising contacting the hydrocarbon stream with the composition according to any of claims 1 to 8.
 13. The method according to claim 12, wherein the weight ratio between hydrogen sulphide contained in the hydrocarbon stream before the step of contacting and the composition ranges from 1:2 to 1:0.05, preferably from 1:1 to 1:0.1, more preferably from 1:0.9 to 1:0.2, even more preferably from 1:0.7 to 1:0.3 and advantageously from 1:0.8 to 1:0.4.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/083680

A. CLASSIFICATION OF SUBJECT MATTER INV. C10L1/14 C10G29/20 C10L3/10 ADD. C10L1/19 C10L1/233		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C10L C10G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2017/102693 A1 (SCHÜLKE & MAYR GMBH [DE]) 22 June 2017 (2017-06-22) cited in the application page 1, lines 4-6 page 2, line 5 - page 4, line 2; claims 1-22; examples 0X, 0K -----	1-13
X	US 6 117 310 A (RIVERS GORDON T [US]) 12 September 2000 (2000-09-12) column 2, line 1 - column 3, line 8; claims 1-18; examples 1-3 -----	1-13
A	FR 3 057 877 A1 (TOTAL MARKETING SERVICES [FR]) 27 April 2018 (2018-04-27) page 22, lines 22-23 -----	1-4
A	US 2015/315506 A1 (DUBOIS THOMAS [FR]) 5 November 2015 (2015-11-05) paragraph [0040]; example 1; table 1 -----	1-4
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 14 February 2020		Date of mailing of the international search report 28/02/2020
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Bork, Ana-Maria

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/083680

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2017102693	A1	22-06-2017	BR 112018011859 A2 27-11-2018
		CN 108495914 A 04-09-2018	
		DE 102015121689 A1 14-06-2017	
		EP 3390578 A1 24-10-2018	
		US 2018371334 A1 27-12-2018	
		WO 2017102693 A1 22-06-2017	

US 6117310	A	12-09-2000	AU 719046 B2 04-05-2000
		CA 2231659 A1 22-01-1998	
		DK 0882112 T3 13-01-2003	
		EP 0882112 A1 09-12-1998	
		NO 317951 B1 10-01-2005	
		US 6117310 A 12-09-2000	
		US 6339153 B1 15-01-2002	
		WO 9802501 A1 22-01-1998	

FR 3057877	A1	27-04-2018	NONE

US 2015315506	A1	05-11-2015	AR 092373 A1 15-04-2015
		BR 112015003674 A2 26-09-2017	
		CN 104603246 A 06-05-2015	
		EA 201590422 A1 30-06-2015	
		EP 2888344 A1 01-07-2015	
		FR 2994695 A1 28-02-2014	
		TW 201425566 A 01-07-2014	
		US 2015315506 A1 05-11-2015	
		WO 2014029770 A1 27-02-2014	
