




- (51) **International Patent Classification:**
G06F 3/041 (2006.01) *G06F 3/048* (2006.01)
- (21) **International Application Number:**
PCT/US2012/036208
- (22) **International Filing Date:**
3 May 2012 (03.05.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/150,727 1 June 2011 (01.06.2011) US
- (71) **Applicant (for all designated States except US):** **MO-
TOROLA MOBILITY LLC** [US/US]; 600 North Us
Highway 45, Libertyville, Illinois 60048 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** **MOORE, Stephen C.**
[US/US]; 208 Sutterville Cove, Austin, Texas 78717 (US).
- (74) **Agents:** **BRETSCHER, John T.** et al.; 600 North US
Highway 45, Libertyville, Illinois 60048 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** USING PRESSURE DIFFERENCES WITH A TOUCH-SENSITIVE DISPLAY SCREEN

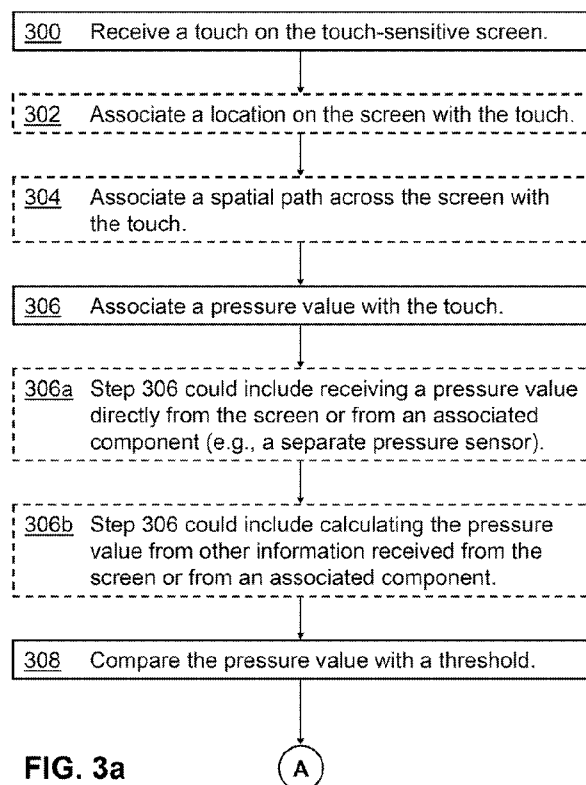

(57) **Abstract:** Disclosed is a user interface that responds to differences in pressure detected by a touch-sensitive screen (102). The user selects one type of user-interface action by "lightly" touching (310) the screen (102) and selects (312) another type of action by exerting more pressure. Embodiments can respond to single touches, to gestural touches that extend across the face of the touch-sensitive screen, and to touches in which the user-exerted pressure varies (504) during the course of the touch. Some embodiments respond to how quickly the user changes (506) the amount of pressure applied. In some embodiments, the location and pressure of the user's input are compared (604) against a stored gesture profile. Action is taken only if the input matches "closely enough" (606) to the stored gesture profile. In some embodiments, a notification is sent to the user when the pressure exceeds a threshold between a light and a heavy press (312c).



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

USING PRESSURE DIFFERENCES WITH A TOUCH-SENSITIVE DISPLAY SCREEN

FIELD OF THE INVENTION

[0002] The present invention is related generally to personal electronic devices and, more particularly, to user interfaces for touch-sensitive display screens.

BACKGROUND OF THE INVENTION

[0003] Touch-sensitive display screens are a well known component of many personal electronic devices. By noting and responding to a user's touch (usually with a finger or a stylus), these screens both gather user input and present the device's output in a unified way that is very appealing for many applications.

[0004] The first popular touch-sensitive display screens could only reliably note one touch location at a time. In the presence of multiple simultaneous touches, these display screens would become confused and unpredictable. Now, however, many devices incorporate screens that reliably track several simultaneous touches and can measure the total pressure exerted by the user.

[0005] One of the appealing aspects of touch-sensitive display screens is that they can, in some instances at least, replace both the keyboard and the pointing device (e.g., a mouse or trackball) found on the more traditional personal computer. This makes these screens especially useful for very small devices such as smart phones where a keyboard, if present at all, is too small to be optimal for ten-finger typing.

[0006] Naturally, the development of user-interface modalities for touch-sensitive screens has followed the uses pioneered by the fixed keyboard and mouse. People very easily transition from using a mouse to control a cursor on the display screen to simply touching the screen and dragging the cursor where it is needed.

BRIEF SUMMARY

[0007] The above considerations, and others, are addressed by the present invention, which can be understood by referring to the specification, drawings, and claims. According to aspects of the present invention, the ability of some modern touch-sensitive screens to respond to differences in pressure is used to enhance a device's user interface. The user selects one type of user-interface action by "lightly" touching the screen and selects another type of action by exerting more pressure. For example, a light touch can be interpreted as a traditional "single click" from a mouse button, while a firmer touch can act as a "double click." In another example, within a drawing application, the user draws with a light touch and erases with a heavier touch.

[0008] Some touch-screens reliably report on a range of user pressures. Embodiments of the present invention can take advantage of this range by allowing the user to select three or even more distinct actions depending upon exactly how firmly he presses against the screen. For example, if the user is fast-forwarding through a media presentation, the speed of the fast-forwarding can vary directly with the amount of pressure exerted.

[0009] Aspects of the present invention are not limited to single-touch modalities. Instead, embodiments can respond to single touches, to gestural touches that extend across the face of the touch-sensitive screen, and to touches in which the user-exerted pressure varies during the course of the touch. Some embodiments respond to how quickly the user changes the amount of pressure applied.

[0010] In some embodiments, the location and pressure of the user's input are compared against a stored gesture profile. Action is taken only if the input matches "closely enough" to the stored gesture profile. For example, a user signs his name, and the signature is then compared against a stored signature profile. The user is given access to controlled information if the signatures match.

[0011] In some embodiments, a notification is sent to the user when the pressure exceeds a threshold between a light and a heavy press. For example, an icon can be

shown on the screen when the pressure is heavy. (This is similar to the “CAPS LOCK” icon sometimes shown in conjunction with a traditional keyboard.) A sound could also be played, or haptic feedback (a “buzz” felt by the user) given.

[0012] Various touch-sensitive screens embody various technologies, and thus they differ in how they measure and report different pressures. Aspects of the present invention work with any pressure-sensing screen.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0013] While the appended claims set forth the features of the present invention with particularity, the invention, together with its objects and advantages, may be best understood from the following detailed description taken in conjunction with the accompanying drawings of which:

- [0014] Figure 1 is a schematic of an exemplary personal electronic device usable with the present invention;
- [0015] Figures 2a and 2b are stylized representations of a touch-sensitive screen responding to different pressures;
- [0016] Figures 3a and 3b together form a flowchart of a first exemplary user interface that takes advantages of pressure reporting by a touch-sensitive screen;
- [0017] Figures 4a and 4b together form a flowchart of a particular embodiment of the user-interface method of Figures 3a and 3b;
- [0018] Figure 5 is a flowchart of an exemplary user interface that responds to a rate of change of the touch pressure; and
- [0019] Figure 6 is a flowchart of an exemplary user interface that uses the teachings of the present invention to compare a user's touch input with a stored gesture profile.

DETAILED DESCRIPTION

[0020] Turning to the drawings, wherein like reference numerals refer to like elements, the invention is illustrated as being implemented in a suitable environment. The following description is based on embodiments of the invention and should not be taken as limiting the invention with regard to alternative embodiments that are not explicitly described herein.

[0021] Figure 1 shows a representative personal electronic device 100 (e.g., a cellular telephone, personal digital assistant, or personal computer) that incorporates an embodiment of the present invention. Figure 1 shows the device 100 as a cellular telephone presenting its main screen 102 to its user. Typically, the main screen 102 is used for most high-fidelity interactions with the user. For example, the main screen 102 is used to show video or still images, is part of a user interface for changing configuration settings, and is used for viewing call logs and contact lists. To support these interactions, the main screen 102 is of high resolution and is as large as can be comfortably accommodated in the device 100. In some situations, it would be useful for the user to have access to a screen even larger than the main screen 102. For these situations, a larger external display can be connected to, and controlled by, the electronic device 100 (e.g., through a docking station). The device 100 may have a second and possibly a third screen for presenting status messages. These screens are generally smaller than the main screen 102. They can be safely ignored for the remainder of the present discussion.

[0022] The screen 102 is a touch-sensitive screen. When the user of the device applies pressure to the screen 102 at one point or at multiple points, the screen 102 reports the locations of the touches. The pressure associated with a touch is also reported. In some devices, the screen 102 itself includes pressure sensors and can measure the pressure applied at each point. In other devices, separate pressure sensors (not shown) report either localized pressure measurements or the total amount of pressure applied to the screen 102 as a whole. To cover all of these cases without using excessive language, the present discussion uses the shorthand phrase “the screen 102 reports the pressure”

regardless of which components on the device 100 actually measure and report the pressure.

[0023] Note that the present invention also applies to touch-sensitive screens that are *not* touch-sensitive *display* screens, such as touch-pads that do not have a display function. These are becoming less common today, and the present discussion focuses on examples that are touch-sensitive *display* screens.

[0024] Today, various technologies are being used to implement touch-sensitive screens 102. The present invention is intended to work with all existing, and any future-developed, touch-sensitive technologies.

[0025] The typical user interface of the personal electronic device 100 includes, in addition to the touch-sensitive screen 102, a keypad and other user-input devices. The keypad may be physical or virtual, involving virtual keys displayed on the touch-sensitive screen 102. Some devices 100 include an audio output and a haptic device for notifying the device's user.

[0026] Figure 1 illustrates some of the more important internal components of the personal electronic device 100. The network interface 104 sends and receives media presentations, related information, and download requests. The processor 106 controls the operations of the device 100 and, in particular, supports aspects of the present invention as illustrated in Figures 3 through 6, discussed below. The processor 106 uses the memory 108 in its operations. Specific uses of these components by specific devices are discussed as appropriate below.

[0027] Figure 2a shows how the touch-sensitive screen 102 responds to a number of touches of moderate pressure. The black areas 200a, 202a, and 204a represent where the user has pressed hard enough to register on the screen 102. (There is no requirement that these areas 200a, 202a, and 204a are displayed to the user of the screen 102 in any way.) The circular area 200a may be the result of a stylus tip or the user's finger tip. Area 202a is more elongated, possibly the result of the stylus or finger pushing down at an angle.

204a is a trace that extends through time. This could be interpreted as a “drag” motion or a gesture, depending upon the software that responds to the output of the screen 102.

[0028] In some embodiments, the screen 102 reports on the actual spatial extent of each of the touches 200a, 202a, and 204a. In these embodiments, Figure 2a is a literal display of what is reported by the screen 102. In other embodiments, the screen 102 reports the pressure exerted, but does not report the actual area of the touch. For example, the touch 200a may be reported as a single point on the screen 102 associated with a specific amount of pressure. In these embodiments, Figure 2a should be taken as a suggestive, rather than as a literal, representation of what the screen 102 reports.

[0029] In Figure 2b, the touches of Figure 2a are repeated but at higher pressures. The circular touch 200a has expanded with greater pressure to the circular area 200b. With greater pressure, the elongated touch 202b is not only larger in area, but has changed its shape, becoming somewhat less elongated with the greater pressure. The trace 204b has the same starting and ending points as the trace 204a, but the width of the trace 204b is much larger because of the greater pressure. In the screen embodiments that do not actually report on the area of the touch, trace 204b is reported with the same location (through time) as trace 204a, but with larger associated pressure values.

[0030] Figures 3a and 3b present a first exemplary method for using the pressure information provided by the touch-sensitive screen 102 in a user interface. In step 300 of Figure 3a, the processor 106 of the personal electronic device 100 receives information about a touch on the screen 102. The present discussion naturally focuses on pressure information associated with the touch, but, as is traditional, information about the touch generally includes at least one location of the touch (step 302). For a gestural touch such as the trace 204a in Figure 2a, the touch information includes the spatial path across the screen (step 304). (The spatial path is generally reported as a series of touched locations.)

[0031] Mention of the trace 204a of Figure 2a makes this a good point to discuss what can be meant by a “touch.” The trace 204a can be considered to be one touch that

extends through space and time. Alternatively, the trace 204a can be thought of as a long series of touches, one right after the other, each touch associated with particular point on the touch-sensitive screen 102 and associated with one particular moment in time. The distinction can be important in the present discussion when the user begins by pressing down with one pressure value and then, without releasing the pressure entirely, changes to a different pressure value. Some user interfaces consider this to be a single touch whose pressure changes with time, while other user interfaces consider this to be at least two touches temporally adjacent, each with a constant pressure value. Different definitions that divide a user's gesture into one or more "touches" can be significant in understanding what signals the user is sending, but the present invention works with any such definition.

[0032] In step 306, a pressure value is associated with the received touch information. There are many ways this can be accomplished, and the differences between them are usually based on the different technologies that can be used in embodying the touch-sensitive screen 102.

[0033] Step 306a covers those cases where the screen 102 itself reports the pressure value. When a touch covers more than a single point on the screen 102, then some screens 102 report on the pressure value of each point in the touch. Other screens 102 may simply give a total, or an average, pressure value for the touch. A trace like 204a in Figure 2a could include a long list of individual pressure values, one for each point along the trace.

[0034] Step 306a also covers the cases where a component (e.g., a pressure sensor) associated with the touch-sensitive screen 102 reports a pressure value. In a very simple case, the entire screen 102 can rest on a piezoelectric pressure sensor. When the screen 102 is touched, the pressure sensor reports the total amount of pressure exerted. This very simple system could not, of course, report the pressure exerted at each point of a touch that extends in space. In another example, a "smart" stylus measures the pressure that the

user is exerting and reports that information to the personal electronic device 100. In general, the stylus only reports total pressure.

[0035] Step 306b covers those cases where the pressure associated with the touch is not directly reported, but enough information is given that the pressure can be calculated. Some touch-sensitive screens 102 report the number of “points” that are included in the touch. This is the area of the screen 102 that has received enough pressure to register a touch. For these screens 102, the light touch 200a of Figure 2a and the heavy touch 200b of Figure 2b are distinguished by the fact that the area affected by the heavy touch 200b is larger. In some screens 102, the area is reported as the number of channels (or points) affected by the touch. Some screens 102 report a stronger signal that is in some manner proportional to the pressure of a touch. If a screen 102 reports both the area of the touch (or the number of channels affected) and a signal proportional to the total pressure, then the average pressure can be calculated by comparing these two values. Thus, a very light touch over a large area of the screen 102 is distinguished from a heavy touch concentrated in a small area, although the total pressure received by the entire screen 102 could be the same in these two cases.

[0036] It should be noted that, for many technologies, the pressure reported is a relative value rather than an actual value of newtons per square meter. The present invention works perfectly well with either actual or relative pressure measurements. Indeed, the pressure value associated with the touch in step 306 could be selected from the group: “above a threshold” and “below a threshold.” Of course, a touch-sensitive screen 102 can also report on a zero pressure value if queried (i.e., “no detected touch at the moment”), but in that case the method of Figures 3a and 3b would not be invoked.

[0037] In step 308, the pressure associated with the touch is compared against a non-zero threshold. (The threshold is *non-zero* because the present invention distinguishes between *light* and *heavy* touches, and a zero threshold would simply distinguish between a *touch* and a *no-touch*.) Note that the actual threshold value can vary with the application that will process the touch (in steps 310 and 312 of Figure 3b). However, the

use of a consistent threshold is recommended so that users can acquire a “feel” for how much pressure to exert to cross the threshold.

[0038] The simplest embodiment of a user interface includes only steps 310 and 312 of Figure 3b. In short, if the pressure is below the threshold, then one action is performed (step 310), otherwise a different action is performed (step 312). The user-interface actions could include, for example, selecting an icon displayed on the touch-sensitive screen 102, opening a file associated with an icon displayed on the screen 102, executing a program associated with an icon displayed on the screen 102, and modifying a value of a control parameter. As a specific example, if a drawing application is currently responding to the touch, then the drawing application could respond to a touch below the threshold by drawing on the screen 102, while a heavier touch could erase what was already drawn.

[0039] As another example, the touch could be sent to a media-playback application. A light touch on a fast-forward icon would fast-forward through a media presentation at a first speed, while a heavy touch would fast-forward through the presentation at a faster speed. If the pressure associated with the touch in step 306 of Figure 3a is more informative than simply “above the threshold” or “below the threshold,” then this two-speed fast-forward control could be refined, in step 312a by making its response proportional to the difference between the associated pressure and the threshold. That is to say, rather than simply switching between two speeds, the speed could keep increasing as the user presses harder and harder. Of course, this type of pressure-sensitive control could easily be combined with known techniques for increasing the speed as the user keeps the control pushed down. This example begins to show the real advantages of the present invention as user-interface designers are given possibilities beyond those traditionally associated with touch-sensitive screens.

[0040] Some embodiments, rather than linearly increasing the response with increased pressure, may simply include at least one more non-zero threshold (step 312b). This would turn the two-speed fast-forward control in the example above into a three-speed control, etc.

[0041] In any embodiment, the user-interface designer may choose to implement step 312c where a notification is given to the user that his pressure has crossed the threshold. For example, an icon could be shown on the touch-sensitive screen that the pressure is greater than the threshold, a sound could be played, or, possibly most usefully, a haptic response could be given that mimics the feedback encountered when a physical button is pressed down harder and harder against its spring. Different user interfaces will likely implement different notifications.

[0042] Note that in the examples given above, there is no a priori logical connection between the pressure exerted and the user-interface action chosen. To illustrate this point by a counter example, in a drawing application, the user's touch is graphically represented on the touch-sensitive screen 102: A line is displayed on the screen 102 when the user creates a trace, such as the trace 204a of Figure 2a. Because a physical brush paints a broader line when pressed harder, it would be logical for the drawing application to display a wider line when the pressure is heavy, as in trace 204b of Figure 2b. In this example, therefore, there exists in the user's mind an a priori logical connection between the pressure exerted and the width of the trace shown on the screen 102. However, as previous examples show, the present invention is in no way limited to these a priori logical implementations.

[0043] The discussion above is meant to be very general and to cover many possible embodiments. For a concrete example, consider the method illustrated in Figures 4a and 4b. The method begins with step 400 of Figure 4a. This step 400 emphasizes that a real-world touch may extend through time and space (on the touch-sensitive display screen 102). In this case, the screen 102 sends periodic messages (or is periodically queried by the processor 106), and the result is a string of location values and associated pressures. That is, step 400 introduces a processing loop (through step 408) that continues as long as the touch continues. Generally, the touch is considered to be complete, and the loop exits to step 410, when the pressure value reported from the screen 102 falls to zero.

[0044] As information about the touch is received, the processor 106 evaluates that information beginning in step 402. Here, a pressure value is associated with the touch at the current moment. The discussion above of step 306 of Figure 3a applies here as well. The current pressure value is compared against a pressure threshold in step 404.

[0045] The processor 106 keeps track of the distance covered by the touch. In general, the processor 106 calculates this distance from the periodic touch-location reports. In step 406, the total distance currently associated with the touch is compared against a distance threshold. If the distance threshold is exceeded, and if this touch has not already been classified as a “hard press” (see step 408), then this touch is classified as a “swipe.”

[0046] Similarly, in step 408, the current pressure is compared against a pressure threshold (as in step 308 of Figure 3a, discussed above). If the pressure threshold is exceeded, and if this touch has not already been classified as a “swipe” (see step 406), then this touch is classified as a “hard press.”

[0047] The processing loop (steps 400 through 408) continues for the duration of the touch. When the touch is complete, if the touch has not been otherwise classified, the touch is classified as a “tap” in step 410.

[0048] The result of steps 406 through 410 is that every touch is classified as exactly one of “hard press,” “swipe,” and “tap.” Of “hard press” and “swipe,” the first one triggered (by exceeding the appropriate threshold) trumps the other one. For example, once a touch is classified as a “hard press,” it cannot become a “swipe.” If neither threshold is exceeded, the default classification is “tap.” Clearly, other implementation choices using these three classifications are possible.

[0049] Finally, in step 412 of Figure 4b, a user-interface action is triggered by the touch, and the specific action is based on the classification of the touch. Note that in many cases, the action of step 412 does not have to wait until the touch is completed. Once a touch is classified as a “hard press,” for example, it cannot be reclassified as

either a “swipe” or a “tap,” so the user interface can take the appropriate action even before the touch is completed.

[0050] As an example of this point, consider the trace 204b of Figure 2b. Assume that the user begins the trace 204b by pressing down hard enough to exceed the pressure threshold. Then, this trace 204b is classified as a “hard press” (step 408 of Figure 4a). In one embodiment, the triggered user action (step 412 of Figure 4b) is a “drag and drop.” A screen icon located at the beginning of the trace 204b is “grabbed” as soon as this trace is classified (step 408), is moved along the path of the trace 204b, and is then set down when the trace 204b ends.

[0051] Figure 5 presents a refinement that can be used along with the previous examples. Those previous examples all monitor touch pressure; the method of Figure 5 also monitors the time rate of change of the pressure value. The method begins in step 500 where “datapoints” are received from the touch-sensitive screen 102. (Datapoints are not a departure from the previous methods: They are simply another way of explaining the relationship between the screen 102 and the user interface.) Just as with the extended touch of Figures 4a and 4b, the method of Figure 5 begins with a loop that continues for the duration of the touch. In step 500, the screen 102 periodically reports on the touch location.

[0052] In step 502, pressure values are associated with at least some of the datapoints. This step is similar to step 306 of Figure 3a and step 402 of Figure 4a.

[0053] Step 504 is new with the present method. A rate of change of the pressure is associated with the set of received datapoints. Generally, the processor 102 calculates the rate of change by mapping the associated pressures of step 502 with the timestamps of the datapoints (from step 500). This rate of change is then used in step 506 as input to the user interface. As just one example, a certain user-interface action could be triggered only if the user very quickly increases the pressure of the touch.

[0054] Optional step 508 notifies the user of the rate of change of pressure. This is similar to notifying the user that the pressure has exceeded a threshold (step 312c of Figure 3b), but, to be honest, it is believed that a notification is of less value for indicating the rate-of-change than it would be for indicating the switch between light and heavy pressure.

[0055] A final concrete example suffices to complete the present discussion. Figure 6 presents a user-interface method that builds on the capabilities discussed above. This method analyzes an extended touch, as do some of the previously discussed methods. The processing loop begins with step 600 where datapoints are received from the touch-sensitive screen 102. Pressure values are associated with the datapoints in step 602. These two steps mirror steps 300 and 306 of Figure 3a, 400 and 402 of Figure 4a, and steps 500 and 502 of Figure 5.

[0056] Then in step 604, the datapoint information is compared against a stored gesture profile. For example, the pressure and location of each datapoint (or, more likely, of representative datapoints) are compared against analogous datapoints in the stored gesture profile.

[0057] The stored gesture profile could, for example, be created from having the user sign his name on the touch-sensitive screen 102 a number of times. A profile is generated that characterizes his signature, using both location and pressure information. In one embodiment, the signatures are compared, and only the most stable parts are represented in the profile. The profile could include very specific threshold information that shows exactly how much this user varies the positioning and pressure information when signing his name. The techniques of Figure 5 could also be applied to the stored gesture profile by storing rate of change of pressure along with the location and pressure value information.

[0058] In step 606, if each of the comparisons is within a threshold (or if a pre-defined percentage of the comparisons are within the threshold), then the set of received

datapoints is taken as a match of the stored gesture profile. Continuing with the example of the signature, the user could be prompted to sign his name. His signature is the touch received and analyzed in steps 600 through 606. If his current signature matches the stored gesture profile, then he is authenticated and could be given access to controlled information. The method of Figure 6 thus provides a level of password security that is much more difficult to compromise than the standard text-entry mechanisms and that is even better than standard signature-based (that is, purely location-based) security mechanisms.

[0059] The method of Figure 6 can be used to recognize and verify any gestures made by the user. This method can, for instance, improve the reliability of a handwriting-recognition program.

[0060] The examples given above illustrate that the actual actions performed are chosen by the designer of the user interface, and the pressure value is simply a signal sent by the user of the personal electronic device 100 to the user interface.

[0061] In view of the many possible embodiments to which the principles of the present invention may be applied, it should be recognized that the embodiments described herein with respect to the drawing figures are meant to be illustrative only and should not be taken as limiting the scope of the invention. For example, widely different uses of the present invention are contemplated for different user interfaces and in different contexts. Therefore, the invention as described herein contemplates all such embodiments as may come within the scope of the following claims and equivalents thereof.

CLAIMS

We claim:

1. On a personal electronic device (100) with a touch-sensitive screen (102), a method for responding to user input, the method comprising:
 - receiving (300) a touch on the touch-sensitive screen (102);
 - associating (306) a pressure with the touch;
 - comparing (308) the associated pressure with a first non-zero threshold;and
 - if the associated pressure is less than the first threshold, then performing (310) a first user-interface action, else performing (312) a second user-interface action distinct from the first user-interface action.
2. The method of claim 1 wherein associating a pressure comprises receiving from the touch-sensitive screen an element selected from the group consisting of: an area measurement, a number of affected channels, and a signal strength.
3. The method of claim 2 wherein associating a pressure comprises comparing a signal strength received from the touch-sensitive screen with a number of affected channels.
4. The method of claim 1 wherein the first and second user-interface actions are selected from the group consisting of: selecting an icon displayed on the screen, opening a file associated with an icon displayed on the screen, executing a program associated with an icon displayed on the screen, modifying a value of a control parameter, opening a context menu, and picking up an icon displayed on the screen.

5. The method of claim 1:
 - wherein the first user-interface action is a drawing action; and
 - wherein the second user-interface action is an erasing action.
6. The method of claim 1:
 - wherein the associated pressure is equal to or greater than the first threshold; and
 - wherein performing the second user-interface action is based, at least in part, on a magnitude of a difference between the associated pressure and the first threshold.
7. The method of claim 6:
 - wherein the second user-interface action comprises changing a value; and
 - wherein a speed of change of the value is based, at least in part, on the magnitude of the difference between the associated pressure and the first threshold.
8. A personal electronic device (100) comprising:
 - a touch-sensitive screen (102); and
 - a processor (106) operatively connected to the touch-sensitive screen (102) and configured for:
 - receiving (300) a touch on the touch-sensitive screen (102);
 - associating (306) a pressure with the touch;
 - comparing (308) the associated pressure with a first non-zero threshold; and
 - if the associated pressure is less than the first threshold, then performing (310) a first user-interface action, else performing (312) a second user-interface action distinct from the first user-interface action.

9. On a personal electronic device (100) with a touch-sensitive screen (102), a method for responding to user input, the method comprising:
- as information about a touch is received (400) from the touch-sensitive screen (102):
 - associating (402) a pressure with the touch;
 - comparing (404) the associated pressure with a non-zero pressure threshold;
 - if a total distance associated with the touch exceeds a distance threshold, and if the touch has not already been classified as a hard press, then classifying (406) the touch as a swipe; and
 - if the associated pressure is greater than or equal to the pressure threshold, and if the touch has not already been classified as a swipe, then classifying (408) the touch as a hard press;
 - if the touch has not been classified as either a hard press or a swipe, then classifying (410) the touch as a tap; and
 - performing (412) a user-interface action, the action depending, at least in part, on a classification of the touch.

10. A personal electronic device (100) comprising:
 - a touch-sensitive screen (102); and
 - a processor (106) operatively connected to the touch-sensitive screen (102) and configured for:
 - as information about a touch is received (400) from the touch-sensitive screen (102):
 - associating (402) a pressure with the touch;
 - comparing (404) the associated pressure with a non-zero pressure threshold;
 - if a total distance associated with the touch exceeds a distance threshold, and if the touch has not already been classified as a hard press, then classifying (406) the touch as a swipe; and
 - if the associated pressure is greater than or equal to the pressure threshold, and if the touch has not already been classified as a swipe, then classifying (408) the touch as a hard press;
 - if the touch has not been classified as either a hard press or a swipe, then classifying (410) the touch as a tap; and
 - performing (412) a user-interface action, the action depending, at least in part, on a classification of the touch.

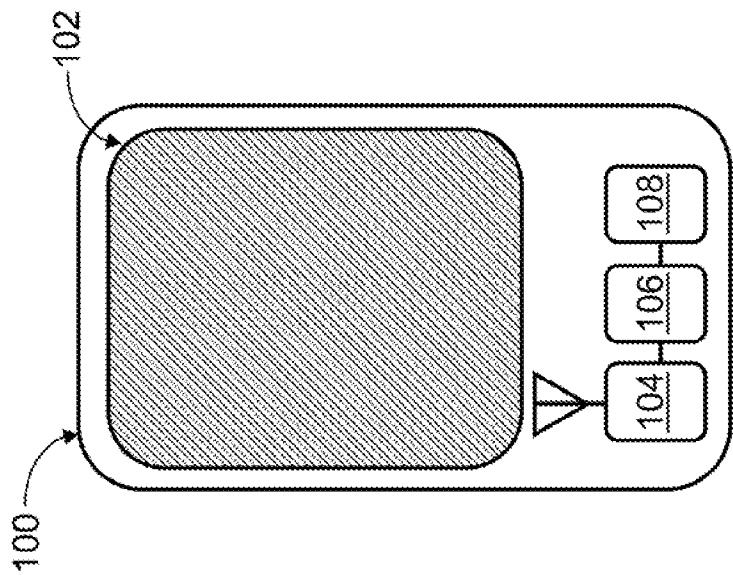


FIG. 1

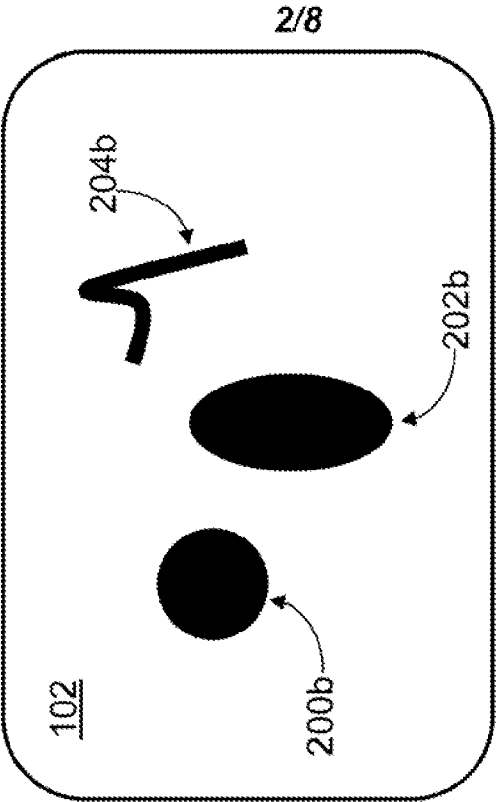


FIG. 2a



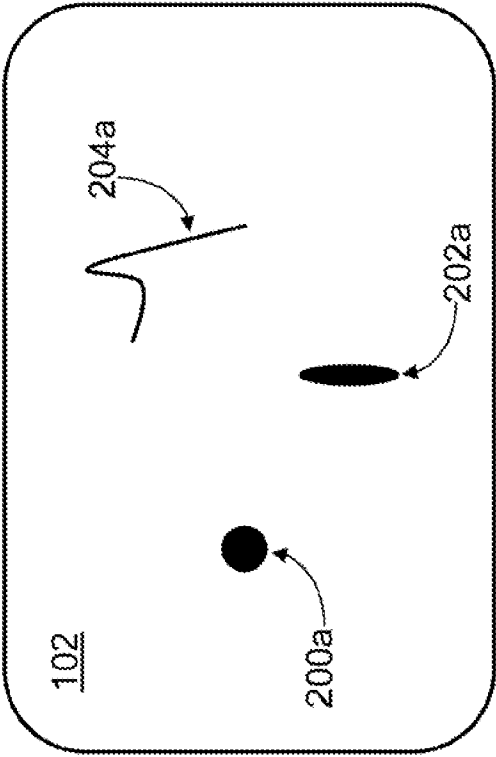


FIG. 2b


3/8

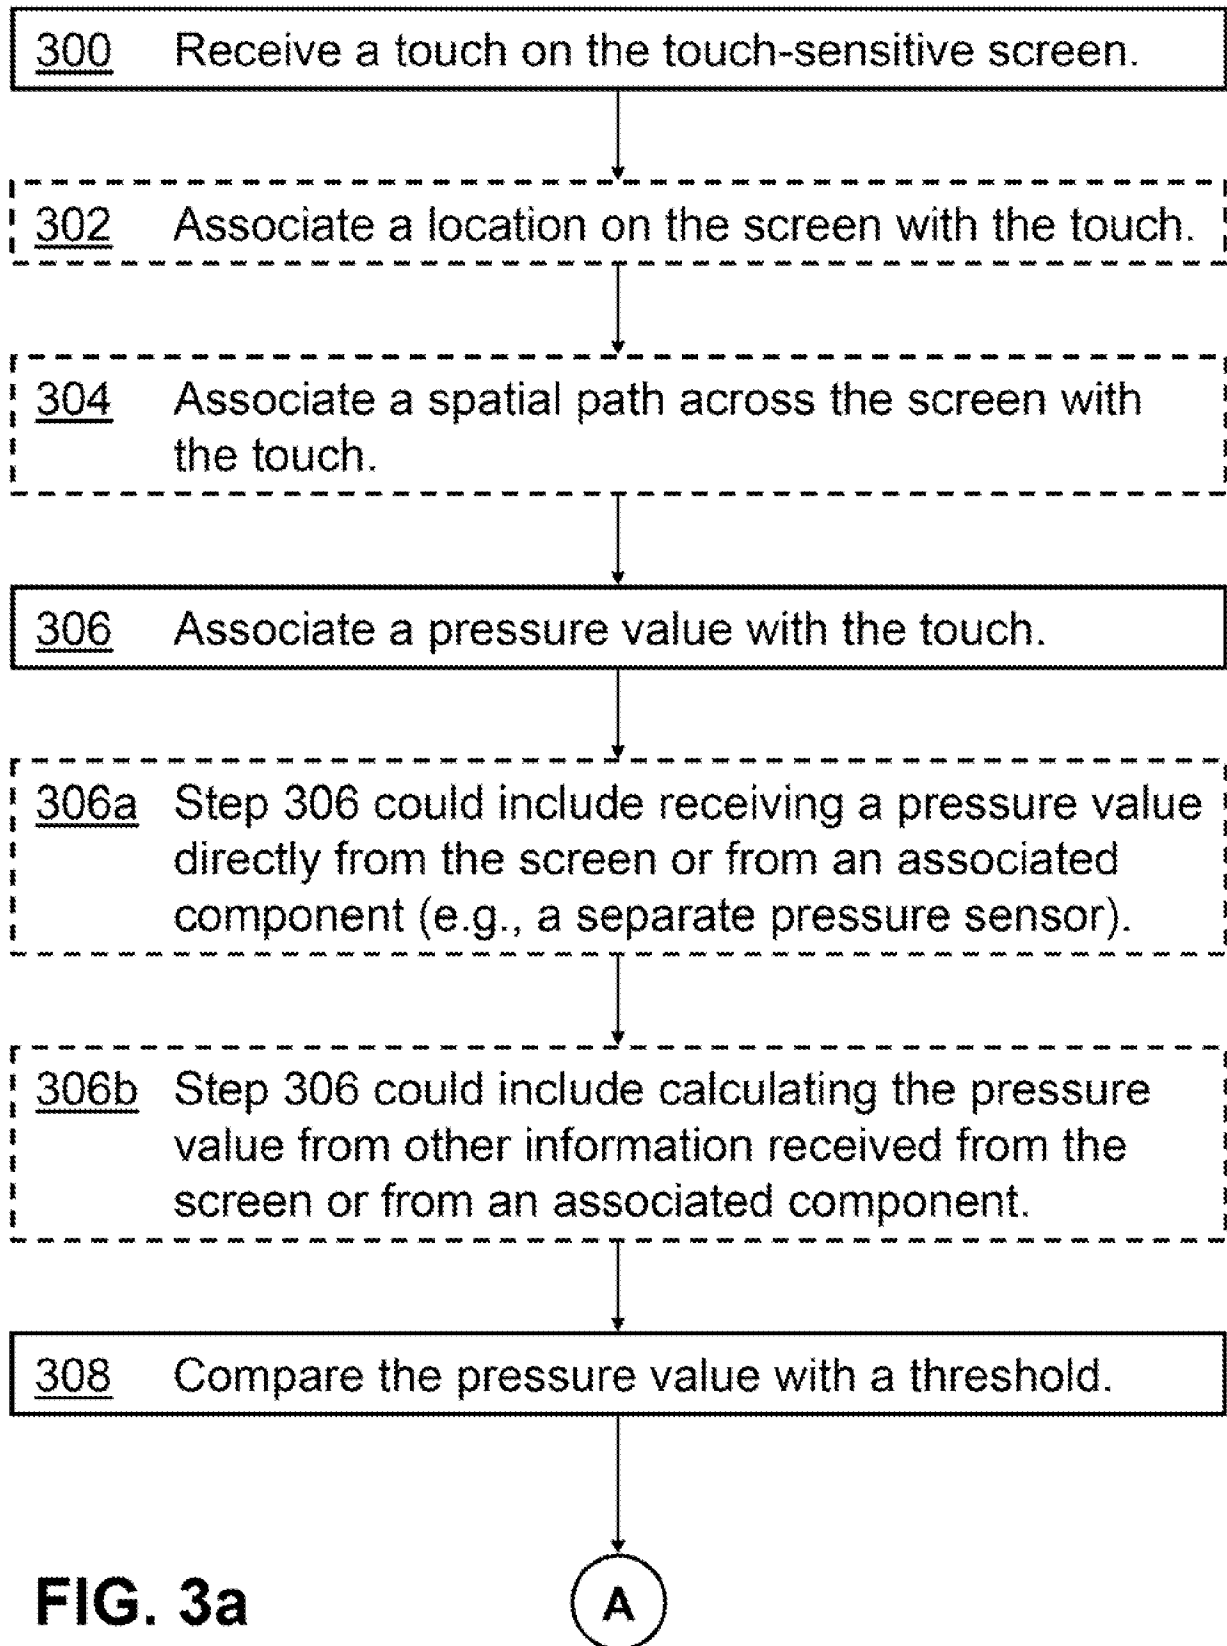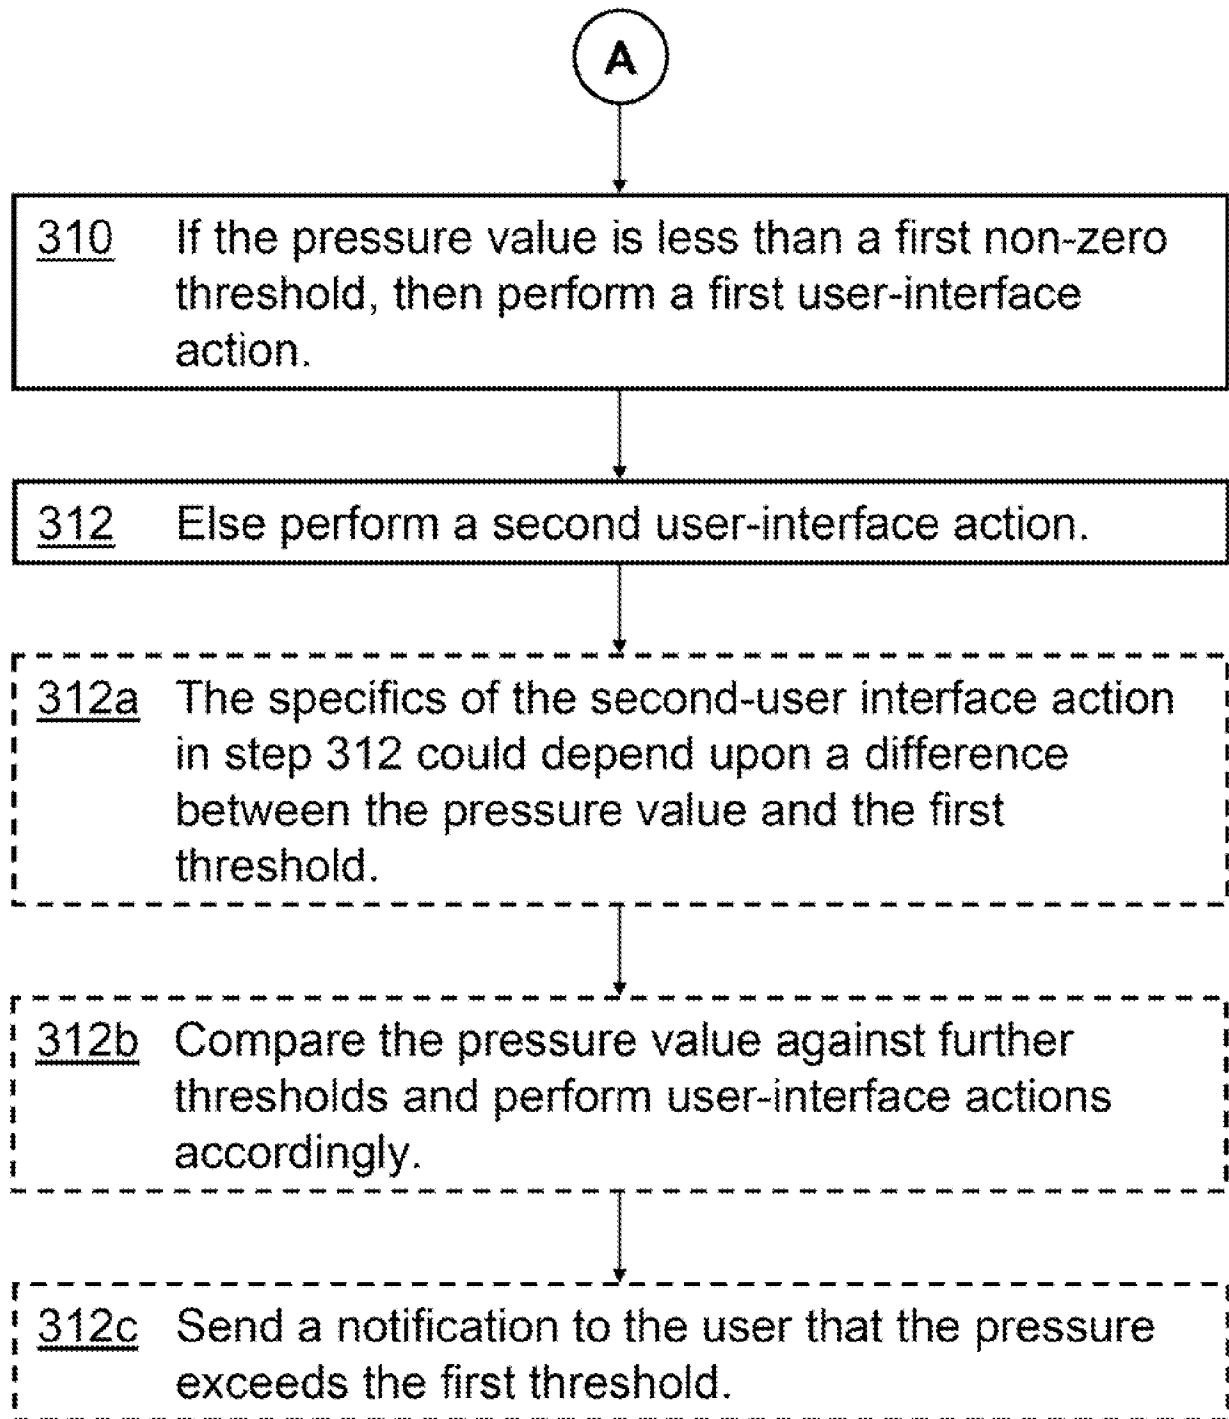

4/8

**FIG. 3b**

5/8

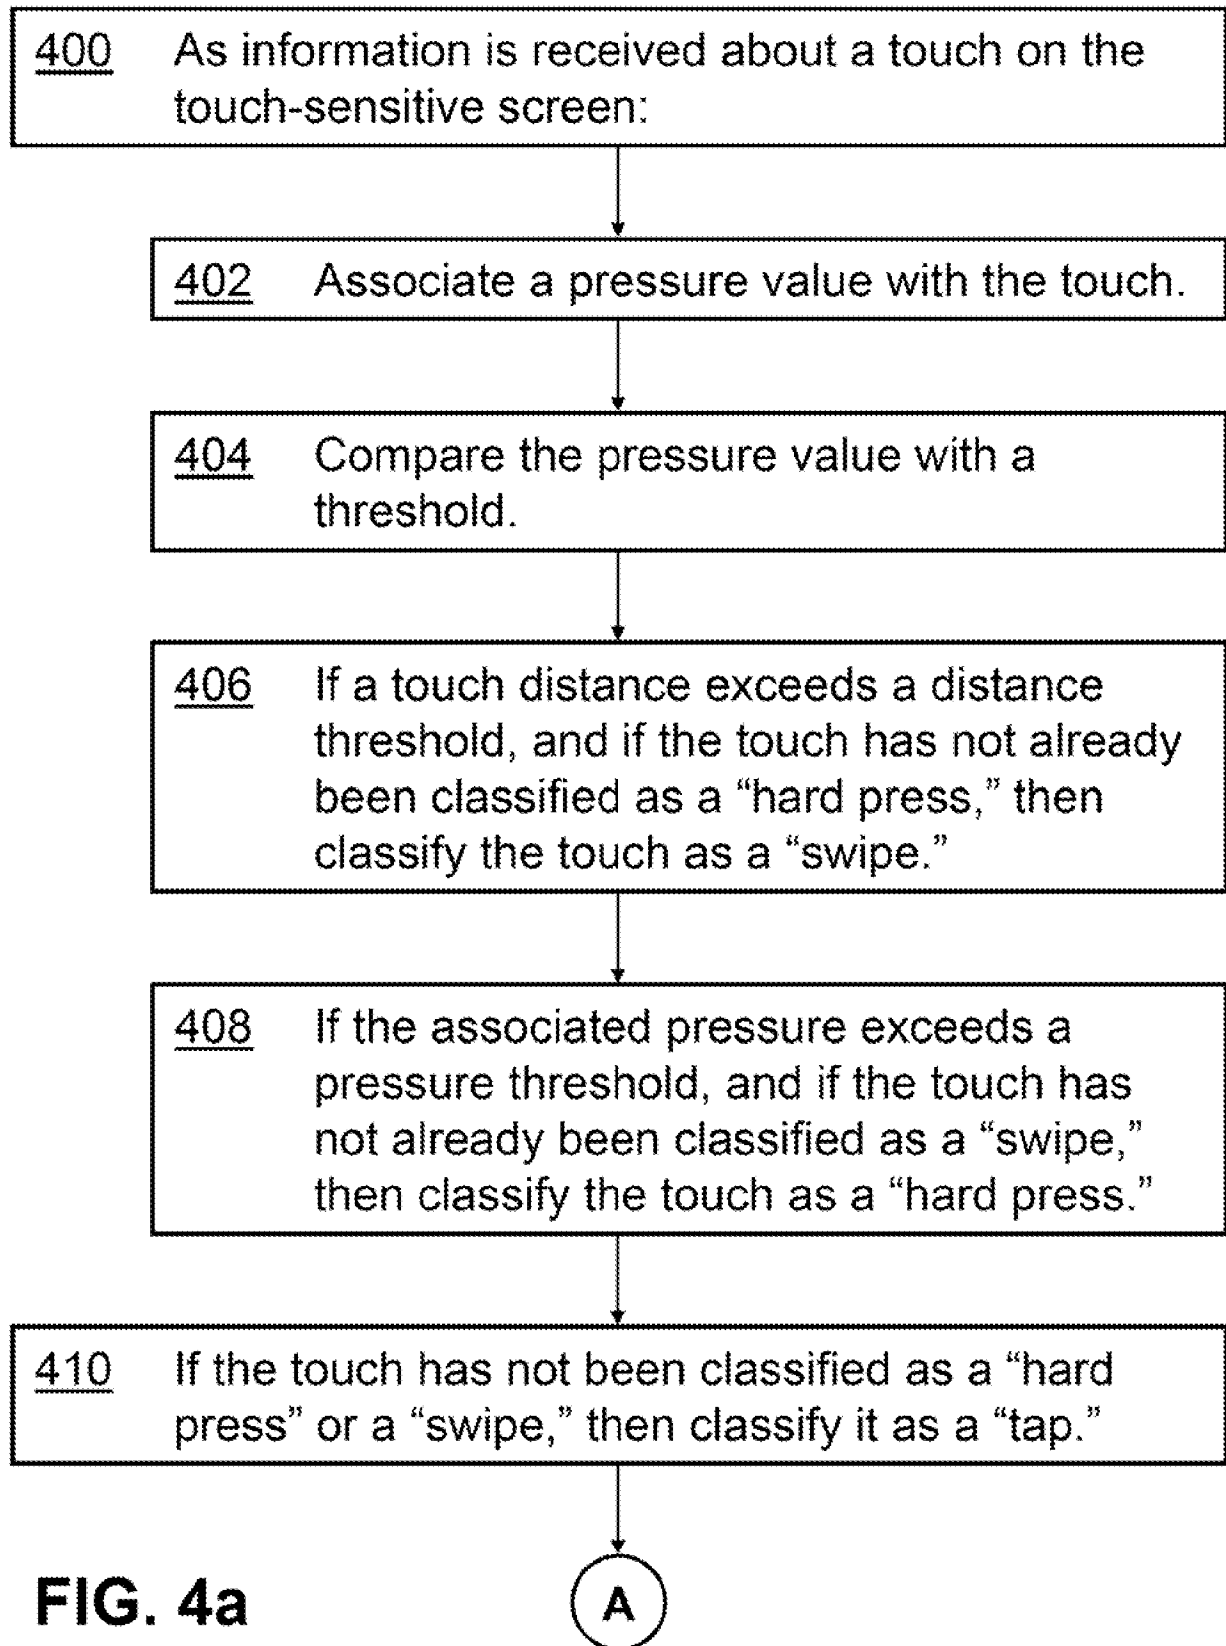**FIG. 4a**


6/8




412 Choose a user-interface action to perform, the choice based, at least in part, on the classification of the touch as a "hard press," "swipe," or "tap."

FIG. 4b

7/8

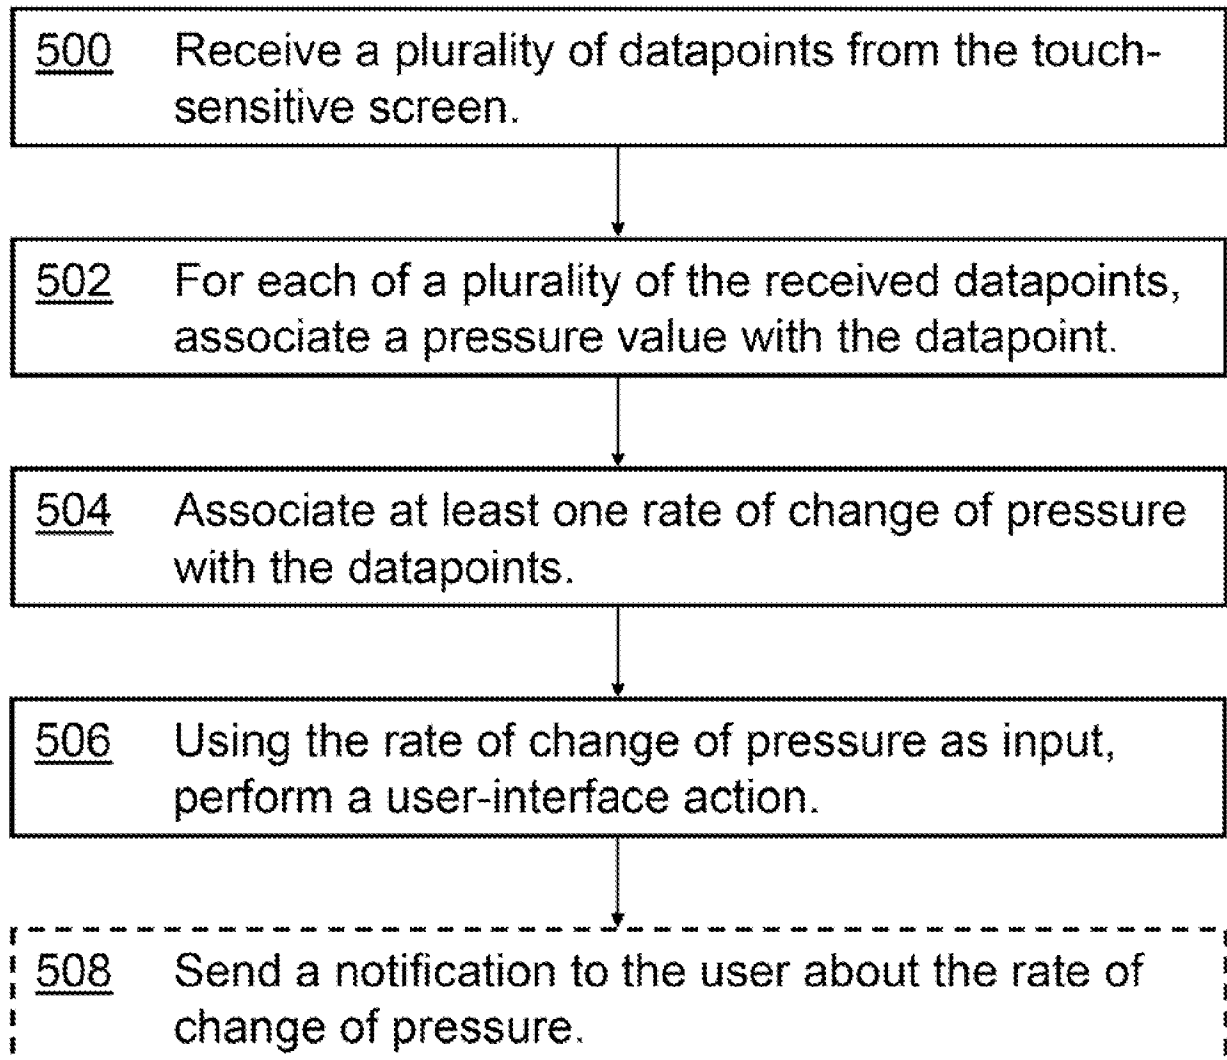**FIG. 5**

8/8

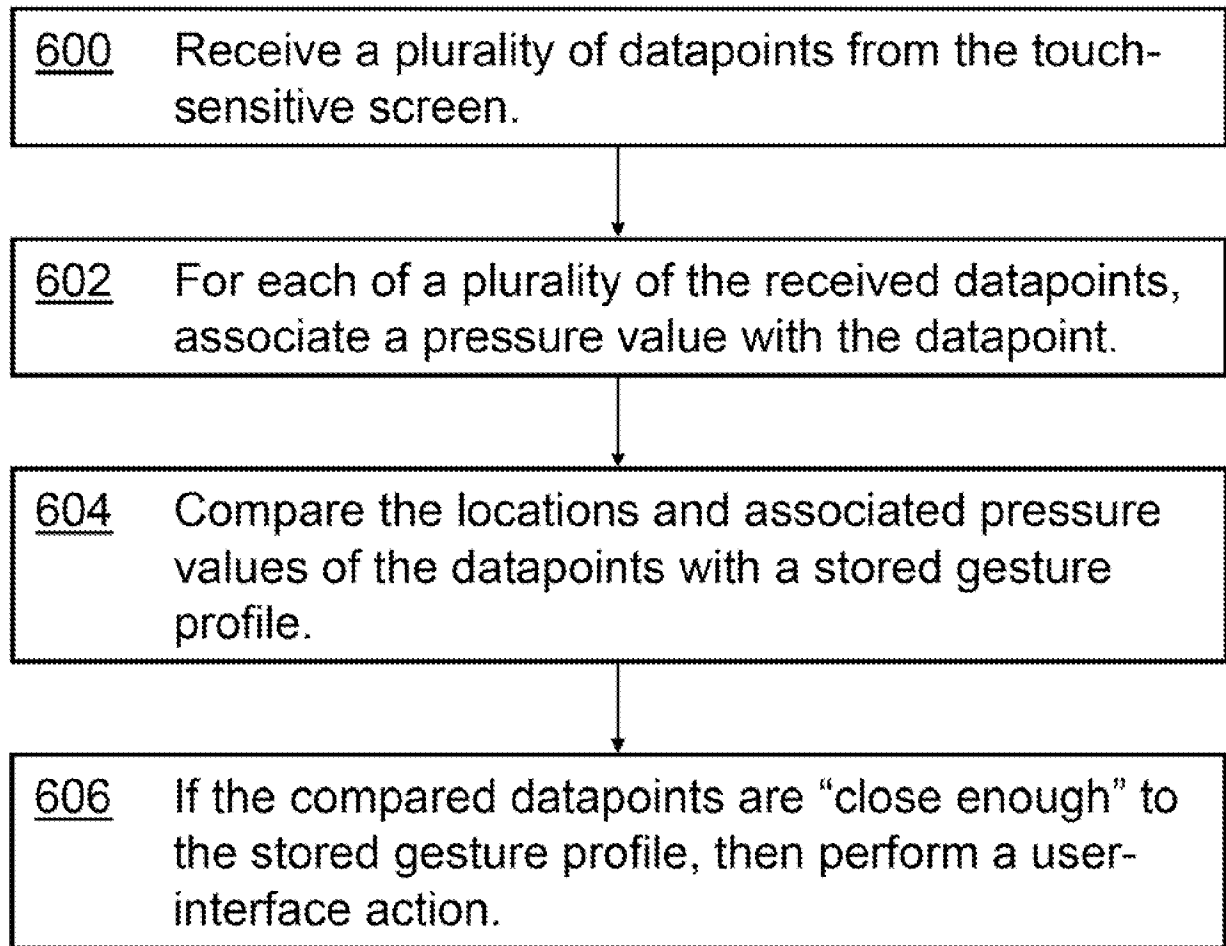**FIG. 6**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/036208

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F3/041 G06F3/048
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/015064 A1 (ROBOTHAM JOHN S [US] ET AL) 7 February 2002 (2002-02-07) the whole document	1-8
X	WO 2011/028944 A1 (AMAZON TECH INC [US]; KIM JOHN T [US]; HEBENSTREIT JOSEPH J [US]; GREE) 10 March 2011 (2011-03-10) the whole document	1-8
A	US 2009/058830 A1 (HERZ SCOTT [US] ET AL) 5 March 2009 (2009-03-05) the whole document	1-8
Y	US 2008/316183 A1 (WESTERMAN WAYNE CARL [US] ET AL) 25 December 2008 (2008-12-25) paragraph [0058] - paragraph [0071] paragraph [0047] - paragraph [0052] ----- -/-	9,10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 October 2012

Date of mailing of the international search report

31/10/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Meyer-Vitali, André

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/036208

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2006/132456 A1 (ANSON DAVID L A [US] ANSON DAVID LEININGER ADOLPHSON [US]) 22 June 2006 (2006-06-22) abstract the whole document	9,10
A	----- US 2010/058251 A1 (ROTTLER BEN [US] ET AL) 4 March 2010 (2010-03-04) the whole document	9,10
A	----- US 2010/277432 A1 (TSAI PO LEI [TW]) 4 November 2010 (2010-11-04) the whole document	9,10
A	----- US 2011/050629 A1 (HOMMA FUMINORI [JP] ET AL) 3 March 2011 (2011-03-03) the whole document -----	9,10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2012/036208

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/ US2012/ 036208

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-8

selection of a user-interface action depending on a pressure threshold

2. claims: 9, 10

classification of user-interface actions based on pressure threshold distance

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/036208

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002015064 A1	07-02-2002	NONE	

WO 2011028944 A1	10-03-2011	CA 2771709 A1	10-03-2011
		CN 102576251 A	11-07-2012
		EP 2473897 A1	11-07-2012
		KR 20120073223 A	04-07-2012
		WO 2011028944 A1	10-03-2011

US 2009058830 A1	05-03-2009	US 2009058830 A1	05-03-2009
		WO 2010002487 A1	07-01-2010

US 2008316183 A1	25-12-2008	US 2008316183 A1	25-12-2008
		US 2012011462 A1	12-01-2012
		WO 2009002787 A2	31-12-2008

US 2006132456 A1	22-06-2006	US 2006132456 A1	22-06-2006
		US 2010060606 A1	11-03-2010

US 2010058251 A1	04-03-2010	US 2010058251 A1	04-03-2010
		WO 2010027803 A1	11-03-2010

US 2010277432 A1	04-11-2010	TW 201040821 A	16-11-2010
		US 2010277432 A1	04-11-2010

US 2011050629 A1	03-03-2011	CN 102004593 A	06-04-2011
		EP 2306281 A2	06-04-2011
		JP 2011053971 A	17-03-2011
		US 2011050629 A1	03-03-2011
