



- (51) **International Patent Classification:**
H04H 20/65 (2008.01)
- (21) **International Application Number:**
PCT/US2014/023466
- (22) **International Filing Date:**
11 March 2014 (11.03.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/801,932 13 March 2013 (13.03.2013) US
- (71) **Applicant:** ECHOSTAR TECHNOLOGIES LLC
[—/US]; 100 Inverness Terrace East, Englewood, Colorado 80112 (US).
- (72) **Inventors:** HARDY, Chris; 5820 Dakota Drive, Cheyenne, Wyoming 82001 (US). YARBOROUGH, Allan; 9352 Crystal Mountain Drive, Cheyenne, Wyoming 82009 (US).
- (74) **Agents:** GRAY, Charles et al.; Eighth Floor, Two Embarcadero Center, San Francisco, California 94111 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) **Title:** MAJORITY RULE SELECTION OF MEDIA CONTENT

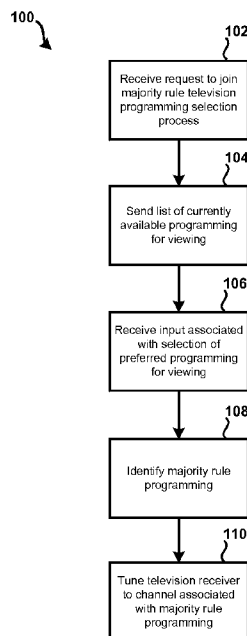


FIG. 1

(57) **Abstract:** A mobile device may be registered to participate in selection of television programming for presentation by a display device external the mobile device. An indication of selection of particular television programming for presentation by a display device may be received from the mobile device. A determination may be made, based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming. The particular television programming may be output for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

MAJORITY RULE SELECTION OF MEDIA CONTENT

CROSS-REFERENCES TO RELATED APPLICATIONS

This PCT application claims priority U.S. Serial No. 13/801,932 filed March 13, 2013 entitled "MAJORITY RULE SELECTION OF MEDIA CONTENT," of which the entire disclosure is incorporated herein by reference for all purposes.

BACKGROUND

In some social or public environments, such as an airport for example, there may be a number of televisions that are tuned to particular programming, such as a newscast. In this example, it may be not be uncommon that at least a portion of the viewing audience is interested in programming other than that being presented on the particular channel.

SUMMARY

This Summary does not in any way limit the scope of the claimed subject matter.

In an aspect, a computer-implemented method for enabling a mobile device to participate in selection of television programming for presentation by a display device external the mobile device is disclosed. The method may include determining, based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming. The method may include outputting the particular television programming for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

In an aspect, a system including one or more processors and a memory communicatively coupled with and readable by the one or more processors is disclosed. The memory may have stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to register a mobile device to participate in selection of television programming for presentation by a display device. The memory may have stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to identify receipt of an indication from the mobile device of selection of particular television programming for presentation by the display device. The memory may have stored therein processor-readable instructions which,

when executed by the one or more processors, cause the one or more processors to determine, based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming. The memory may have stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to output the particular television programming for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

In an aspect, a non-transitory processor-readable medium comprising processor-readable instructions is disclosed. The processor-readable instructions may be configured to cause one or more processors to, register a mobile device to participate in selection of television programming for presentation by a display device external the mobile device. The processor-readable instructions may be configured to cause one or more processors to identify an indication of selection of particular television programming for presentation by the display device received from the mobile device. The processor-readable instructions may be configured to cause one or more processors to determine, based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming. The processor-readable instructions may be configured to cause one or more processors to output the particular television programming for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

BRIEF DESCRIPTION OF THE DRAWINGS

A further understanding of the nature and advantages of various embodiments may be realized by reference to the following figures. In the appended figures, similar components or features may have the same reference label. Further, various components of the same type may be distinguished by following the reference label by a dash and a second label that distinguishes among the similar components. When only the first reference label is used in the specification, the description is applicable to any one of the similar components having the same first reference label irrespective of the second reference label.

FIG. 1 shows a first example method in accordance with the present disclosure.

FIG. 2 shows an example media content distribution system.

FIG. 3 shows aspects of the system of **FIG. 2** in further detail.

FIG. 4 shows an example block diagram of a television receiver of **FIG. 2**.

FIG. 5 shows an example block diagram of particular components of the system of **FIG. 2**.

FIG. 6 shows a second example method in accordance with the present disclosure.

FIG. 7 shows an example computing system or device.

DETAILED DESCRIPTION

The present disclosure is directed towards enabling a majority of a group of television viewers to control what type of programming is currently being output for presentation by a display device. Such an implementation may, for example, be likened to a democratic process for choosing particular programming for display. Although described in the context of a satellite-based content distribution system, the various aspects of the present disclosure may generally be applicable to any scenario in which it is desirable to enable individuals within a group to participate in selection and consumption of media content. For example, referring now to **FIG. 1**, a first example method **100** is shown in accordance with the present disclosure. In particular, the method **100** as shown in **FIG. 1** and its corresponding description may demonstrate a first example scenario in which a particular individual is enabled to participate in selection of television programming for viewing in a public or social environment. The example method **100** as described may be performed on or by a computing system or device, such as a television receiver. An example of such a computing system or device is discussed below in connection with at least **FIG. 7**.

The method **100** may include receiving (module **102**), by a television receiver from a mobile device, a request to join a “majority rule” television programming selection process. For example, a particular individual may enter a social or public environment, such as a sports bar, where there may be one or more televisions that are tuned to particular programming, such as a particular football game. The individual may have a mobile device, such as a smartphone, on their person. The mobile device may be configured to interact with the television receiver to enable the individual to control or have input as to what type of programming is currently being output by the television receiver to a television for presentation by the television. For example, when the individual (and the mobile device) is within a predetermined distance from the television receiver, such as within a radius of about 20-30 meters for example, the mobile device and the television receiver may establish a communication link, and the television receiver may receive a request from the mobile device to enroll, register, enlist, etc., the mobile device (and the individual) to join the majority rule television programming selection process. This may enable the individual to use the mobile

device to have input as to what type of programming is currently being output by the television receiver to the television, for presentation by the television.

For example, the method **100** may further include sending (module **104**), by the television receiver to the mobile device, a list or listing of television programming currently available for viewing. In general, “currently” available television programming may refer to recorded content or live content. In the present example, content of the listing may be similar to that which may be displayed in an EPG (Electronic Programming Guide). For example, the list may at least present various information related to television channels and the timing of programs or programming appearing on such television channels. For example, the listing may display channel information associated with a channel 2009, where a football game Broncos vs. Ravens may be listed as scheduled to appear on the channel 2009 during a particular time period 1-4:30 PM of a particular day January 16, 2013 (see e.g., **FIG. 3**). For the sake of example, the list may further display channel information associated with a channel 2012, where a football game Packers vs. 49ers may be listed as scheduled to appear on the channel 2012 during the particular time period 1-4:30 PM of the particular day January 16, 2013 (see e.g., **FIG. 3**). Other embodiments are possible.

Continuing with the present example, assuming that a current time is sometime during the particular time period 1-4:30 PM of the particular day January 16, 2013, the television receiver may send to the mobile device a listing that when displayed by the mobile device at least designates or specifies that the Broncos vs. Ravens game and the Packers vs. 49ers game are currently available for viewing. In some instances, it may be that one of these football games is currently being output by the television receiver to the television for presentation by the television. For example, the Broncos vs. Ravens game may be currently playing on one or more televisions of or within the sports bar. However, it may be that the particular individual after entering the sports bar is more interested in watching the Packers vs. 49ers game on the television, because the individual may be a Green Bay Packers fan for example. In accordance with the present disclosure, at least the television receiver and the mobile device together may be configured to enable to the individual to “cast a vote,” and have input as to whether the television(s) and/or television receiver of the sports bar is tuned to the Broncos vs. Ravens game or the Packers vs. 49ers game.

For example, the method **100** may further include receiving (module **106**), by the television receiver from the mobile device, input associated with selection of particular programming preferred for viewing by the particular individual. For example, the individual may navigate the listing as received by the television receiver (module **104**) and presented by the mobile

device, and interact with the list to “select” the Packers vs. 49ers game as preferred programming for viewing. An example of such an interaction with a mobile device is described in further detail below in connection with at least **FIG. 3**. Upon selection of the Packers vs. 49ers game, the mobile device may send to the television receiver an indication that represents the selection of the Packers vs. 49ers game by the individual. Such an implementation may be likened to a “cast vote” by the particular individual, in favor of watching the Packers vs. 49ers game on the television. In accordance with the present disclosure, the television receiver may take into account the cast vote by the particular individual, and determine whether a majority of individuals taking part in the majority rule television programming selection process are in favor of watching the “Packers vs. 49ers” game. If so, the television receiver may, automatically or in response to input by an authorized individual (e.g., an individual in the “majority”), change tuning such that the Packers vs. 49ers game corresponds to programming currently being output by the television receiver to the television for presentation by the television, assuming that the Broncos vs. Ravens game is currently output by the television receiver to the television for presentation by the television.

For example, the method **100** may further include identifying (module **108**), by the television receiver, particular programming of currently available programming that is “majority rule programming.” Majority rule programming may refer to programming having a “greatest” number of individuals in favor of watching the same. For example, upon receiving input associated with selection of programming preferred for viewing by the particular individual (see module **106**), the television receiver may “tally the vote” and determine, based on an updated tally, which programming of currently available programming has the “greatest” number of individuals in favor of watching the same. For example, and assuming for simplicity that the only currently available programming is the Broncos vs. Ravens game and the Packers vs. 49ers game, the television receiver may determine that five (5) individuals are in favor of watching the Broncos vs. Ravens game, and that six (6) individuals are in favor of watching the Packers vs. 49ers game. In this example, the vote by the particular individual in favor of watching the Packers vs. 49ers game tipped the scales such the Packers vs. 49ers game has the majority vote, and may be considered the majority rule programming. In accordance with the present disclosure, and continuing with the example scenario, the television receiver may take into account this new majority rule programming and change tuning from the Broncos vs. Ravens game such that the Packers vs. 49ers game corresponds

to programming currently being output by the television receiver to the television for presentation by the television.

For example, the method **100** may further include tuning (module **110**), by the television receiver, the television receiver from a channel associated with first programming to a channel associated with majority rule programming. For example, the television receiver may change tuning from the Broncos vs. Ravens game to the Packers vs. 49ers game such that the Packers vs. 49ers game corresponds to programming currently being output by the television receiver to the television for presentation by the television. As mentioned above, this may in one embodiment be implemented “automatically” by the television receiver, without further user input, upon identification of majority rule programming (see module **108**). In other embodiments, the television receiver may configure itself such that an “authorized” individual, such as an individual in the “majority,” may use their mobile device to switch programming from the Broncos vs. Ravens game to the Packers vs. 49ers game. Here, the television receiver may further configure itself such that an “unauthorized” individual, such as an individual in the “minority,” may not use their mobile device to switch programming from the Broncos vs. Ravens game to the Packers vs. 49ers game. For example, an individual in the “minority” may attempt to change the channel back to the Broncos vs. Ravens game, but the television receiver may not respond to the command. Other embodiments are possible.

Such an implementation as described in connection with **FIG. 1** may be beneficial and/or advantageous in many respects. For example, it may be possible that a particular group of friends come together and collectively decide that they would like to go to the sports bar discussed above to watch the Packers vs. 49ers game. In many instances, it may be that the friends arrive at the sports bar only to find that they do not have control or input as to what is being displayed on a television(s) for viewing. For example, the television(s) may be tuned to the Broncos vs. Ravens game and staff or servers of the sports bar may be too busy or unwilling to change the channel to the Packers vs. 49ers game. Further, there may be a number of Broncos fans in the sports bar who may object to changing the channel from the Broncos vs. Ravens game to the Packers vs. 49ers game. In accordance with the present disclosure, however, the particular group of friends may enter the sports bar and have control or input as to what type of programming is currently being displayed by the television(s). Among other things, this may be a powerful marketing device for the sports bar. For example, the sports bar may advertise that “large” groups who frequent or enter the sports bar may, by virtue of their numbers, potentially have control over what is being displayed by one

or more televisions within the sports bar. The sports bar may benefit from increased sales due to “large” numbers of patrons frequenting the sports bar. The “large” numbers of patrons may benefit due to being able to go out into a social environment with friends, colleagues, etc., and still be able to watch programming that they may be interested in.

Further scenarios and beneficial aspects associated with enabling a majority of a group of television viewers to control what type of programming is currently being output for presentation by a display device may be understood in light of the following description in connection with **FIGS. 2-7**.

For example, referring now to **FIG. 2** an example media content distribution system **200** is shown in which aspects of the present disclosure may be implemented. For brevity, the system **200** is depicted in a simplified and conceptual form, and may generally include more or fewer systems, devices, networks, and/or other components as desired. Further, number and type of features or elements incorporated within the system **200** may or may not be implementation-specific, and at least some of the aspects of the system **200** may be similar to a cable television distribution system, an IPTV (Internet Protocol Television) content distribution system, and/or any other type of media or content distribution system.

The example system **200** may include a service provider **202**, a satellite uplink **204**, a plurality of orbiting (e.g., geosynchronous) satellites **206a-c**, a satellite dish **208**, a PTR (Primary Television Receiver) **210**, a plurality of STRs (Secondary Television Receivers) **212a-b**, a plurality of televisions **214a-c**, a plurality of computing devices **216a-b**, and at least one social network server **218**. In the present example, the PTR **210** may at least include a content management module **220**. The content management module **220** may in one aspect be configured for enabling a majority of a group of television viewers to control what type of programming is currently being output for presentation by a display device, as discussed further below.

The system **200** may also include at least one network **222** that establishes a bi-directional communication path for data transfer between and among the PTR **210**, STRs **212a-b**, televisions **214a-c**, computing devices **216a-b**, and social network server **218** of the example system **200**. In some embodiments, the network **222** may further establish a bi-directional communication path (not shown) for data transfer between the PTR **210** and the service provider **202**. The network **222** is intended to represent any number of terrestrial and/or non-terrestrial network features or elements. For example, the network **222** may incorporate or exhibit any number of features or elements of various wireless and/or hardwired packet-based communication networks such as, for example, a WAN (Wide Area Network) network, a

HAN (Home Area Network) network, a LAN (Local Area Network) network, a WLAN (Wireless Local Area Network) network, the Internet, a cellular communications network, and/or any other type of communication network(s) configured such that data may be transferred between and among respective elements of the example system **200**.

The PTR **210**, and the STRs **212a-b**, as described throughout may generally be any type of television receiver, such as a STB (Set-Top-Box) for example. In another example, the PTR **210**, and the STRs **212a-b**, may exhibit functionality integrated as part of or into a television, a DVR, a computer such as a tablet computing device, or any other computing system or device, as well as variations thereof. Further, the PTR **210** and the network **222**, together with the STRs **212a-b**, televisions **214a-c**, and possible computing devices **216a-b**, may form at least a portion of a particular home computing network, and may each be respectively configured so as to enable communications in accordance with any particular communication protocol(s) and/or standard(s) including, for example, TCP/IP (Transmission Control Protocol/Internet Protocol), DLNA/DTCP-IP (Digital Living Network Alliance/Digital Transmission Copy Protection over Internet Protocol), HDMI/HDCP (High-Definition Multimedia Interface/High-bandwidth Digital Content Protection), etc. Still other embodiments are possible.

For example, the PTR **210** and the network **222**, together with the STRs **212a-b**, televisions **214a-c**, and possible computing devices **216a-b**, may form at least a portion of a computing network other than a home computing network, such as a network associated with a particular social or public establishment, such as a sports bar, airport, physician's office, government office, etc. In such an implementation, the respective elements of the example system **200** may each be respectively configured so as to enable communications in accordance with any particular communication protocol(s) and/or standard(s).

In practice, the satellites **206a-c** may each be configured to receive uplink signals **224a-b** from the satellite uplink **204**. In this example, the uplink signals **224a-b** may contain one or more transponder streams of particular data or content, such as particular television channel, that is supplied by the service provider **202**. For example, each of the respective uplink signals **224a-b** may contain various media content such a plurality of encoded HD (High Definition) television channels, various SD (Standard Definition) television channels, on-demand programming, programming information, and/or any other content in the form of at least one transponder stream, and in accordance with an allotted carrier frequency and bandwidth. In this example, different media content may be carried using different ones of the satellites **206a-c**. Further, different media content may be carried using different

transponders of a particular satellite (e.g., satellite **206a**); thus, such media content may be transmitted at different frequencies and/or different frequency ranges. For example, a first and second television channel may be carried on a first carrier frequency over a first transponder of satellite **206a**, and a third, fourth, and fifth television channel may be carried on second carrier frequency over a first transponder of satellite **206b**, or, the third, fourth, and fifth television channel may be carried on a second carrier frequency over a second transponder of satellite **206a**, and etc.

The satellites **206a-c** may further be configured to relay the uplink signals **224a-b** to the satellite dish **208** as downlink signals **226a-b**. Similar to the uplink signals **224a-b**, each of the downlink signals **226a-b** may contain one or more transponder streams of particular data or content, such as various encoded and/or at least partially electronically scrambled television channels, on-demand programming, etc., in accordance with an allotted carrier frequency and bandwidth. The downlink signals **226a-b**, however, may not necessarily contain the same or similar content as a corresponding one of the uplink signals **224a-b**. For example, the uplink signal **224a** may include a first transponder stream containing at least a first group or grouping of television channels, and the downlink signal **226a** may include a second transponder stream containing at least a second, different group or grouping of television channels. In other examples, the first and second group of television channels may have one or more television channels in common. In sum, there may be varying degrees of correlation between the uplink signals **224a-b** and the downlink signals **226a-b**, both in terms of content and underlying characteristics.

Continuing with the example implementation scenario, the satellite dish **208** may be provided for use to receive television channels (e.g., on a subscription basis) provided by the service provider **202**, satellite uplink **204**, and/or satellites **206a-c**. For example, the satellite dish **208** may be configured to receive particular transponder streams, or downlink signals **226a-b**, from one or more of the satellites **206a-c**. Based on the characteristics of the PTR **210** and/or satellite dish **208**, however, it may only be possible to capture transponder streams from a limited number of transponders concurrently. For example, a tuner of the PTR **210** may only be able to tune to a single transponder stream from a transponder of a single satellite, such as satellite **206a**, at a time.

Additionally, the PTR **210**, which is communicatively coupled to the satellite dish **208**, may subsequently select via tuner, decode, and relay particular transponder streams to the television **214c** for display thereon (see e.g., **FIG. 4** and associated description). For example, the satellite dish **208** and the PTR **210** may, respectively, be configured to receive, decode,

and relay at least one premium HD-formatted television channel to the television **214c**. Programming or content associated with the HD channel may generally be presented “live,” or from a recording as previously stored on, by, or at the PTR **210**. In this example, the HD channel may be output to the television **214c** in accordance with the HDMI/HDCP content protection technologies. Other embodiments are possible. For example, in some embodiments, the HD channel may be output to the television **214c** in accordance with the MoCA® (Multimedia over Coax Alliance) home entertainment networking standard. Still other embodiments are possible.

Further, the PTR **210** may select via tuner, decode, and relay particular transponder streams to one or both of the STRs **212a-b**, which may in turn relay particular transponder streams to a corresponding one of the television **214a** and the television **214a** for display thereon. For example, the satellite dish **208** and the PTR **210** may, respectively, be configured to receive, decode, and relay at least one television channel to the television **214a** by way of the STR **212a**. Similar to the above-example, the television channel may generally be presented “live,” or from a recording as previously stored on the PTR **210**, and may be output to the television **214a** by way of the STR **212a** in accordance with a particular content protection technology and/or networking standard. Other embodiments are possible.

Still further, the satellite dish **208** and the PTR **210** may, respectively, be configured to receive, decode, and relay at least one premium television channel to one or both of the computing devices **216a-b**. Similar to the above-examples, the television channel may generally be presented “live,” or from a recording as previously stored on the PTR **210**, and may be output to one or both of the computing devices **216a-b** in accordance with a particular content protection technology and/or networking standard. Other embodiments are possible.

Referring now to **FIG. 3**, aspects of the example system **200** of **FIG. 2** are shown in further detail. In particular, the PTR **210** may be configured to output an interactive listing **302** to and for presentation by at least the computing device **216a** of **FIG. 2**. The computing device **216a** may at least include or exhibit a multi-touch display **304**. In the present example, the listing **302** may present various information related to television channels and the timing of programs or programming appearing on such television channels, such as programs or programming as received from one or more of the satellites **106a-c**. For example, the listing **302** may display channel information associated with a channel 2009, where a football game Broncos vs. Ravens may be listed as scheduled to appear on the channel 2009 during a particular time period 1-4:30 PM of a particular day January 16, 2013. The listing **302** may further display channel information associated with a channel 2012, where a football game

Packers vs. 49ers may be listed as scheduled to appear on the channel 2012 during the particular time period 1-4:30 PM of the particular day January 16, 2013. Other embodiments are possible. For example, more or fewer programs or programming may be listed within the listing **302**. Further, programming listed within the listing **302** may correspond to recorded content or “live” content. Still other embodiments are possible.

In the example of **FIG. 3**, and assuming that a current time is sometime during the time period 1-4:30 PM of the particular day January 16, 2013, a user may interact with the listing **302** to select the Packers vs. 49ers game as preferred programming for viewing, as part of a majority rule television programming selection process such as described above in connection with **FIG. 1**. For example, a user may “touch” or “tap” a cell or block **306** within the listing **302** associated with the Packers vs. 49ers game to select this game as preferred program for viewing, indicated by light stipple-shading in **FIG. 3**. The computing device **216a** may then send, by wireless communication channel for example, to the PTR **210** an indication that represents the selection by the particular individual of the Packers vs. 49ers game as preferred programming. An example of such a communication between the computing device **216a** and the PTR **210** is described below in connection with at least **FIG. 5**.

Referring now to **FIG. 4**, a simplified block diagram of the PTR **210** of **FIG. 2** is shown in accordance with the present disclosure. In some embodiments, at least one of the STRs **212a-b** may be configured in a manner similar to that of the PTR **210**. In other embodiments, at least one of the STRs **212a-b** may be configured to exhibit a reduced functionality as compared to the PTR **210**, and may depend at least to a certain degree on the PTR **210** to implement certain features or functionality. In this example, the STRs **212a-b** may be referred to as a “thin client.”

For brevity, the PTR **210** is depicted in a simplified and conceptual form, and may generally include more or fewer elements or components as desired in accordance with the present disclosure. For example, the PTR **210** is shown in **FIG. 4** to include the content management module **220** as mentioned above in connection with **FIG. 2**. Additionally, although not explicitly shown in **FIG. 4**, the PTR **210** may include one or more logical modules configured to implement a television steaming media functionality that encodes video into a particular format for transmission over the Internet such as to allow users to remotely view and control a home cable, satellite, or personal video recorder system from an Internet-enabled computer with a broadband Internet connection. The Slingbox® by Sling Media, Inc. of Foster City, CA, is one example of a product that implements such a functionality.

Additionally, the PTR **210** may be configured to include any number of other various components or logical modules that are implemented in hardware, software, firmware, or any combination thereof, and such components or logical modules may or may not be implementation-specific.

In some embodiments, the PTR **210** and/or the STRs **212a-b** comprises of a STB. In addition to being in the form of an STB, at least the PTR **210** may be incorporated into another device, such as the television **214c** as shown in **FIG. 2**. For example, the television **214c** may have an integrated television receiver that does not involve an external STB being coupled with the television **214c**. A STB may contain some or all of the components of the PTR **210** and/or may be able to perform some or all of the functions of the PTR **210**. Accordingly, instances in this document referring to a STB, and steps being performed by a STB, may also be performed, more generally, by the PTR **210** and/or STRs **212a-b**.

Referring still to **FIG. 4**, the PTR **210** may include the content management module **220** as shown in **FIG. 2**, at least one processor **402**, including a central processor **402a** and a control processor **402b**, a plurality of tuners **404a-c**, at least one network interface **406**, at least one non-transitory computer-readable storage medium **408**, at least one EPG database **410**, at least one television interface **412**, at least one NIT (Networking Information Table) **414**, at least one DVR database **416**, at least one user interface **418**, at least one PID filter **420**, at least one smart card **422**, at least one descrambling engine **424**, at least one PMT (Program Map Table) **426**, and at least one decoder **428**. In other embodiments of the PTR **210**, fewer or greater numbers of components may be present. Further, functionality of one or more components may be combined; for example, functions of the descrambling engine **424** may be performed by the central processor **402a**. Still further, functionality of components may be spread among additional components. For example, the PID filter **420** may be handled by hardware and/or software separate from the PMT **426**.

The processor **402** may include one or more specialized and/or general-purpose processors configured to perform processes such as tuning to a particular channel, accessing and displaying EPG information from the EPG database **410**, and/or receiving and processing input from a user. For example, processor **402** may include one or more processors dedicated to decoding video signals from a particular format, such as MPEG (Moving Picture Experts Group), for output and display on a television and for performing decryption.

The control processor **402b** may communicate with the central processor **402a**. The control processor **402b** may control the recording of television channels based on timers stored in the DVR database **416**. The control processor **402b** may initiate recording of a television channel

by sending a record command along with an indication of the television channel to be recorded to the central processor **402a**. The control processor **402b** may not send a second record command, when additional recording is to begin at the same time, until an acknowledgement that recording of the first television channel has successfully been received and initiated by the central processor **402a**. The control processor **402b** may also provide commands to the central processor **402a** when recording of a television channel is to cease. In addition to providing commands relating to the recording of television channels, the control processor **402b** may provide commands to the central processor **402a** that indicate television channels to be output to the decoder **428** for output to a presentation device, such as the television **214c** for example.

The control processor **402b** may also communicate with the network interface **406** and the user interface **418**. The control processor **402b** may handle in-coming data from the network interface **406** and the user interface **418**. Additionally, the control processor **402b** may be configured to output data via the network interface **406**.

The tuners **404a-c** may be used to tune to television channels, such as television channels transmitted via satellite or cable, such as satellites **206a-c**. Each respective one of the tuner **404a-c** may be capable of receiving and processing a single stream of data from a satellite transponder, or a cable RF channel, at a given time. As such, a single tuner may tune to a single transponder or, for a cable network, a single cable RF channel. Additionally, one tuner (e.g., tuner **404a**) may be used to tune to a television channel on a first transponder stream for display using a television, while another tuner (e.g., tuner **404b**) may be used to tune to a television channel on a second transponder for recording and viewing at some other time. Still another tuner (e.g., tuner **404c**) may be used to check various television channels to determine if they are available or not. If multiple television channels transmitted on the same transponder stream are desired, a particular tuner (e.g., tuner **404a**) may be used to receive the signal containing the multiple television channels for presentation and/or recording. The tuners **404a-c** may receive commands from the central processor **402a**. Such commands may instruct the tuners **404a-c** which frequencies are to be used for tuning.

The network interface **406** may be used to communicate via an alternate communication channel with a television service provider. For example, the primary communication channel may be via satellite, which may be unidirectional to the STB, and the alternate communication channel, which may be bidirectional, may be via a network, such as the Internet. The PTR **210** may be able to communicate with the service provider **202** of **FIG. 2** via a network, such as the Internet. This communication may be bidirectional. For example,

data may be transmitted from the PTR **210** to the service provider **202**, and from the service provider **202** to the PTR **210**. The network interface **406** may be configured to communicate via one or more networks, such as the Internet, to communicate with the service provider **202**. Information may be transmitted and/or received via the network interface **406**.

The storage medium **408** may represent a non-transitory computer-readable storage medium. The storage medium **408** may include memory and/or a hard drive. The storage medium **408** may be used to store information received from one or more satellites and/or information received via the network interface **406**. The storage medium **408** may store information related to the EPG database **410**, the NIT **414**, and/or the DVR database **416**. Recorded television programs may be stored using the storage medium **408**. The storage medium **408** may be partitioned or otherwise divided such that predefined amounts of the storage medium **408** are devoted to storage of omnibus channel files and user-selected television programs.

The EPG database **410** may store information related to television channels and the timing of programs appearing on such television channels. The EPG database **410** may be stored using the storage medium **408**, which may be a hard drive. Information from the EPG database **410** may be used to inform users of what television channels or programs are popular and/or provide recommendations to the user. Information from the EPG database **410** may provide the user with a visual interface displayed by a television that allows a user to browse and select television channels and/or television programs for viewing and/or recording. Information used to populate the EPG database **410** may be received via the network interface **406** and/or via satellites, such as satellites **206a-c** of **FIG. 2** via the tuners **404a-c**. For instance, updates to the EPG database **410** may be received periodically via satellite. The EPG database **410** may serve as an interface for a user to control DVR functions of the PTR **210**, and/or to enable viewing and/or recording of multiple television channels simultaneously.

In addition to being used to provide users with information about scheduled programming, information from the EPG database **410** may be used to determine when television programs begin and end for the purposes of recording. For instance, when a channel-specific file is recorded that contains multiple television channels, the start and end of time of specific television programs within the channel-specific file may be based on the start and end times indicated in the EPG database **410**. Other data may be stored within the EPG database **410** that may be useful in managing channel-specific files, such as series identifiers and episode identifiers, which may be used by a television service provider to identify particular television programs.

The decoder **428** may serve to convert encoded video and audio into a format suitable for output to a display device. For instance, the decoder **428** may receive MPEG video and audio from the storage medium **408**, or the descrambling engine **424**, to be output to a television. MPEG video and audio from the storage medium **224** may have been recorded to the DVR database **416** as part of a previously-recorded television program. The decoder **428** may convert the MPEG video and audio into a format appropriate to be displayed by a television or other form of display device and audio into a format appropriate to be output from speakers, respectively.

The television interface **412** may serve to output a signal to a television, or another form of display device, in a proper format for display of video and playback of audio. As such, the television interface **412** may output one or more television channels, stored television programming from the storage medium **408**, such as television programs from the DVR database **416** and/or information from the EPG database **410** for example, to a television for presentation.

The NIT **414** may store information used by the PTR **210** to access various television channels. The NIT **414** may be stored using the storage medium **408**. Information used to populate the NIT **414** may be received via satellite, or cable, via the tuners **404a-c** and/or may be received via the network interface **406** from a service provider. As such, information present in the NIT **414** may be periodically updated. The NIT **414** may be locally-stored by the PTR **210** using the storage medium **408**. Information that may be present in the NIT **414** may include, for example: television channel numbers, a satellite identifier, a frequency identifier, a transponder identifier, an ECM (Entitlement Control Message) PID (Packet Identifier), one or more audio PIDs, and a video PID. A second audio PID of a channel may correspond to a SAP (Second Audio Program) program, such as in another language. In some embodiments, the NIT **414** may be divided into additional tables. For example, rather than the specific audio PIDs and video PIDs being present in the NIT **414**, a channel identifier may be present within NIT **414** which may be used to look up the audio PIDs and video PIDs in another table, such as the PMT **426**. For example, the PMT **426** may store information on audio PIDs and video PIDs for television channels that are transmitted on a transponder frequency.

Table 1 provides a simplified example of the NIT **414** for several television channels. It should be understood that in other embodiments, many more television channels may be represented in the NIT **414**. The NIT **414** may be at least periodically updated by a television service provider. As such, television channels may be reassigned to different satellites and/or

transponders, and the PTR **210** may be able to handle this reassignment as long as the NIT **414** is updated.

Channel	Satellite	Transponder	ECM PID	PMT PID
4	1	2	27	1001
5	2	11	29	1002
7	2	3	31	1001
13	2	4	33	1004

Table 1

Based on information in the NIT **414**, it may be possible to determine the proper satellite and transponder to which to tune for a particular television channel. In some embodiments, the NIT **414** may list a particular frequency to which to tune for a particular television channel. Once tuned to the proper satellite/transponder/frequency, the PMT PID may be used to retrieve a program management table that indicates the PIDs for audio and video streams of television channels transmitted by that transponder.

It should be understood that the values provided in **Table 1** are for example purposes only. Actual values, including how satellites and transponders are identified, may vary. Additional information may also be stored in NIT **414**. Additional information on how the NIT **414**, as indicated in **Table 1**, may be used is provided in reference to **FIG. 4**. The same PID may be reused on different transponders.

A DVR may permit a television channel to be recorded for a period of time. DVR functionality of the PTR **210** may be managed by the control processor **402b**. The control processor **402b** may coordinate the television channel, start time, and stop time of when recording of a television channel is to occur. The DVR database **416** may store information related to the recording of television stations. The DVR database **416** may store timers that are used by the control processor **402b** to determine when a television channel should be tuned to and its programs recorded to the DVR database **416**. However, other embodiments are possible. For example, in some embodiments, the storage medium **408** may store timers. Timer files may be defined as a daily_schedule_db.dat file and a global_timer_db.dat file. In general, when a “new” timer is created, a “new” entry may be added into the daily_schedule_db.dat and global_timer_db.dat files, which may include all timer related information such as channel number, start time, duration, etc. Further, a limited amount of the storage medium **408** may be devoted to the DVR database **416**. Timers may be set by a service provider and/or one or more users of the PTR **210**.

DVR functionality of the control processor **402b** may have multiple modes. For example, DVR functionality of the control processor **402b** may be configured to record individual television programs selected by a user to the DVR database **416**. Using the EPG database **410**, a user may select a particular television program. Based on the date, time period, and television channel indicated by the EPG database **410**, the control processor **402b** may record the associated television program to the DVR database **416**. In another example, the DVR database **416** may be used to store recordings of predefined periods of time on one or more television channels. These predefined periods of time may include one or more television programs. For example, primetime on a particular television network may be recorded each weekday night. Further, multiple television channels may be recorded for such predefined periods of time. Such recording of television channels for predefined periods of time may be defined by a television service provider (e.g., service provider **202**).

As an example of this second mode of DVR functionality, a television service provider may configure the PTR **210** to record television programming on multiple, predefined television channels for a predefined period of time, on predefined dates. For instance, a television service provider may configure the PTR **210** such that television programming may be recorded from 7 PM to 10 PM on the NBC, ABC, CBS, and FOX networks each weeknight. When a television program is selected for recording by a user and is also specified for recording by the television service provider, the user selection may serve as an indication to save the television program for an extended time, beyond the time which the predefined recording would otherwise be saved.

The user interface **418** may include a remote control, physically separate from PTR **210**, and/or one or more buttons on the PTR **210** that allows a user to interact with the PTR **210**. The user interface **418** may be used to select a television channel for viewing, view information from the EPG database **410**, and/or program a timer stored to the DVR database **416** wherein the timer may be used to control the DVR functionality of the control processor **402b**.

Referring back to tuners **404a-c**, television channels received via satellite, or cable, may contain at least some scrambled data. Packets of audio and video may be scrambled to prevent unauthorized users, such as nonsubscribers, from receiving television programming without paying the television service provider. When one of the tuners **404a-c** is receiving data from a particular transponder of a satellite, the transponder stream may be a series of data packets corresponding to multiple television channels. Each data packet may contain a PID, which, in combination with the NIT **414** and/or the PMT **426**, can be determined to be

associated with particular television channel. Particular data packets, referred to as ECMs may be periodically transmitted. ECMs may be associated with another PID and may be encrypted; the PTR **210** may use the smart card **422** to decrypt ECMs. Decryption of an ECM may only be possible when the user (e.g., PTR **210**) has authorization to access the particular television channel associated with the ECM. When an ECM is determined to correspond to a television channel being stored and/or displayed, the ECM may be provided to the smart card **422** for decryption.

When the smart card **422** receives an encrypted ECM, the smart card **422** may decrypt the ECM to obtain some number of control words. In some embodiments, from each ECM received by the smart card **422**, two control words are obtained. In some embodiments, when the smart card **422** receives an ECM, it compares the ECM to the previously received ECM. When the two ECMs match, the second ECM is not decrypted because the same control words would be obtained. In other embodiments, each ECM received by the smart card **422** is decrypted; however, when a second ECM matches a first ECM, the outputted control words will match; thus, effectively, the second ECM does not affect the control words output by the smart card **422**. The smart card **422** may be permanently part of the PTR **210** or may be configured to be inserted and removed from PTR **210**.

The central processor **402a** may be in communication with the tuners **404a-c** and the control processor **402b**. The central processor **402a** may be configured to receive commands from the control processor **402b**. Such commands may indicate when to start/stop recording a television channel and/or when to start/stop causing a television channel to be output to a television. The central processor **402a** may control the tuners **404a-c**. The central processor **402a** may provide commands to the tuners **404a-c** that instruct the tuners which satellite, transponder, and/or frequency to tune to. From the tuners **404a-c**, the central processor **402a** may receive transponder streams of packetized data. As previously detailed, some or all of these packets may include a PID that identifies the content of the packet.

The central processor **402a** may be configured to create at least one PID filter **420** that sorts packets received from the tuners **404a-c** based on the PIDs. When a tuner is initially tuned to a particular frequency, such as a particular transponder of a satellite, a PID filter may be created based on a PID of PMT data. The PID of PMT data packets may be known because it is stored as part of the NIT **414**. From the PMT data packets, the PMT **426** may be constructed by central processor **402a**. **Table 2** provides an exemplary extract of a PMT. The PMT **426** may be specific to a particular transponder. As such, when tuning to a different transponder occurs, a new PMT may be created for the different transponder.

Channel	Video PID	1 st Audio PID	2 nd Audio PID
4	1003	2383	2119
5	2993	2727	2728
7	9238	1233	0129
13	0012	9348	-

Table 2

Accordingly, based on the information present in the PMT **426**, the audio and video PIDs for specific television channels may be identified. A television channel may have multiple audio PIDs due to a second audio program, which may be in a different language.

It should be understood that the values provided in **Table 2** are for example purposes only. Actual values may vary. Additional information or less information may also be stored in the PMT **426**.

The PID filter **420** may be configured to filter data packets based on PIDs. In some embodiments, the PID filter 420 is created and executed by central processor **402a**. In other embodiments, separate hardware may be used to create and execute multiple PID filters. Depending on a television channel selected for recording/viewing, a PID filter may be created to filter the video and audio packets associated with the television channel, based on the PID assignments present in the PMT **426**. For example, when a transponder data stream includes multiple television channels, data packets corresponding to a television channel that is not desired to be stored or displayed by the user, may be ignored by PID filters. As such, only data packets corresponding to the one or more television channels desired to be stored and/or displayed may be filtered and passed to either the descrambling engine **424** or the smart card **422**; other data packets may be ignored. For each television channel, a stream of video packets, a stream of audio packets, one or both of the audio programs, and/or a stream of ECM packets may be present, each stream identified by a PID. In some embodiments, a common ECM stream may be used for multiple television channels. Additional data packets corresponding to other information, such as updates to the NIT **414**, may be appropriately routed by the PID filter **420**. At a given time, one or multiple PID filters may be executed by the central processor **402a**.

The descrambling engine **424** may use the control words output by the smart card **422** in order to descramble video and/or audio corresponding to television channels for storage and/or presentation. Video and/or audio data contained in the transponder data stream received by the tuners **404a-c** may be scrambled. Video and/or audio data may be

descrambled by descrambling engine **424** using a particular control word. Which control word output by the smart card **422** to be used for successful descrambling may be indicated by a scramble control identifier present within the data packet containing the scrambled video or audio. Descrambled video and/or audio may be output by the descrambling engine **424** to the storage medium **408** for storage in the DVR database **416** and/or to the decoder **428** for output to a television or other presentation equipment via the television interface **412**.

For simplicity, the PTR **210** of **FIG. 4** has been reduced to a block diagram; commonly known parts, such as a power supply, have been omitted. Further, some routing between the various modules of PTR **210** has been illustrated. Such illustrations are for exemplary purposes only. The state of two modules not being directly or indirectly connected does not indicate the modules cannot communicate. Rather, connections between modules of the PTR **210** are intended only to indicate possible common data routing. It should be understood that the modules of the PTR **210** may be combined into a fewer number of modules or divided into a greater number of modules. Further, the components of the PTR **210** may be part of another device, such as built into a television. Also, while the PTR **210** may be used to receive, store, and present television channels received via a satellite, it should be understood that similar components may be used to receive, store, and present television channels via a cable network.

Referring now to **FIG. 5**, a block diagram is shown illustrating particular components of the example system **200** of **FIG. 2**. More specifically, **FIG. 5** shows the PTR **210**, the computing device **216a**, and the social network server **218** of **FIG. 2** in further detail. For example, the PTR **210** may at least include the content management module **220** and a communication module **228**. The computing device **216a** may at least include a mobile application module **230** and an input module **232**. The social network server **218** may at least include a profile module **234** and an API (Application Programming Interface) module **236**. Other embodiments are possible. For example, in some embodiments, one or more respective components of the PTR **210** as shown in **FIG. 5** may be wholly or at least partially located on one or more other components of the example system **200** of **FIG. 2**. For example, one or more respective components of the PTR **210** as shown in **FIG. 5** may be wholly or at least partially located on a particular one of the STRs **212a-b**. Further, one or more respective components of the PTR **210** as shown in **FIG. 5** may optionally be wholly or at least partially located on a dedicated computing device or server **238**, the “option” indicated in **FIG. 5** by intermittent line. Such an implementation may free particular computing resources of the PTR **210**, such that the PTR **210** may more efficiently perform various other tasks.

There may be a number of ways or methods for enabling a majority of a group of television viewers to control what type of programming is currently being output for presentation by a display device in accordance with the present disclosure. For example, the control may be a function of “direct” user input or a function of “indirect” user input. An example of direct user input is described above at least in connection with **FIG. 1**. The direct user input scenario may be further understood in connection with **FIG. 5**.

For example, in practice, a particular individual may enter a social or public environment, such as a sports bar, where there may be one or more televisions that are tuned to particular programming, such as a particular baseball game as depicted in **FIG. 2** with respect to televisions **214a-c**. In this example, the individual may have the computing device **216a** on their person. The computing device **216a** may be configured to interact with the PTR **210** to enable the individual to control or have input as to what type of programming is currently being output by the PTR **210** to one or more of the televisions **214a-c** for presentation thereon. For example, when the individual (and the computing device **216a**) is within a predetermined distance from the PTR **210**, such as within a radius of about less than 20 meters, about less than 30 meters, about less than 40 meters, about less than 50 meters, about less than 100 meters, etc., a communication link may be established between the computing device **216a** and the PTR **210**. For example, the communication module **228** of the PTR **210** may correspond to a Bluetooth® or a WiFi radio that may periodically “ping” for the purpose of discovering computing devices (e.g., computing device **216a**) configured to interact with the PTR **210** and within the predetermined distance from the PTR **210**. Such an implementation may enable the PTR **210** to discover and connect with the computing device **216a** when for example the computing device **216a** (and the individual) are at least located within, for example, a parking lot of the sports bar. Certain hardware and/or software resource may be required of a particular computing device to interact with the PTR **210**.

For example, the computing device **216a** may be configured to include or exhibit a Bluetooth® and/or a WiFi radio such that a communication may be established with the PTR **210** by a particular communication channel. Additionally, the computing device **216a** may be configured to include or exhibit a particular mobile application, as stored within the mobile application module **230** for example, that may enable the particular individual to access and/or interact with a listing of television programming “currently” available for viewing, and further select particular programming preferred for viewing in a manner such described above in connection with at least **FIGS. 1-3**. The access or interaction may be realized by user interaction with the input module **232** of the computing device **216a**. For example, the

input module **232** may be a touch screen, a microphone, or other type of computer device input mechanism. In the present example, the particular mobile application may or may not be a propriety mobile application made available by the sports bar for download by the computing device **216a** from an online mobile application store. The particular mobile application may enable the computing device **216a**, when located within the predetermined distance from the PTR **210**, to be “matched” to the PTR **210** and/or a customer account associated with the PTR **210** so that the computing device **216a** may be used by the particular individual to join a “majority rule” television programming selection process. In the example of **FIG. 5**, the content management module **220** of the PTR **210** may serve as a control module to manage discovery of the computing device **216a**, and control transfer of data between the PTR **210** and the computing device **216a**.

As may be understood from the preceding discussion, the PTR **210** including at least the content management module **220** and the communication module **228**, and the computing device **216a** including at least the mobile application module **230** and the input module **232**, may enable a particular individual to participate in selection of television programming for viewing in a public or social environment in manner. This may be referred to as a direct user input scenario. However, control of what type of programming is currently being output for presentation by a display device may also be a function of indirect user input. The indirect user input scenario may be further understood in connection with the social network server **218** in tandem with the PTR **210** and the computing device **216a** as shown in **FIG. 5**.

For example, in a first aspect, the particular individual may use the computing device **216a** to interact with a particular social network service. In general, a social network service may refer to an online service, platform, or site that focuses on facilitating the building of social networks or social relations among people who, for example, share interests, activities, backgrounds, or real-life connections. The social network server **218** as shown in **FIG. 5** is intended to represent at a high-level one or more computing devices configured to implement feature, functionality, etc., offered by the particular social network service.

In the present example, the particular individual may use the computing device **216a** to update their own profile, as housed within the profile module **234** of the social network server **218**. In general, the profile may contain a plurality of information such as ideas, activities, events, interests, etc., of and as supplied by at least the particular individual to the profile as part of their interaction with the particular social network service. For example, the individual may be a fanatic Green Bay Packers supporter. In this example, the profile may contain at least one positive reference to the Green Bay Packers, such as a name of a favorite player (e.g.,

“My Vote For Favorite NFL Player: NAME of the team Green Bay Packers”), and/or any other conceivable bit of information that may in some manner be correlated to the Green Bay Packers football team. Other embodiments are possible.

Continuing with this example, in practice, the particular individual may enter a social or public environment, such as a sports bar, where there may be one or more televisions that are tuned to particular programming, such as a particular baseball game as depicted in **FIG. 2** with respect to televisions **214a-c**. In this example, the individual may have the computing device **216a** on their person. In one aspect, the computing device **216a** may be configured to interact with the PTR **210** to enable the individual to have direct control or input as to what type of programming is currently being output by the PTR **210** to one or more of the televisions **214a-c** for presentation thereon, such as described above. In another aspect, the computing device **216a** may be configured to interact with the PTR **210** to enable the individual to have indirect control or input as to what type of programming is currently being output by the PTR **210** to one or more of the televisions **214a-c** for presentation thereon. For example, when the individual (and the computing device **216a**) is within a predetermined distance from the PTR **210**, such as within a radius of 20-30 meters for example, a communication link may be established between the computing device **216a** and the PTR **210**. For example, the communication module **228** of the PTR **210** may correspond to a Bluetooth® or a WiFi radio that may periodically or at least intermittently “ping” for the purpose of discovering computing devices (e.g., computing device **216a**) configured to interact with the PTR **210** and within the predetermined distance from the PTR **210**. As discussed above, certain hardware and/or software resource may be required of the computing device **216a** to interact with the PTR **210**. More specifically, the computing device **216a** and the PTR **210** may have to be compatibly configured in terms communication capability or capabilities.

For example, the computing device **216a** may be configured to include or exhibit a Bluetooth® and/or a WiFi radio such that a communication may be established with the PTR **210** by a particular communication channel. Upon establishing a communication link between the computing device **216a** and the PTR **210**, the content management module **220** of the PTR **210**, as pre-authorized by the particular individual, may query the social network server **218** to access at least a portion of the profile, via the API module **236**, of the particular individual as contained within the profile module **234**. For example, the content management module **220** of the PTR **210** may query the social network server **218** and determine that the individual is likely a fanatic Green Bay Packers supporter, based upon the profile containing

at least one reference to the Green Bay Packers as mentioned above. In this example, the content management module **220** may leverage this information to enable the individual to “indirectly” participate in selection of television programming for viewing in a public or social environment.

For example, referring now to additionally to **FIG. 6**, a second example method **600** is shown in accordance with the present disclosure. In particular, the method **600** as shown in **FIG. 6** and its corresponding description may demonstrate a second example scenario in which a particular individual is enabled to participate in selection of television programming for viewing in a public or social environment. The example method **600** as described may be performed on or by a computing system or device, such as a television receiver. An example of such a computing system or device is discussed below in connection with at least **FIG. 7**.

The method **600** may include receiving (module **602**), by a television receiver from a mobile device, a request to join a “majority rule” television programming selection process. For example, a particular individual may enter a social or public environment, such as a sports bar, where there may be one or more televisions that are tuned to particular programming, such as a particular football game. The individual may have a mobile device, such as a smartphone, on their person. The mobile device may be configured to interact with the television receiver to enable the individual to control or have input as to what type of programming is currently being output by the television receiver to a television for presentation by the television. For example, when the individual (and the mobile device) is within a predetermined distance from the television receiver, such as within a radius of about 20-30 meters for example, the mobile device and the television receiver may establish a communication link, and the television receiver may receive a request from the mobile device to enroll, register, enlist, etc., the mobile device (and the individual) to join the majority rule television programming selection process. This may enable the individual to “indirectly” have input as to what type of programming is currently being output by the television receiver to the television, for presentation by the television.

The method **600** may further include accessing (module **604**), by the television receiver, profile content of at least one social network. The profile content being specific to the individual. For example, the television receiver may establish a communication link between the television receiver and at least one social network server to access at least a portion of a user profile, of a social network, specific to the individual. In general, the access may be pre-authorized by the individual and may include authorization to access more than one social network, such as by selection of a particular setting using a mobile application installed to the

mobile device that may or may not be a propriety mobile application made available by a corresponding social or public establishment (e.g., sports bar, physician's office, etc.) for download by the mobile device from an online mobile application store. Other embodiments are possible.

The method **600** may further include identifying (module **606**), by the television receiver, from the profile content information corresponding to "likes" and/or "dislikes" of the individual. For example, the individual may be a fanatic Green Bay Packers supporter. In this example, the profile may contain, under a "likes" heading or column, the phrase "Green Bay Packers." In another example, the individual may be a detractor of the Denver Broncos. In this example, the profile may contain, under a "dislikes" heading or column, the phrase "Denver Broncos." Other embodiments are possible. For example, the profile may contain at least one positive reference to the Green Bay Packers such as the phrase "My Vote For Favorite NFL Player: NAME of the team Green Bay Packers." In another example, the profile may contain at least one critical or disparaging reference to the Denver Broncos such as the phrase "My Vote For Least Favorite NFL Player: NAME of the team Denver Broncos." Still other embodiments are possible as well. Further, type and form or formatting of information within the user-specific profile may be dependent on the particular social network. For example, a first social network may actually have information itemized according to "likes" and/or "dislikes." In this example, "likes" and/or "dislikes" may be directly observed. In another example, a second social network may not have information itemized according to "likes" and/or "dislikes." In this example, "likes" and/or "dislikes" may be inferred. Still other embodiments are possible.

The method **600** may further include comparing (module **608**), by the television receiver, the user-specific likes/dislikes (see module **606**) against a list or listing of television programming currently available for viewing. In general, "currently" available television programming may refer to recorded content or live content. In the present example, content of the listing may be similar to that which may be displayed in an EPG. For example, the list may at least present various information related to television channels and the timing of programs or programming appearing on such television channels. For example, the listing may display channel information associated with a channel 2009, where a football game Broncos vs. Ravens may be listed as scheduled to appear on the channel 2009 during a particular time period 1-4:30 PM of a particular day January 16, 2013. The list may further display channel information associated with a channel 2012, where a football game Packers

vs. 49ers may be listed as scheduled to appear on the channel 2012 during the particular time period 1-4:30 PM of the particular day January 16, 2013. Other embodiments are possible.

The method **600** may further include submitting (module **610**), by the television receiver, or “casting” a vote on behalf of the individual that represents input associated with selection of particular programming preferred for viewing by the particular individual. For example, the television receiver may “select” the Packers vs. 49ers game as a preferred programming for viewing on behalf of the individual based on at least two factors. A first factor may relate to the football game Packers vs. 49ers being “currently” available for viewing. A second factor may relate to the television receiver identifying at least one positive reference to the Green Bay Packers within a social network profile associated with the individual, in a manner as discussed above. Other embodiments are possible.

The method **600** may further include identifying (module **612**), by the television receiver, particular programming of currently available programming that is “majority rule programming.” Majority rule programming may refer to programming having a “greatest” number of individuals in favor of watching the same. For example, upon submission of the vote on behalf of the individual that represents input associated with selection of particular programming preferred for viewing by the particular individual (see module **610**), the television receiver may “tally the vote” and determine, based on an updated tally, which programming of currently available programming has the “greatest” number of individuals in favor of watching the same. For example, and assuming for simplicity that the only currently available programming is the Broncos vs. Ravens game and the Packers vs. 49ers game, the television receiver may determine that five (5) individuals are in favor of watching the Broncos vs. Ravens game, and that six (6) individuals are in favor of watching the Packers vs. 49ers game. In this example, the vote submitted by the television receiver on behalf of the particular individual in favor of watching the Packers vs. 49ers game tipped the scales such that the Packers vs. 49ers game has the majority vote, and may be considered the majority rule programming. In accordance with the present disclosure, and continuing with the example scenario, the television receiver may take into account this new majority rule programming and change tuning from the Broncos vs. Ravens game such that the Packers vs. 49ers game corresponds to programming currently being output by the television receiver to the television for presentation by the television.

For example, the method **600** may further include tuning (module **614**), by the television receiver, the television receiver from a channel associated with first programming to a channel associated with majority rule programming. For example, the television receiver may

change tuning from the Broncos vs. Ravens game to the Packers vs. 49ers game such that the Packers vs. 49ers game corresponds to programming currently being output by the television receiver to the television for presentation by the television. Other embodiments are possible.

FIG. 7 shows an embodiment of an example computer system or device **700**. An example of a computer system or device includes an enterprise server, blade server, desktop computer, laptop computer, personal data assistant, smartphone, gaming console, STB, and any other type machine for performing calculations. The computer system **700** may be wholly or at least partially incorporated as part of previously-described computing devices, such as the PTR **210**, the STRs **212a-b**, the televisions **214a-c**, the computing devices **216a-b**, and the social network server(s) **218** of **FIG. 2**. The example computer device **700** may be configured to perform and/or include instructions that, when executed, cause the computer system **700** to perform the method of **FIG. 1** and **FIG. 6**. The example computer device **700** may be configured to perform and/or include instructions that, when executed, cause the computer system **700** to instantiate and implement functionality of the content management module **220** as described above.

The computer device **700** is shown comprising hardware elements that may be electrically coupled via a bus **702** (or may otherwise be in communication, as appropriate). The hardware elements may include a processing unit with one or more processors **704**, including without limitation one or more general-purpose processors and/or one or more special-purpose processors (such as digital signal processing chips, graphics acceleration processors, and/or the like); one or more input devices **706**, which can include without limitation a remote control, a mouse, a keyboard, and/or the like; and one or more output devices **708**, which can include without limitation a presentation device (e.g., television), a printer, and/or the like.

The computer system **700** may further include (and/or be in communication with) one or more non-transitory storage devices **710**, which can comprise, without limitation, local and/or network accessible storage, and/or can include, without limitation, a disk drive, a drive array, an optical storage device, a solid-state storage device, such as a random access memory, and/or a read-only memory, which can be programmable, flash-updateable, and/or the like. Such storage devices may be configured to implement any appropriate data stores, including without limitation, various file systems, database structures, and/or the like.

The computer device **700** might also include a communications subsystem **712**, which can include without limitation a modem, a network card (wireless or wired), an infrared communication device, a wireless communication device, and/or a chipset (such as a Bluetooth™ device, an 802.11 device, a WiFi device, a WiMax device, cellular

communication facilities (e.g., GSM, WCDMA, LTE, etc.), and/or the like. The communications subsystem **712** may permit data to be exchanged with a network (such as the network described below, to name one example), other computer systems, and/or any other devices described herein. In many embodiments, the computer system **700** will further comprise a working memory **714**, which may include a random access memory and/or a read-only memory device, as described above.

The computer device **700** also can comprise software elements, shown as being currently located within the working memory **714**, including an operating system **716**, device drivers, executable libraries, and/or other code, such as one or more application programs **718**, which may comprise computer programs provided by various embodiments, and/or may be designed to implement methods, and/or configure systems, provided by other embodiments, as described herein. By way of example, one or more procedures described with respect to the method(s) discussed above, and/or system components might be implemented as code and/or instructions executable by a computer (and/or a processor within a computer); in an aspect, then, such code and/or instructions can be used to configure and/or adapt a general purpose computer (or other device) to perform one or more operations in accordance with the described methods.

A set of these instructions and/or code might be stored on a non-transitory computer-readable storage medium, such as the storage device(s) **710** described above. In some cases, the storage medium might be incorporated within a computer system, such as computer system **700**. In other embodiments, the storage medium might be separate from a computer system (e.g., a removable medium, such as flash memory), and/or provided in an installation package, such that the storage medium can be used to program, configure, and/or adapt a general purpose computer with the instructions/code stored thereon. These instructions might take the form of executable code, which is executable by the computer device **700** and/or might take the form of source and/or installable code, which, upon compilation and/or installation on the computer system **700** (e.g., using any of a variety of generally available compilers, installation programs, compression/decompression utilities, etc.), then takes the form of executable code.

It will be apparent to those skilled in the art that substantial variations may be made in accordance with specific requirements. For example, customized hardware might also be used, and/or particular elements might be implemented in hardware, software (including portable software, such as applets, etc.), or both. Further, connection to other computing devices such as network input/output devices may be employed.

As mentioned above, in one aspect, some embodiments may employ a computer system (such as the computer device **700**) to perform methods in accordance with various embodiments of the invention. According to a set of embodiments, some or all of the procedures of such methods are performed by the computer system **700** in response to processor **704** executing one or more sequences of one or more instructions (which might be incorporated into the operating system **716** and/or other code, such as an application program **718**) contained in the working memory **714**. Such instructions may be read into the working memory **714** from another computer-readable medium, such as one or more of the storage device(s) **710**. Merely by way of example, execution of the sequences of instructions contained in the working memory **714** may cause the processor(s) **704** to perform one or more procedures of the methods described herein.

The terms “machine-readable medium” and “computer-readable medium,” as used herein, may refer to any medium that participates in providing data that causes a machine to operate in a specific fashion. In an embodiment implemented using the computer device **700**, various computer-readable media might be involved in providing instructions/code to processor(s) **704** for execution and/or might be used to store and/or carry such instructions/code. In many implementations, a computer-readable medium is a physical and/or tangible storage medium. Such a medium may take the form of a non-volatile media or volatile media. Non-volatile media may include, for example, optical and/or magnetic disks, such as the storage device(s) **710**. Volatile media may include, without limitation, dynamic memory, such as the working memory **714**.

Example forms of physical and/or tangible computer-readable media may include a floppy disk, a flexible disk, hard disk, magnetic tape, or any other magnetic medium, a CD-ROM, any other optical medium, a RAM, a PROM, EPROM, a FLASH-EPROM, any other memory chip or cartridge, or any other medium from which a computer can read instructions and/or code.

Various forms of computer-readable media may be involved in carrying one or more sequences of one or more instructions to the processor(s) **704** for execution. By way of example, the instructions may initially be carried on a magnetic disk and/or optical disc of a remote computer. A remote computer might load the instructions into its dynamic memory and send the instructions as signals over a transmission medium to be received and/or executed by the computer system **700**.

The communications subsystem **712** (and/or components thereof) generally will receive signals, and the bus **702** then might carry the signals (and/or the data, instructions, etc. carried

by the signals) to the working memory **714**, from which the processor(s) **704** retrieves and executes the instructions. The instructions received by the working memory **714** may optionally be stored on a non-transitory storage device **710** either before or after execution by the processor(s) **704**.

The methods, systems, and devices discussed above are examples. Various configurations may omit, substitute, or add various method steps or procedures, or system components as appropriate. For instance, in alternative configurations, the methods may be performed in an order different from that described, and/or various stages may be added, omitted, and/or combined. Also, features described with respect to certain configurations may be combined in various other configurations. Different aspects and elements of the configurations may be combined in a similar manner. Also, technology evolves and, thus, many of the elements are examples and do not limit the scope of the disclosure or claims.

Specific details are given in the description to provide a thorough understanding of example configurations (including implementations). However, configurations may be practiced without these specific details. For example, well-known circuits, processes, algorithms, structures, and techniques have been shown without unnecessary detail in order to avoid obscuring the configurations. This description provides example configurations only, and does not limit the scope, applicability, or configurations of the claims. Rather, the preceding description of the configurations will provide those skilled in the art with an enabling description for implementing described techniques. Various changes may be made in the function and arrangement of elements without departing from the spirit or scope of the disclosure.

Also, configurations may be described as a process which is depicted as a flow diagram or block diagram. Although each may describe the operations as a sequential process, many of the operations can be performed in parallel or concurrently. In addition, the order of the operations may be rearranged. A process may have additional steps not included in the figure. Furthermore, examples of the methods may be implemented by hardware, software, firmware, middleware, microcode, hardware description languages, or any combination thereof. When implemented in software, firmware, middleware, or microcode, the program code or code segments to perform the necessary tasks may be stored in a non-transitory computer-readable medium such as a storage medium. Processors may perform the described tasks.

Furthermore, the example embodiments described herein may be implemented as logical operations in a computing device in a networked computing system environment. The logical

operations may be implemented as: (i) a sequence of computer implemented instructions, steps, or program modules running on a computing device; and (ii) interconnected logic or hardware modules running within a computing device.

Although the subject matter has been described in language specific to structural features and/or methodological acts, it is to be understood that the subject matter defined in the appended claims is not necessarily limited to the specific features or acts described above. Rather, the specific features and acts described above are disclosed as example forms of implementing the claims.

WHAT IS CLAIMED IS:

1. A computer-implemented method for enabling a mobile device to participate in selection of television programming for presentation by a display device external the mobile device, comprising:

receiving, at a television receiver from the mobile device, an indication of selection of particular television programming for presentation by the display device;

determining, by the television receiver based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming; and

outputting by the television receiver the particular television programming for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

2. The method of claim 1, further comprising receiving from a social networking computing system an indication of selection of first television programming other than the particular television programming for presentation by the display device.

3. The method of claim 2, further comprising determining, based on the indication of selection of the first television programming, whether a collective indication of selection tally of the first television programming is greater than a collective indication of selection tally of other television programming.

4. The method of claim 3, further comprising outputting the first television programming for presentation by the display device when the first television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

5. The method of claim 1, further comprising sending to the mobile device a listing of a plurality of instances of television programming, including the particular television programming, available for selection for presentation by the display device.

6. The method of claim 5, further comprising the indication of selection of particular television programming based on user selection of an icon associated with the particular television programming within the listing.
7. The method of claim 1, further comprising periodically searching to discover other mobile devices to participate in selection of television programming for presentation by the display device.
8. The method of claim 1, further comprising: determining that the collective indication of selection tally of the particular television programming is greater than the collective indication of selection tally of other television programming; and receiving a command based on user input to output the particular television programming for presentation by the display device.
9. The method of claim 1, further comprising outputting the particular television programming for presentation by the display device without user input in response to determining that the collective indication of selection tally of the particular television programming is greater than the collective indication of selection tally of other television programming.
10. The method of claim 1, further comprising registering a mobile device to participate in selection of television programming for presentation by a display device external the mobile device.
11. The method of claim 1, further comprising establishing a communication link with the mobile device when the mobile device is within a predetermined distance from one of the television receiver and the display device.
12. The method of claim 11, further comprising establishing a communication link with the mobile device when the mobile device is within at least about 100 meters from one of the television receiver and the display device.
13. A system, comprising:
one or more processors; and

a memory communicatively coupled with and readable by the one or more processors and having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to:

register a mobile device to participate in selection of television programming for presentation by a display device;

identify receipt of an indication from the mobile device of selection of particular television programming for presentation by the display device;

determine, based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming; and

output the particular television programming for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

14. The system of claim **13**, wherein the memory having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to identify receipt of an indication from a social networking computing system of selection of first television programming other than the particular television programming for presentation by the display device.

15. The system of claim **14**, wherein the memory having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to determine, based on the indication of selection of the first television programming, whether a collective indication of selection tally of the first television programming is greater than a collective indication of selection tally of other television programming.

16. The system of claim **15**, wherein the memory having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to output the first television programming for presentation by the display device when the first television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming

17. The system of claim 13, wherein the memory having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to

18. The system of claim 13, wherein the memory having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to send to the mobile device a listing of a plurality of instances of television programming, including the particular television programming, available for selection for presentation by the display device.

19. The system of claim 13, wherein the memory having stored therein processor-readable instructions which, when executed by the one or more processors, cause the one or more processors to periodically search to discover other mobile devices to participate in selection of television programming for presentation by the display device.


20. A non-transitory processor-readable medium comprising processor-readable instructions configured to cause one or more processors to:

register a mobile device to participate in selection of television programming for presentation by a display device external the mobile device;

identify an indication of selection of particular television programming for presentation by the display device received from the mobile device;

determine, based on the indication of selection, whether a collective indication of selection tally of the particular television programming is greater than a collective indication of selection tally of other television programming; and

output the particular television programming for presentation by the display device when the particular television programming has a collective indication of selection tally greater than a collective indication of selection tally of other television programming.

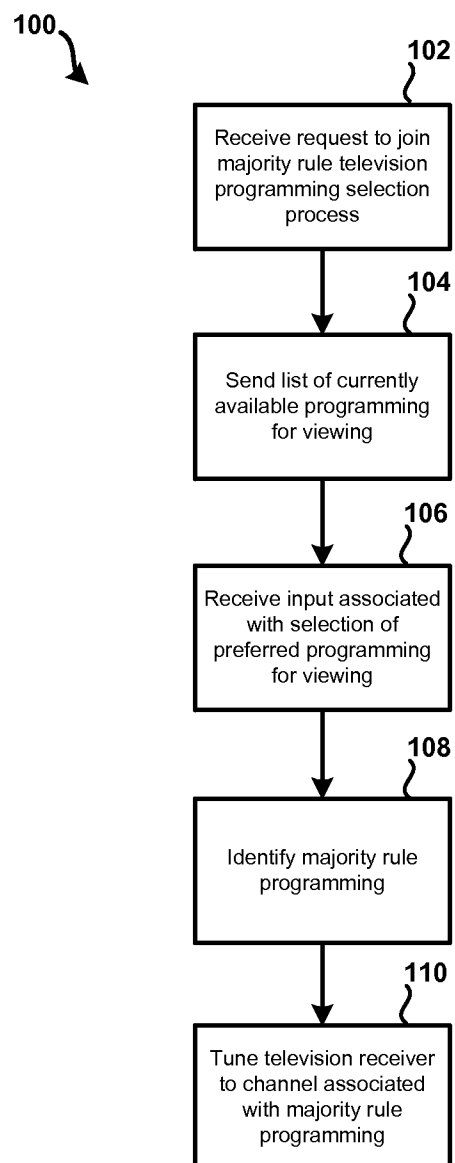**FIG. 1**

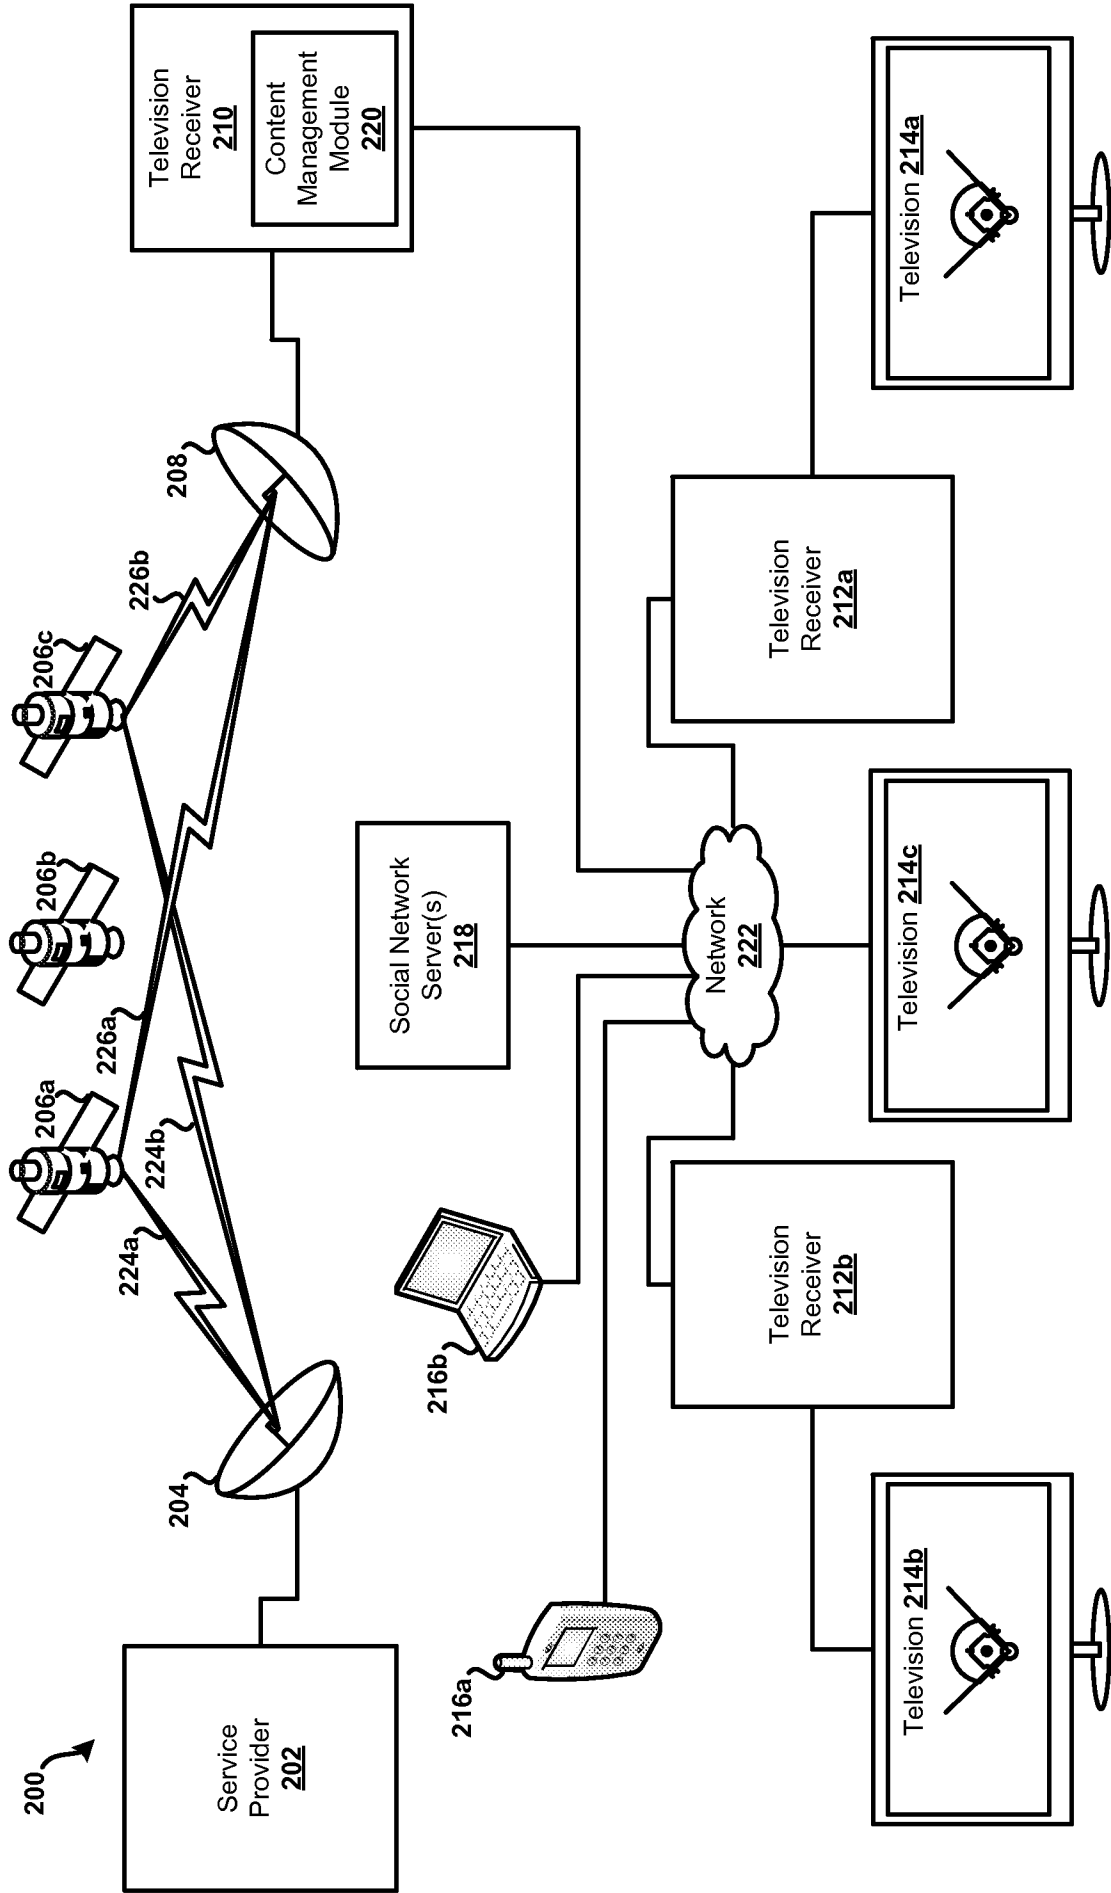


FIG. 2

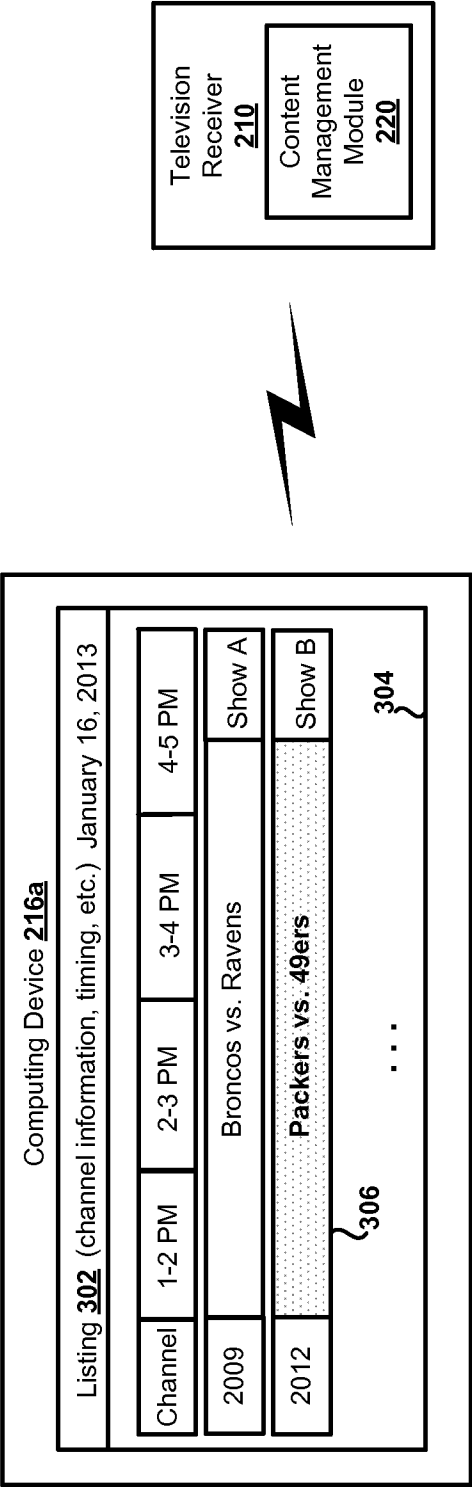


FIG. 3

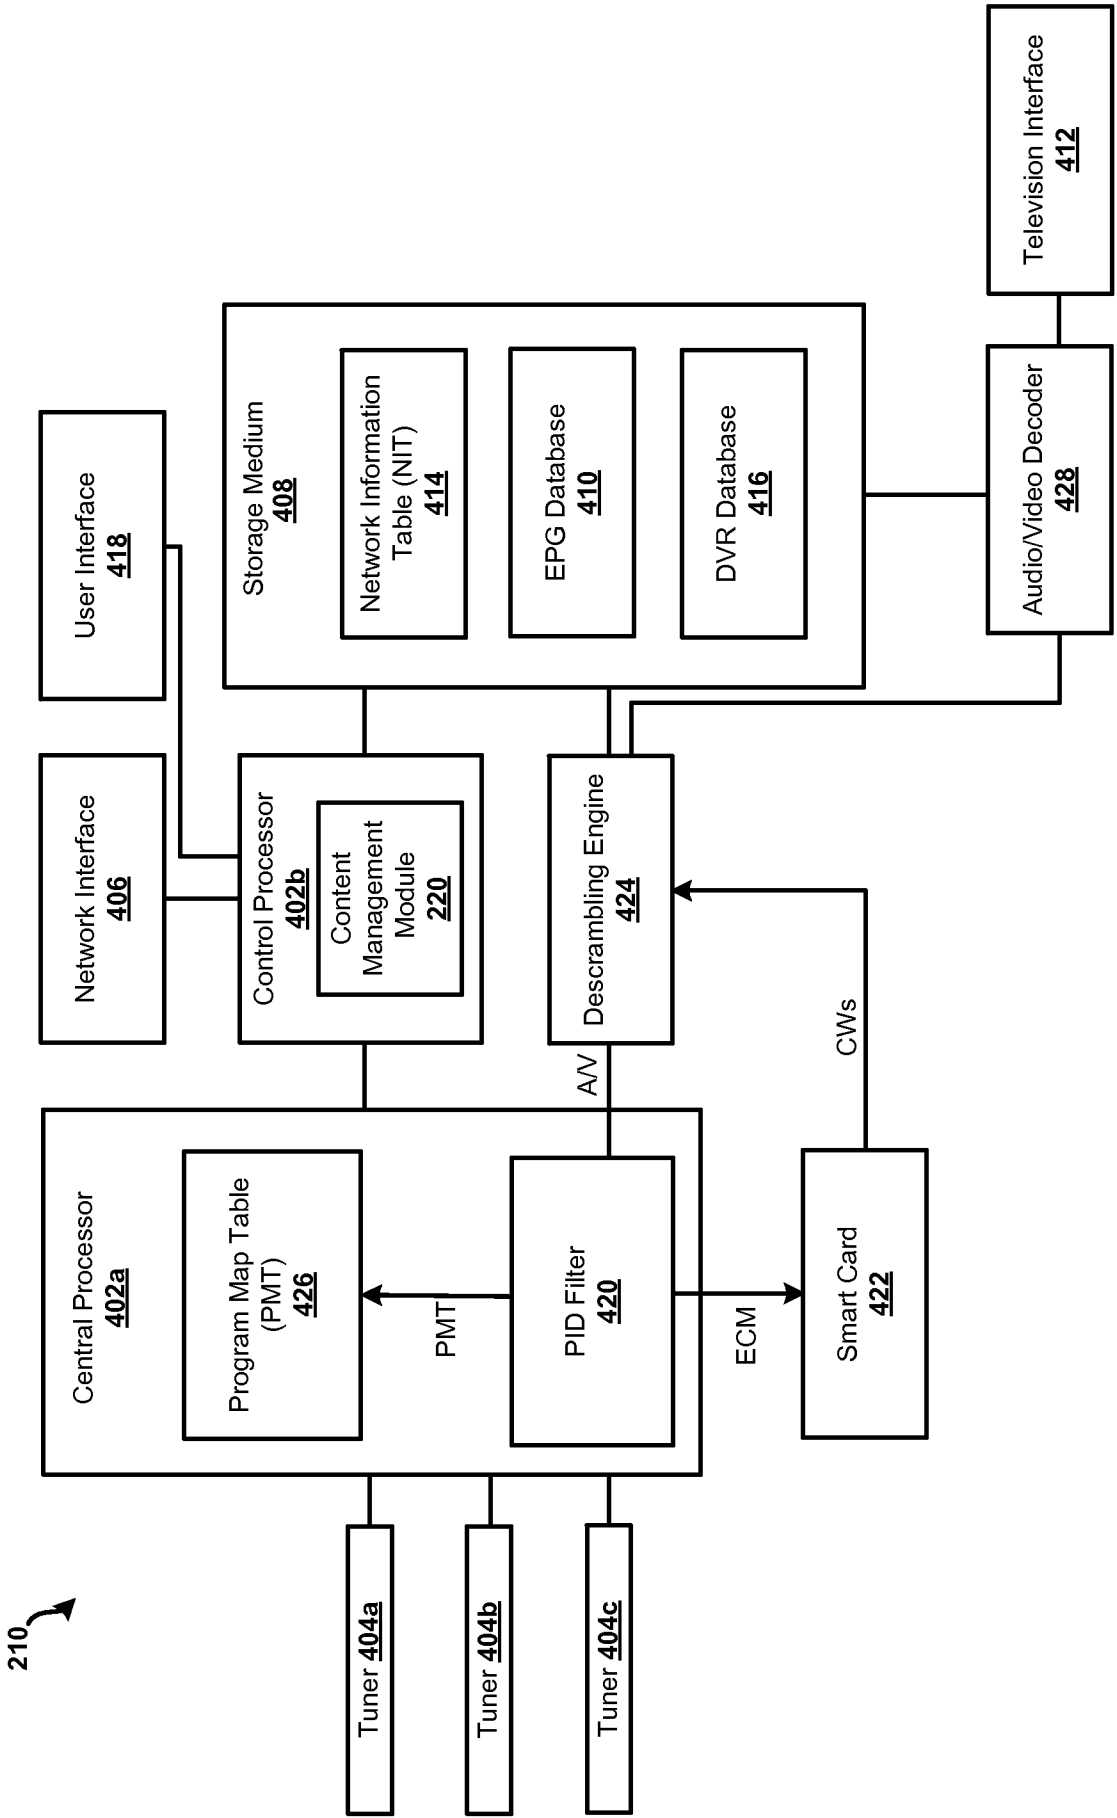


FIG. 4

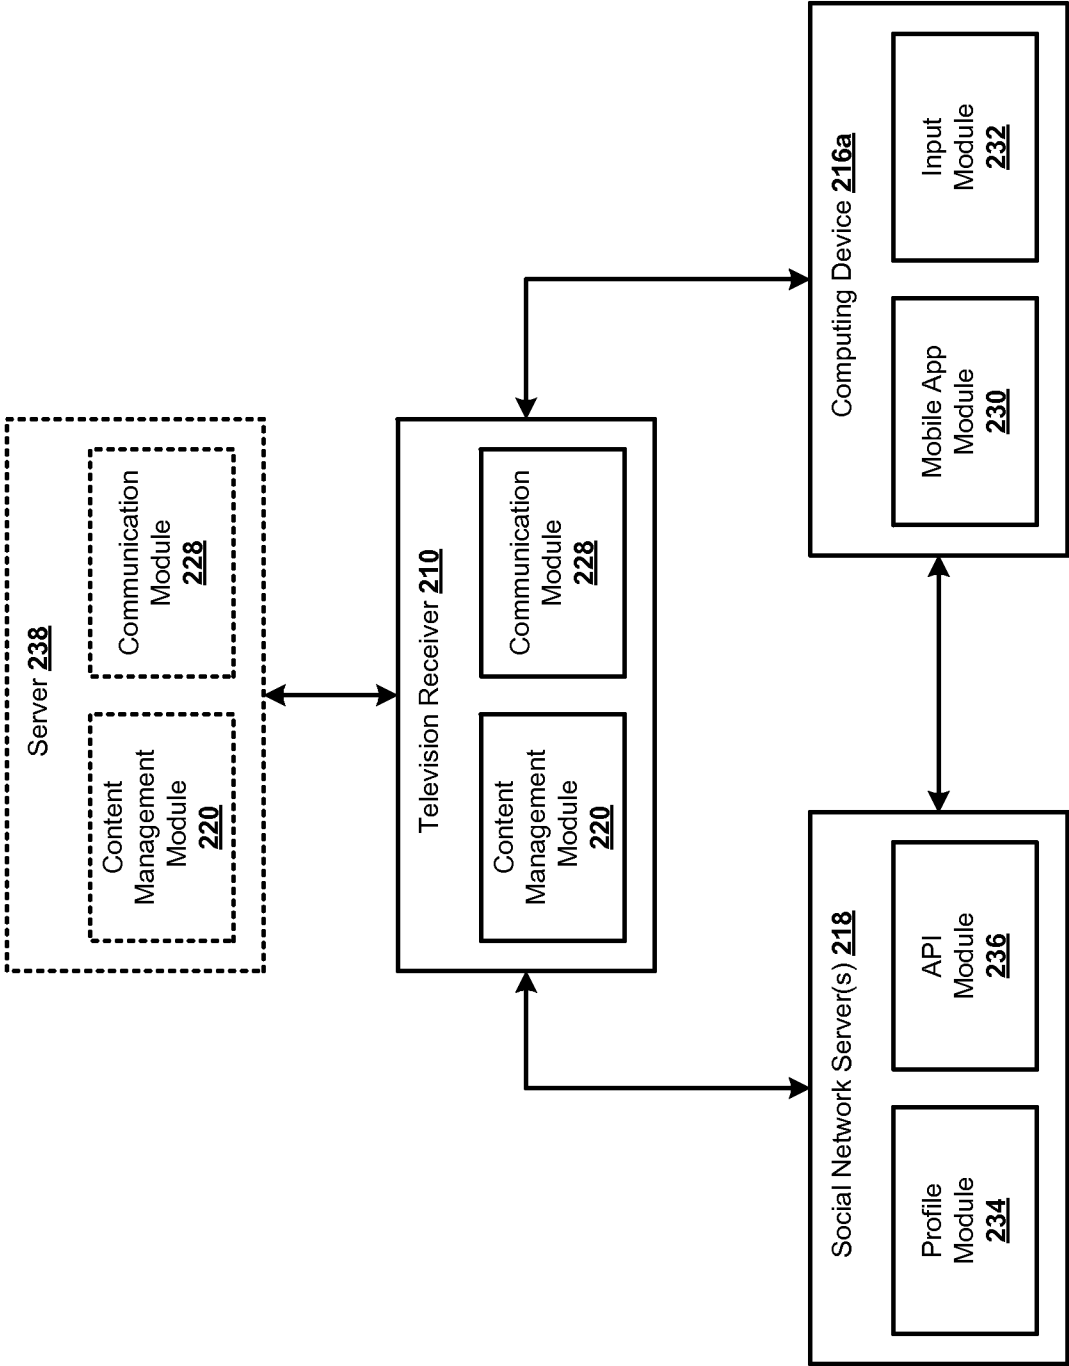
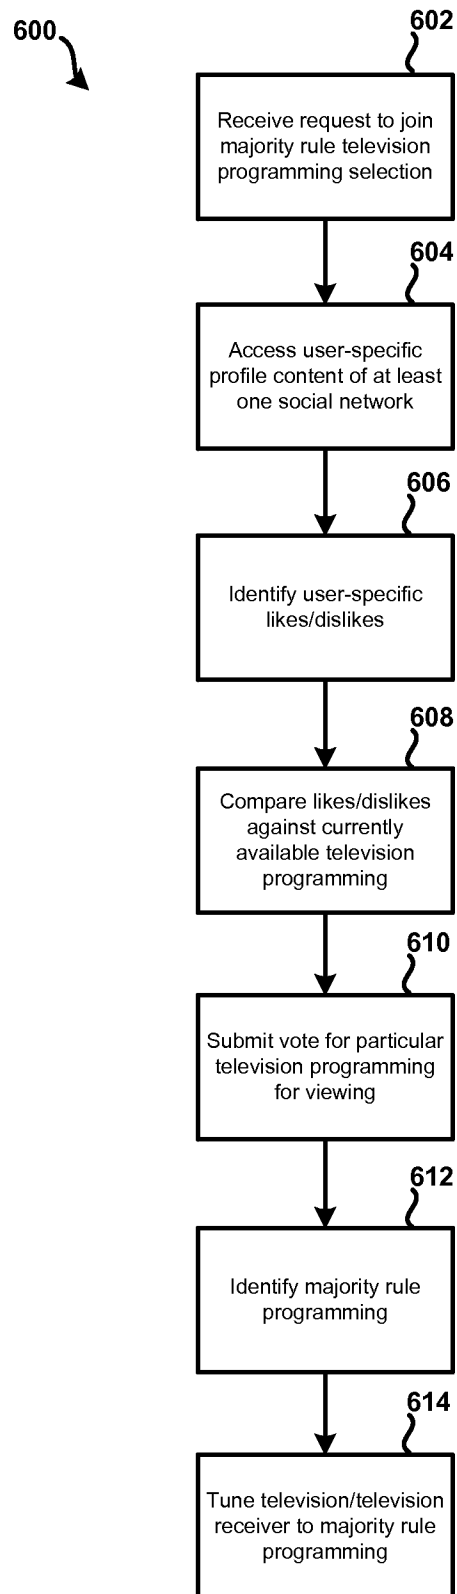
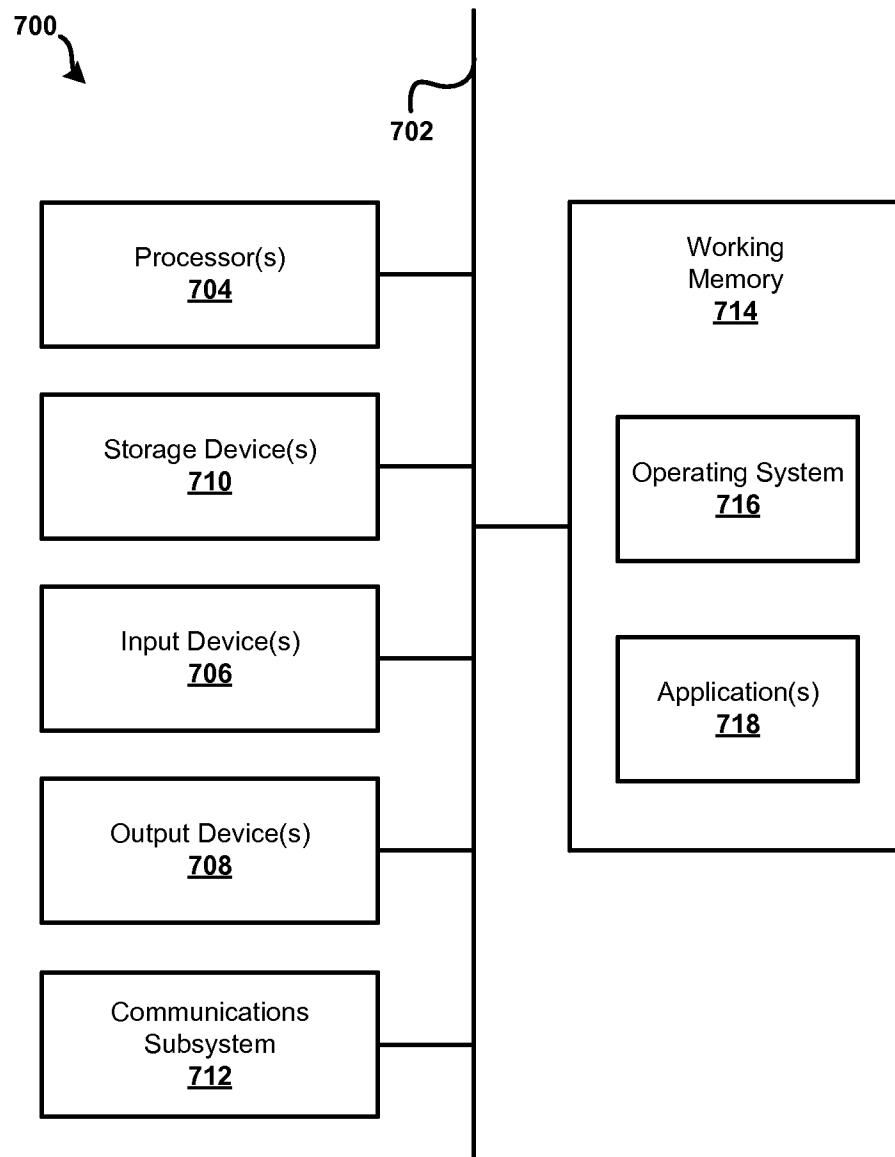


FIG. 5

**FIG. 6**

**FIG. 7**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2014/023466

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H04H20/65 (2014.01)

USPC - 725/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - H04H20/65, H04H20/71, H04N7/173, G06F15/16 (2014.01)

USPC - 725/24, 348/563, 348/734

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
CPC - H04N21/4758, H04H60/80, H04N21/26258 (2014.02)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patents, Google Scholar, Proquest Dissertations & Theses: The Sciences and Engineering Collection; ProQuest Technology Collection

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2009/0228911 A1 (VRIJSEN) 10 September 2009 (10.09.2009) entire document	1-20
Y	US 2010/0064306 A1 (TIONGSON et al) 11 March 2010 (11.03.2010) entire document	1-20
Y	US 2007/0169165 A1 (CRULL et al) 19 July 2007 (19.07.2007) entire document	2-4, 10, 13-20
A	WO 2011040999 A1 (GUINN) 07 April 2011 (07.04.2011) entire document	1-20

☐

Further documents are listed in the continuation of Box C.

☐

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 June 2014

Date of mailing of the international search report

10 JUL 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774