


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : <b>B62K 25/30, 25/22, 25/08</b>		A1	(11) International Publication Number: <b>WO 94/22710</b> (43) International Publication Date: 13 October 1994 (13.10.94)
(21) International Application Number: PCT/CA93/00367			(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 14 September 1993 (14.09.93)			
(30) Priority Data: 08/038,264 29 March 1993 (29.03.93) US			
(71)(72) Applicant and Inventor: BLANCHARD, Pierre [CA/CA]; 645, rue Isabelle, Acton Vale, Quebec J0H 1AO (CA).			Published <i>With international search report.</i>

## (54) Title: BICYCLE WITH A LONG STROKE SUSPENSION

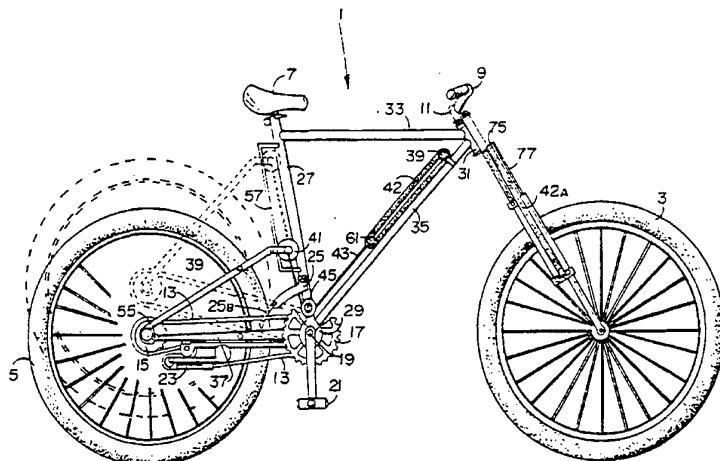

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## BICYCLE WITH A LONG STROKE SUSPENSION

FIELD OF THE INVENTION

The present invention relates to bicycles, more particularly to mountain bicycles, equipped with a suspension.

BACKGROUND OF THE INVENTION

5 In known bicycles equipped with a suspension, the up-and-down movement of the wheels relative to the bicycle frame is limited because the suspension springs used are compression springs. Also, known bicycle suspensions are heavy and this detracts from the aim of building bicycles which are as light as 10 possible.

OBJECTS OF THE INVENTION

It is the main object of the present invention to provide a bicycle equipped with a long stroke suspension and which is very light.

15 Another object of the present invention is to provide a rear bicycle suspension which includes a rear wheel carrying swing arm provided with a brace arm to prevent torsion of the swing arm.

20 Another object of the present invention is to provide a long stroke suspension for both the front and back bicycle wheels fitted with a stabilizer system to yieldingly transfer, at least in part, the up-and-down movement of one wheel to the other wheel.

Yet, another object of the invention is to associate the suspension with an oscillation damper.

25 SUMMARY OF THE INVENTION

The bicycle of the present invention comprises a bicycle

frame including rigidly interconnected frame parts, namely a rear frame part consisting of a seat post and of a pedal housing at the lower end of said seat post, a steering rod receiving sleeve at the front of said frame and a tubing interconnecting said seat post and said sleeve; a rear suspension system comprising a swing arm extending rearwardly from and pivoted at its front end to said rear frame part for up and down movement in the plane of said frame, a follower guided by and moveable along said seat post for up and down movement above said swing arm, a brace arm extending above said swing arm, attached to said follower and forming a pivoted junction with the rear end of said swing arm, and biasing means connected between said follower and said bicycle frame and biasing said follower toward said pedal housing, the pivoted junction being adapted to rotatably carry a rear bicycle wheel.

15 The biasing means is preferably an elastic tension cord. In preferred embodiments, the cord is in the form of a loop disposed along the tubing. One end of the loop is fixed to the tubing near the sleeve while a cable is fixed to the other end of the loop and to the follower, being trained on a pulley attached to 20 the seat post just above the pedal housing.

The follower can be a collar slidable on the seat post but is preferably a grooved wheel rotatably carried by the front end of the brace arm and rotatably engaging the seat post.

25 The swing arm comprises a pair of laterally spaced arm portions disposed on both sides of the rear bicycle wheel and preferably pivoted to the opened ends of the cylindrical nipple

formed by the pedal housing. Preferably, this pivotal connection comprises a stepped, full collar fixed to the front end of one arm portion and rotatably fitted around one end of the nipple with the step of the full collar abutting one end of the nipple and adapted 5 to freely surround the pedal axle, a stepless half-collar fixed to the front end of the other arm portion and rotatably fitted on and axially shiftable along the other end of the nipple, a stepped half-collar rotatably fitted on the other end of the nipple in registry with the stepless half collar and with its step abutting 10 against the other end of the nipple and means to releasably fix the two half collars to each other in registering position.

The front suspension of the bicycle comprises an upper fork part fixed to the steering rod of the bicycle, a lower fork part guided on said upper fork part for up and down movement and 15 adapted to carry the front wheel at its lower end and elastic tension cords attached to both fork parts and biasing said lower fork part downwardly.

Preferably, a stabilizer system is also provided including an additional elastic tension cord to yieldingly transfer 20 at least part of the up and down movement of one wheel to the other wheel.

A damper is also described and claimed to prevent oscillation of the bicycle frame.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 is a side elevation of a first embodiment of a multi-speed bicycle equipped with a front and a back suspension;

Figure 2 is a partial perspective view of the rear suspension also showing the front derailleur;

Figure 3 is a longitudinal section of the front derailleur;

5 Figure 4 is a partial perspective view showing the pedal housing and the pivotal connection of the swing arm to said housing;

Figure 5 is a longitudinal section on line 5-5 of Figure 4;

10 Figure 6 is a front elevation of part of the bicycle of Figure 1, and showing the front suspension;

Figure 7 is a plan section taken along line 7-7 of Figure 6;

15 Figures 8 and 9 are partial side elevations of the front suspension in down and up portions, respectively;

Figures 10 and 11 are partial side elevations of another embodiment of the front suspension in down and up positions, respectively;

20 Figures 12 and 13 are partial side elevations of the bicycle frame and of another embodiment of the rear suspension in down and up positions, respectively, also showing one embodiment of the stabilizer system, the front suspension being either one of Figures 8 or 10;

25 Figures 14 and 15 are partial side elevations similar to Figures 12 and 13, respectively, but showing other embodiments of the front and back suspension and of the stabilizer system;

Figures 18, 19 and 20 are schematic side elevations of another embodiment of the bicycle suspension with a stabiliser shown in three different positions;

5 Figures 21 and 22 are schematic side elevations of the oscillation damper in two positions of the rear suspension; and

Figures 23 and 24 are a side elevation and a section, respectively, of the damper collapsible chamber.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figures 1 to 9, there is shown a multi-speed 10 bicycle embodying the long stroke suspension of the invention. The bicycle comprises a rigid frame 1, front and back wheels 3 and 5, a seat 7, a handle-bar 9 fixed to a steering rod 11, a gear chain 13, a set of rear gears 15 fixed to the rear wheel shaft, a set of front gears 17 fixed to the shaft 19 of pedals 21, a rear gear 15 derailleur 23 such as applicant's derailleur of U.S. Patent application No. 07/733,624 filed July 22, 1991 and entitled "DERAILLEURS FOR MULTI-SPEED BICYCLE", and a front gear derailleur 25.

The frame 1 is made of rigidly interconnected tubular 20 frame parts including a seat post 27, a pedal housing 29 at the lower end of seat post 27, a steering rod receiving sleeve 31 and tubings interconnecting the seat post 27 to sleeve 31, namely top horizontal tubing 33 and lower forwardly upwardly inclined tubing 35 having its lower end fixed directly to pedal housing 29. Top 25 tubing 33 could be replaced by an inclined tubing parallel to tubing 35 or could be entirely eliminated.

The rear suspension of the invention includes a swing arm 37 pivoted to pedal housing 29 and extending rearwardly from the latter, a brace arm 39, a follower 41 carried by the front end of brace arm 39 and guided for up and down movement along seat post 27, an elastic tension cord 42, a flexible cable 43 and an idle pulley 45.

Swing arm 37 is composed of two laterally spaced arm portions 37a joined by a cross arm 37b near their pivoted ends which are formed by a stepped, full collar 47 and by a stepless half collar 49, respectively (Figures 4 and 5). Stepped collar 47 is axially fitted over one end of the cylindrical nipple formed by pedal housing 29 until said nipple abuts against the step of collar 47; during this operation, stepless half-collar 49 is made to slide on the cylindrical housing 29. Then a stepped half-collar 51 is secured to stepless half collar 49 by bolts 53 joining lateral ears 49a and 51a of half collars 49 and 51 respectively. The steps of full collar 47 and half collar 51 abut the opposite ends of cylindrical housing 29 and prevent lateral shifting of swing arm 37 on housing 29. Full collar 47 and the full collar formed by the joined half collars 49 and 51 slidably rotate on housing 29.

Rear bicycle wheel 5 extends between the two arm portions 37a and also between the two laterally spaced brace arm portions 39a formed by brace arm 39.

The rear wheel shaft is secured to the rear ends of brace arm portions 39a which are, in turn, pivotally connected to the rear ends of swing arm portions 37a at 55.

Follower 41 is a grooved idle wheel carried by the front end of brace arm 39 and receiving seat post 27. A wheel retaining rod 57 is fixed to seat post 27, is parallel thereto and engages the groove of follower wheel 41 diametrically opposite seat post 27. Rod 57 also serves to limit up and down movement of wheel 41.

Tension cord 42 is a loop and is made of natural or synthetic rubber or other elastomers. Cord 42 is disposed along inclined tubing 35 and its front end is attached to said tubing 35 at 59 near sleeve 31. The rear end of cord 42 is attached at 61 to one end of cable 43 which is trained on idle pulley 45 and has its other end attached to brace arm 39 adjacent follower wheel 41. Pulley 45 is carried by seat post 27 just above pedal housing 29. Upward movement of rear wheel 5 and of swing arm 37 to the limit upper position shown in dotted lines in Figure 1 causes follower wheel to roll up seat post 27 against the bias of tension cord 42. Cord 42 also presses wheel 41 against seat post 27. Guide rod 57 clears the bottom of the wheel groove but positively retains wheel 41 in engagement with seat post 27 at all times.

Brace arm 39 with follower wheel 41 prevent torsion of swing arm 37 and therefore rear wheel 5 is maintained in the plane of bicycle frame 1. The biasing means of the rear suspension, namely cord 42, idle pulley 45 and cable 43 is lightweight, an important characteristic for a bicycle.

Referring to Figures 1 and 3, it is noted that the front 25 derailleur 25 includes a chain guide formed of two interconnected, spaced plates 25a between which gear chain 13 may extend and a U-

shaped hoop 25b pivoted to the rear end of plates 25a and surrounding gear chain 13. The resulting chain guide can positively laterally shift gear chain 13 despite up and down movement of the latter when the bicycle travels on rough terrain.

5 Hoop 25b, which is above swing arm 37 abuts the latter and swings upwardly upon upward pivoting of swing arm 37.

The front suspension of the bicycle is illustrated in Figures 1, 6, 7, 8, and 9 and includes a telescopic fork 59 carrying the front wheel 3 at its lower end and attached to the 10 steering rod 11 at its upper end. The front suspension further includes elastic tension cords 42a biasing the front wheel downwardly away from the steering rod 11.

More specifically, the telescopic fork 59 is composed of two parallel laterally spaced tines 63 between which the front 15 wheel 3 extends. Each tine 63 is composed of an upper part 65 and a lower part 67. The two upper parts 65 are rigidly interconnected and secured to the steering rod 11 by means of a pair of vertically spaced connector plates 69 rigidly secured to the steering rod 11 above and below the sleeve 31 and laterally extending on each side 20 of the steering rod, as shown in Figures 6 and 7.

Referring to Figures 8 and 9, each tine 63 of the telescopic fork 59 includes a collar 71 rigidly fixed to the lower end of each upper part 65 and which protrudes forwardly therefrom to slidably receive and guide the cylindrical lower part 67. 25 Similarly, an upper collar 73 is fixed to the top end of the lower part 67 and slidably surrounds the cylindrical upper part 65.

There are two elastic cords 42b, one for each tine 63; each elastic cord 42b is attached at its ends to the lower end of the upper part 65 and to the upper end of the lower part 67 being arranged laterally outside of the two telescopically slidable parts. The two 5 tension cords 42b exert sufficient tensional forces to maintain the lower part 67 in the down position as shown in Figure 8 when the bicycle is normally loaded. When the front wheel 3 moves up when encountering a road obstruction, the lower parts 67 can move up to the position shown in Figure 9 against the bias exerted by the two 10 elastic cords 42b. In practice, the two elastic cords are made longer than shown in Figures 8 and 9, being replaced by cords 42a (Figure 1) having their upper ends attached at 75 to the top of a support 77 protruding upwardly from the top end of the two lower parts 67.

15 Figures 10 and 11 show an alternative arrangement of the elastic tension cords which also enables to use longer cords than those shown in Figures 8 and 9. In these Figures, there are two tension cords 42c, one for each tine 63 and each extending alongside the upper part 65. The top end of the tension cord 42c 20 is attached at 79 to the upper part 65 while the lower end of the cord 42c is attached to a cable 81 which is trained on an idle pulley 83 carried by the lower end of the upper part 67 or by the lower collar 71. The cable 81 then extends alongside the lower part 67 and is attached at 85 to the top end of the lower part 67. 25 Upward movement of the lower part causes extension of the elastic cords 42c and, therefore, increases the downward force exerted by

said cords.

Referring to Figure 6, it is seen that the shaft 87 of the front bicycle wheel 3 is attached to the lower end of the lower part 67. The telescopic fork 59 is rotated by the handle bar 9 in 5 conventional manner.

Due to the presence of the elastic cords 42a, 42b or 42c which act in tension, the front suspension is of very light construction and also the two collars 71 just scrape away any dirt or mud which may adhere to the external surfaces of the upper parts 10 65 and lower parts 67.

In Figures 8 to 11, there is also shown a flexible cable 89 guided in a cable sheath 91. One end of the cable 89 is attached at 93 to the lower collar 71 carried by the lower end of the upper part 65 while the adjacent end of the cable sheath 91 is 15 attached at 95 to the upper end of the corresponding lower part 67.

In the first and second embodiments of the front suspension illustrated in Figures 1, and 6 to 11 inclusive, there is no need for the flexible cable 89 and its associated sheath 91. 20 Such cable and sheath is used in other embodiments to be described hereinafter.

The first such embodiment is illustrated in Figures 12 and 13, it incorporates a stabilizer system whereby upward movement of the front wheel tends to raise the rear wheel. In such an 25 embodiment, the rear end 99 of the cable sheath 91 is attached to the top horizontal tubing 33 while the flexible cable 89 has its

rear end attached to an elastic tension cord 101 which is trained on an idle pulley 103 while the other end of the cord 101 is attached at 105 to a collar 107 which surrounds and slides up and down the seat post 27. Collar 107 is an alternate, less preferred 5 embodiment of the follower 41 of Figures 1 and 2.

In Figure 12, the elastic cord associated with the rear suspension is also modified as shown at 42d, being an elastic cord attached to the swing arm 37 and to the brace arm 39 adjacent the pedal housing 29 and the collar 107.

10 A comparison of Figures 12 and 13 will show that when the lower fork parts 67 move up, for instance when the front wheel encounters a road obstruction, the cable sheath 91 will take a folded position as shown in Figure 13 since its rear end 99 is attached to the bicycle frame. This causes front movement of the 15 rear portion of the cable 89 and, therefore, extension of the tension cord 101 which exerts an upward bias on the follower collar 107 against the bias of the tension cord 42d. Therefore the rear suspension, namely the swing arm 37 and brace arm 39, move upwardly and also the rear wheel 5.

20 It will be understood that the stabilizer system, in accordance with Figures 12 and 13, functions only in one direction, that is from front to back of the bicycle, namely raising of the front wheel will cause upward movement of the rear wheel, but upward movement of the rear wheel will not cause corresponding 25 upward movement of the front wheel.

Figures 14 and 15 show another embodiment including a

stabilizer system and also wherein the elastic cords of the front and rear suspensions have been modified as to their arrangement.

The front suspension elastic cords 42b or 42c of Figures 8 to 11 are replaced by an elastic cord 109 which is disposed along 5 the top horizontal tube 15, is fixed thereto at its front end 111 while its rear end 113 is attached to the rear end 99a of cable sheath 91 which is not attached to horizontal tube 33 but is free to slide along the cable 89, the rear end of which is fixed at 115 to the seat post 27. Thus, the elastic cord 109 serves as the 10 downward bias for the front suspension. An elastic cord 117 serves as a downward bias for the rear suspension. Cord 117 extends along the inclined tubing 35 of the bicycle frame 1, its front end 119 being secured to the tubing 35 near the sleeve 31 and its rear end 121 being attached to a flexible cable 123 which is trained on an 15 idle wheel 125 carried by the lower end the seat post 27. The rear end of the cable 123 is attached at 123a to the brace arm 39 adjacent collar 107. Upward movement of collar 107 stretches the tension cord 117. The stabiliser system, per se, includes a flexible cable 127 having one end attached to the rear end 99a of 20 cable sheath 91 and, consequently, to the rear end 113 of the elastic cord 109. Cable 127 is trained on an idle pulley 129 carried by the top horizontal tubing 33 near sleeve 31 and the rear end of the cable 127 is attached at 131 to a stabilizer elastic cord 133 which is trained on an idle pulley 135 carried by the 25 upper portion of the seat post 27 and which is attached to the collar 107 at its lower end 137.

As shown in Figures 14 and 15, upward movement of the front wheel 3 causes stretching of the front suspension cord 109 and also stretching of the stabilizer cord 133 which moves collar 107 upwardly along post 27 against the bias of rear suspension cord 117. Therefore, raising of the front wheel will cause upward movement of the rear wheel but upward movement of the rear wheel will not cause corresponding upward movement of the front wheel since cord 133 will simply shorten.

Figures 16 and 17 show still another embodiment of a combined front and rear suspension without any stabilizer system. In this case, a single elastic cord 139 serves as a bias for the front and rear suspension. This cord 139 extends along the inclined tubing 35 of the bicycle frame being attached at its front end 141 to tubing 35 adjacent sleeve 31. The rear end 143 of cord 139 is attached to the rear end 99a of cable sheath 91 and also to a rear suspension flexible cable 145 which extends further along tube 35, is trained on an idle pulley 147 and is attached to the collar 107 or to the brace arm 39. Idle pulley 147 is carried by the seat post 27 adjacent the lower end thereof. The cable 89, which extends through the cable sheath 91, is attached to the lower end of the seat post 27 at 115a. Preferably, attachment 115a is at the shaft of idle pulley 147 so that cables 89 and 145 may have parallel portions forwardly of pulley 147.

Figures 18, 19, and 20 show still another embodiment incorporating a two-way acting stabilizer system. This embodiment is schematically shown.

The cable sheath 91 together with its associated cable 89 are arranged as in the embodiment of Figure 14, namely: the front end of cable sheath 91 is attached to the top end of the lower telescopic part 67 while the rear end 99a of cable sheath 91 can 5 move along the cable 89, the front end of which is attached to the lower end of the upper front suspension part 65 and the rear end of which is attached at 115 to the seat post 27.

A front suspension elastic cord 149, in loop form, is attached at this front end at 151 to the sleeve 31 while its rear 10 end is attached to the rear end 99a of the cable sheath 91. It will be understood that upward movement of the front bicycle wheel will cause rearward displacement of the rear end 99a of cable sheath 91 around cable 89 and this will stretch the front suspension cord 149.

15 The rear suspension is similar to that described in Figure 14, the rear suspension elastic cord 117 of Figure 14 is replaced by a loop-shape rear suspension elastic cord 153, one end of which is shown to be attached to the sleeve 31 at 154 and the rear end of which is attached at 157 to a cable 159 trained on an 20 idle pulley 161 carried by seat post 27 and attached at its other end to the collar 107 or brace 39 of the rear suspension system. Here again, it will be seen that upward movement of the rear bicycle wheel, and consequently of the collar 107 along seat post 27 will cause stretching of the rear suspension cord 153.

25 It is noted that both cables 89 and 159 have a portion adjacent seat 27 and forwardly thereof which are substantially

parallel. A slider element 155 is adapted to slides rearwardly and forwardly of the bicycle frame on said two parallel cable portions. The lower end of the slider element 155 is adapted to engage the outside of the rear end of the rear suspension cord 153 to be 5 pushed rearwardly along the rear parallel cable portions upon extension of the rear suspension cord 153. The top end of the slider element 155 is attached at 157 to the rear end of a stabilizer elastic tension cord 159 which has a loop form. The front end of the loop shape cord 159 is attached to sleeve 31 at 10 151.

Figure 18 shows a normal position of the arrangement of the three elastic cords and slider element corresponding to normal positions of the front end rear wheels of the bicycle.

A comparison of Figures 18 and 19 will show that raising 15 movement of the front bicycle wheel will cause rearward movement of the rear end 99a of cable sheath 91 and consequent extension of both elastic cords 149 and 159. Slider element 155 moves rearwardly along cables 89 and 159 and ceases to exert a forward bias on the rear suspension cord 153. Therefore, the latter is 20 free to extend and the rear bicycle wheel will raise accordingly.

If the rear wheel is first raised (see Fig. 20) then the cable 159 will pull and stretch the rear suspension cord 153 and this will cause rearward movement of the slider element 155 against 25 the bias of only the stabilizer cord 159 which is then stretched. This releases the forward action exerted by stabilizer cord 159 on

the front suspension cord 149 and consequently the downward bias exerted on the front wheel by the latter will be decreased and the front wheel will raise. Accordingly, it is seen that the system of Figures 18 to 20 acts both ways, namely when the front wheel is 5 raised, the rear wheel will raise accordingly and vice and versa when the rear wheel is raised, the front wheel will raise accordingly.

Figures 21 to 24 show a damper system for preventing up and down oscillation of the rear bicycle suspension. It is obvious 10 that the same system can be applied to the front bicycle suspension. A resilient collapsible chamber 161 in the form of a bellows made of rubber or other resilient material takes an expanded state as shown in Figures 23 and 24 when filled with a fluid, preferably air at atmospheric pressure. The larger base of 15 the bellows is fixed to a plate 163 having an air-filling hole 165 and a much smaller bleed hole 167. The bleed hole 167 is in communication with the exterior at all times, while the filling hole 165 is closed by a check valve 169 when the air pressure within the chamber 161 is equal to or greater than the exterior air 20 pressure. More particularly, the check valve 169 is in the form of a rubber element having a body 171 provided with a rim 173 at one end and a resilient flap 175 at the other end. The body 171 is press-fitted within a hole 177 made in base plate 163 and retained 25 in this hole by rim 173 with the flap 175 overlying and closing air filling hole 173. Flap 175 opens upon partial vacuum in chamber 161.

A second plate 179 is attached to the opposite end of the bellows 161. Plate 163 is fixed to a support plate 181 which, as shown in Figures 21 and 22, is part of a support fixed to the seat post 27 at the upper end thereof, for instance, just below the bicycle seat 7. Obviously, support plate 181 allows free communication of holes 165, 167 with the exterior. Two strings 183 are attached at one end 185 to second plate 179 on each side of the bellows 161 while the other end of the two strings 183 are attached to the rear suspension follower 41, more particularly, on each side 10 of the follower wheel to the yoke carrying said follower wheel. Each string 183 is wound at least one full turn around a flanged circular stud 189 protruding from each side of the support plate 181, as shown in Fig. 23. A guard 191 secured to each stud 189 extends over the wound string to prevent disengagement of said 15 string from the stud 189. The length of the two strings 183 is adjusted in accordance with the user's desires so that the strings 183 will become taut only in a lower adjusted portion of the down movement of the follower wheel. During this downward movement the strings, upon becoming taut, collapse the chamber 161 but the air 20 will be expelled at a slow rate through the bleed hole 167; therefore downward movement of the follower is smoothly decelerated. The resistance to this downward movement as produced by the collapsing air chamber 161 is increased by the friction developed on the string turns 183a around the rounded studs 189 25 when the strings 183 are taut. When the strings are loosened, no friction is exerted on the strings by the studs 189 and, therefore,

the bellows 161 are free to return to their original expanded position with the exterior air re-filling the bellows, the check valve flap 175 being in open position.

5 This damper system is efficient to quickly eliminate any up and down oscillation of the suspension; obviously, the same system can be applied to the front suspension.

This shock-absorbing damper system is of very light weight.

10 Obviously, a damper system can be built in the same manner, but using a liquid such as oil instead of air as the fluid contained in chamber 161. In this case, a reservoir would be provided to receive the expelled fluid and to return the same to the chamber.

15 The strings 183 can be replaced by any other type of pulling members which act only in tension.

## CLAIMS-

1. A bicycle comprising a bicycle frame including rigidly interconnected frame parts, namely a rear frame part consisting of a seat post and of a pedal housing at the lower end of said seat post, a steering rod receiving sleeve at the front of said frame and a tubing interconnecting said seat post and said sleeve; a rear suspension system comprising a swing arm extending rearwardly from and pivoted at its front end to said rear frame part for up and down movement in the plane of said frame, a follower guided by and moveable along said seat post for up and down movement above said swing arm, a brace arm extending above said swing arm, attached to said follower and forming a pivoted junction with the rear end of said swing arm, and biasing means connected between said follower and said bicycle frame and biasing said follower toward said pedal housing, said pivoted junction adapted to rotatably carry a rear bicycle wheel.

2. A bicycle as defined in claim 1 wherein said biasing means is an elastic tension cord.

3. A bicycle as defined in claim 2, wherein said tension cord is disposed along said tubing.

4. A bicycle as defined in claim 1, wherein said tension cord forms a loop.

5. A bicycle as defined in claim 3, wherein said tension cord forms a loop, one end of the loop being fixed to said tubing adjacent said sleeve and further including a cable fixed to the other end of said loop and to said follower and trained on a pulley carried by said seat post above said pedal housing.

6. A bicycle as defined in claim 1, wherein said pedal housing is a cylindrical nipple opened at both ends and adapted to receive a pedal axle protruding from both ends of said nipple, said swing arm comprising a pair of laterally spaced arm portions, each having a front end, a stepped full collar fixed to the front end of one arm portion and rotatably fitted around one end of said nipple with the step of said full collar abutting against the one of said nipple and adapted to freely surround said pedal axle, a stepless half-collar fixed to the front end of the other arm portion and rotatably fitted on and axially shiftable along the other end of said nipple, a stepped half-collar rotatably fitted on the other end of said nipple in registry with said stepless half collar and with its step abutting against said other end of said nipple and means to releasably fix said half collars to each other in registering position.

7. A bicycle as defined in claim 1, wherein said follower is a collar slidable on said seat post.

8. A bicycle as defined in claim 1, wherein said

follower includes a grooved wheel rotatably carried by the front end of said brace arm and rotatably engaging said seat post.

9. A bicycle as defined in claim 1, which has a bicycle chain and a set of gears of varying diameters carried by said pedal axle and a chain guide mounted on said bicycle frame for gear shifting movement in a direction parallel to said pedal axle and including a pair of interconnected spaced plates between which said bicycle chain may extend, said chain guide being characterized by a U-shape hoop pivoted to the rear ends of said plates for pivotal movement in a vertical plane, said hoop surrounding said bicycle chain.

10. A bicycle as defined in claim 1, wherein said biasing means is an elastic tension cord disposed along said seat post and extending between and interconnecting said swing arm and said brace arm adjacent said pedal housing and said collar.

11. A bicycle as defined in claim 1, wherein said biasing means is a first elastic tension cord and further including a steering rod rotatably carried by said steering rod receiving sleeve, a telescopic front fork fixed to and downwardly depending from said steering rod and adapted to carry a front bicycle wheel at its lower end, said telescopic fork including an upper part fixed to said steering rod and a lower part guided by and mounted for up and down movement relative to said upper part and second

elastic tension cords connected between said two parts and biasing said lower part downwardly with respect to said upper part.

12. A bicycle as defined in claim 11, wherein said elastic tension cords extend between and are attached to the lower end of said upper part and to the upper end of said lower part.

13. A bicycle frame as defined in claim 11, wherein said elastic tension cords have one end attached to the upper end of said upper part, a flexible cable attached to the other end of said cords, an idle pulley carried by the lower end of said upper part and on which said cable is trained, the other end of said cable attached to the upper end of said lower fork part.

14. A bicycle as defined in claim 1, further including a steering rod rotatably received within said steering rod receiving sleeve, an upper fork part fixed to said steering rod, a lower fork part slidably guided on said upper fork part for up and down movement relative to said upper fork part, the lower end of said lower fork part adapted to carry a front bicycle wheel, a flexible cable attached to the lower end of said upper fork part and to said bicycle frame adjacent said pedal housing, a flexible sheath surrounding said cable, attached to the upper end of said lower fork part and having its other end freely moveable on said cable and said biasing means including an elastic tension cord having one end attached to said frame adjacent said sleeve and its

other end attached to the free end of said sheath.

15. A bicycle as defined in claim 14, wherein said biasing means include said elastic tension cord and a second flexible cable having one end attached to said brace arm adjacent said follower and its other end attached to the other end of said tension cord and of said sheath and an idle pulley carried by the lower end of said seat post and on which said second cable is trained, whereby said elastic tension cord biases both said front and rear wheels towards a down position with respect to said bicycle frame.

16. A bicycle comprising a steering rod rotatably received within a steering rod receiving sleeve, an upper fork part fixed to said steering rod, a lower fork part slidably guided on said upper fork part for up and down movement relative to said upper fork part, the lower end of said lower fork part adapted to carry a front bicycle wheel, and an elastic tension cord connected to said two parts and biasing said lower part downwardly with respect to said upper part.

17. A bicycle as defined in claim 16, wherein said elastic tension cord extends between and are attached to the lower end of said upper part and to the upper end of said lower part.

18. A bicycle as defined in claim 16, wherein said

elastic tension cord has one end attached to the upper end of said upper part, a flexible cable attached to the other end of said cord, an idle pulley carried by the lower end of said upper part and on which said cable is trained, the other end of said cable attached to the upper end of said lower fork part.

19. A bicycle as defined in claim 16 further including a bicycle frame including said sleeve and a rear portion, a flexible cable attached to the lower end of said upper fork part and to said rear portion, a flexible sheath surrounding said cable, attached to the upper end of said lower fork part and having its other end freely moveable on said cable and said elastic tension cord having one end attached to said frame adjacent said sleeve and its other end attached to the free end of said sheath.

20. A bicycle as defined in claim 1, further including a steering rod rotatably carried by said steering rod receiving sleeve, an upper fork part fixed to said steering rod, a lower fork part guided on and moveable for up and down movement relative to said upper fork part, said lower fork part adapted to receive a front bicycle wheel at its lower end, a cable sheath fixed to the upper end of said lower fork part, a first flexible cable within said sheath having one end fixed to the lower end of said upper fork part, said flexible cable having its other end fixed to said seat post, the other end of said flexible sheath slidably along said cable under up and down movement of said lower fork part, a

first elastic tension cord downwardly biasing said lower fork part having one end attached to said bicycle frame adjacent said sleeve and its other end attached to said other end of said cable sheath, said biasing means being a second elastic tension cord downwardly biasing said follower, having one end attached to said bicycle frame adjacent said sleeve, a second flexible cable having one end fixed to the other end of said second elastic tension cord and having its other end attached to said brace arm adjacent said follower, a first idle pulley mounted on said seat post adjacent said pedal housing and on which said second cable is trained, a third elastic tension cord upwardly biasing said follower when said lower fork part moves upwardly, said third elastic cord having one end attached to said brace arm adjacent said follower extending upwardly therefrom, a second idle pulley carried by said seat post adjacent the seat of said bicycle and on which said third elastic cord is trained, a third idle pulley mounted on said bicycle frame adjacent said sleeve, a third flexible cable trained on said third idle pulley and having one end attached to the forward end of said third elastic cord and its other end attached to said other end of said cable sheath.

21. A bicycle as defined in claim 11, further including a cable sheath having one end fixed to the upper end of said lower part and its other end fixed to said tubing, a flexible cable longitudinally movable within said cable sheath and having one end attached to the lower end of said upper part, a third elastic cord

having one end attached to the other end of said flexible cable and its other end attached to said follower and an idle pulley carried by said frame adjacent the upper end of said seat post and on which said third elastic cord is trained, said third elastic cord biasing said follower upwardly when said lower part moves upwardly.

22. A bicycle as defined in claim 1, further including a steering rod rotatably received within said steering rod receiving sleeve, an upper fork part fixed to said steering rod, a lower fork part slidably guided on said upper fork part for up and down movement relative to said upper fork part, the lower end of said lower fork part adapted to carry a front bicycle wheel, a first flexible cable attached to the lower end of said upper fork part and to said seat post, a flexible sheath surrounding said first cable, attached to the upper end of said lower fork part and having its other end movable on said first cable, a first elastic tension cord having one end attached to said sleeve and its other end attached to said movable end of said sheath, said biasing means including a second elastic tension cord having one end attached to said sleeve, a second flexible cable having one end attached to said brace arm adjacent said follower and its other end attached to the other end of said second tension cord, an idle pulley carried by the lower end of said seat post and on which said second cable is trained, said first and second cables having generally parallel portions adjacent said seat post, a slider slidable on both parallel portions and in the path of said other ends of both said

first and second elastic cords, said slider sliding on said parallel portions towards said seat post upon elongation of either one of said first and second elastic cords, and a third elastic cord having one end attached to said sleeve and its other end attached to said slider and biasing said slider towards said sleeve.

23. A bicycle as defined in claim 22, wherein each one of said elastic cords forms a loop.

24. A bicycle as defined in claim 1, further including a rear suspension oscillation damper including a collapsible resilient chamber carried by said bicycle frame and a pulling member attached to said chamber and to said follower, said chamber containing a fluid and having a check valve and a bleed hole, said chamber slowly collapsing while expelling said fluid through said bleed hole upon a pull exerted by said pulling member and produced by the downward movement of said follower relative to said bicycle frame and resiliently expanding while said fluid re-enters said chamber through said check valve upon cessation of said pull during upward movement of said follower.

25. A bicycle as defined in claim 24, wherein said pull is absent when said follower moves through an upper portion of its up and down movement and is present and collapses said chamber during the lower portion of the down movement of the said follower.


26. A bicycle as defined in claim 25, wherein said pulling member is a string and said chamber is a bellows made of resilient material, a first plate fixed to one end of said bellows and to said bicycle frame, a second plate fixed to the other end of said bellows and to which one end of said string is attached and a circular portion carried by said first plate and on which said string is wound at least one complete turn, the friction exerted by said circular portion on said string when said string is under tension adding to the resistance exerted by said chamber collapsing during the down movement of said follower.

27. A bicycle suspension oscillation damper adapted to be used on a bicycle having a bicycle frame and a suspension including a bicycle wheel associated part movable up and down with said wheel relative to said bicycle frame, said damper including a collapsible resilient chamber carried by said bicycle frame and a pulling member attached to said chamber and to said part, said chamber containing a fluid and having a check valve and a bleed hole, said chamber slowly collapsing while expelling said fluid through said bleed hole upon a pull exerted by said pulling member and produced by the downward movement of said part relative to said bicycle frame and resiliently expanding while said fluid re-enters said chamber through said check valve upon cessation of said pull during upward movement of said part.

28. A damper as defined in claim 27, wherein said

chamber has a limit expanded state and a limit collapsed state and said pull is absent while said part moves through an upper portion of its up and down movement and is present and collapses said chamber from said expanded state during the lower portion of the down movement of said part.

29. A damper as defined in claim 28, wherein said pulling member is a string and said chamber is a bellows made of resilient material, a first plate fixed to one end of said bellows and to said bicycle frame, a second plate fixed to the other end of said bellows and to which one end of said string is attached, and a circular portion carried by said first plate and on which said string is wound at least one complete turn, the friction exerted by said circular portion on said string when said string is under tension adding to the resistance exerted by said chamber collapsing during the down movement of said part.

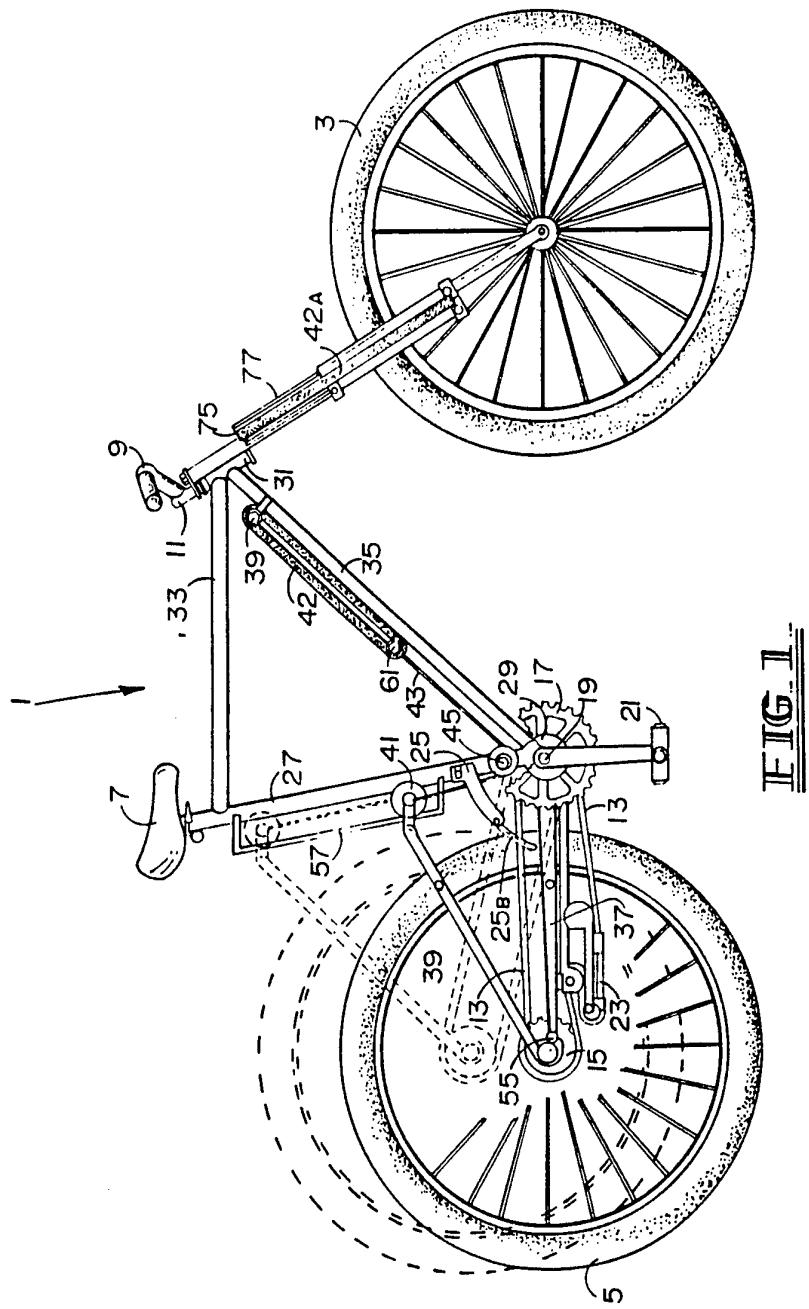

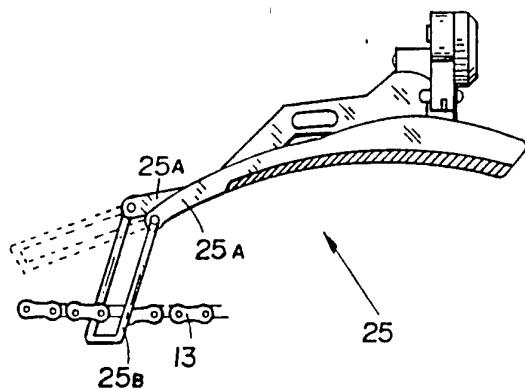


FIG. 3.

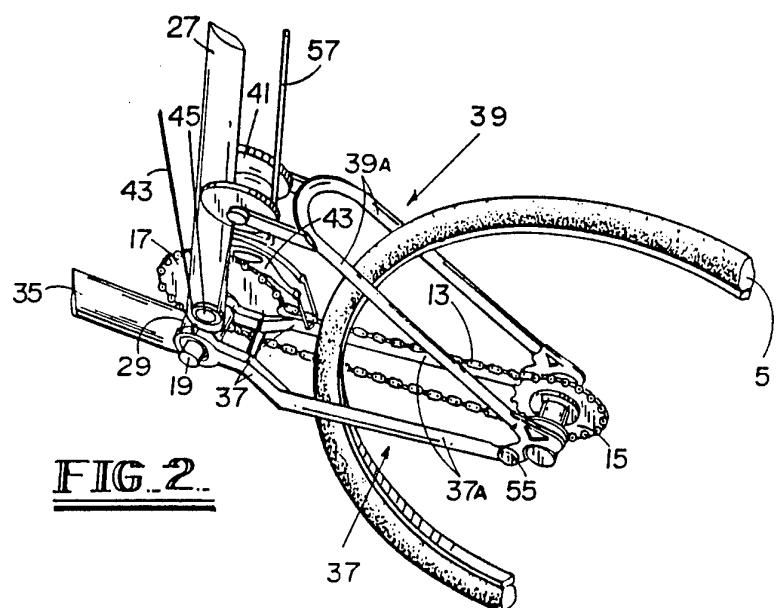


FIG. 2.

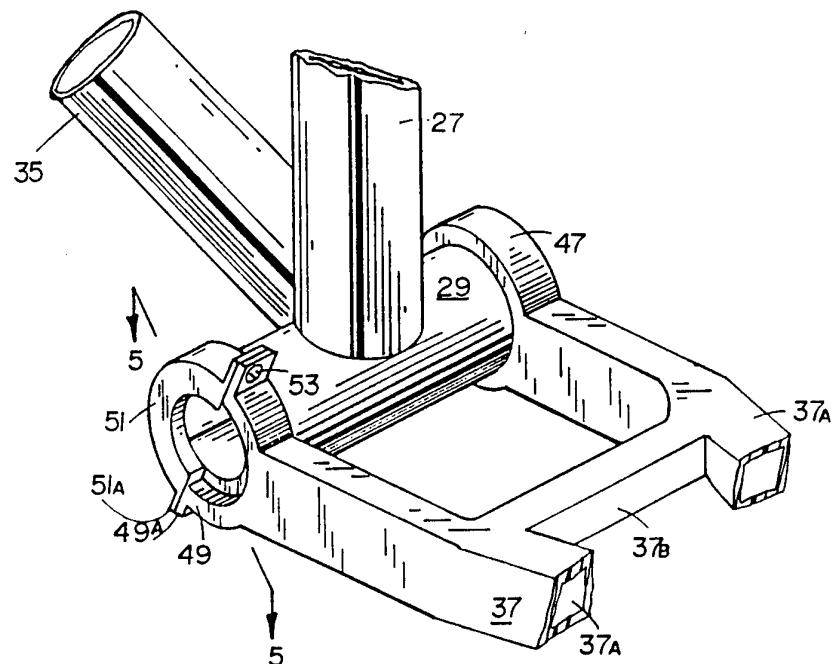


FIG. 4

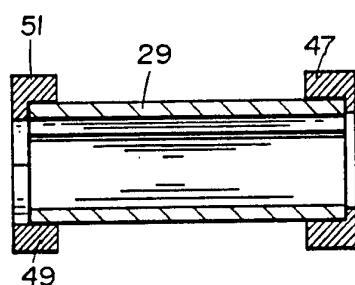


FIG. 5

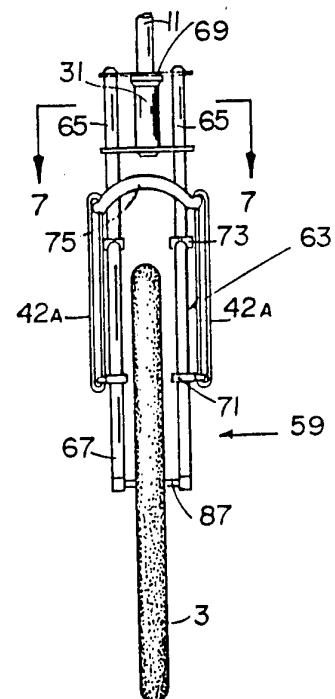


FIG. 6.

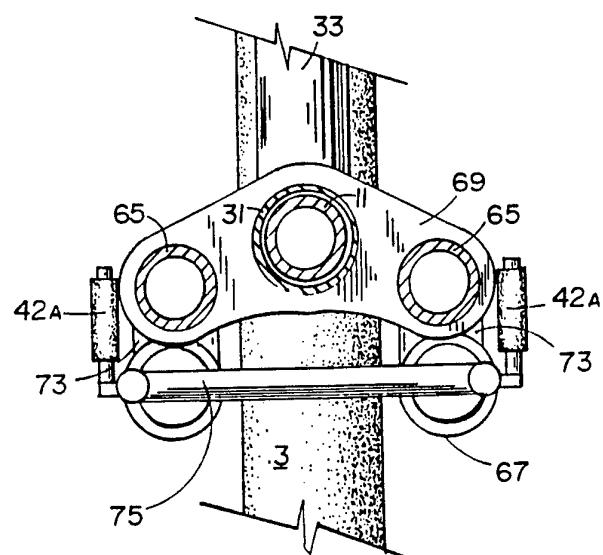


FIG. 7.



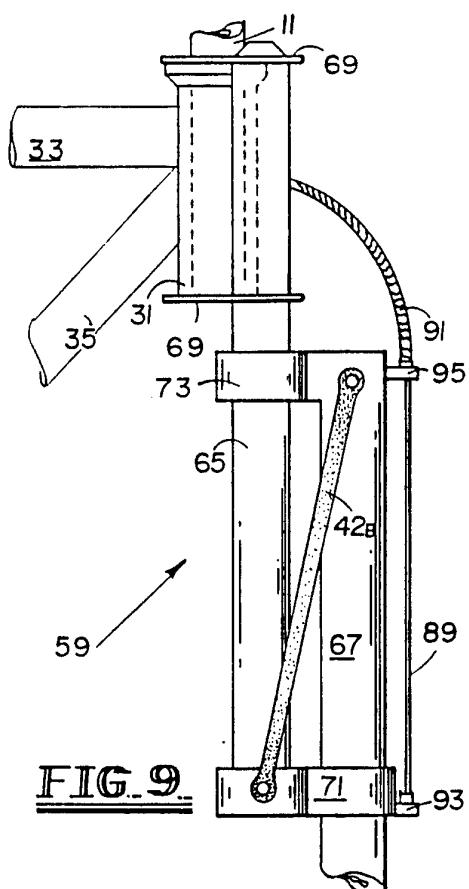


FIG. 9.



**FIG. 8.**

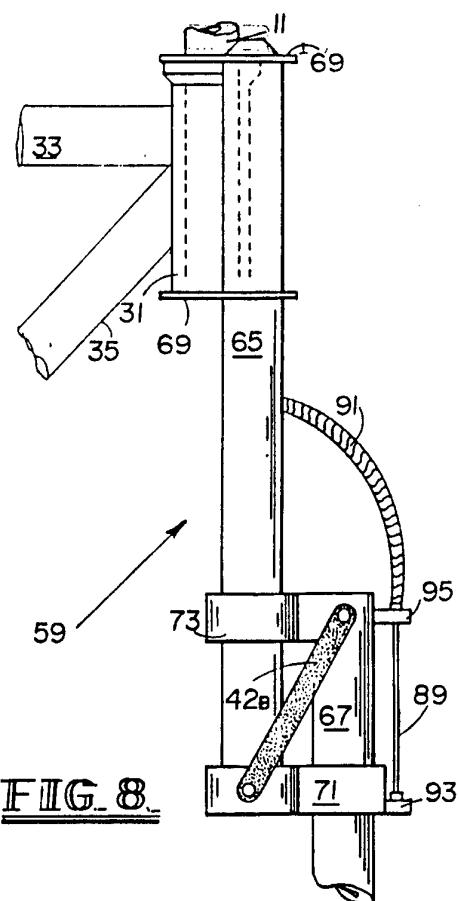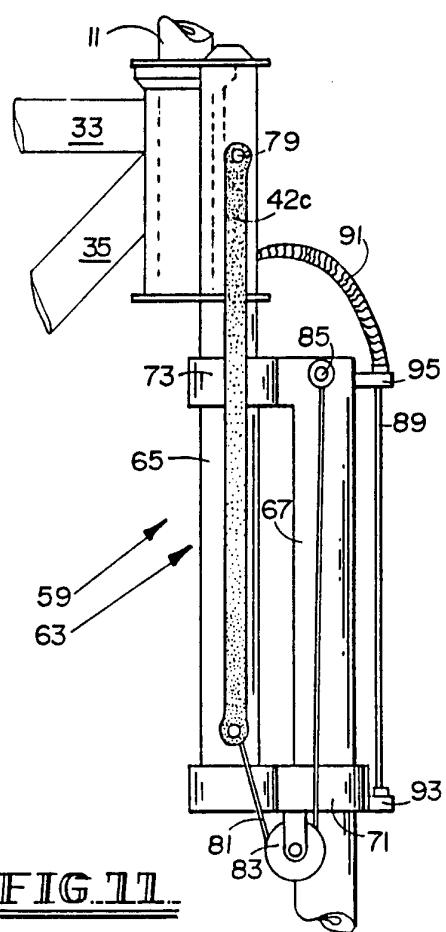

### FIG. 11.

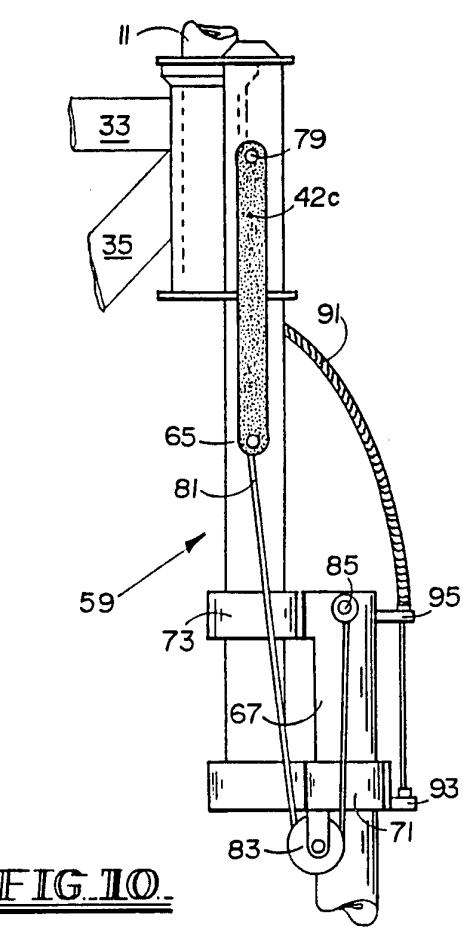


FIG. 10.

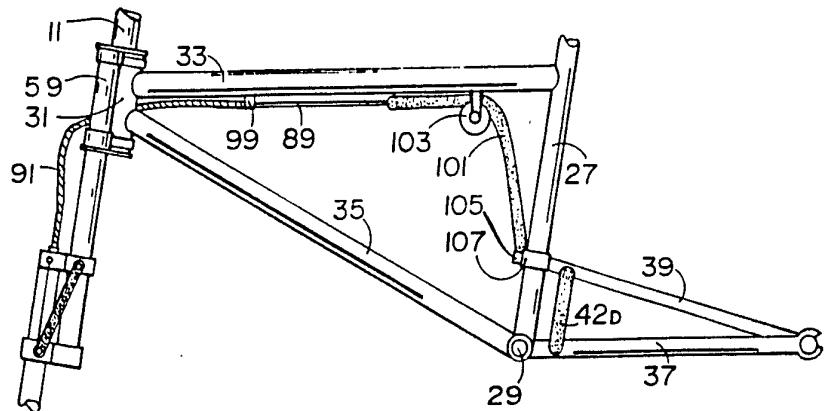


FIG. 12.

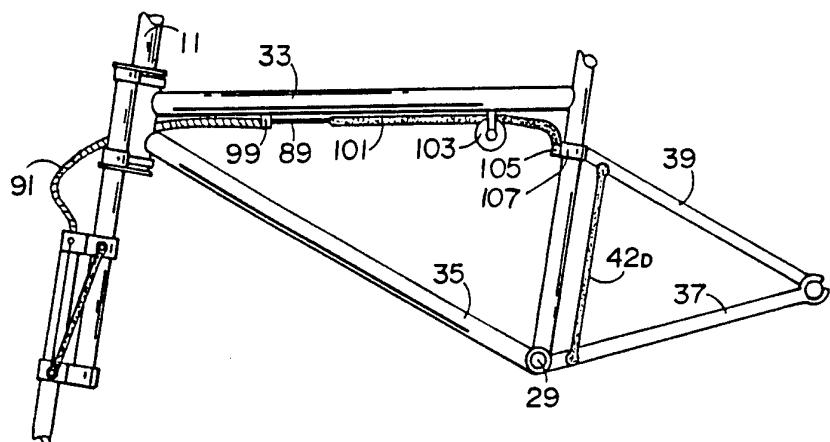


FIG. 13.

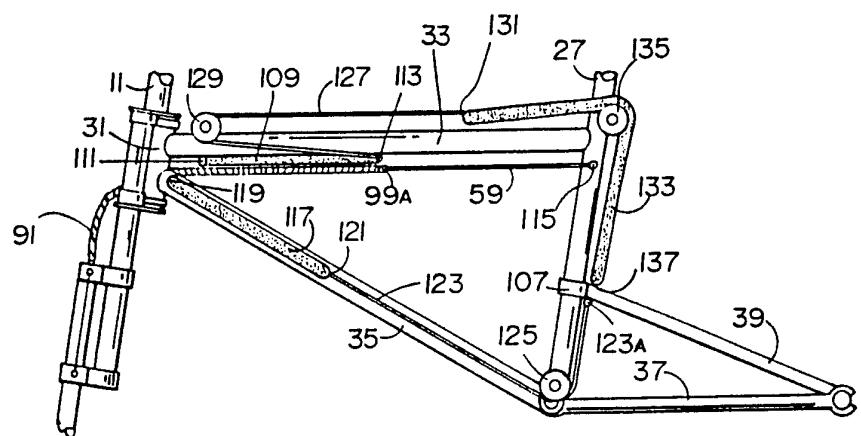
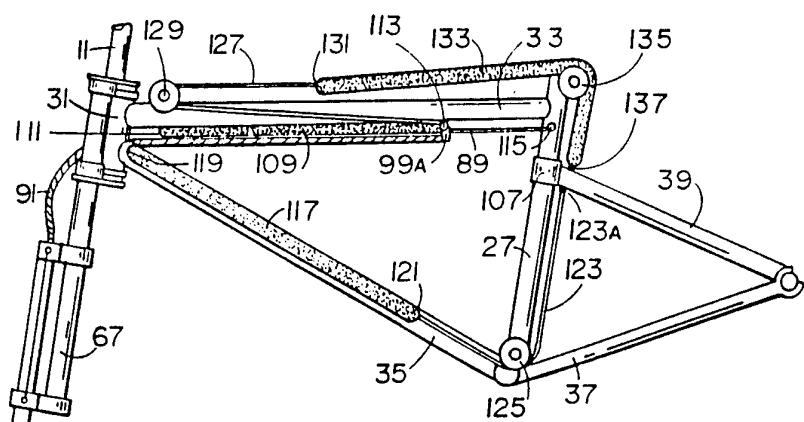
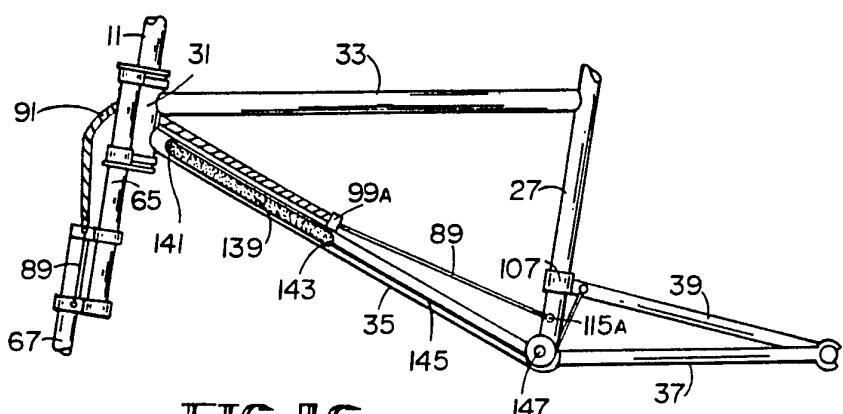
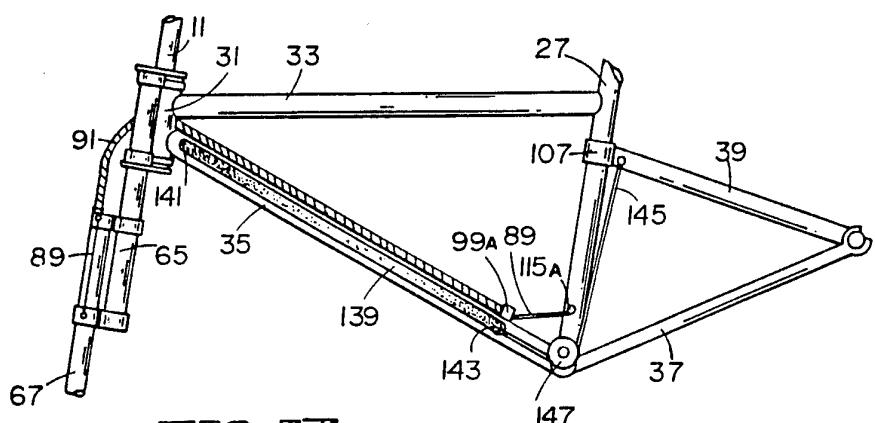


FIG. 14.

FIG. 15.FIG. 16.FIG. 17.

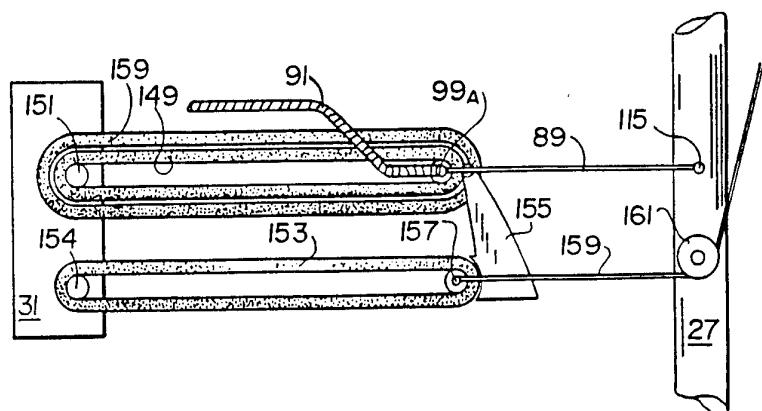


FIG. 18.

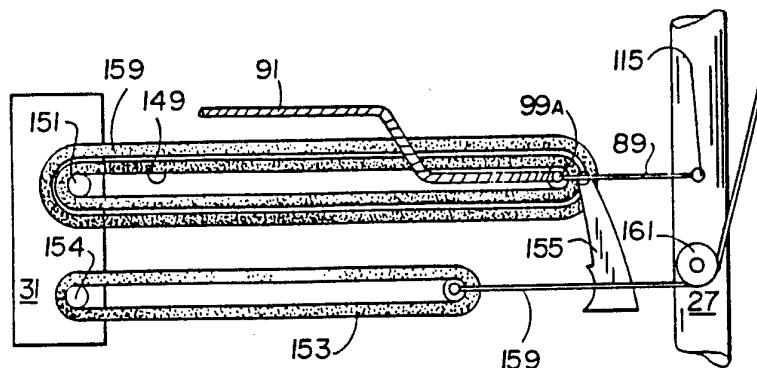


FIG. 19.

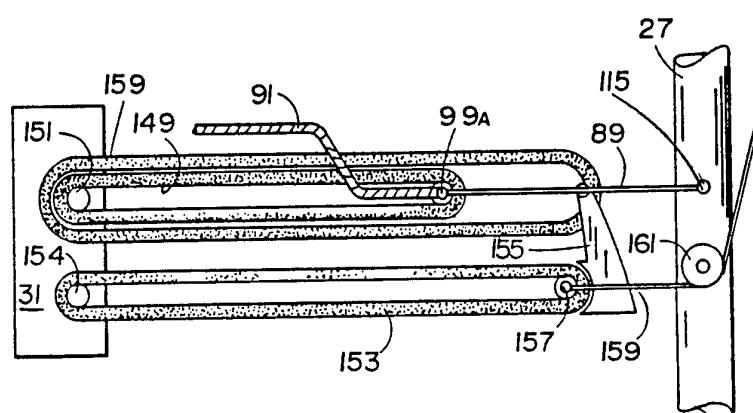


FIG. 20.

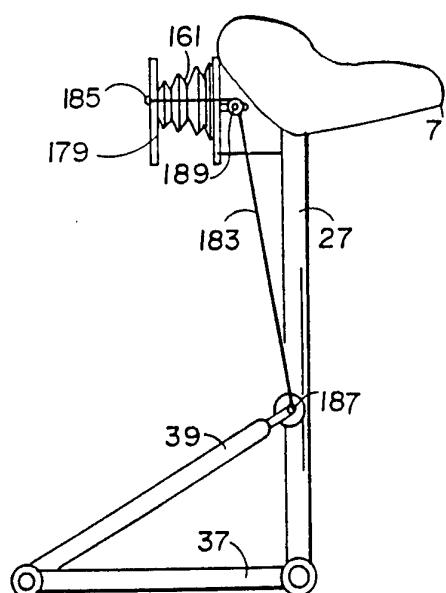


FIG. 21.

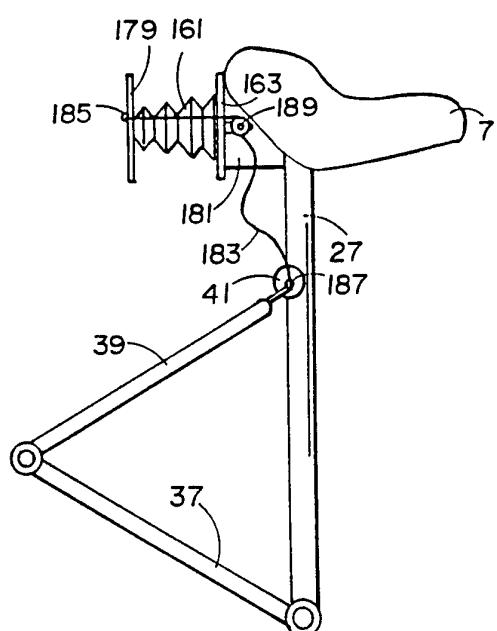


FIG. 22.

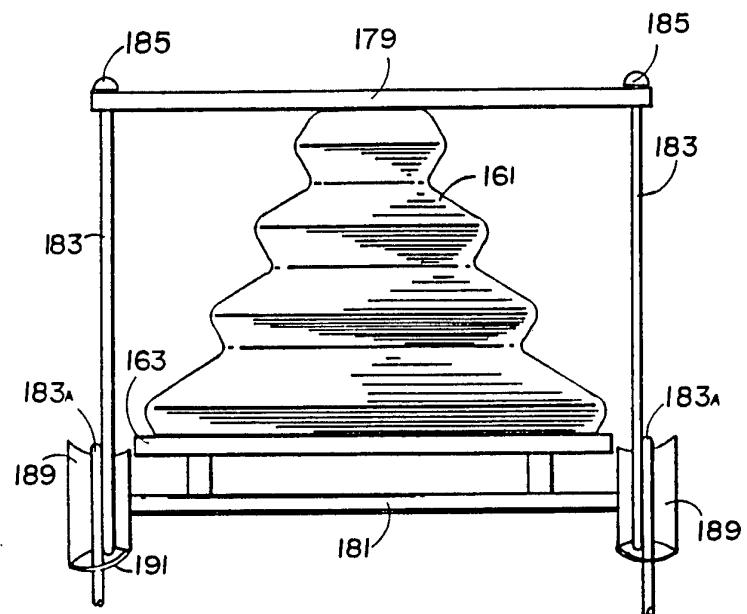


FIG. 23.

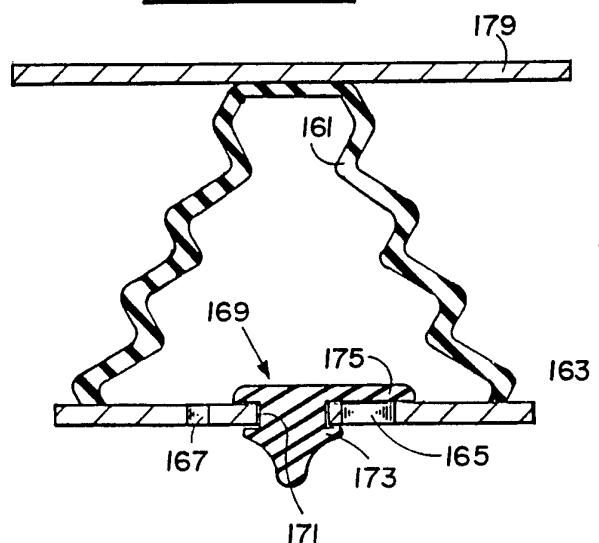


FIG. 24.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 93/00367

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 5 B62K25/30 B62K25/22 B62K25/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 5 B62K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR,A,994 122 (CANU) 12 November 1951 see page 1, column 2, line 6 - line 15; figure 1 ---	16,17
X	FR,A,1 071 483 (RASCLE) 1 September 1954 see the whole document ---	16,17
A	US,A,4 997 197 (SHULTZ) 5 March 1991 see the whole document ---	1-5, 10-14,16
A	FR,A,767 510 (DEBRIXE-DEBUE) 20 July 1934 see the whole document ---	1,5,7,8
A	EP,A,0 493 773 (GALLY O.) 8 July 1992 see the whole document ---	1 -/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

,2

Date of the actual completion of the international search

30 May 1994

Date of mailing of the international search report

- 3. 06. 94

## Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patendaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

## Authorized officer

Denicolai, G

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 93/00367

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR,A,868 744 (FINLAY) 14 January 1942 see the whole document -----	1

2

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/CA93/00367

**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

- Claims 1-15, 20-26
- Claims 16-19
- Claims 27-29

see PCT/ISA/206 sent 2.3.94

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:  
  
*16-19, and 1-15, 20-26.*
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

Int'l. Appl. No

PCT/CA 93/00367

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
FR-A-994122		NONE		
FR-A-1071483		NONE		
US-A-4997197	05-03-91	NONE		
FR-A-767510		NONE		
EP-A-0493773	08-07-92	DE-A-	4041375	25-06-92
		DE-U-	9116838	31-03-94
		JP-A-	4266580	22-09-92
FR-A-868744		NONE		