

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number
WO 03/048437 A1

(51) International Patent Classification⁷: D04H 1/46, 1/54

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/GB02/05381

(22) International Filing Date:
29 November 2002 (29.11.2002)

(25) Filing Language: English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

(30) Priority Data:
0128692.1 30 November 2001 (30.11.2001) GB

Published:

— with international search report

(71) Applicant (for all designated States except US): B & H RESEARCH LIMITED [GB/GB]; 11 Austin Street, Stamford, Lincolnshire PE9 2QR (GB).


For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventor; and

(75) Inventor/Applicant (for US only): BEVAN, Christopher, Graham [GB/GB]; 11 Austin Street, Stamford, Lincolnshire PE9 2QR (GB).

(74) Agents: QUEST, Barry et al.; Wilson Gunn M'Caw, 41-51 Royal Exchange, Cross Street, Manchester M2 7BD (GB).

(54) Title: FORMATION OF SHEET MATERIAL USING HYDROENTANGLEMENT

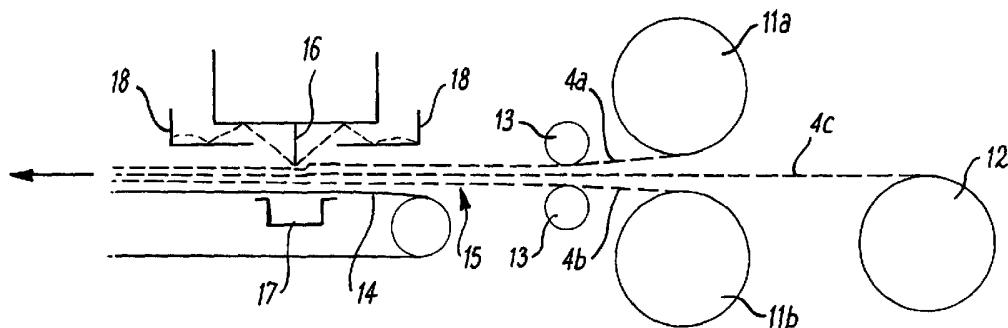

WO 03/048437 A1

(57) Abstract: Sheet material is made from a mixture of base fibres, such as leather fibres, and bi-component synthetic fibres which have outer layers which melt at a lower temperature than their inner cores. The fibres are mixed, formed into a web and then heated so that the synthetic fibres fuse together to form a network within the web. The base fibres are then tangled, whilst constrained by the network, preferably using hydroentanglement. A high quality reconstituted leather sheet material can be produced.

FORMATION OF SHEET MATERIAL USING HYDROENTANGLEMENT

This invention relates to the formation of sheet material from fibres particularly using a process known as hydroentanglement or spunlacing.

Prior patent application PCT/GB 01/02451 describes the use of 5 hydroentanglement (or spunlacing) to produce a high quality reconstituted leather sheet material from waste leather fibres.

A feature of the procedure described in the prior application is the use of specialised screens through which hydroentangling jets are directed at high pressure, in contrast to previously known procedures where 10 entangling commences at low pressure until the fibres are sufficiently interlocked to avoid disruption by the jets. Leather fibres entangle particularly readily, and with previously known procedures, they form a surface layer of entangled fibres that impedes further entanglement. This is particularly disadvantageous with thick webs needed for leather 15 products but by using the aforesaid screens, jets can penetrate deeply at high pressure to hydroentangle throughout the depth of the web.

The difficulties with disruption and the formation of a surface layer arise because fibres resulting from the disintegration of waste leather are far shorter and finer than those normally used for hydroentangling. The 20 screens of the prior patent application provide a means of constraining such fibres from being washed away by the jets, but even with screens it is difficult to constrain very short fibres such as are produced by hammer milling waste leather. Also, whatever the length of fibres about half the

- 2 -

hydroentangling energy is wasted when using screens due to the solid parts of the screen shielding significant area of the web from the jets. The loss of energy when using screens and the lower output rates from using leather fibres of greater length are inherent with the procedure of 5 the prior application.

An object of the present invention is to provide a method of entangling fibres to form sheet material whereby the aforesaid problems arising from use of screens and longer fibres can be avoided or at least minimised.

10 According to one aspect of the invention therefore there is provided a method of forming a sheet material from a mixture of fibres comprising base fibres and additional synthetic fibres, said synthetic fibres having outer meltable layers, comprising the steps of:

forming the fibres into a web,

15 heating to melt the outer layers of the additional synthetic fibres so as to cause such fibres to fuse together at intersections to form a network within the web,

subjecting the web to entanglement to entangle the base fibres whilst constrained by the network.

20 Preferably, the entanglement is hydroentanglement. Preferably also the base fibres are leather fibres.

Thus, in accordance with a second aspect of the invention there is provided a method of forming a sheet material from a mixture of fibres

- 3 -

comprising leather base fibres and additional synthetic fibres, said synthetic fibres having outer melttable layers comprising the steps of:

forming the fibres into a web,

5 heating to melt the outer layers of the synthetic fibres so as to cause such fibres to fuse together at intersections to form a network within the web,

subjecting the web to hydroentanglement to entangle the leather fibres whilst constrained by the network.

The entanglement of the method of the invention is preferably 10 performed using high pressure jets of liquid (particularly water) preferably in multiple passes. Reference is made to the prior application for further details of such features.

In a preferred embodiment, the invention provides a method of forming sheet material with a mixture of leather fibres and man made 15 bicomponent fibres, said bicomponent fibres having outer layers with a lower melting point than the inner cores. The mixture of fibres is formed into a web, which advances through a heating means that melts the outer layers of the bicomponent fibres so they fuse at their intersections, and form a three dimensional network throughout the web. Fine jets of water 20 at high pressure are then directed onto the web so they penetrate deeply and hydroentangle the leather fibres while these are constrained by the network of bicomponent fibres.

Fused bicomponent supporting networks are known but not in the

- 4 -

context of the present invention.

Such networks are used in conjunction with wood pulp fibres to impart most or all of the finished product strength for applications such as wet wipes and absorbent sanitary products. The high pressure jets used in hydroentanglement would disrupt the bonding of such network and, where such networks are used with hydroentanglement, the bicomponent fibres are fused after hydroentanglement, thereby avoiding such disruption. With the present invention the network is used for a different purpose to that of providing structural reinforcement for the end product, and entanglement is effected after fusing.

A basic requirement of entangling is that fibres must move in order to entangle, and the fused network would be expected to impede the entanglement of the fibres. Surprisingly, it has been found that leather fibres can entangle effectively within such networks even if the apparent restraining effects are enhanced by compressing the webs containing the leather and bicomponent fibres while the surfaces of the bicomponent fibres are still tacky, thereby presenting a significantly denser layer to the hydroentangling jets.

With the arrangement of the invention, the network can take over part or all of the function of the external screens used in the method of the prior patent application. However, instead of acting on the surface, the network can provide a succession of much lighter screens within the depth of the web. Each internal screen can have relatively much more

- 5 -

open area than an external screen, but collectively they can provide an effective and improved alternative to the external screen of the prior application. In particular the network of internal screens allows hydroentangling jets to penetrate deeply at pressures that would 5 otherwise disrupt the web.

Apart from replacing the function of the screens, the bicomponent network can also improve the way the leather fibres hydroentangle. One of the difficulties of hydroentangling leather fibres is that even when using screens they consolidate so readily that they impede drainage of 10 water through the web and the resulting flooding can prevent optimum entanglement. However, the three dimensional structure of the bicomponent network can even out the rate of consolidation of the web, which together with the deep penetration can assist the drainage of water through the web until full entanglement is achieved.

15 It is believed that this drainage effect is achieved by the three-dimensional network of bicomponent fibres providing a resilient restraint to compaction within the body of leather fibres. It is desirable to ensure that the network does not hold the leather fibres away from each other to the extent that there is insufficient proximity for them to entangle 20 well with each other since this could result in a spongy material less desirable for leather products. This effect can be reduced or prevented by reducing the quantity of bicomponent fibres in the mix and/or using bicomponents of lower diameter and/or lower elastic modulus.

- 6 -

In normal hydroentangling practice most of the fibres can start off too far apart to entangle effectively, and a first pass through the jets is used to bring the fibres close enough to entangle. In a preferred embodiment of the present invention, the fibres are brought into closer proximity before entangling commences by compressing the web containing the bicomponent network before the fused junctions of the network solidify. This can more than halve the thickness of the web compared to conventional practice and can effectively eliminate the first hydroentangling stage used in conventional practice.

10 In the method of the prior application the external screen helped to compress the web at the first stage of entanglement, but this can incur significant loss of hydroentangling energy because of the surface area of the web being shielded from the jets. However in the present invention the solid parts of the internal bicomponent screens can be relatively 15 insubstantial so there can be substantially less shielding of hydroentangling jets from the fibres. This can reduce the number of passes needed by the jets over the web to achieve full entanglement and reduce the energy consumed. Typical production speeds can also increase from 6 m/min mentioned in the prior application to over 20 10 m/min in the present invention.

Being relatively fine, the bicomponent network may be less effective than externally applied screens for masking the furrows in the surface caused by the jets. Accordingly, with the method of the present

- 7 -

invention external screens may additionally be used (which may be generally of the kind described in the prior application) in at least one pass to eliminate or at least reduce or substantially prevent formation of surface furrows by the hydro-entanglement jets. In so far as the 5 bicomponent network acts as a series of internal screens, externally applied screens can have more open area than the preferred openings described in the prior patent application thereby reducing the loss of energy. Such external screens still waste some energy, but they can be confined to passes where they are needed to mask jet lines. Typically 10 this can be the last pass on the finish face, and possibly the first pass so that the jets bite less deeply while the fibres are least entangled.

The prior patent application describes a method for producing long leather fibres to improve performance of the finished product but such fibres also pass more slowly through the preferred equipment for 15 air-laying the webs. However with the present invention, short leather fibres can be used without necessarily adversely affecting product performance because the network can reduce or eliminate some of the defects that arise with short leather fibres. For example, products made with short leather fibres are more liable to surface cracking, but short 20 bicomponent fibres may still be beneficially used to enhance throughput from web laying equipment, as by fusing the bicomponent fibres to form a network, they act like much longer fibres and thereby more effectively constrain surface cracking. Short fibres are also more prone to erosion

- 8 -

during hydroentangling, but the network of fused bicomponent fibres can considerably reduce this without interfering with the relatively small movements needed for hydroentanglement.

Unlike other fields of manufacture where short bicomponent fibres are fused at their intersections, the contribution of bicomponent fibres to primary strength can be negligible, and the proportion of such fibres in the total mix can preferably be minimised as they can seriously detract from leather-like handle. In cases where the performance of products made with short fibres needs to be significantly upgraded this can be achieved by incorporating normal, non-bicomponent fibres with a reduced proportion of bicomponent fibres.

The proportion of bicomponent fibre needed to provide the purely process benefits of the present invention can be as low as 2% of the total weight of web, and can be many times less than the percentage used in conventional applications where a bicomponent network is a primary source of strength. Apart from unacceptably increasing stiffness and coarsening the surface feel of the final product, a bicomponent network that provides significant structural contribution may reduce the attachment of leather fibres to internal reinforcing fabrics by impeding the leather fibres from locking into the interstices of the fabric.

Because of these limitations, in a preferred embodiment of the present invention bicomponent fibres are used with weak outer sheaths to promote a partial breakdown of the network as the web progresses

- 9 -

through successive stages of hydroentangling. With each pass the increased entanglement of the leather fibres can compensate for the reduction of bonds between bicomponent fibres, and can result in end products with minimal stiffening from the network. Such a procedure
5 would be a disadvantage in conventional practice but, as with the externally applied screens of the prior application, the main purpose of the network is to overcome processing problems peculiar to hydroentangling rather than providing structural strength.

Processing benefits of the bicomponent network also extend to
10 producing the webs themselves, particularly with commercially available equipment normally used for air laying wood pulp fibres. Such processes can have high rates of production for short fibres like wood pulp, and the bicomponent network can significantly reduce the erosion of short fibres under hydroentanglement. This allows short leather fibres such as
15 produced by hammer milling to be hydroentangled much more effectively than by the methods of the prior application.

A further processing advantage of bicomponent networks is that they can provide sufficient strength to the web before hydroentangling to allow webs to be wound onto reels at interim stages of production. This
20 removes the need to feed webs directly from the air laying equipment to the hydroentangling line as in the method of the prior application, and allows the webs to be produced at optimum speeds determined by the air laying equipment without compromising the operation of the

- 10 -

hydroentangling line. Thus, in one embodiment the (or each) web is wound on a reel after formation of the network, and the web is drawn from such reel to be subjected to said entanglement.

Furthermore, where the product requires two webs on either side of a reinforcing fabric, both webs can be formed using one air laying plant. Two reels of webs stabilised with bicomponent networks can then be fed to the hydroentangling line, and can result in a substantial saving of capital cost compared to the method of the prior application where two entire air laying means were required to continuously feed the hydroentangling line. Where a reinforcing fabric is used the base (leather) fibres preferably penetrate this so as to be entangled therewith.

The fibre content needed to provide adequate reel handling strength depends on web thickness, bicomponent content and the strength of the melt-able sheath on the bicomponent fibres. However, generally the percentage of bicomponent fibre needed to impart sufficient in-process strength for reel winding need be no more than the same low bicomponent content that can provide effective internal screens in the method of the present invention. This in-process strength for individual webs is well below the strength after hydroentangling, particularly after hydroentangling webs and reinforcing fabric to form a final product.

As with most fibrous products, fibre length preferably needs to be as long as possible. However, long leather fibres produced by textile reclaiming methods have a wide distribution of fibre length from around

- 11 -

1mm to occasionally over 15mm, and the upper end of the distribution can cause very slow production rates using air laying equipment designed for wood pulp fibres. It can therefore be preferable to limit the maximum length of such fibres to around 6 mm, for example by passing them 5 through a conventional granulating machine (taking care to avoid shortening more than necessary to make a worthwhile improvement in air laying output). Such methods of shortening fibres can be very approximate, but preferably at least 90% of the fibres should be less than 6mm for efficient air laying. Thus, in the method of the invention, in 10 order to obtain improved throughput from air-laying equipment designed for wood pulp fibres, at least 90% of the base fibres have a maximum fibre length of 6mm.

In the case of hammer milled leather fibres there is also a wide distribution of fibre lengths, but lengths are generally much less than 15 produced by textile reclaiming methods. Typically the maximum length may be around 3 mm and, as with fibres produced by textile reclaiming methods, the average fibre length is significantly less than the maximum. No granulation is required for hammer milled fibres, but the much shorter length can result in a need to increase average length of the mix by 20 adding manmade fibres of predetermined optimum length in order to improve the physical properties of the final product.

Unlike leather fibres, manmade fibres can be chopped to a constant length so they can all be of a length that provides the optimum balance

- 12 -

between air laying throughput and performance of the finished product.

For air laying equipment designed for wood pulp, the length of manmade inclusions may be around 6 mm, but recent improvements in air laying technique may make it feasible to increase this to over 10 mm. These indicative fibre lengths apply typically to bicomponent and non-bicomponent manmade fibres in the 1.7 dtex to 3.0 range. Finer fibres can significantly reduce air laying output unless fibre length is reduced appropriately.

Air laying speeds vary considerably depending not only on fibre length and diameter, but also on the smoothness and shape of fibres. In these respects leather fibres are particularly unfavourable regarding air laying throughput, as they are usually curly and have finely fibrillated branches that can impede flow through the perforated distribution screens of air laying equipment. Air laying rate for un-granulated leather fibres produced by textile reclaiming methods can be as low as 3 m/min for a 200gsm web, but this can be more than doubled if the fibres are shortened. Laying rates for manmade and pulp fibres can be considerably faster.

Regarding the percentage of bicomponent fibre in the mix, it is generally preferable to keep this to the minimum as described earlier. The degree to which the bicomponent network compromises leather-like handle depends on end use, and for shoes the greater stiffness and wearing properties conferred by the bicomponent network can be more

- 13 -

acceptable or even be of benefit compared to (for example) clothing leather. For shoes up to 10% of 3.0 dtex bicomponent can be used, but to obtain better handle it can be preferable to use under 5% bicomponent and a greater proportion of non-bicomponent fibres. In general the overall 5 range for additional synthetic fibres is 2% to 10% by weight with a preference towards the lower end of the range.

From the viewpoint of providing effective internal screens, the number of bicomponent fibres can be as significant as their percentage by weight of total mix. For example, reducing from 3.0 to 1.7 dtex in a 5% 10 mix would proportionately increase the number of fibres in the mix, and to obtain a similar screen effect, the percentage of 1.7 dtex fibres may need to reduce to below 3%. Using finer bicomponent fibres can also provide better surface feel to the finished product, which is an added benefit.

Commercially available bicomponent fibres are generally not less 15 than 1.7 dtex, but end product handle can be improved by choosing bicomponents with a low elastic modulus, such as polypropylene. These usually have polyethylene melt-able sheaths that are not particularly strong but can still provide sufficient reel handling strength even at low percentage additions. As mentioned earlier some degree of bond 20 weakness can be an advantage for some product applications as this can improve the handle of the final product. In applications where more stiffness is acceptable or required, stronger bicomponents can be used, such as polyester with nylon sheaths.

- 14 -

Bonding between bicomponent fibres at their intersections can be achieved by passing hot air through the web to melt the outer coating while the fibres are held between porous belts. The bond may not be strong enough to link short fibres together to contribute significantly to the tensile strength of the final product, but the bonds may be sufficient to provide an effective network for hydroentangling and enough anchorage to resist surface cracking of the finished product.

The fused intersections of the network may be at least partially disrupted by the entanglement.

Resistance to surface cracking can be enhanced by including ordinary non-bicomponent manmade fibres in the mix. Such fibres can also significantly improve peel resistance of the surface coating that is usually applied to the finished product. Furthermore, being free to move, non-bonded synthetic fibres can be more readily driven by jets into the interstices of the reinforcing fabric and thereby improve peel strength between the webs and the reinforcing fabric. This is particularly important for hard wearing shoes, and relatively high percentages of such fibres (compared to bicomponent) can be used without over-stiffening the final product.

In the case of a fabric reinforcing material having one or more webs or bodies of fibres united with the fabric, the (or each) web or body may contain a higher proportion of said further synthetic material adjacent the reinforcing layer than at the outer surface thereof.

- 15 -

The effect on handle of such further (non-bicomponent) fibres depends on their fineness as well as their percentage of mix, and in this respect they should preferably be not more than 1.7 dtex. For minimum effect on handle, such fibres can be into the "microfibre" range of well 5 under 1.0 dtex, and with sufficiently fine manmade fibres, adequate handle can be maintained at over 10% of total fibre content. However reducing fineness increases the number of fibres present, which in itself can change the feel of the product. Alternatively where improved peel 10 resistance is more important than handle, coarser fibres can produce better all round results. Generally, for reasons of cost and detracting from the leather-like feel of the final product it is preferable to keep further synthetic fibre content to below 20% by weight of the end product sheet material. The range may be 5-20% by weight.

Particularly with coarser manmade fibres, even small percentages in 15 the mix can detract from the characteristic surface feel of real leather, particularly as after buffing the superior abrasion resistance of manmade fibres can make them more prominent. In a further feature of the invention, hot air or other suitable heat sources are applied to the surface of the web after buffing at sufficient temperature to melt back the 20 bicomponent fibres without adversely affecting the leather fibres. The technique exploits the high moisture retention of leather which keeps it cool, and its property of charring rather than melting when subjected to excess local heat. Any such charring can be brushed or lightly buffed

- 16 -

away, leaving a substantially natural leather finish.

The invention will now be described further by way of example only and with reference to the accompanying drawings in which:

Figure 1 is a schematic view of initial stages of one form of apparatus
5 used in the performance of the method of the invention and which shows the main operating principles of a commercially available plant for making a fibre web with a fused bicomponent network; and

Figure 2 shows further stages of the apparatus for combining such
10 web with reinforcing fabric and hydroentangling the resulting sandwich.

Referring to Figure 1, waste leather fibres made by textile reclaiming methods lightly chopped to a maximum length of approximately 6 mm are mixed with 4% of 1.7 dtex bicomponent fibres
15 and 5% of 3.0 dtex standard polyester fibres both cut to constant 6 mm length. The mixture is evenly distributed at around 200 g/m² onto a driven porous belt 1 by at least one pair of perforated drums 2 while the fibres are drawn onto the porous belt by vacuum box 3.

The resulting web 4 of evenly laid fibres is transferred by a
20 conventional vacuum conveyor 5 to porous belts 6 and 7, which contain and partially compress the web while hot air from a box 8 is blown through belts 7 and 6 and web 4, and received by a suction box 9. The temperature of the hot air is sufficient to melt the outer sheath of the

- 17 -

bicomponent fibres (but not the inner core) and thereby fuse the fibres together at their intersections.

Before the melted sheaths at the intersections of the bicomponent fibres solidify, the web may be compressed by nip rollers 10 to form a 5 denser web consisting of un-bonded leather and polyester fibres supported by a three-dimensional network of fused bicomponent fibres. On solidification of the intersections the network provides sufficient strength for the web to be wound onto reel 11 for transport and/or storage.

10 Referring to Figure 2, two such webs 4a and 4b unwind from reels 11a and 11b together with fabric reinforcement 4c from reel 12, and are brought together by rollers 13 to feed onto a porous belt 14. Webs 4a, 4b and fabric 4c comprising a composite web 15 are conveyed by belt 14 through hydroentangling jets 16, and water from the jets is drawn 15 through web 15 and porous belt 14 by vacuum box 17. Water rebounding from the surface of the composite web is collected in trays 18 and conveyed away as described more fully in the prior application.

For complete hydroentanglement the composite web is passed through a plurality of successive hydroentanglement stages, one or more 20 of which may incorporate a screen applied over the surface of the web 15. Hydroentanglement stages are arranged so that jets can be applied to both surfaces of the web, and for the present example, such application of jets is on alternate sides through 5 such stages at a speed of

- 18 -

10 m/min.

In this example perforated screens with an open area of approximately 60% made from chemically etched stainless steel of the type described in the prior application are applied to each side of the web
5 for the final stage of hydroentangling in order to mask the furrow marks from the jets. To prevent coincidence lines forming on the surface, the pitch of the apertures of the screen is made the same as the pitch of the jet orifices.

Jet orifices for this example are 140 microns at 0.9 mm centres,
10 and when applied through the screens, jet pressures can be at the maximum normally available in commercial hydroentangling equipment at 200 bar. Pressures without the screen may be reduced slightly to 180 bar, and unlike similar webs without a bicomponent network, this same high pressure can be applied at the first stage of hydroentangling without
15 the need for an external screen.

The resulting hydroentangled web may be finished by impregnating with emulsified oils, pigments and pigment fixatives as may be applied to natural leather, followed by drying and buffing both sides. The side that received three hydroentangling stages (and therefore has a higher degree
20 of entanglement and attachment to the reinforcing fabric) can then be coated with a leather-like finish by conventional means as used for coating synthetic leather.

The foregoing procedures may be suitable for shoe material, but for

- 19 -

un-coated materials such as for clothing suede, web 4 may be on one side only of the reinforcing fabric and four hydroentangling stages applied, all onto the side having the web. After buffing and impregnation the web face may be treated with hot air to cause the projecting manmade fibres 5 to melt and the surface brushed to remove any slight charring leaving a finish closely similar to natural leather.

The resulting sheet material is a high quality reconstituted leather having an excellent feel, strength and surface finish.

It is of course to be understood that the invention is not intended 10 to be restricted to the details of the above embodiment which are described by way of example only.

Thus, for example, the web may be wet laid, although there can be disadvantages with this.

As described in the prior patent application, webs can be wet laid 15 by methods normally used for paper making or by carding if sufficiently long textile fibres are included to carry the leather fibres through the carding process. The use of bicomponent fibres which are added or which make up the carrier fibres provides a "screen" for hydroentangling according to the present invention. For effective carding, normally over 20 5% of 1.7 decitex carrier fibres of 20 mm or more is needed, and the leather fibres need to be made by textile reclaiming methods to be long enough to avoid excessive ejection of fines. For wet laying, the bicomponent fibres need to be short and the webs dried before fusing.

- 20 -

This may not be wholly satisfactory when the next step is to wet the webs again for hydroentangling, while the disadvantages of carding include slow rates of production and wastage from the ejection of fine fibres.

5 A wide variety of variations are feasible within the scope of this invention. Jet orifice size, screen details, production speeds and other details provided in the prior application can broadly apply to the present invention. The main departure is the reduced application of surface screens, and to ensure good attachment to the reinforcing core, it is often
10 desirable to hydroentangle on alternate sides of the fabric so that fibres are pushed evenly into the interstices of the fabric. Also, due to the stabilising effect of the bicomponent network, pressures can be higher and leather fibres shorter than in the method of the prior application.

Product compositions can vary widely and thickness of the web
15 between the final coated surface and the internal reinforcing layer can differ substantially from the web forming the back layer. For example, instead of the equal webs implied in the previously described example, the front one may be 150 g/m² and contain 15% non-bicomponent synthetic fibres and the back may be 250 g/m² and contain 0% of non-
20 bicomponent fibre. The bicomponent content for both webs, however, may be constant at 4%.

Fibre lengths can be determined largely by the production limitations of commercial web laying equipment and, where alternative

web laying equipment (such as carding) can handle long manmade fibres, it may not be necessary to incorporate fabric reinforcement. Also, where jet markings are acceptable in the finished product, there may be no need for surface applied screens. Alternatively, screens may be used 5 extensively to supplement the internal screens of the bicomponent network, particularly if the latter are very light and the leather fibres are particularly short.

Hydroentangling speeds can vary widely depending on a whole range of parameters, including weight per unit area of material being 10 hydroentangled, open area of fabric reinforcement, jet pressures, jet diameter, jet spacing, number of passes through the jets, weight of bicomponent network, type of leather fibre, number of passes using external screens, and open area of screens. Generally lighter webs can be hydroentangled at faster speeds, and typically 600 g/m² material may 15 require 6 m/minute while 200 g/m² may entangle fully at 15 m/min.

The choice of using relatively long waste leather fibres made by textile reclaiming methods or short ones made by milling (such as conventional hammer or disk milling) can depend on the cost and availability of the different types of waste leather. Milling is cheaper and 20 can use waste leather shavings, which are usually cheaper than the sheet waste used in textile reclaiming plant. However end product quality can be lower and more costly manmade fibre additions may be needed to achieve acceptable performance. Blends of both types of waste fibre can

- 22 -

also be used for intermediate quality products.

As with the prior application, the main limitation in weight of composite webs that can be hydroentangled is the onset of hydroentanglement itself as this reduces permeability to the jets and 5 constricts further entanglement. Such constriction is far greater with leather fibres than conventional synthetic fibres but, by using the methods of this invention, it is possible to make acceptable product at relatively high composite web weights of around 600 g/m². Producing acceptable quality end product at much above this weight is possible but 10 becomes increasingly difficult. Lighter webs are easier to hydroentangle, and minimum web weights can be set more by limits of web forming accuracy and limited market demand for exceptionally thin leather products.

The inter-relationships between all the foregoing parameters are 15 complex and can vary considerably for different types of end product. An optimum balance between output rate, cost and finished product performance can be established by conducting empirical trials within the broad guidance provided in this patent application. The bicomponent network and associated features of the present invention assist 20 considerably in improving production rate and product quality at lower cost compared to the methods of the prior application.

- 23 -

CLAIMS

1. A method of forming a sheet material from a mixture of fibres comprising base fibres and additional synthetic fibres, said synthetic fibres having outer melttable layers, comprising the steps of:
 - 5 forming the fibres into a web,
 - heating to melt the outer layers of the additional synthetic fibres so as to cause such fibres to fuse together at intersections to form a network within the web,
 - 10 subjecting the web to entanglement to entangle the base fibres whilst constrained by the network.
2. A method according to claim 1 wherein the base fibres are leather fibres.
3. A method according to claim 1 or 2 wherein the said entanglement
15 comprises hydroentanglement.
4. A method of forming a sheet material from a mixture of fibres comprising leather base fibres and additional synthetic fibres, said synthetic fibres having outer melttable layers comprising the steps of:
 - 20 forming the fibres into a web,
 - heating to melt the outer layers of the synthetic fibres so as to cause such fibres to fuse together at intersections to form a network within the web,

- 24 -

subjecting the web to hydroentanglement to entangle the leather fibres whilst constrained by the network.

5. 5. A method according to claim 3 or 4 wherein the hydroentanglement is performed with high pressure jets of liquid which penetrate the network.
6. 6. A method according to any one of claims 3 to 5 wherein the hydroentanglement is performed with high pressure jets of liquid applied from the opposite sides of the web.
10. 7. A method according to any one of claims 3 to 6 wherein the hydroentanglement is preformed with high pressure jets of liquid and a water receiving structure is provided to receive bounced back liquid.
15. 8. A method according to any one of claims 3 to 7 wherein the entanglement is performed using high pressure jets of liquid in multiple passes.
9. 9. A method according to any one of claims 5 to 8 wherein the liquid is water.
10. 10. A method according to any one of claims 5 to 9 wherein the hydroentanglement is performed with a screen or screens between the web and the jets in at least one said pass.
20. 11. A method according to claim 10 wherein the screen is at least 60% open.
12. 12. A method according to claim 10 or 11 wherein the screen has

- 25 -

openings with a pitch the same as that of the jets.

13. A method according to any one of claims 10-12 wherein the screen is such as to substantially prevent formation of furrows by the hydroentanglement jets.
- 5 14. A method according to any one of claims 3 to 13 wherein the hydroentanglement is performed with the web advancing at a speed greater than 6m/min.
15. A method according to any one of claims 3 to 14 wherein at least 90% of the base fibres have a maximum fibre length of 6mm.
- 10 16. A method according to any one of claims 3 to 15 wherein the additional synthetic fibres have a maximum fibre length of 10mm.
17. A method according to any one of claims 3 to 16 wherein the additional synthetic fibres constitute 2-10% of the weight of the mixture of fibres.
- 15 18. A method according to any one of claims 3 to 16 wherein the additional synthetic fibres constitute up to 5% of the weight of the mixture of fibres.
19. A method according to any one of claims 3 to 18 wherein the additional synthetic fibres are in the range 1.7 to 3.0 dtex.
- 20 20. A method according to any one of claims 3 to 19 wherein the additional synthetic fibres are bicomponent fibres having outer layers with a lower melting point than inner cores thereof.
21. A method according to claim 20 wherein the outer layers are

- 26 -

polyethylene and the inner cores are polyester or polypropylene.

22. A method according to any one of claims 3 to 21 wherein the said mixture of fibres also includes further synthetic fibres which are not melted to fuse together.
- 5 23. A method according to claim 22 wherein the further synthetic fibres are less than 1.0 dtex.
24. A method according to claim 22 or 23 wherein the further fibres make up 5-20% by weight of the material.
- 10 25. A method according to claim 2 or 4 or any claim dependent thereon wherein the leather fibres have lengths of less than 3mm.
26. A method according to any one of claims 1 to 25 wherein the outer layers of the additional synthetic fibres are melted by passing hot air through the web.
- 15 27. A method according to claim 26 wherein the web is held between porous belts during passage of the hot air through the web.
28. A method according to any one of claims 1 to 27 wherein the surface of the entangled web is subjected to heat to melt said additional synthetic fibres at said surface.
- 20 29. A method according to any one of claims 1 to 28 wherein the surface of the entangled web is buffed.
30. A method according to claim 28 wherein the surface of the entangled web is buffed before said heating of the surface of the web.

- 27 -

31. A method according to any one of claims 1 to 30 wherein two separate said webs are united on opposite sides of a reinforcing fabric prior to entanglement.
32. A method according to claim 31 wherein the said base fibres are entangled with the reinforcing fabric.
33. A method according to any one of claims 1 to 32 wherein the (or each) web is wound on a reel after formation of the network, and the web is drawn from such reel to be subjected to said entanglement.
34. A method according to any one of claims 1 to 33 wherein the fused intersections of the network are at least partially disrupted by the entanglement.
35. A method according to any one of claims 1 to 31 wherein the network is predominantly open whereby solid parts of the network make up a minor proportion of its structure.
36. A method according to any one of claims 1 to 35 wherein the said mixture of fibres is compressed after melting of the additional synthetic fibres but before they have fused together and solidified at the intersections.
37. Sheet material formed using the method of any one of claims 1 to 36.
38. A sheet material comprising at least one body of entangled fibres comprising leather base fibres wherein an openwork structure

- 28 -



extends within the body so as to be penetrated by the leather fibres, said openwork structure being defined by a network of additional synthetic fibres fused together at intersections thereof, and wherein the network makes up a minor proportion by weight of 5 the sheet material.

39. A sheet material according to claim 38 wherein the leather fibres have a maximum fibre length of 6mm.
40. A sheet material according to claim 38 or 39 wherein 90% of the additional synthetic fibres have a maximum fibre length of 10mm.
- 10 41. A sheet material according to any one of claims 38 to 40 wherein the additional synthetic fibres constitute 10% of the weight of the sheet material.
42. A sheet material according to claim 41 wherein the additional synthetic fibres constitute up to 5% of the weight of the sheet 15 material.
43. A sheet material according to any one of claims 38 to 42 wherein the additional synthetic fibres are bicomponent fibres having outer layers with a lower melting point than inner cores thereof.
44. A sheet material according to claim 43 wherein the outer layers are 20 polyethylene and the inner cores are polyester or polypropylene.
45. A sheet material according to any one of claims 38 to 44 wherein the additional synthetic fibres are in the range 1.7 to 3.0 dtex.
46. A sheet material according to any one of claims 38 to 45 wherein

- 29 -

the said body of entangled fibres also includes further synthetic fibres which are not melted to fuse together.

47. A sheet material according to any one of claims 38-46 wherein the further synthetic fibres are less than 1.0 dtex.
- 5 48. A sheet material according to claim 46 or 47 wherein the further synthetic fibres make up less than 20% by weight of the sheet material.
49. A sheet material according to any one of claims 38 to 48 wherein the leather fibres have lengths of less than 3mm.
- 10 50. A sheet material according to any one of claims 38 to 49 wherein the network is predominantly open whereby solid parts of the network make up a minor proportion of its structure.
51. A sheet material according to any one of claims 38 to 50 comprising two said bodies united on opposite sides of a fabric layer.
- 15 52. A sheet material according to claim 51 wherein the said leather fibres penetrate the fabric layer.
53. A sheet material according to claim 51 or 52 and claims 46 or any claim dependent thereon wherein the (or each) body contains a higher proportion of said further synthetic material adjacent the reinforcing layer than at the outer surface thereof.
- 20

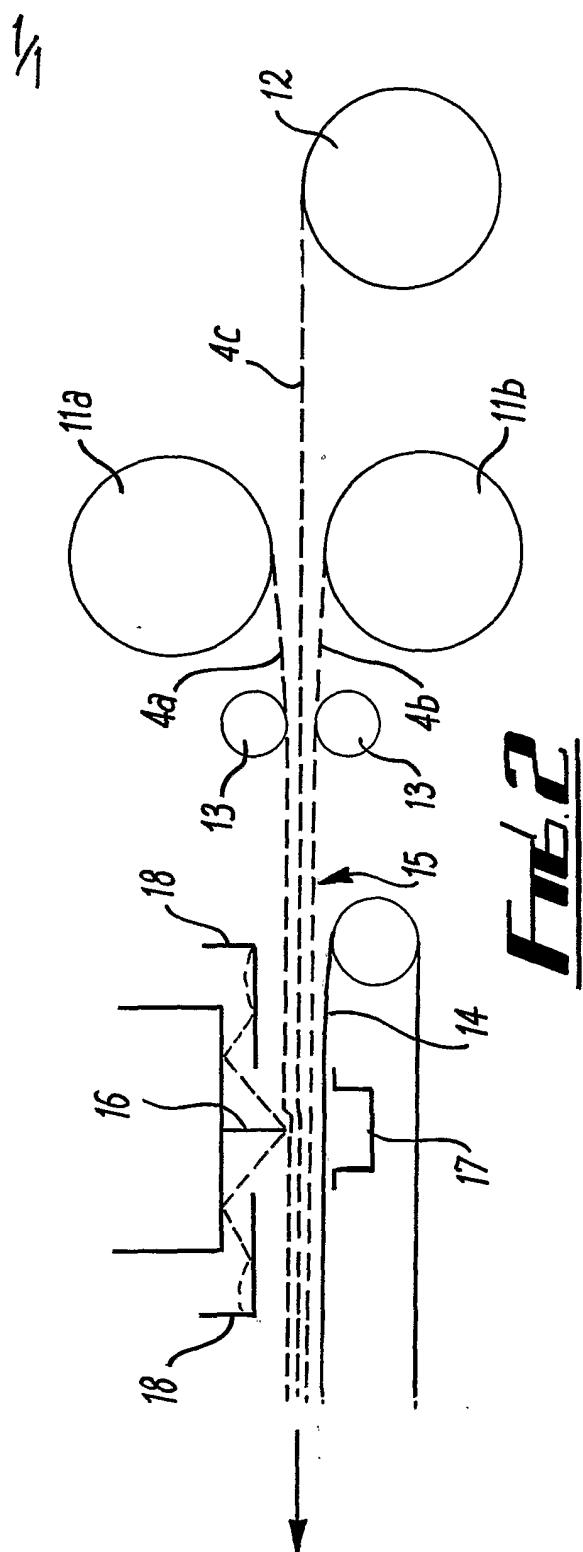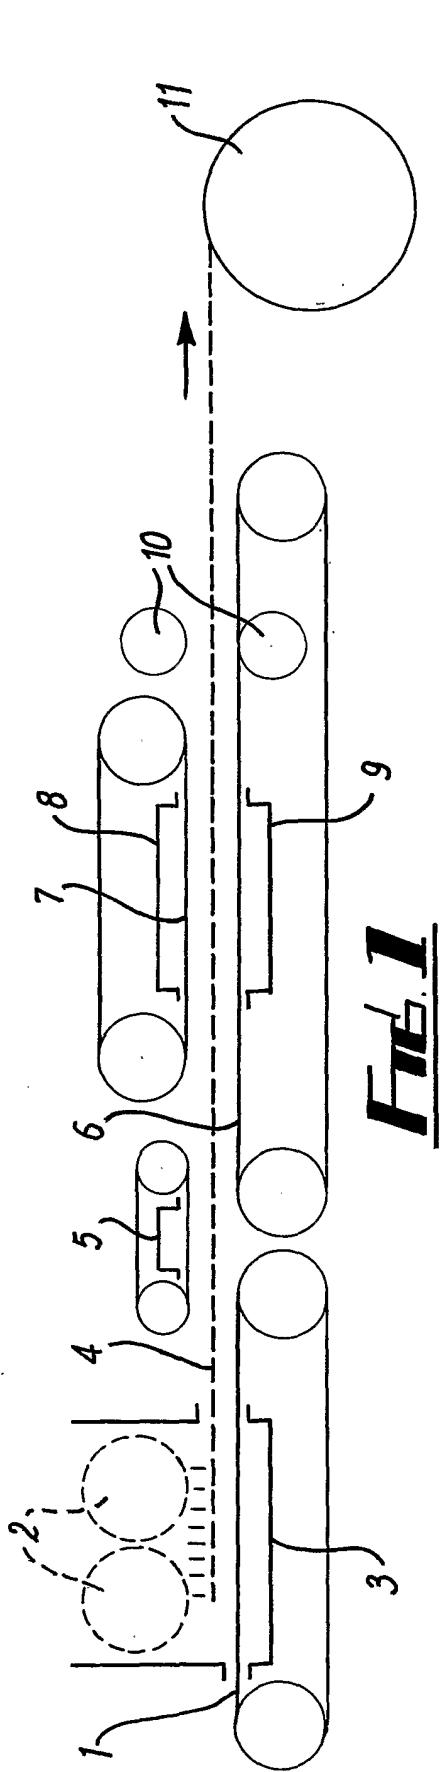

INTERNATIONAL SEARCH REPORT

Inte

nal Application No

PCT/GB 02/05381

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 D04H1/46 D04H1/54

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 07 821 A (NLK CELPAP DEUTSCHLAND GMBH) 9 September 1999 (1999-09-09) claims 1-7, 9, 12, 17, 18 ---	1, 37
X	WO 96 39553 A (UPM KYMMENE OY ; PIRINEN PENTTI (FI); NIEMI TAPIO (FI)) 12 December 1996 (1996-12-12) page 1, line 5 -page 1, line 7 page 3, line 26 -page 3, line 29 page 4, line 3 -page 4, line 10; claims 1, 3; figure 1 ---	1, 3, 20-22, 24, 37
X	WO 01 31131 A (OWENS CORNING FIBERGLASS CORP ; ZENG QINGYU (US); NELSON THOMAS E () 3 May 2001 (2001-05-03) page 6, line 11 -page 6, line 20 page 7, line 20 -page 7, line 32; claims 1, 9-15, 18, 19, 23, 26 ---	1, 3, 20-22, 37

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

7 March 2003

Date of mailing of the international search report

20/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Demay, S

INTERNATIONAL SEARCH REPORT

Inte

ial Application No

PCT/GB 02/05381

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 01 94673 A (B & H RES LTD ; BEVAN CHRISTOPHER GRAHAM (GB)) 13 December 2001 (2001-12-13) cited in the application the whole document ---	1-53
A	FR 2 601 970 A (VUILLAUME ANDRE) 29 January 1988 (1988-01-29) claims 1-19; figures 1-3 ---	5, 6, 8-14
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 188 (C-0710), 17 April 1990 (1990-04-17) & JP 02 033367 A (DAIYU SHOJI:KK), 2 February 1990 (1990-02-02) abstract ---	4-53
A	US 6 264 879 B1 (KARPIK JOSEPH ET AL) 24 July 2001 (2001-07-24) examples 1-4 -----	4-53

INTERNATIONAL SEARCH REPORT

Inte 1al Application No

PCT/GB 02/05381

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
DE 19807821	A 09-09-1999	DE	19807821 A1	09-09-1999
WO 9639553	A 12-12-1996	FI DE DE EP ES WO JP US	952754 A 69616785 D1 69616785 T2 0830468 A1 2167574 T3 9639553 A1 11506504 T 6007653 A	07-12-1996 13-12-2001 13-06-2002 25-03-1998 16-05-2002 12-12-1996 08-06-1999 28-12-1999
WO 0131131	A 03-05-2001	AU WO	7987000 A 0131131 A1	08-05-2001 03-05-2001
WO 0194673	A 13-12-2001	AU WO	7420701 A 0194673 A1	17-12-2001 13-12-2001
FR 2601970	A 29-01-1988	FR	2601970 A1	29-01-1988
JP 02033367	A 02-02-1990	NONE		
US 6264879	B1 24-07-2001	US AU WO	5958554 A 5177800 A 0075379 A1	28-09-1999 28-12-2000 14-12-2000