

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 November 2005 (10.11.2005)


PCT

(10) International Publication Number
WO 2005/105367 A1

- (51) International Patent Classification⁷: **B23Q 3/00**, B21D 39/00, B23P 19/04, B25B 27/14
- (21) International Application Number: PCT/US2004/009828
- (22) International Filing Date: 31 March 2004 (31.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **BELL HELICOPTER TEXTRON INC.** [US/US]; P.O. Box 482, Fort Worth, TX 76101 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SEMBRITZKY, David, D.** [US/US]; 3349 Wilshire Avenue, Grapevine, TX 76051 (US). **SAVILLE, Terry, L.** [US/US]; 3491 Huntington Lane, St. Charles, MO 63303 (US).
- (74) Agent: **WALTON, James, E.**; Law Offices of James E. Walton, P.L.L.C., Suite 107-328, 1169 North Burleson Boulevard, Burleson, TX 76028 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: AXIAL SWAGE ALIGNMENT TOOL

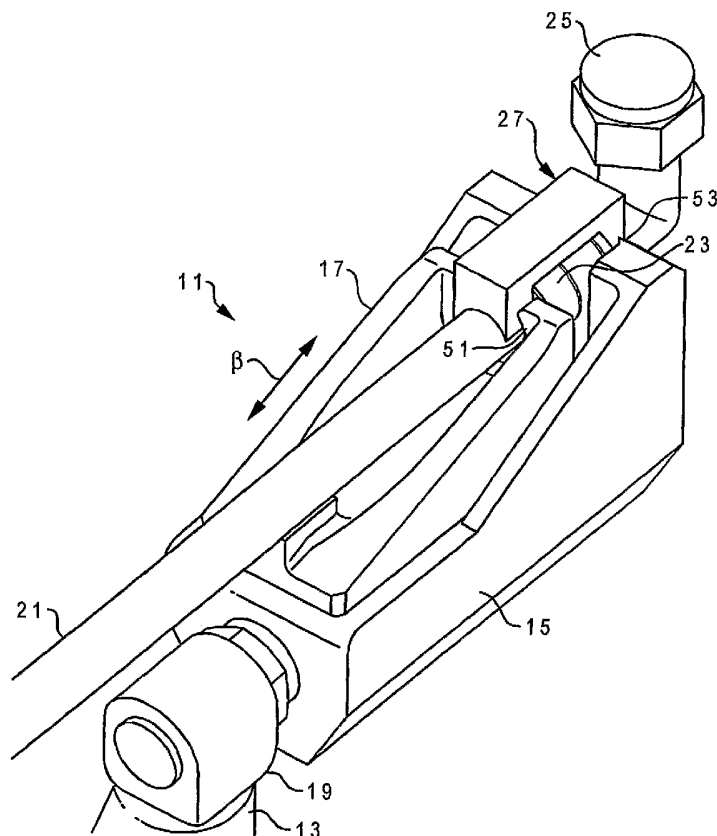

(57) Abstract: An axial swage alignment tool (11) having a bridge member (27) for axially and rotationally aligning a metal tube (21) and a fitting (31) is disclosed. The bridge member that is temporarily bonded to the exterior surfaces of the metal tube and the fitting. The bridge member eliminates the need to place any material between the metal tube and the fitting either prior to or after the swaging process.

WO 2005/105367 A1



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AXIAL SWAGE ALIGNMENT TOOL

Technical Field

The present invention relates to alignment tools. In particular, the present invention relates to axial swage alignment tools.

5 Description of the Prior Art

Many complicated machines require metal tubing for carrying pressurized fluids, such as fuel and hydraulic fluid. Often, this metal tubing is formed by assembling together several small metal tubes. This is particularly true for metal tubing that has curves, bends, joints, and other complicated shapes. When
10 assembling the small metal tubes, the joints must be coupled together with fluid tight seals that can withstand the pressures required by the machine. Some applications, such as aircraft applications, require specialized couplings, or fittings, that must be swaged onto the metal tubes with high-precision swaging tools to provide proper, fluid-tight, metal-to-metal seals and ensure that the resultant metal tubing conforms
15 to strict dimensional tolerances. These swaging tools are typically high-pressure hydraulic machines that are capable of slightly deforming the metal tubing and the specialized fittings. Once the tubes and fitting are swaged together, they cannot be separated without damaging the tubes and fittings.

Often, due to space constraints, the swaging tool will not fit into the required
20 location to swage the metal tubes and fittings. When this happens, the metal tubes and fittings must be removed from the machine, swaged remote from the machine, and then reinstalled onto the machine as assembled metal tubing. These parts must be temporarily fastened together so that the orientation between them is maintained while they are remotely swaged together. Both the rotational alignment and the axial
25 alignment must be accurately maintained. If the proper orientation is not maintained, the resultant metal tubing will not fit properly when it is reinstalled onto the machine.

Several problems arise when metal tubes and fittings must be removed from the machine and remotely swaged together. With one method, the tubes and fittings

- 2 -

5 must be precisely marked with reference marks to ensure the proper axial and rotational orientation. This is a time consuming process that is prone to errors. Often, the marks are made by hand with dull markers. With another method, the metal tubes and fittings must be temporarily fastened together. This is typically done by driving small wedges between the metal tube and the fitting, or by using super glue between the metal tube and the fitting. Methods that require the placement of materials between the metal tube and the fitting are undesirable. Wedges do not work well, because they fall out when the assembly is moved. Adhesives do not work well, because they degrade the seal.

10 Although there have been significant developments in the area of swaging metal tubing, considerable shortcomings remain.

Summary of the Invention

There is a need for an axial swage alignment tool that can accurately maintain the proper orientation between the swaged parts.

15 Therefore, it is an object of the present invention to provide an axial swage alignment tool that can accurately maintain the proper orientation between the swaged parts.

20 This object is achieved by providing an axial swage alignment tool having a bridge member that is temporarily bonded to the exterior surfaces of the metal tubing and the fitting. The tool does not require placing any material between the metal tube and the fitting.

25 The present invention provides significant advantages, including: (1) the metal tubes and the fittings can be removed from the machine and accurately swaged remote from the tool; (2) specialized marking templates are not required; (3) the parts do not have to be marked prior to removal; (4) the axial alignment of the fitting on the metal tube is adjustable, i.e., the metal tube does not have to be axially bottomed-out into the fitting; and (5) because the bridge member is only bonded to

the exterior surfaces of the metal tube and the fitting, it is not necessary to place any material between the metal tube and the fitting.

Additional objectives, features, and advantages will be apparent in the written description that follows.

5 Brief Description of the Drawings

The novel features believed characteristic of the invention are set forth in the appended claims. However, the invention itself, as well as, a preferred mode of use, and further objectives and advantages thereof, will best be understood by reference to the following detailed description when read in conjunction with the accompanying
10 drawings, wherein:

Figure 1 is a perspective view of the axial swage alignment tool according to the present invention;

Figure 2 is a partial longitudinal cross-sectional view of the axial swage alignment tool of Figure 1;

15 Figure 3A is a left side view of the bridge member of the axial swage alignment tool of Figure 1;

Figure 3B is a cross-sectional view of the bridge member of Figure 3A taken at A-A; and

20 Figure 3C is a right side view of the bridge member of the axial swage alignment tool of Figure 1.

Description of the Preferred Embodiment

The present invention represents the discovery that metal tubes and fittings can be swaged together without placing adhesives and other materials between the metal tubes and the fittings. The alignment tool according to the present invention is

particularly useful in applications in which the metal tubes and the fittings are swaged remotely from the machine on which they are to be installed.

Referring to Figure 1 in the drawings, the preferred embodiment of an axial swage alignment tool 11 according to the present invention is illustrated. Tool 11 is preferably powered by a hydraulic system, but may be powered by other means, such as an electric motor. Tool 11 includes a hydraulic pump (not shown) for pumping high-pressure hydraulic fluid through a hydraulic line 13. Hydraulic line 13 is coupled to a housing 15 and a ram member 17 by a coupling 19. Ram member 17 is driven forward and backward in the direction of arrow B by a piston (not shown) that is in communication with the hydraulic fluid from hydraulic line 13. Tool 11 is used to precisely align and axially swage a metal tube 21 to a fitting 23, so that metal tube 21 can be coupled to an elbow 25 or other tube or component part. A bridge member 27 is used to align tube 21 and fitting 23.

Referring now Figures 2 and 3A-3C in the drawings, the assembly of metal tube 21, fitting 23, and elbow 25 is illustrated prior to swaging. As is shown, fitting 23 preferably includes a body portion 31 and a collar 33. Fitting 23 may be any of a wide variety of fittings, including unions, elbows, and tees. Body portion 31 includes a radially outward extending flange 35. One side of flange 35 may form a selected fillet radius 37 with body portion 31. The opposing side of flange 35 is received by a recessed area 39 bored into the end of collar 33 upon swaging.

Bridge member 27 is generally U-shaped having a first end 41, a second end 43, and a cross piece 45. First end 41 includes a contact surface 47 that is curved to match the outside diameter of tube 21. In a similar fashion, second end 43 has a contact surface that is curved to match the outside diameter of fitting 23. In addition, second end 43 includes a fillet radius that matches fillet radius 37 of flange 35. Cross piece 45 is configured to provide sufficient clearance between the inside surface of cross piece 45 and the outside surface of collar 33, including any radially outward deformation that occur to collar 33. Bridge member 27 is preferably made of steel, but may be made of other metallic or strong, rigid materials. Bridge member

27 eliminates the need to place any material between metal tube 21 and fitting 23 either prior to or after the swaging process.

In operation, tube 21 is inserted into fitting 23. Tube 21 may be axially located anywhere within fitting 23. It is not necessary that tubing 21 bottom-out within fitting 23. One significant advantage of the present invention is that tool 11 allows for both axial and rotational alignment of tube 21 and fitting 23. Next, first end 41 of bridge member 27 is adhered to tube 21 and second end 43 of bridge member 27 is adhered to fitting 23. In the preferred embodiment, first end 41 and second end 43 are adhered to metal tube 21 and fitting 23 with cyanoacrylate, or a similar high-strength adhesive for bonding smooth metal parts together. It is preferred that second end 43 butt-up against and be adhered to fillet radius 37 of flange 35. This provides additional strength and stability to the assembly. Once assembled in this fashion, metal tube 21 and fitting 23 may be moved to any convenient location for carrying out the swaging process.

In the swaging process, metal tube 21 is installed into a slot 51 in ram member 17, and fitting 23 is installed into a slot 53 in housing 15 (see Figure 1). Slot 51 engages collar 33, and slot 53 engages flange 35. Tool 11 is then activated such that ram member 17 forces collar 33 in the direction of arrow C. This movement slightly deforms metal tube 21, body portion 31, and collar 33 and forms a metal-to-metal seal between metal tube 21 and fitting 23. Then, bridge member 27 is pried off of tube 21 and fitting 23. First end 41 and second end 43 of bridge member 27 may then be cleaned with acetone, alcohol, or any other suitable cleansing agent, and reused.

It is apparent that an invention with significant advantages has been described and illustrated. Although the present invention is shown in a limited number of forms, it is not limited to just these forms, but is amenable to various changes and modifications without departing from the spirit thereof.

Claims

1. An axial swage alignment tool for swaging together a tube and a fitting having a swaging collar, the axial swage alignment tool comprising:
a housing adapted to engage the fitting;
5 a ram member adapted to engage the swaging collar; and
a bridge member for maintaining the orientation of the tube relative to the fitting during swaging, the bridge member being configured for adhesion to the exterior surfaces of the tube and the fitting.
- 10 2. The axial swage alignment tool according to claim 1, wherein the bridge member is U-shaped, having curved contact surfaces for mating with the exterior surfaces of the tube and the fitting.
- 15 3. The axial swage alignment tool according to claim 2, wherein the contact surfaces are adapted to be temporarily adhered to the exterior surfaces of the tube and the fitting.
4. The axial swage alignment tool according to claim 1 further comprising:
a means for actuating the ram member.
- 20 5. The axial swage alignment tool according to claim 4, wherein the means for actuating the ram member is a hydraulic power source.
- 25 6. The axial swage alignment tool according to claim 4, wherein the means for actuating the ram member is an electro-mechanical power source.
7. A bridge member for use in swaging together a metal tube and a fitting having a swaging flange, the bridge member comprising:
a first end portion having a curved contact surface for matingly contacting the
30 metal tube;

a second end portion having a curved contact surface for matingly contacting the fitting;

a cross piece for connecting the first end portion to the second end portion.

5 8. The bridge member according to claim 7, wherein the second end portion is configured to mate with the swaging flange.

9. A method of swaging together a metal tube and a fitting having a swaging collar comprising the steps of:

10 inserting the metal tube into the fitting such that the metal tube is selectively aligned both axially and rotationally with the fitting;

15 providing a bridge member having a first end and a second end, the first end having a contact surface configured to mate with the exterior surface of the metal tube, the second end having a contact surface configured to mate with the exterior surface of the fitting;

adhering the contact surface of the first end to the metal tube;

adhering the contact surface of the second end to the fitting;

forcing the swaging collar over the fitting;

removing the bridge member from the metal tube and the fitting.

20 10. The method according to claim 9, wherein the steps of adhering the contact surfaces of the first and second ends to the metal tube and fitting are achieved by using a cyanoacrylate adhesive.

1/2

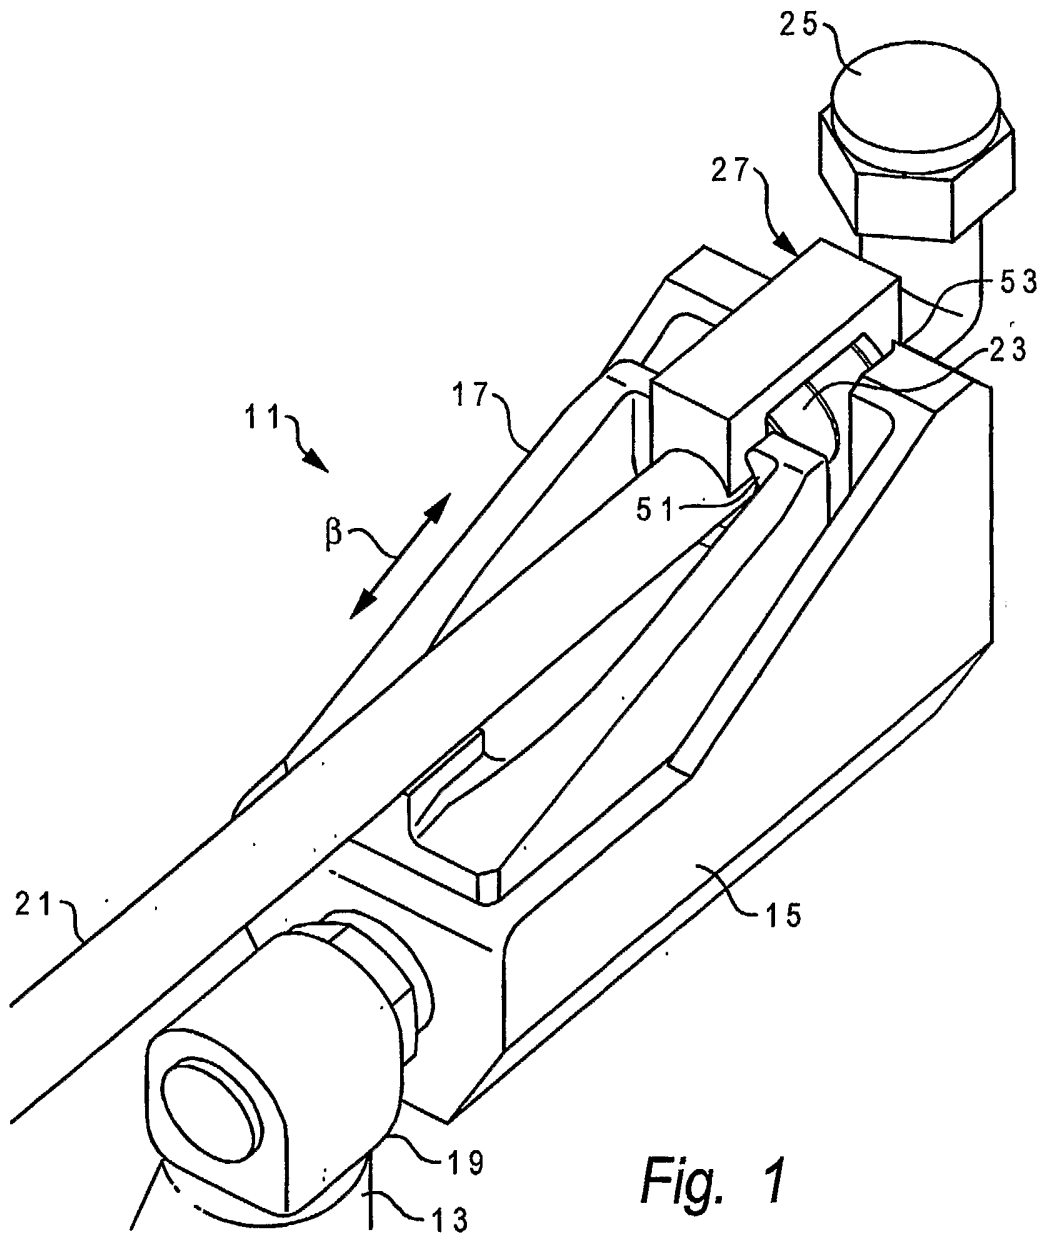


Fig. 1

2/2

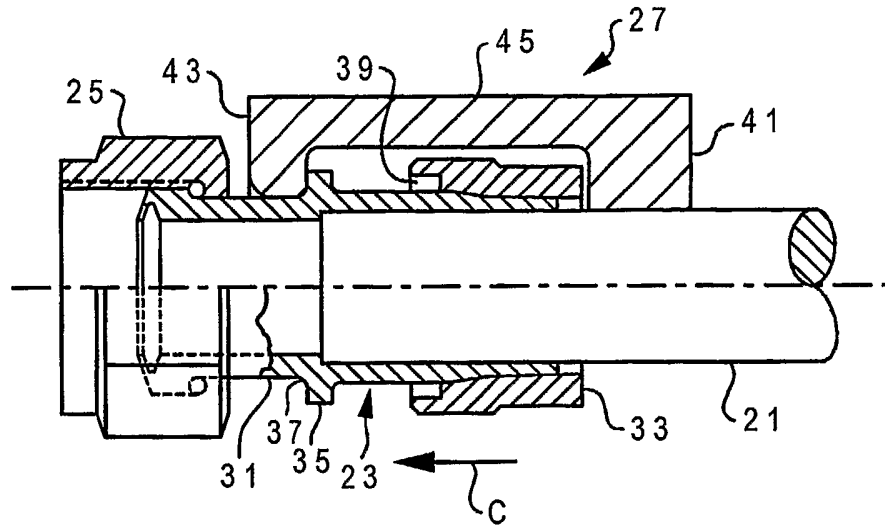


Fig. 2

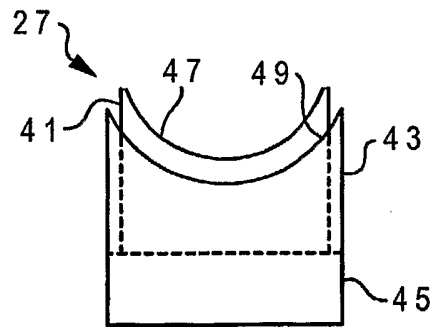


Fig. 3A

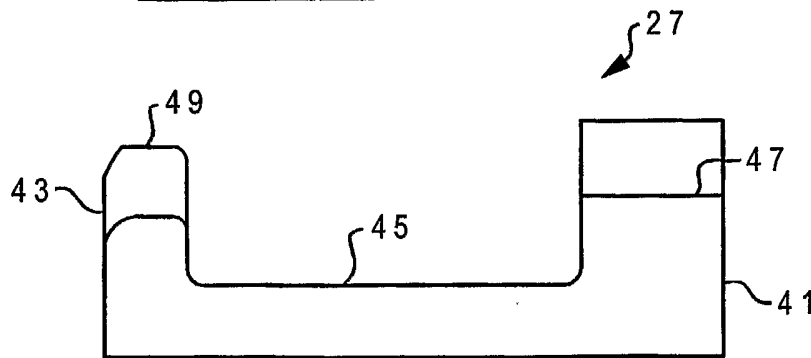


Fig. 3B

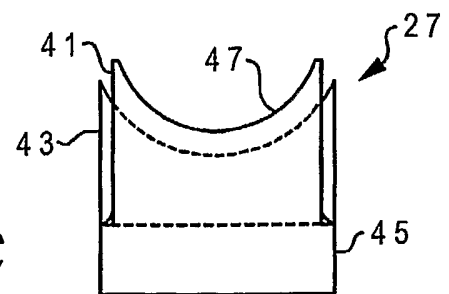


Fig. 3C

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US04/09828

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B23Q 3/00; B21D 39/00; B23P 19/04; B25B 27/14
 US CL : 29/464, 520, 237, 272

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 U.S. : 29/464, 520, 237, 272, 516, 517, 508; 33/412, 661

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, 6,430,792 B1 (FOSTER et al.) 13 August 2002 (13.08.2002). See entire document.	1-6, 9, 10
A	US 3,726,122 A (DAWSON) 10 April 1973 (10.04.1973). See entire document.	1-6, 9, 10
A	US 4,189,817 A (MOEBIUS) 26 February 1980 (26.02.1980). See entire document.	1-6, 9, 10
A	US 5,347,701 A (HOSSEINIAN et al.) 20 September 1994 (20.09.1994). See entire document.	1-6, 9, 10
X	US 2,656,607 A (HARDING) 27 October 1953 (27.10.1953). In Figures 1 and 4, note first curved end portion 50, second curved end portion 52, and cross piece 30/48 for connecting the first and second portions.	7, 8
X	US 2,514,374 A (COOPER) 11 July 1950 (11.07.1950). In Figures 1 and 2, note first curved end portion 18, second curved end portion 19, and cross piece 41 for connecting the first and second portions.	7, 8

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

30 September 2004 (30.09.2004)

Date of mailing of the international search report

22 NOV 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
 Commissioner for Patents
 P.O. Box 1450
 Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

David P. Bryant

Telephone No. (703) 308-1148

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US04/09828

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 409,008 A (BREYMAN) 13 August 1889 (13.08.1889). In Figures 1 and 2, note first curved end portion D, second curved end portion C, and cross piece E for connecting the first and second portions.	7, 8
A	US 2,105,954 A (RIPPE) 18 January 1938 (18.01.1938). See the Figures.	7, 8