

(12) **United States Patent**
Connolly

(10) **Patent No.:** **US 9,644,927 B2**
(45) **Date of Patent:** ***May 9, 2017**

(54) **ARCHERY ARROW HAVING IMPROVED FLIGHT CHARACTERISTICS**

USPC 473/578, 581–585
See application file for complete search history.

(71) Applicant: **Aldila Golf Corp.**, Poway, CA (US)

(56) **References Cited**

(72) Inventor: **Martin Connolly**, San Marcos, CA (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **ALDILA GOLF CORP.**, Poway, CA (US)

1,648,376 A 11/1927 Blodgett
1,913,810 A 6/1933 Lannes, Sr.
2,288,562 A 6/1942 Birkhofer et al.
2,525,332 A 10/1950 Alger et al.

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

Tim Dehn, "Gold Tip Arrow Production Bounces Back from Involuntary Plant Closure", Arrow Trade Magazine, United States.

(Continued)

(21) Appl. No.: **15/181,326**

(22) Filed: **Jun. 13, 2016**

Primary Examiner — Carson Gross

(74) *Attorney, Agent, or Firm* — Gary L. Eastman, Esq.; Eastman & McCartney LLP

(65) **Prior Publication Data**

US 2017/0023340 A1 Jan. 26, 2017

Related U.S. Application Data

(60) Continuation-in-part of application No. 14/531,063, filed on Nov. 3, 2014, now Pat. No. 9,366,509, which is a division of application No. 13/306,966, filed on Nov. 29, 2011, now Pat. No. 8,876,640.

(60) Provisional application No. 61/417,726, filed on Nov. 29, 2010.

(51) **Int. Cl.**

F42B 6/04 (2006.01)

F42B 10/00 (2006.01)

(52) **U.S. Cl.**

CPC **F42B 6/04** (2013.01); **F42B 10/00** (2013.01)


(58) **Field of Classification Search**

CPC F42B 6/02; F42B 6/04; F42B 6/06; F42B 10/00; F42B 12/362

(57) **ABSTRACT**

The archery arrow having improved flight characteristics of the present invention is designed to improve the accuracy of the arrow which is equipped with a dampening medium within the central bore of the arrow shaft. The dampening materials in an embodiment may include, but not be limited to, silicon, epoxies or urethanes and selection of various dampening materials may provide for varying degrees of stiffness. The dampening effects of internal dampening materials decrease the initial deflection distance of the arrow and also serves to decrease the deflection with each oscillation. In addition, the dampening medium adopted in the present invention provides for an arrow having a selectable center of gravity location that has improved flight characteristics. Thus, the dampening materials adopted in the present invention provide for a selected location of center of gravity and a desired attenuation of oscillations.

20 Claims, 5 Drawing Sheets

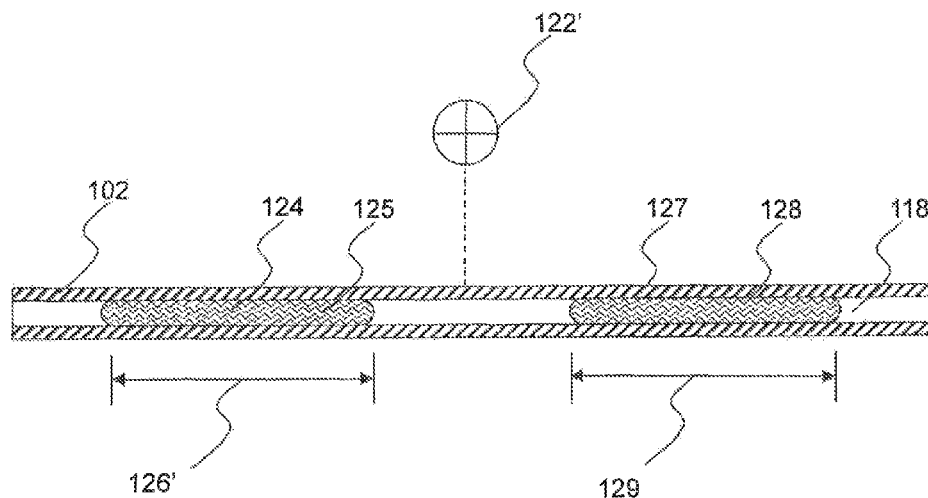

(56)

References Cited

U.S. PATENT DOCUMENTS

2,723,426	A	11/1955	Pelley	7,374,504	B2	5/2008	Palomaki et al.
4,204,307	A	5/1980	Pfetzing	7,578,801	B2	8/2009	Weststrate et al.
4,210,330	A	7/1980	Kosbab	7,608,001	B2	10/2009	Palomaki et al.
4,558,868	A	12/1985	Musacchia	D605,499	S	12/2009	Gaudron
4,645,211	A	2/1987	Beiter	7,651,421	B2	1/2010	Smith et al.
4,706,965	A	11/1987	Schaar	7,686,714	B2	3/2010	Smith et al.
4,801,151	A	1/1989	Sturm et al.	D628,056	S	11/2010	Busch
4,829,974	A	5/1989	Anderson	7,824,171	B2	11/2010	Hanson et al.
4,874,180	A	10/1989	Fingerson et al.	8,057,330	B2	11/2011	Blosser et al.
4,905,397	A	3/1990	Juelg, Jr.	8,230,748	B2	7/2012	Wang et al.
4,943,067	A	7/1990	Saunders	8,241,156	B2	8/2012	Sims et al.
5,154,432	A	10/1992	Saunders	8,262,518	B2	9/2012	Palomaki et al.
5,234,220	A	8/1993	Schellhammer et al.	8,388,473	B2	3/2013	Smith
5,265,872	A	11/1993	Tennent et al.	8,475,303	B2	7/2013	James
5,273,293	A	12/1993	Lekavich	8,876,640	B2 *	11/2014	Connolly F42B 10/00 473/578
5,338,177	A	8/1994	Le Touche	9,366,509	B2 *	6/2016	Connolly F42B 6/04
5,417,439	A	5/1995	Bickel	2003/0166425	A1	9/2003	Sutherland et al.
5,516,117	A	5/1996	Rangel	2006/0281593	A1	12/2006	Young
5,895,331	A	4/1999	Rinehart	2007/0259743	A1 *	11/2007	Sims F42B 6/04 473/578
6,017,284	A	1/2000	Giles	2008/0085793	A1	4/2008	Palomaki et al.
6,251,036	B1	6/2001	Wu et al.	2009/0163308	A1	6/2009	Odabachian et al.
6,364,499	B1	4/2002	Jones	2009/0291785	A1	11/2009	Smith
D456,700	S	5/2002	Miller et al.	2009/0291786	A1	11/2009	Liao
6,530,865	B2	3/2003	Held	2010/0113195	A1	5/2010	Rezmer
6,554,725	B1	4/2003	Schaar	2011/0172040	A1	7/2011	Belcik
6,554,726	B2	4/2003	Thurber	2012/0021856	A1	1/2012	Mackey, Jr. et al.
6,595,868	B1	7/2003	Androlia	2012/0028741	A1	2/2012	Palomaki et al.
6,612,947	B2	9/2003	Porter	2013/0288831	A1	10/2013	James
6,959,868	B2	11/2005	Tsikos et al.				
6,974,398	B2	12/2005	Murphy				
7,004,859	B2	2/2006	Palomaki et al.				
7,077,770	B2	7/2006	Palomaki et al.				
7,115,055	B2	10/2006	Palomaki et al.				
7,270,618	B2	9/2007	Palomaki et al.				
7,331,886	B2	2/2008	Morris et al.				

OTHER PUBLICATIONS

Patrick Meitin, "Fat or Thin, Arrow Suppliers Have 3D Shooters Covered", Arrow Trade Magazine, Jan. 2007, United States.

* cited by examiner

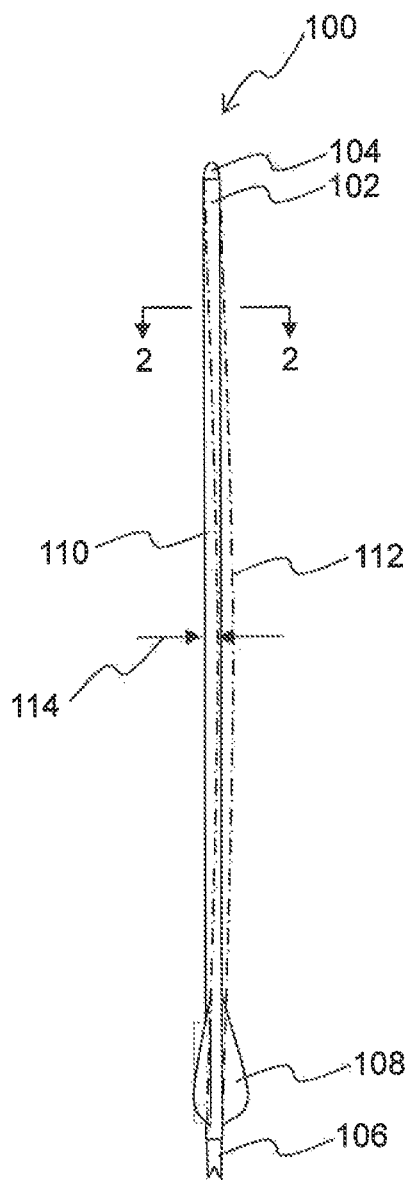


FIG. 1

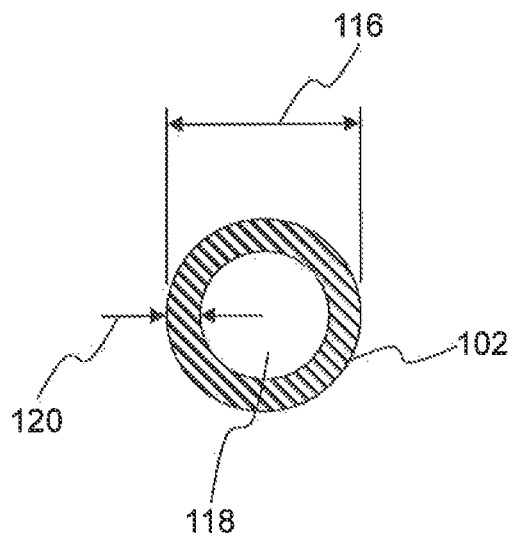


FIG. 2

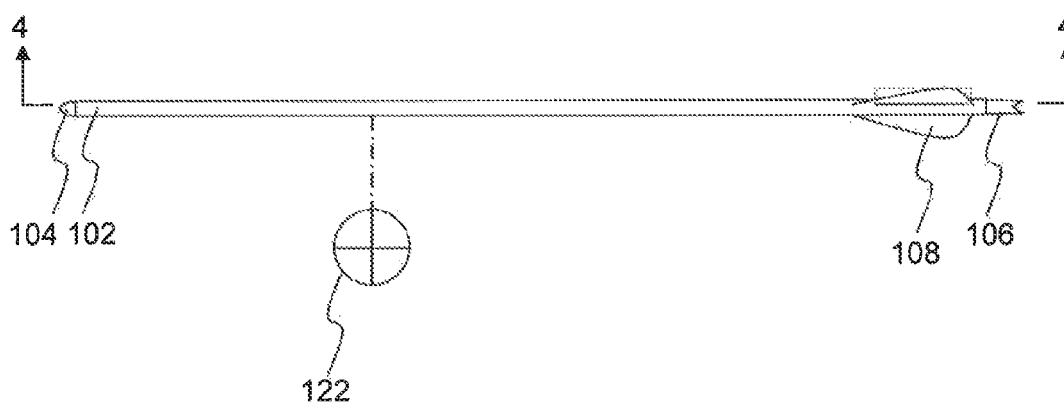


FIG. 3

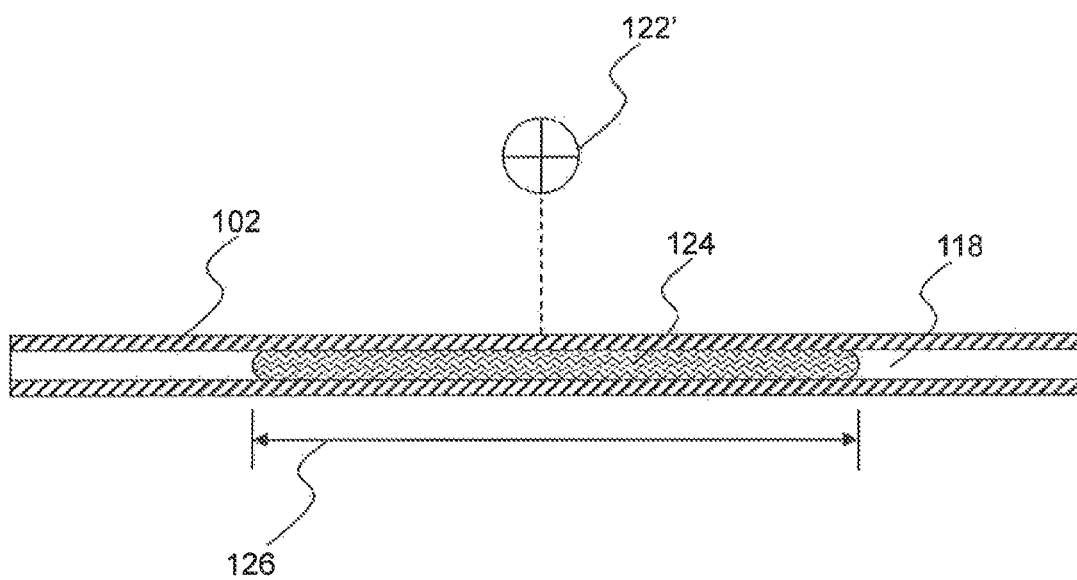


FIG. 4

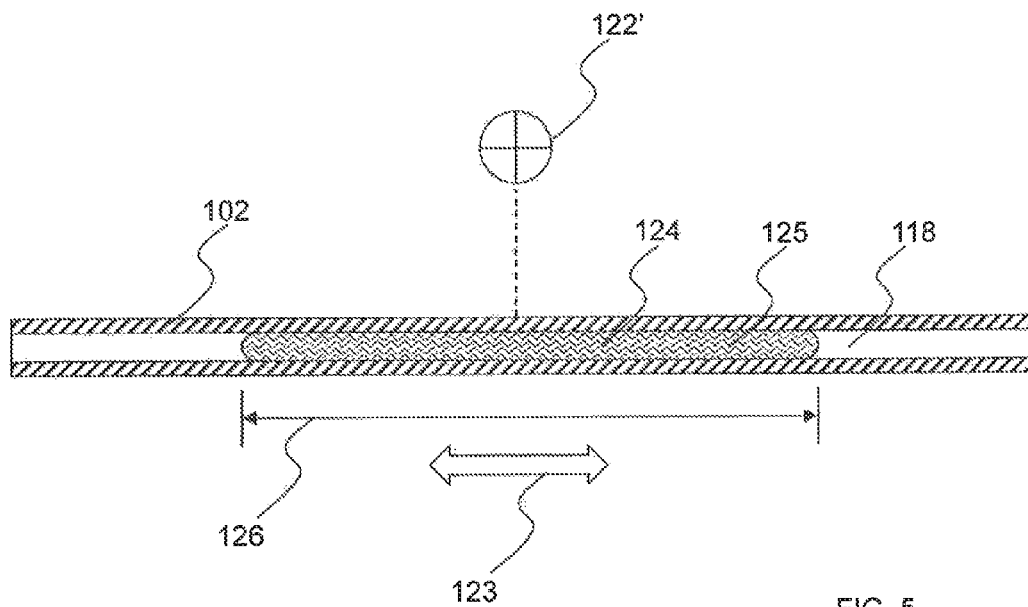


FIG. 5

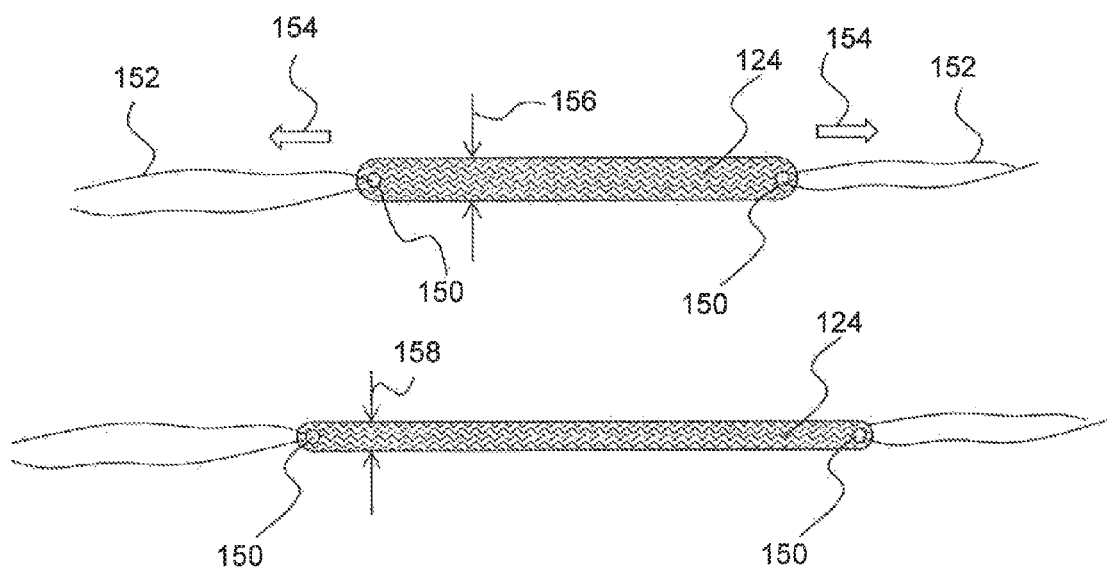


FIG. 6

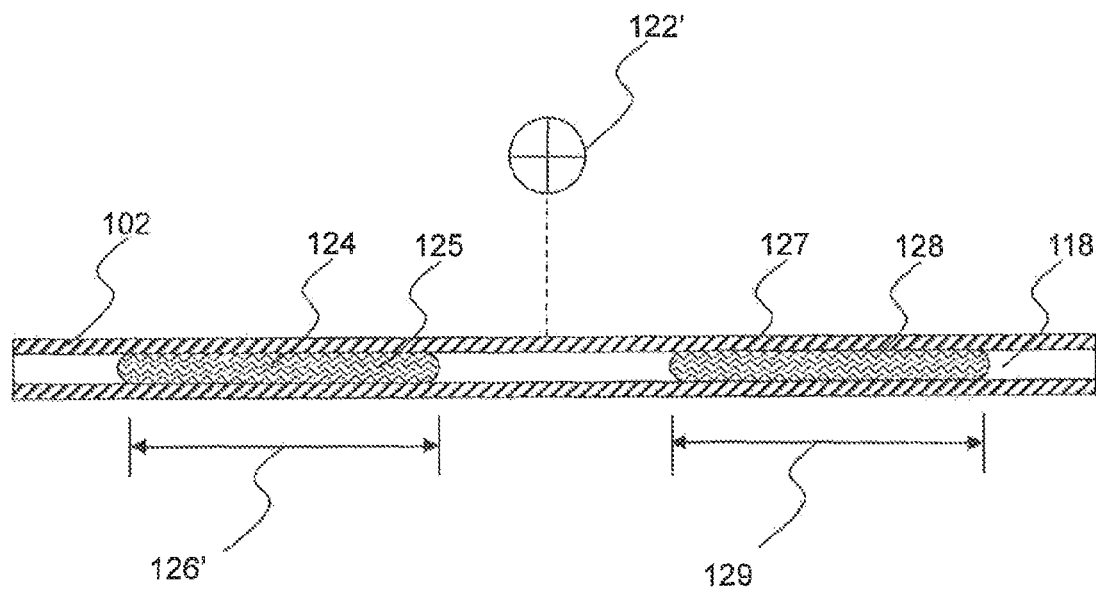


FIG. 7

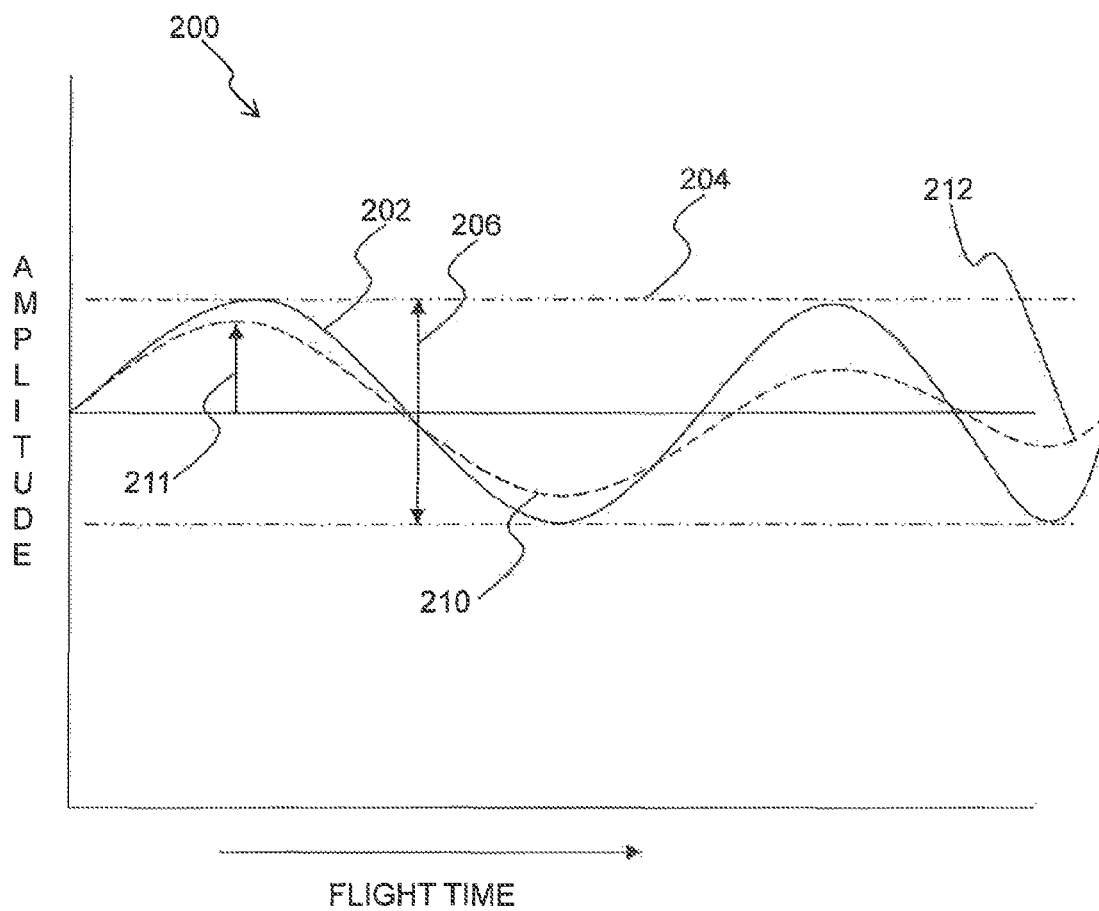


FIG. 8

1

ARCHERY ARROW HAVING IMPROVED FLIGHT CHARACTERISTICS

REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of U.S. patent application Ser. No. 14/531,063 for "Archery Arrow Having Improved Flight Characteristics," filed on Nov. 3, 2014, which is a divisional of U.S. patent application Ser. No. 13/306,966 for "Archery Arrow Having Improved Flight Characteristics," filed on Nov. 29, 2011, now U.S. Pat. No. 8,876,640, which claims the benefit of priority to U.S. Provisional Patent Application for "Archery Arrow Having Improved Flight Characteristics," Ser. No. 61/417,726, filed on Nov. 29, 2010, and the disclosure is incorporated fully herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates generally to archery arrows, and more specifically to techniques for improving the flight characteristics of the arrow. The present invention is more particularly, though not exclusively useful as improving the accuracy of the arrow by adopting an internal dampening material which provides for the minimization of the oscillation and the selective placement of the center of gravity of an arrow.

Description of the Related Art

Modern arrows are typically made from a carbon fiber arrow shaft that is hollow, and include a point in the front of the arrow shaft, a nock in the rear of the arrow shaft, and fletching along the surface of the arrow shaft adjacent the nock. In flight, the hollow arrow shaft flexes slightly along its length in an oscillatory motion. Specifically, the action of shooting the arrow from the bow creates a lateral deflection along the length of the arrow which oscillates. This oscillatory motion, coupled with the natural rotation of the arrow due to the fletching, results in an imperfect flight of the arrow. In some cases, the flight can be disrupted sufficiently by the oscillation such that the arrow misses the intended target. Thus, minimization of the oscillatory motion of an arrow improves the accuracy of the arrow.

Another characteristic of archery arrows that impacts flight is the placement of the center of gravity of the arrow. In cases where hunting points are used, the center of gravity will be far forward in the arrow. In other circumstances, the point may be light, creating an arrow having a center of gravity far back in the arrow. Often, the location of the center of gravity of an arrow is an aspect of personal preference for the shooter, so the ability to select the location of this would be advantageous so as to provide an archer with the capability to match the point weight, the arrow, and the location of the center of gravity for each arrow used.

In light of the above, it would be advantageous to provide an arrow that is capable of adaptation to minimize oscillations during flight, as well as adjust the positioning of the center of gravity of an arrow.

SUMMARY OF THE INVENTION

The archery arrow having improved flight characteristics of the present invention is designed to improve the accuracy of the arrow by incorporating an internal dampening material into the arrow. An improved arrow is provided that is equipped with a dampening medium within the central bore of the arrow shaft.

2

In a preferred embodiment, the dampening materials may include, but not be limited to, silicon, epoxies or urethanes and these materials may at least partially solidify once positioned within lumen and maintain the position along the length of the shaft. Alternatively, the dampening materials may be created as inserts and be removably inserted into the lumen of the arrow shaft. Selection of various dampening materials may provide for varying degrees of stiffness. Dampening material in the lumen can extend a distance within shaft, where the distance may vary depending on the weight that is desired to be added to the arrow and the amount of desired effects of dampening. The dampening material may be placed throughout the entire length of the shaft, or only a portion of the shaft, or at multiple locations. In addition, the dissimilar dampening materials can also be equipped into the arrow in the present invention.

The dampening effects of internal dampening materials decrease the initial deflection distance of the arrow and also serves to decrease the deflection with each oscillation. This also provides for an arrow having a selectable center of gravity location, as well as an arrow that has improved flight characteristics through the minimization of unwanted deflections and oscillations. Therefore, by selectively including a variety of dampening materials in a single arrow shaft, an arrow having highly customizable mechanical and flight characteristics can be devised through the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The nature, objects, and advantages of the present invention will become more apparent to those skilled in the art after considering the following detailed description in connection with the accompanying drawings, in which like reference numerals designate like parts throughout, and wherein:

FIG. 1 is a diagrammatic view of an arrow in the present invention, with an illustration of laterally flexed arrow, when it is shot;

FIG. 2 is a cross-sectional view taken along lines 2-2 of FIG. 1;

FIG. 3 is a diagrammatic view of an arrow in the present invention, showing the center of gravity of it;

FIG. 4 is a cross-sectional view of an arrow taken along lines 4-4 of FIG. 3;

FIG. 5 is a cross-sectional view of the arrow taken along lines 4-4 of FIG. 3 with an alternative dampening material inserted within;

FIG. 6 is a view of the dampening material of the present invention shown formed with pulling apertures and demonstrating the resilience and deformability of the dampening materials for positioning within the arrow lumen;

FIG. 7 is a cross-sectional view of the arrow taken along lines 4-4 of FIG. 3 with multiple alternative dampening materials inserted within; and

FIG. 8 is a graphical representation of the deflection and oscillation of the arrow shaft in the present invention.

DETAILED DESCRIPTION OF THE INVENTION

An improved arrow is provided that is equipped with a dampening medium within the central lumen, or bore, of the arrow shaft. Referring to FIG. 1, an arrow 100 is provided and includes an arrow shaft 102 fitted with a point 104 at its front end, a nock 106 at its rear end, and fletching 108 positioned on the outer surface of shaft 102 adjacent nock

3

106. As the arrow 100 is shot from a bow (cross or compound), the shaft 102 flexes laterally from a straight position 110 to a deflected position 112. Specifically, the arrow shaft 102 bends along its length so as to deflect a distance 114. Due to the flexible and resilient nature of the shaft 102, this deflection distance oscillates as the arrow 100 flies through the air to a target.

FIG. 2 is a cross-sectional view taken along lines 2-2 of FIG. 1, showing the tubular nature of the shaft 102. As shown, shaft 102 has an outer diameter 116 and is formed with a central lumen 118. The wall thickness 120 may vary depending on the weight and rigidity of the shaft 102. In some cases, the wall thickness may be greater; however, this arrow will be heavier due to the increase in shaft material. In a preferred embodiment, shaft 102 is made from a carbon fiber or as is known in the art. These shafts have an inherent flexibility due to the materials and manufacturing, and can result in an arrow having significant deflection 114. As stated above, the amplitude of this deflection 114 can significantly affect the flight characteristics of the arrow 100.

An arrow will have a typical center of gravity. For instance, referring to FIG. 3, the center of gravity 122 is shown in the front half of the arrow 100. The positioning of the center of gravity 122 along arrow 100 will be determined by the weights of shaft 102, the point 104, nock 106 and fletching 108.

The arrow of the present invention 100 is equipped with an internal dampening material which provides for the minimization of the deflection 114, the dampening of any deflection 114, and the selective placement of the center of gravity 122 along the length of the arrow shaft 102. Referring to FIG. 4, a cross-sectional view of arrow 100 as taken along lines 4-4 of FIG. 3, dampening material 124 is shown in lumen 118 and extends a distance 126 within shaft 102. As can be appreciated, distance 126 may vary depending on the weight that is desired to be added to the arrow 100, and the amount of dampening that is desired. For instance, if only a small adjustment to the center of gravity 122' is desired, a small amount of dampening material 124 may be added. This would necessarily have a minimal effect on the dampening function for the arrow 100. Alternatively, a significant shift in the center of gravity 122' may be created by adding a larger amount of dampening material 124 to lumen 118 of arrow 100.

The dampening material 124 may be placed throughout the entire length of the shaft 102, or through only a portion of the shaft. Lumen 118 may be filled with multiple dampening materials 124, and such multiple dampening materials 124 may be of similar or dissimilar materials. For instance, the portion of the lumen adjacent the point may be filled with a first dampening material, and the portion of the lumen adjacent the nock may be filled with a second dampening material. The first and second dampening materials may be the same or dissimilar to achieve a desired dampening effect on shaft 102. The shaft-stiffening and dampening effects of the material 124 provides for the deflections and oscillations in arrow 100 to diminish as the arrow flies towards its target.

Referring now to FIG. 5, the cross-sectional view of arrow 100 taken along lines 4-4 of FIG. 3 is shown. The dampening material 124 as shown in FIG. 5 is formed as a dampening insert 125. The dampening insert 125 is removably inserted into the lumen 118 and may be made with multiple dampening materials 124, which may be of similar or dissimilar dampening materials. For instance, one portion of the dampening insert 125 may be made with a first dampening material, and a different portion of the dampening insert 125 may be made with a second dampening

4

material. The first and second dampening materials may be the same or dissimilar to achieve a desired dampening effect on shaft 102. The number of different dampening materials 124 used for the dampening insert 125 is not limited and the use of multiple dampening materials 124 for the dampening insert 125 is contemplated.

The dampening insert 125 is formed having length 126 and configured to fit within the lumen 118. It is contemplated that the dampening insert 125 may be configured to fit within preexisting arrow shafts. The dampening insert 125 is removably inserted into the lumen 118 by placing one end of the dampening insert 125 and moving the dampening insert 125 to the desired location within the lumen 118 of the arrow shaft 102. The dampening insert 125 may be moved through the lumen 118 by the use of a rod or other similar elongated structures. The rod may have markings at regular intervals indicating distance measurements. This will allow for the precise placement of the dampening insert 125 inside the lumen 118. To remove the dampening insert 125, the rod will be used to push the dampening insert 125 all the way through the arrow shaft 102. The shaft-stiffening and dampening effects of the dampening insert 125 provides for the deflections and oscillations in arrow 100 to diminish as the arrow flies towards its target.

Referring now to FIG. 6, an alternative embodiment of the dampening insert 124 is shown and formed with pulling apertures 150. Apertures 150 are sized to receive a pull line 152 which, when tension is applied in directions 154, cause dampening insert 125 to deform from an original diameter 156 to a smaller diameter 158 as the dampening insert elongates in directions 154. By passing one of the pull lines 152 through the hollow lumen of an arrow shaft, the dampening insert 124 may be elongated and positioned within the arrow lumen of the arrow shaft (108 of FIG. 5) and adjusted in direction 123. Once in position, pull lines are released causing the dampening insert 124 to attempt to return to its original shape, but being held in place by friction created between the expanding dampening insert 124 and the interior surface of the arrow shaft 102. Once in position, pull lines 152 may be removed. Alternatively, pull lines 152 may be simply pushed into the arrow shaft for later removal or positional adjustment of the dampening insert 124.

It is to be appreciated that multiple dampening inserts 124 may be used to add weight to the length of an arrow shaft at specific locations within the shaft. By connecting the pull line 152 of a first dampening insert 124 to a second dampening insert 124, multiple dampening inserts may be inserted into the arrow shaft and positioned in place.

Referring now to FIG. 7, the cross-sectional view of arrow 100 taken along lines 4-4 of FIG. 3 with dampening insert 125 and dampening insert 128 is shown. As shown in FIG. 6, the arrow 100 has dampening insert 125 made of dampening material 124 and dampening insert 128 made with dampening material 127 located within the lumen 118 of the arrow shaft 102 at predetermined distances. As described above, dampening inserts 125 and 128 may be made of single or multiple dampening materials 124 and 127, respectively. Dampening insert 128 may be substantially similar to dampening insert 125 in construction, shape, and size. Dampening material 124 may be similar or dissimilar to dampening material 127 and the length 126' may be similar or dissimilar to length 129. It is contemplated that multiple dampening inserts may be placed within the lumen 118 of the arrow shaft 102 and that the multiple dampening inserts may be similar or dissimilar without departing from the scope and spirit of the invention.

5

Referring to FIG. 8, a graphical representation of the deflection and oscillation of the arrow shaft **102** is shown. Specifically, graph **200** includes a representative graph of the amplitude of deflection as a function of flight time. This graphical representative is merely exemplary of a preferred embodiment, and represents one embodiment; the deflection and dampening can be adjusted by the addition and placement of dampening materials **124**.

Graph **200** includes a first oscillating curve **202** representing an arrow that is not equipped with the present invention. Specifically, curve **202** has a maximum deflection **204**, and a consistent amplitude of deflection **206** representing an un-dampened oscillation of the shaft of an arrow during its entire flight. Curve **210** (shown in dashed lines) represents the arrow **100** of the present invention has a higher stiffness and thus has an initial deflection of **211**, which diminishes through flight to a lesser amplitude shown as **212**. The dampening effects of dampening materials **124** decrease the initial deflection distance **211** of arrow **100**, and also serves to decrease the deflection with each oscillation. This provides for an arrow **100** having a selectable center of gravity location, as well as provides for an arrow that has improved flight characteristics through the minimization of unwanted deflections and oscillations.

Graph **200** indicates that the frequency of deflections within arrow **100** is similar to those of an ordinary arrow not equipped with the dampening materials of the present invention. However, it is to be appreciated that the selection of various dampening materials will provide for a change in the amplitude and periodicity of the oscillations experience by the arrow **100**. For instance, dampening materials having a higher viscosity may decrease the frequency of oscillations, and dampening materials having a lower viscosity may provide for faster oscillations. Also, selection of various dampening materials may provide for varying degrees of stiffness, in which a dampening material **124** having a higher stiffness will result in lower deflections **114**, while dampening material **124** having a lower stiffness may result in greater deflections **114**.

In a preferred embodiment, dampening materials **124** may include, but not be limited to, silicon, epoxies or urethanes. These materials may at least partially solidify once positioned within lumen **118** and maintain the position along the length of shaft **102**. In other cases, the dampening materials may remain viscous, with a sufficient viscosity to maintain the position of the material within the length of arrow shaft **102**. In other cases the dampening material **124** is formed as a dampening insert **125** and removably inserted within the lumen **118** of the arrow shaft **102**.

It is also to be appreciated that the arrow of the present invention may be equipped with multiple locations of dampening materials **124** within lumen **118**. For instance, a length **126** of dampening materials **124** may be positioned forward in the arrow **100** to provide a center of gravity **122** near the point **104**, and a second length of dampening material **124** near fletching **108** to provide a selected location of center of gravity, and a desired attenuation of oscillations.

It is also to be appreciated that the arrow **100** of the present invention may include dampening materials **124** of dissimilar material. For instance, a low viscosity light weight material may be positioned in lumen **118** between two separate placements of dampening materials of higher viscosity or weight. Thus, by selectively including a variety of dampening materials **124** in a single arrow shaft **102**, an arrow having highly customizable mechanical and flight characteristics can be devised using the present invention.

6

What is claimed is:

1. An archery arrow having improved flight characteristics comprising:

an arrow shaft having a length and an outer diameter and formed with a central lumen;

a point attached to a first end of said arrow shaft;

a nock attached to a second end of said arrow shaft; and a dampening insert inserted within said central lumen along said length of said arrow shaft, wherein said dampening insert is spatially disparate from said point and said nock.

2. The archery arrow of claim **1**, wherein said dampening insert comprises a dampening material.

3. The archery arrow of claim **1**, wherein said dampening insert comprises a plurality of dampening materials.

4. The archery arrow of claim **3**, wherein said plurality of dampening materials are all dissimilar.

5. The archery arrow of claim **1**, further comprising a second dampening insert.

6. The archery arrow of claim **5**, wherein said second dampening insert comprises a dampening material.

7. The archery arrow of claim **6**, wherein said second dampening insert comprises a plurality of dampening materials.

8. The archery arrow of claim **7**, wherein said plurality of dampening materials are all dissimilar.

9. The archery arrow of claim **8**, wherein said dampening insert and said second dampening insert are dissimilar.

10. The archery arrow of claim **8**, wherein said dampening insert and said second dampening insert are the same.

11. An archery arrow having improved flight characteristics comprising:

an arrow shaft having a length and an outer diameter and formed with a central lumen;

a point attached to a first end of said arrow shaft;

a nock attached to a second end of said arrow shaft;

a first dampening insert inserted within said central lumen along said length of said arrow shaft, wherein said first dampening insert is spatially disparate from said point and nock; and

a second dampening insert inserted within said central lumen along said length of said arrow shaft, wherein said second damping insert is spatially disparate from said point and said nock.

12. The archery arrow of claim **11**, wherein said first dampening insert is made of a first dampening material.

13. The archery arrow of claim **12**, wherein said second dampening insert is made of a second dampening material.

14. The archery arrow of claim **13**, wherein said first dampening material and said second dampening material are dissimilar.

15. The archery arrow of claim **11**, wherein said first dampening insert comprises a plurality of dampening materials.

16. The archery arrow of claim **15**, wherein said second dampening insert comprises a plurality of dampening materials.

17. The archery arrow of claim **16**, wherein said first dampening insert and said second dampening insert are dissimilar.

18. An archery arrow having improved flight characteristics comprising:

an arrow shaft having a length and an outer diameter and formed with a central lumen;

a point attached to a first end of said arrow shaft;

a nock attached to a second end of said arrow shaft; and

a plurality of dampening inserts inserted within said central lumen along said length of said arrow shaft,

wherein said plurality of dampening inserts are spatially disparate from said point and said nock.

19. The archery arrow of claim **18**, wherein said plurality of dampening inserts are each placed at different locations along said length of said shaft within said lumen.

5

20. The archery arrow of claim **18**, wherein said plurality of dampening inserts is each made of a different dampening material.

* * * * *