



(51) International Patent Classification:
B23Q 11/10 (2006.01)

(21) International Application Number:

PCT/EP2017/061412

(22) International Filing Date:

11 May 2017 (11.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16382239.8

27 May 2016 (27.05.2016)

EP

(71) Applicants: UNIVERSIDAD DEL PAIS VASCO - EUSKAL HERRIKO UNIBERTSITATEA (UPV/EHU) [ES/ES]; Barrio Sarriena, S/N, 48940 Leioa, Vizcaya (ES). FUNDACIÓN TECNALIA RESEARCH & IN-

NOVATION [ES/ES]; Parque Científico y Tecnológico de Bizkaia, C/ Geldo, Edificio 700, 48160 Derio, Vizcaya (ES).

(72) Inventors: PEREIRA NETO, Octavio Manuel; Barrio Sarriena, S/N, 48940 Leioa - VIZCAYA (ES). RODRÍGUEZ EZQUERRO, Adrián; Barrio Sarriena, S/N, 48940 Leioa - VIZCAYA (ES). LUIS, López De Lacalle Marcaide; Barrio Sarriena, S/N, 48940 Leioa - VIZCAYA (ES). GIROT MATA, Franck Andrés; Barrio Sarriena, S/N, 48940 Leioa - VIZCAYA (ES). PENALVA OSCOZ, Mariluz; Parque Científico y Tecnológico de Bizkaia, C/ Geldo, Edificio 700, 48160 DERIO - VIZCAYA (ES). MARIA ASUNCIÓN, Rivero Rastrero; Parque Científico y Tecnológico de Bizkaia, C/ Geldo, Edificio 700, 48160 DERIO - VIZCAYA (ES).

(54) Title: DEVICE AND METHOD FOR COOLING AND LUBRICATING TOOLS IN MACHINING PROCESSES

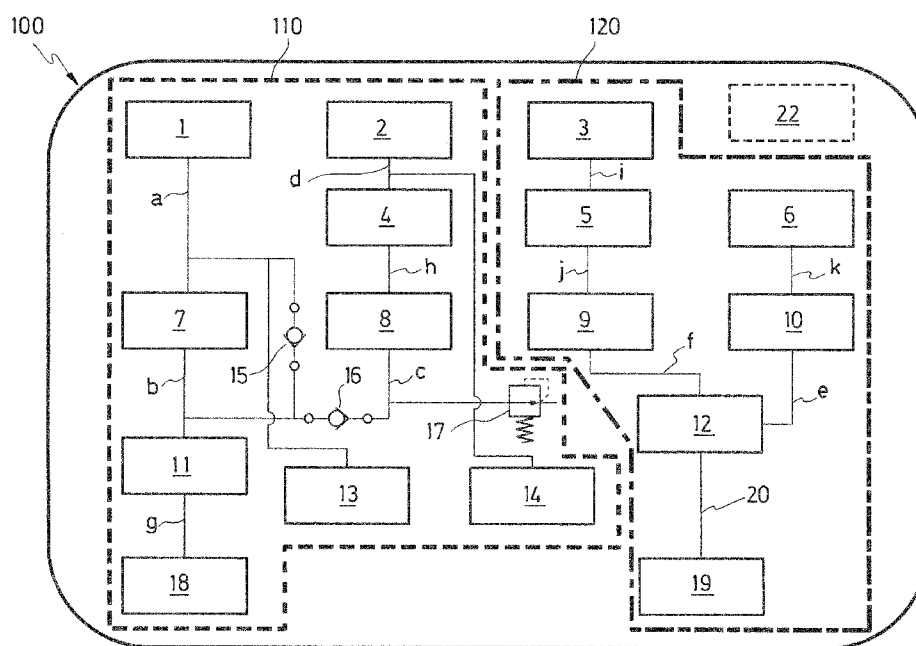


FIG.3

(57) Abstract: A device (100) for cooling and lubricating a tool during a chip removal machining process, which comprises: a first subsystem (110) for cryogenic cooling that comprises: a first entry (1) configured to introduce CO₂ in liquid state in a first conduit (a) of the device (100); a first exit (18) configured to supply CO₂ in liquid state from a second conduit (g) of the device (100); a third conduit (b) located between said first (a) and second conduit (g); and means (2, 7, 8, 4, 11, 13, 14, 15, 16, d, h, c) for preventing the formation of dry ice in said first, second and third conduits (a, g, b); and a second subsystem (120) for lubrication that comprises means (3, 5, 6, 9, 10, 12, 19, i, j, f, k, e, 20) for supplying micro-particles of a cutting oil in liquid state; wherein said first subsystem (110) and second subsystem (120) are independent from each other, and



(74) **Agent: BALDER IP LAW, S.L.;** Castellana 93, 5ª planta,
28046 Madrid (ES).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

DEVICE AND METHOD FOR COOLING AND LUBRICATING TOOLS IN MACHINING PROCESSES

TECHNICAL FIELD

The present invention belongs to the field of mechanical manufacturing and more
5 specifically to lubrication and cooling systems for tools in machining processes.

BACKGROUND OF INVENTION

To increase productivity in machining processes and considering the need to maintain
and/or improve the superficial integrity after the process, it is customary to use
lubricants and coolants. The most common cutting fluids used in machining processes
10 based on shaving removing with coolants, are oil emulsions with a mineral base where
the concentration of mineral oil varies between 5% and 40%.

For example, patent US5678466 describes an external cooling and lubrication device
used in the contact area of a saw and the part that is being machined. Two containers
contain both fluids in liquid state, one of which acts as a lubricant, while the other acts
15 as a coolant. Each fluid in liquid state is applied over the machined area using
independent spray type instruments.

One of the alternatives that has appeared to eliminate coolants from machining
processes is the use of cryogenic liquids as cutting fluids. This technique is known as
cryogenic cooling and consists in assisting machining with liquids and/or gases at very
20 low temperatures with the aim of reducing the cutting temperature. Among the
advantages of cryogenic cooling is the fact that the technology is clean, safe and
environmentally friendly.

The gases that are normally injected in the cutting area are liquid nitrogen (LN₂) and
liquid carbon dioxide (CO₂). The reasons for using LN₂ as cutting fluid are that it is an
25 inert gas that is found in large amounts in the atmosphere and has high cooling
capacity (-196°C). On the other hand, LN₂ is difficult to store because it is continuously
boiling when injected in containers at -196°C and at an atmospheric pressure that are
not completely isolated. That is why LN₂ generates overpressure inside the container
which, once a certain value is reached, triggers a safety valve that evacuates nitrogen
30 in the form of exhaust, thereby preventing risk of explosion due to nitrogen
overpressure. On the contrary, CO₂ has lower cooling capacity (-78°C), can be stored
in liquid state at room temperature in pressurised containers at 5.5 - 6 MPa and can
dissolve oils when it is in supercritical state, which makes it more attractive from an
industrial point of view. However, use of CO₂ requires a special regulation system to
35 prevent dry ice from forming in the conduits of the system before it expands when
exiting the system. This is the point where CO₂ regulation systems come into play.

Nowadays, there are mainly two types of CO₂ regulation systems: The first type (Type-1) is strictly a cryogenic regulation system used simply to prevent the CO₂ from solidifying inside the injection system conduits. However, the second type (Type-11) not only prevents the formation of dry ice, but is also capable of injecting pulverised oil particles in the cutting area along with the CO₂.

An example of the Type-1 regulation system that can be applied to machining processes is that described in patent US7293570B2. In this system the CO₂ solidifies in micro-particles under control to prevent the obstruction of the conduits. The system consists of a conduit with two coaxial channels for this purpose. CO₂ is introduced in liquid state at 7 MPa through the central channel. The initial diameter of this channel is small - the recommended diameter is 0.5 mm, but this diameter increases stage-by-stage until the exit is reached. In order to drag the solid particles of CO₂ that are formed and prevent obstruction of the central channel, CO₂ is introduced in gaseous state through the outer channel at a pressure that varies between 0.07 and 1.72 MPa. Both conduits are joined just at the exit of the system, so the CO₂ in gaseous state generates a Venturi effect that drags the dry ice particles to the outside, thereby obtaining the cutting fluid to inject in the cutting area.

The most common regulation systems used currently are Type-II. This is because they are intended for the machining of super-alloys, which are known to be difficult-to-cut materials and are in increasing demand by the aeronautic sector. During the machining of these types of materials, the tool is subjected to high stresses that cause premature wear, requiring both cooling and lubrication. Some of the systems of this kind are listed below.

Patent US2011/0166692A1 describes a hybrid system between Type-I and Type-II; the system can pulverise oil particles and use cryogenic technology but separately. In other words, it cannot cryogenize the oil particles. This system is based on placing a hose along the spindle of the machine-tool with two coaxial channels. The central channel is fed with an aerosol of oil micro-particles and CO₂ is introduced in the outer channel in supercritical state. Operation is based on using one channel or the other according to the needs of the machining operation. This system is specifically designed for drilling operations where the micro-particle spray is injected while the drill bit is machining the material. Once the bit finishes machining the hole, the spray channel closes during bit removal and CO₂ is injected in supercritical state to clean the remains of shavings and oil.

Patent US8048830B1 describes a Type-II regulation system. The starting point is a pressurised tank containing cutting oil that has to withstand more than 6 MPa of pressure. CO₂ is introduced in this tank, whether in non-supercritical state along with solid micro-particles, CO₂ in dense-semi-liquid state or CO₂ in pure gaseous state. Once introduced, the pressure rises and it comes into contact with the cutting oil, which

absorbs the CO₂ to form a carbonated cutting fluid. The increased pressure in the tank, caused by the introduction of the CO₂ or the sublimation of the CO₂ particles, increases the carbonation of the cutting fluid which approaches saturation. The carbonated cutting fluid is then pumped through a conduit to the cutting area. By doing this, and passing from relatively high pressure to ambient conditions, the carbonated lubricant boils and the CO₂ evaporates, producing a CO₂ mist that is comprised of gas and cutting oil.

However, in Superkar et al. (2012). Performance of supercritical carbon dioxide sprays as coolants and lubricants in representative metalworking operations. Journal of Materials Processing Technology, 212(12):2652 - 2658, to obtain a homogeneous mixture of CO₂ and cutting oil, a system equipped with a pressurised tank containing oil was used. Liquid CO₂ was introduced in the tank, after which heat was applied by electrical resistors to carry the CO₂ over its triple point and make it soluble in oil. After completing the process, the mixture is simply pumped to the cutting area through a channel located at the top of the tank.

Lastly, patent EP2574424B1 describes a method where an oil micro-particle spray is cooled directly or indirectly. In both cases, the system is equipped with two channels; an oil micro-particle spray is introduced in one and CO₂ in liquid state is introduced in the other. To cool the spray indirectly, the conduits are placed so they are in contact, thereby lowering the temperature of the channel containing the spray by conduction. An additional channel, also containing CO₂ in liquid state, can be used to improve heat transfer in this case. However, to cool the spray directly, the design of the conduits changes in such a way that they are communicated, either at the end of the tool or at the head of the tool holder.

As shown in the state of the technique, the need not only to cool but also to lubricate the cutting area while machining difficult-to-cut materials rules out Type-I CO₂ regulation systems for these types of applications. As regards the Type- II systems described above, these are not completely functional in an industrial setting. This is either because they are not a good solution for machining difficult-to-cut materials or because the solution is a specific ad-hoc design for each case that cannot be adapted to any machining process and machine-tool used currently.

DESCRIPTION OF THE INVENTION

The present invention intends to provide a solution for the need for a cooling and lubricating device for tools in machining processes, capable of injecting both carbon dioxide (CO₂) in liquid state and micro-particles of a cutting fluid in spray form into the machining area simultaneously, and CO₂ in liquid state or micro-particles of cutting fluid separately (only CO₂ or only cutting fluid micro-particles), depending on the need of the material to be machined. The device is comprised of a CO₂ regulation system that

prevents the formation of dry ice. The device has been designed so it can adapt to the most common machining processes, such as milling, lathing and drilling. Likewise, the proposed device is fully portable, so it can be used in different machine tools without requiring prior installation for proper operation.

5 In other words, depending on the material to be machined, either CO₂ is injected in liquid state to be used as cutting fluid (cryogenic cooling) or, if required, a spray formed by cutting oil micro-particles is also injected to assist lubrication by the CO₂ in liquid state, or only a spray formed by oil cutting micro-particles is injected to lubricate the machining area. The last option (lubrication without cooling) can be applied, for
10 example, in aluminium part machining processes.

Therefore, the device is capable of supplying CO₂ in liquid state while avoiding obstruction of injection system conduits cause by the formation of dry ice; the device is also capable of injecting cutting fluid (normally oil) micro-particles in the form of spray. Moreover, the supply of CO₂ is continuous and controlled. This continuous and
15 controlled supply can be interrupted when necessary by using an algorithm designed for that purpose.

The device is divided into two subsystems that are completely differentiated but governed electronically by common controls (preferably a Programmable Logic Controller (PLC) so the two subsystems can be used separately or in conjunction. The
20 first subsystem is in charge of supplying CO₂ in liquid state and the second is in charge of pulverising the cutting oil to form a spray with those particles.

In a first aspect of the invention, a device is for cooling and lubricating a tool during a chip removal machining process that comprises: a first subsystem for cryogenic cooling that comprises: a first entry (input) configured to introduce CO₂ in liquid state through a
25 first conduit of the device; a first exit (output) configured to supply CO₂ in liquid state from a second conduit of the device; a third conduit placed between the first and second conduits; and means for preventing formation of dry ice in those first, second and third conduits; and a second subsystem for lubrication that comprises means for supplying micro-particles of a cutting oil in liquid state; both subsystems are
30 independent and are configured to operate either simultaneously or each one alone.

In a possible embodiment, the means for preventing the formation of dry ice in said first, second and third conduits are implemented by means of means for pressurising said conduits above the triple point of CO₂ before injecting the CO₂ in liquid state through the exit.

35 In a more specific embodiment, the means for pressurising said first, second and third conduits above the triple point of CO₂ comprises a second entry configured to introduce CO₂ in gaseous state in a fourth conduit of the device; a fifth conduit placed after said fourth conduit; a first solenoid valve configured to control the passage of CO₂ in liquid state between the first conduit and the third conduit; a second solenoid valve

configured to control the passage of CO₂ in gaseous state between the fifth conduit and a sixth conduit; a first no-return valve placed to communicate said first conduit and third conduit, so that when said first solenoid valve is closed, passage of CO₂ in gaseous state is allowed from the third conduit towards the first conduit before introducing the CO₂ in liquid state through the first entry; and a second no-return valve placed to communicate said third and sixth conduits, so that when said second solenoid valve is open, circulation of the CO₂ in gaseous state is allowed from the sixth conduit towards the first solenoid valve but not the other way around, impeding the advance of CO₂ in liquid state towards the second solenoid valve.

Moreover, the means to pressurise the first, second and third conduits above the triple point of the CO₂ can also comprise a first shut-off valve placed on the first conduit and a second shut-off valve placed on the fourth conduit, configured to depressurise the first subsystem if necessary.

In addition, the means to pressurise said first, second and third conduits above the triple point of the CO₂ can also comprise a first pressure regulator for CO₂ in liquid state and a second pressure regulator for CO₂ in gaseous state, the first pressure regulator being placed between the third and second conduits; and the second pressure regulator being placed between the fourth and fifth conduits.

In a possible embodiment, the means for supplying micro-particles of a cutting oil in liquid state, comprise: a third entry configured to introduce pressurised air into a seventh conduit of the device; a tank configured to supply cutting oil in liquid state through an eighth conduit; a third solenoid valve configured to control the passage of pressurised air to the seventh conduit; a fourth solenoid valve to control the passage of cutting oil to the eighth conduit; a coupling designed to join said seventh and eighth conduits in a single conduit; and a nozzle placed at the end of the exit of said conduit, the nozzle being configured to pulverise the cutting oil by the Venturi effect so it can be injected.

In a more specific embodiment, the coupling is a T-shaped coupling, in which the seventh and eighth conduits are joined axially in that conduit. Preferably, the exit conduit of the T-shaped coupling is a hose with two coaxial channels: an internal conduit configured so the cutting oil can flow in liquid state, the internal conduit being surrounded by an outer wall, configured so that the pressurised air can flow between the internal conduit and the outer wall.

In addition, the means for supplying the micro-particles of a cutting oil in liquid state can comprise a third pressure regulator located between a ninth conduit located at the exit of the third entry and a tenth conduit located at the entry of the third solenoid valve.

In a possible embodiment, the device also comprises control means configured to control both the first subsystem and the second subsystem.

In a possible embodiment, the device comprises a plurality of magnetic legs configured to couple to a machine-tool.

In a second embodiment of the invention, aa method of operating a device like the one above is provided. The method comprises the following stages for the injection of CO₂ in liquid state through the exit coupling (first exit): opening the second solenoid valve to control the passage of CO₂ in gaseous state between the fifth conduit and the sixth conduit; pressurising the first, second and third conduits above the triple point of the CO₂; opening the first solenoid valve controlling the passage of CO₂ in liquid state between the first conduit and the third conduit; injecting CO₂ in liquid state through the first exit.

In a possible embodiment, the method comprises the following stages to interrupt the injection of CO₂ in liquid state through the first exit: closing the first solenoid valve to control the passage of CO₂ in liquid state; sweeping at least the second and third conduits of CO₂ in liquid state by injecting CO₂ in gaseous state pressurised above the triple point; closing the second solenoid valve that controls the CO₂ in gaseous state.

In a possible embodiment, the method comprises the following stages for simultaneous injection of CO₂ in liquid state and a spray formed by micro-particles of a cutting oil in liquid state: opening the second solenoid valve to control the passage of CO₂ in gaseous state and the third solenoid valve that controls the passage of pressurised air towards the seventh conduit; pressurising the first, second and third conduits above the triple point of the CO₂; opening the first solenoid valve controlling the passage of CO₂ in liquid state and the fourth solenoid valve controlling the passage of the cutting oil.

In a possible embodiment, the method comprises the following stages to interrupt the simultaneous injection of CO₂ in liquid state and a spray formed by lubricant micro-particles in liquid state: closing the first solenoid valve that controls the passage of CO₂ in liquid state and the fourth solenoid valve that controls the passage of the cutting oil; sweeping at least the second and third conduits of CO₂ in liquid state by injecting CO₂ in gaseous state pressurised above the triple point; closing the second solenoid valve to control the passage of CO₂ in gaseous state and the third solenoid valve controlling the passage of the pressurised air.

This device (and method) not only presents a solution for the formation of dry ice inside the conduits through which the CO₂ in liquid state passes, but also allows simultaneous use of cryogenic cooling assisted by micro-particles in the form of spray, while also presenting other clear advantages versus the equipment described above in the state of the technique. Thanks to the electronic control of all the solenoid valves by the PLC, this equipment allows separate use of the two technologies that comprise it; in other words, the use of cryogenic cooling or lubrication by MQL, depending on machining needs. On the other hand, it has not been developed for a single operation or specific machine-tool; rather, the equipment is fully portable and interchangeable and can be

adapted to any machine-tool easily and flexibly to be used in the most common machining operations. Moreover, this system allows using cryogenic cooling not only outside the tool, but also inside the tool. In fact, as regards milling, when cryogenic cooling is used inside the machine, it is used as a heat exchanger, resulting in considerable savings of CO₂ in liquid state and an increase in the useful life of the machine. When the two subsystems are used simultaneously and both fluids are injected in the cutting area, all the cooling power of the CO₂ is used, not only to cool said cutting area, but also to cool the oil micro-particles (i.e., the lubricant). Thus, the oil micro-particles reach temperatures near -78°C at the same time that the cutting temperature drops. On the other hand, since there is no pressurised tank containing cutting oil, oil refilling in the storage tank can be done while it is being used without entailing any risk or the need to stop the equipment to refill the tank. Lastly, thanks to the electronic control system governed by the PLC, cutting oil consumption is fully controlled by supplying the exact flow of oil needed at each moment.

In sum, this invention achieves both separate and combined injection of CO₂ in liquid state and an aerosol of oil micro-particles. In addition, the equipment installation can be completely "plug&play", both in new and existing machine-tools and it can be used in any of the most common machining operations.

These and other advantages of the invention will become apparent from the description that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

To complement the description and with the aim of helping to provide a better understanding of the characteristics of the invention in accordance with an example of a practical embodiment of the invention, the following set of figures is included as an integral part of the description. What is represented in these figures is not restrictive and is for illustrative purposes only.

Figures 1A to 1E depict different views or details of the device in accordance with a possible embodiment of the invention. Figure 1A shows a view of the front part of the device. Figures 1B and 1C show details of some of the connections of the device. Figure 1D shows a perspective view of the device, in which the bottom of the device can be seen. Figure 1E shows the components that are inside the housing of the device.

Figure 2 shows a flowchart of an algorithm used to control the equipment in accordance with a possible embodiment of the invention.

Figure 3 shows a sketch of the equipment in accordance with a possible embodiment of the invention.

Figure 4 shows two views (side and front) of the coupling (2-channel fitting) used to couple the coupling exit of the pressurised air and cutting oil channels of the lubrication subsystem to the hose that leads to the nozzle, according to a possible embodiment of the invention.

- 5 Figure 5 shows a lengthwise view (left side) and a cross-section view (right side) of the 2-channel nozzle located at the end of the hose used in the MQL subsystem, according to a possible embodiment of the invention.

Figure 6 shows an example of use of the device externally to the part that is being machined.

- 10 Figures 7A and 7B show an example of use of the device internally to the tool used for machining.

DESCRIPTION OF ONE MODE OF THE INVENTION'S EMBODIMENT

- 15 In this text, the term 'comprises' and its variants (such as 'comprising', etc.) should not be interpreted in an excluding sense, that is, these terms do not exclude the possibility that what is described may include other elements, steps, etc.

- 20 In the context of the present invention, the term 'approximately' and its family of terms (such as 'approximate', etc.) should be understood as indicative values very close to those accompanying the previously mentioned term. That is to say, a deviation from an exact value should be accepted within acceptable limits, since a person skilled in the art will understand that said deviation from the indicated values is inevitable due to inaccuracies of measurement, etc. The same applies to the terms 'around' and 'substantially'.

- 25 The following description should not be interpreted as restrictive, but is provided to describe the general principles of the invention. The following embodiments of the invention are described as examples, with reference to the figures mentioned, which show devices, methods and results, depending on the invention.

- 30 Figures 1A to 1E depict several views of a device 100 in accordance with a possible embodiment of the invention. The device 100 is formed by a housing 30 that houses several components and by other components located outside the housing 30. The internal and external components form the device 100. The device 100 is portable and easy to couple to any machine-tool to assist in the most common machining operations. The device 100 is completely separate from the machine. For "plug&play" installation, the device 100 is equipped with magnetic legs, not illustrated, that are used to couple it to any machine without difficulty. The various components of the device 100 are controlled by control means 22. These control means 22, which are configured to automate electro-mechanical processes, comprise processing means, such as a computer. Preferably, these control means 22 are a PLC (*Programmable Logic*
- 35

Controller). Figure 2 shows a flowchart of an algorithm used by the control means 22. The algorithm is described in detail further along. Figure 3 shows a block diagram sketch of the device 100 illustrated in Figures 1A-1E.

The device 100 is divided into two subsystems 110, 120 that are completely differentiated but governed electronically by the control means 22, preferably a PLC, shared by the two subsystems. A first subsystem 110 is in charge of supplying CO₂ in liquid state (also known as the regulation subsystem for CO₂ in liquid state) and a second subsystem 120 is in charge of pulverising the cutting oil to form a spray with the pulverised particles (also known as the cutting oil pulverising subsystem).

The first subsystem 110 has been developed in such a way as to prevent the formation of dry ice inside the conduits that CO₂ travels through in liquid state (conduits "a", "b" and "g" in Figure 3). In conduits "a" and "b", the CO₂ in liquid state is at ambient temperature. The temperature of the CO₂ in liquid state drops when it passes through the pressure regulator 11. The temperature drops due to the drop in pressure. And once the CO₂ in liquid state is injected (through the exit 18), it reaches -78°C because it is completely depressurised. The cryogenic temperature of CO₂ is -78°C. To prevent the formation of dry ice, this subsystem 110 is equipped with two entry channels (entry or input 1 that supplies the CO₂ in liquid state, from which channel or conduit "a" is accessed and the entry or input 2 that supplies CO₂ in gaseous state, from which channel or conduit "d" is accessed) that are communicated as explained further on, and an exit channel or conduit "g". An end of a hose or conduit, not illustrated because it is not part of device 100, will be connected to said coupling 18. The other end of the hose or conduit will be connected either to a nozzle, if the intention is to use CO₂ supplied by the subsystem 110 as external cutting fluid, or to the entry of the coupling provided with the machine-tool being used, with the intention of injecting said CO₂ internally in the tool.

Figure 6 shows an example of use of the device in the first option (external use). In other words, in this example a hose has been connected to the coupling 18 and the other end of the hose has been connected to a nozzle 185 to externally cool the part that is being machined. Also illustrated is the MQL nozzle 19, which supplies pulverised oil externally. Figure 7 shows an example of use of the device in the second option (internal use). As shown, only liquid CO₂ passes through the inside of the tool to be cooled, while the pulverised oil is always supplied externally, injected through the nozzle 19. The liquid CO₂ passes through an internal conduit of the machine. The liquid CO₂ exits through some openings 300 of the tool coupled to the machine. The machine and its internal conduit lie outside the scope of the present invention. That is, the cutting oil for lubrication is always supplied externally to the machine, while the liquid CO₂ for cooling can be supplied either externally (Figure 6) or internally (Figure 7).

Returning to Figure 3, each entry channel "a", "d" of the first subsystem 110 is

controlled electronically by a closing solenoid valve 7, 8, respectively. More precisely, the closing solenoid valve 8 of the conduit of CO₂ in gaseous state is not located on conduit "d" itself, but on its extension, after a pressure regulator 4, on the conduit referenced as "h". The CO₂ in gaseous state is used to pressurise the conduits of the subsystem above the triple point of the CO₂ (0.511 MPa and -56.4°C) before injecting the CO₂ in liquid state (through the coupling 18). The conduits that really need to be pressurised above the triple point to prevent the formation of dry ice are conduits "a", "b" and "g", since the liquid CO₂ will be travelling through these. For example, as regards conduit "a": when a new bottle of CO₂ in liquid state is going to be connected to the device 100 via the coupling 1, before opening the new bottle so the liquid CO₂ reaches the solenoid valve 7, it may be necessary to pressurise said conduit "a" above the triple point to prevent the formation of dry ice. This pressure (above the triple point) is reached by the action of the CO₂ in gaseous state introduced through the coupling 2. In other words, conduit "d" has the pressure of the container or bottle of gaseous CO₂ (around 5-6 MPa). This pressure is reduced by the pressure regulator 4 to a value above the triple point, which is consequently the pressure in conduits "h" and "c" so it can be transmitted to conduits "a", "b" and "g". In sum, all the conduits of the subsystem 110 are pressurised above the triple point of the CO₂. To achieve that degree of pressurisation in the conduits, the solenoid valve 7, which controls the entry of CO₂ in liquid state is bypassed with a no-return valve 15, allowing the passage of the CO₂ in gaseous state upstream of said solenoid valve 7 before introducing CO₂ in liquid state in the device through the coupling 1. Thus, all the conduits of the subsystem 110 are pressurised, while preventing the liquid CO₂ from leaking through said bypass once the subsystem is supplied with CO₂ in liquid state. In other words, conduits "a" and "b" are communicated via the no-return valve 15 so that, if the solenoid valve 7 is closed, flow is allowed from conduit "b" towards conduit "a" but not the other way around. In channel or conduit "b", the CO₂ in liquid state is at a pressure of around 50-60 bar (that is, 5.0-6.0 MPa), so it has to be passed through a pressure regulator 11 to lower the pressure to a value close to but above the triple point of the CO₂ (0.511 MPa and -56.4°C). When CO₂ in gaseous state passes through conduits "a", "b" and "g", its pressure is above the triple point from the moment it passes through the pressure regulator 4.

Conduits "a" and "d" are preferably equipped with the shut-off valves 13, 14 (or depressurising valves) to depressurise the system if necessary; e.g., to change a component of the device 100.

On the other hand, channels "c" (of CO₂ in gaseous state) and "b" (of CO₂ in liquid state) must also be connected or communicated by a no-return valve 16, so that the no-return valve 16 can allow circulation of the CO₂ in gaseous state towards the solenoid valve 7 but not the other way around. In other words, this prevents the CO₂ in liquid state from flowing towards the solenoid valve 8. The reason for this is that during

the injection cycle of CO₂ in liquid state, in the initial stage, the solenoid valve 8, which controls the CO₂ in gaseous state, is opened thereby pressurising the entire subsystem 110 above the triple point.

Once all the conduits of the subsystem 110 are pressurised with CO₂ in gaseous state above the triple point, the solenoid valve 7, which controls the passage of the CO₂ in liquid state - which is preferably at a pressure between 5 and 6 MPa - opens and allows the passage of the CO₂ in liquid state, sweeping the CO₂ in gaseous state towards the exit channel "g" on the one hand and towards the no-return valve 16. Without this valve 16, the CO₂ in gaseous state would be driven by the CO₂ in liquid state and the entire channel containing CO₂ in gaseous state (channels "c", "h" and "d") would end up filled with CO₂ in liquid state. Thanks to this combination, the CO₂ in liquid state can be conducted to exit channel "g" (all the way to the coupling 18) without formation of dry ice inside the conduits and, consequently, no obstructions. In other words, the formation of dry ice is prevented from the liquid CO₂ in conduits "a", "b" and "g"; in other words, in all the conduits that the CO₂ in liquid state passes through downstream from the solenoid valve 7 and the no-return valve 15.

Lastly, to shut off the injection of CO₂ in liquid state and prevent it from expanding inside the conduits it passes through, the solenoid valve 7, which controls the passage of the CO₂ in liquid state, must be closed; this will allow the CO₂ in gaseous state to sweep all the conduits or channels "b" and "g" of CO₂ in liquid state and, once the conduits do not contain any more CO₂ in liquid state, valve 8, which controls the entry of CO₂ in gaseous state, closes. This ensures that when the solenoid valve 7 is closed, the residual CO₂ in liquid state does not turn into dry ice when the pressure drops because the supply of CO₂ in liquid state has been interrupted. Note that in this case (when there is CO₂ in liquid state in conduit "a"), the CO₂ in gaseous state does not sweep conduit "a", which continues to contain CO₂ in liquid state at a pressure between 4.5 and 6 MPa (depending on the level of CO₂ in liquid state in the tank or bottle supplying conduit "a"), which is why there is no danger of dry ice formation. Note that the pressure in conduit "a" varies according to level of CO₂ in liquid state in the container or bottle that supplied this conduit "a". For example, when the bottle of CO₂ in liquid state is full, the pressure in this conduit is around 6 MPa, but drops to approximately 4.5 MPa as the level in the bottle drops, which is usually when the bottle has to be changed.

Moreover, the subsystem 110 for regulating the CO₂ in liquid state preferably has two pressure regulators 4, 11 to control both the intake pressure of the CO₂ in gaseous state (pressure regulator 4) and the pressure in exit channel "g" when the CO₂ travels in liquid state (pressure regulator 11). The pressure regulator 4 is placed on the channel that is supplied (through entry 2) with CO₂ in gaseous state, upstream from the solenoid valve 8, with the purpose of lowering the intake pressure of CO₂ in gaseous state to a pressure close to, but somewhat higher than the triple point. In other words,

the pressure regulator 4 is located between channels "d" and "h". Preferably, the pressure regulator 4 is designed to lower the pressure of CO₂ in gaseous state to a range from 0.6 to 1.5 MPa, more preferably to a range from 0.8 to 1.3 MPa. For example, in a specific embodiment, this pressure regulator 4 is designed to lower the pressure of CO₂ in gaseous state to approximately 1 MPa. This pressure regulator 4 is preferably a single or double diaphragm so that once the solenoid valve 8 closes, the supply pressure (pressure at entry 2) will not be transmitted to the interior of the subsystem 110. The other pressure regulator 11 is located between channel or conduit "b" and exit channel or conduit "g" (which leads to the coupling 18), and which is adjusted so that the pressure of the CO₂ in liquid state drops to a level slightly above that of the CO₂ in gaseous state, thereby satisfying the desired injection conditions. Preferably, the pressure regulator 11 is designed to lower the pressure of CO₂ in liquid state to a range from 0.6 to 1.8 MPa, more preferably to a range from 0.8 to 1.6 MPa. For example, in a specific embodiment, this pressure regulator 11 is designed to lower the pressure of CO₂ in liquid state at the exit 18 to approximately 1.2 MPa. Conduit "b" communicates the solenoid valve 7 with the pressure regulator 11 and conduit "g" communicates the pressure regulator 11 with the injection coupling 18, thereby connecting the device 100 with the pertinent CO₂ in liquid state injection system. This injection system for CO₂ in liquid state lies outside the scope of the present invention. As an example, it can be comprised by a conduit that ends in a converging nozzle, similar to those used for the cutting fluid, or by a connection that communicates with the internal channel of the cutting tool to be used. The pressure regulator 11 must be adjusted so the exit pressure is above the triple point of the CO₂ (0.511 MPa), preferably between 0.6 and 1.8 MPa, more preferably between 0.8 and 1.6 MPa.

Preferably, the regulation subsystem of CO₂ in liquid state 110 is equipped with a safety valve 17 on conduit "c", designed to supply (with a setting) a pressure slightly higher than (preferably above 0.7 MPa, more preferably between 0.8 and 2 MPa; for example, around 1.5 MPa) the working pressure of the CO₂ in gaseous state to prevent damaging the system if there is a failure in the no-return valve 16, which connects the two channels "c" and "b" or the pressure regulator 4 located on the channel that contains CO₂ in gaseous state. That is, the safety valve 17 is needed to prevent overpressure that may occur for reasons not involving normal use of the device 100. The pressure supplied by the safety valve 17 must be somewhat higher than the pressure of the CO₂ in gaseous state; otherwise, the valve 17 will be enabled as soon as solenoid valve 8, which allows the passage of CO₂ in gaseous state, is opened.

As shown in Figures 1A-1E, part of the subsystem 110 for the supply of CO₂ in liquid state is located in the housing 30 and part is located outside the housing. Thus, the connections or couplings 1, 2 used for the entry in the device of liquid CO₂ and gaseous CO₂, respectively, the pressure regulators 4, 11, the depressurising valves 13, 14, the rated safety valve 17 and the connection or coupling 18 for device injection

of liquid CO₂ (for cooling) are all located outside the housing 30. The control means 22, shared by both subsystems, are also located outside the housing 30. On the contrary, inside the housing 30 and protected by it are the solenoid valve 7 of liquid CO₂, the solenoid valve 8 of gaseous CO₂, the no-return valves 15, 16 and the various conduits of liquid and gaseous CO₂ that pass through the subsystem 110 from its entries 1, 2 to the exit 18.

The second subsystem 120 (in charge of pulverising the cutting oil to form a spray of cutting oil micro-particles in liquid state) has been developed as a minimum quantity lubrication (MQL) technique with two channels, which lies outside the scope of the present invention; therefore, up until the moment it is injected in the corresponding tool or machine, the oil is not pulverised by a nozzle 19 due to the Venturi effect. This eliminates the limits on the length of the channels presented in traditional, single-channel systems, a restriction derived from the condensation of the micro-particles on the walls of the conduits.

This cutting oil pulverising subsystem 120 has an entry or coupling 3 for pressurised air to a first channel or conduit "i" of the subsystem 120. Preferably, after this entry 3, in conduit or channel "i" there is a pressure regulator 5 that controls the pressure of the air supply of the subsystem 120. Normally, the pressurised air entry or coupling 3 is connected to a general pressurised air circuit that is usually at a pressure between 0.6 and 1 MPa. The pressure regulator 5 is then in charge of lowering that pressure. That is, the pressure regulator 5 controls the pressure of the air reaching conduit or channel "j", so the pressure in channel "j" is around 0.5 MPa. The subsystem also comprises a tank 6 that contains a cutting fluid, which accesses a second channel or conduit "k" of the subsystem 120. As an expert knows, a cutting fluid is a product comprising one or more oils, which is used as a lubricant and coolant in shaving removal machining operations. The cutting fluid may or may not contain water. It is also frequently called cutting oil. The present invention uses a conventional "water-free" cutting oil that lies outside the scope of the invention. The subsystem also has two solenoid valves 9, 10 that control the passage of air and cutting oil, respectively. The solenoid valve 9, which controls the passage of air, is preferably located after the pressure regulator 5, that is, between conduits or channels "j" and "f", while the solenoid valve 10, which controls the passage of cutting fluid is preferably located after the cutting fluid tank 6, that is, between conduits or channels "k" and "e". After this, the two channels through which the pressurised air (channel "f") and cutting fluid (channel "e") travel are joined axially by a coupling or connection 12. Preferably, a T-shaped coupling is used for this connection 12. In other words, conduits "f" and "e" connect the solenoid valves 9, 10, respectively, with the T-shaped coupling 12. Preferably, the selected conduit "e" is made in a flexible material or flexible materials. More preferably, conduit "e" is manufactured in flexible polymer materials, such as teflon, to attenuate load losses caused by oil travelling through its interior. As for the rest of the conduits of the device

100, these can be either rigid or flexible, as long as they withstand the operating pressures.

The coupling 12 has two entries, preferably designed so conduit "f" connects to the coupling 12 by means of an adaptor or similar coupling, while conduit "e" is preferably inserted inside it by means of an airtight coupling to prevent air leaks through the walls of said connection. Figure 4 illustrates a possible adaptor 125. Inside the coupling 12, the air introduced from conduit "f", as well as conduit "e", are conducted towards the exit of the coupling 12. The exit of this coupling or connection 12 is a coaxial channel or conduit 20 used to conduct pressurised air and cutting oil. In a possible embodiment, this coaxial conduit 20 is a hose with two coaxial channels. That is, the hose 20 is comprised by an internal conduit - preferably flexible - that is surrounded by an outer wall so the cutting oil can flow on the inside and the air can flow on the outside. This double coaxial conduit 20 conducts the fluids to a nozzle 19 located at the end of coaxial conduit 20. The nozzle 19, using the Venturi effect, pulverises the oil transported from the oil tank 6, forming micro-particles of pulverised oil. Therefore, at the exit, nozzle 19 supplies pressurised air with pulverised oil.

Preferably, the exit of the coupling 12 comprises an adaptor 125 as shown in Figure 4, which connects the coupling 12 with the hose 20, so the air surrounds oil conduit "e" coaxially, which therefore remains inside the adaptor 125. The cross-section view at the right of Figure 4 shows the oil channel "e" surrounded coaxially by the conduit or channel 127, which contains air.

Lastly, the exit hose or conduit 20 is connected at one end to the adaptor 125 of the exit of the coupling 12 and provided with a nozzle 19 at the end, like the MQL nozzle illustrated in Figure 5. On the left, Figure 5 shows a lengthwise view of the nozzle 19, and the right side shows a cross-section view (front) of the nozzle 19.

As shown in Figures 1A-1E, part of the oil pulverisation system 120 is located in the housing 30 and part is located outside the housing. Thus, the connection or coupling 3 used to introduce pressurised air into the device, the cutting oil tank 6, the pressure regulator 5 and the MQL connection or nozzle 19 are located outside the housing 30. On the contrary, inside the housing 30 and protected by it are the air solenoid valve 9, the cutting oil solenoid valve 10, the connection or coupling 12 and the hose 20 that connects the coupling 12 to the nozzle 19.

When this subsystem 120 starts operating, the solenoid valve 9 located between the conduit or channel "j" and the conduit or channel "f" opens, the air starts circulating through them and the solenoid valve 10 located between the conduit or channel "k" and the conduit or channel "e" also opens immediately and the cutting oil starts circulating through them. However, the latter solenoid valve 10 opens intermittently, that is, it changes status continuously at a frequency that will determine the flow of cutting oil that is injected. Thus, the flow of cutting oil that passes through the conduit or channel

"e" to the coupling or connection 12 and therefore to the nozzle 19, is controlled by pulses. With this pulse control method, use of valves and air meters used by traditional MQL dual-channel systems is avoided; control over the flow of cutting oil is thus improved.

- 5 For the device 100 to run properly, it must be supplied with CO₂ in liquid state through the corresponding entry or coupling 1, with CO₂ in gaseous state through the corresponding entry or coupling 2 and with pressurised air through the corresponding entry or coupling 3. In addition, the tank 6 must contain a cutting fluid that can be pulverised. In a possible embodiment, the cutting fluid is cutting oil with a kinematic
10 viscosity of 88 mm²/s at 20°C and a density of 0.92 g/cm³. In a possible embodiment, the entries or couplings 1, 2 and 3 are adaptors. Alternatively, the entries or couplings 1, 2 and 3 are implemented using any connection system that can be used to communicate the corresponding supply conduits and the proper components of the device. The pressure at which the CO₂ in gaseous state is introduced (through entry 2
15 to conduit "d") must be higher than the pressure of the triple point (0.511 MPa). Preferably, the CO₂ in gaseous state in conduit "d" is approximately at a pressure between 4.5 and 6 MPa. The intake pressure through conduit "a" of the CO₂ in liquid state must be at least slightly higher than the pressure of the CO₂ in gaseous state to optimise the cooling capacity of the CO₂ in liquid state once it is injected in the cutting
20 area. Preferably, the intake pressure of liquid CO₂ through conduit "a" varies between 4.5 and 6 MPa, depending on the level of CO₂ in liquid state in the container or bottle that supplies the fluid to conduit "a" through coupling 1.

Lastly, the pressure of the air used to supply the MQL subsystem (subsystem 120) through the coupling 3 is preferably between 0.1 and 1 MPa, so it can cause enough
25 depression due to the Venturi effect in the nozzle 19 to drag the cutting oil contained in the tank 6. In a more preferred embodiment, the pressure chosen as optimal pressure in conduits "j" and "f" is around 0.5 MPa.

In embodiments of the invention, the entry or coupling 1 is connected to the solenoid valve 7 directly via conduit "a". However, the couplings or entries 2 and 3 are
30 connected previously to their corresponding pressure regulators 4 and 5 and these are connected in turn to their corresponding solenoid valves 8 and 9. Finally, the tank 6 is connected to the solenoid valve 10, which is recommended to be installed at the bottom of the tank. Alternatively, the solenoid valve 10 can be placed in another part of the tank.

- 35 The equipment is fully controlled by control means 22, preferably implemented by a PLC that is preferably programmed using the algorithm described in Figure 2. This algorithm is used to govern the four solenoid valves 7, 8, 9 and 10 according to operational requirements. It allows the use of cryogenic cooling technology and minimum quantity lubrication both together and separately, and can be used to control

the flow of oil or some other cutting fluid used during micro-pulverisation.

The control algorithm in Figure 2 is implemented as follows: Once the algorithm is started (40), a decision has to be made (41) whether to activate the MQL subsystem or not (i.e., subsystem 120). That is, it has to be decided whether to inject micro-pulverised cutting fluid or not. If at this stage (41) it is decided that subsystem 120 will be activated, the solenoid valve 9 is activated (42) and then the solenoid valve 10 is activated (43). A query is then submitted (44) to find out whether to change the flow of cutting fluid. If so, the flow of cutting fluid is changed (45) and querying continues (44) until changing the flow of the cutting fluid is no longer required. Another query is then submitted (46) to decide whether to disconnect subsystem 120. If not, the query (44) is repeated to decide whether to change the flow of cutting oil. If, on the contrary, subsystem 120 has to be disconnected, the solenoid valve 10 is deactivated (47) and then the solenoid valve 9 is deactivated (48). Then the algorithm submits another query (41) to find out whether to activate subsystem 120 or not.

If, on the contrary, at that stage (41) it is decided not to activate subsystem 120, then the algorithm queries (51) to decide whether to activate the cryogenic system only (i.e., subsystem 110) or not. If at this stage (51), it is decided to activate subsystem 110 only, the solenoid valve 8 is activated (52) and then the conduits are pressurised (53). The solenoid valve 7 is then activated (54). Another query is submitted (55) to decide whether to disconnect subsystem 110. If not, another query (55) is submitted to find out whether the decision has changed. If, on the contrary, subsystem 110 has to be disconnected, the solenoid valve 7 is deactivated (56) and then the liquid CO₂ is eliminated (57) and the solenoid valve 8 is deactivated (58). The algorithm then queries again (51) to find out whether to activate subsystem 110 alone or not.

If at this stage (51) it is decided that subsystem 110 is not going to be activated, then the algorithm submits a query (61) to decide whether to activate the cryogenic subsystem (i.e., subsystem 110) and subsystem 120 simultaneously. If at this stage (61) it is decided to activate the two subsystems 110 and 120, the solenoid valves 9, 8 are activated (62) and then the conduits are pressurised (63). The solenoid valves 7, 10 are then activated (64). The query (65) is repeated to decide whether to disconnect the two subsystems 110, 120. If not, another query (69) is submitted to decide whether to change the flow of the cutting fluid. If so, the flow of cutting fluid is changed (70) and querying (69) continues until changing the flow of the cutting fluid is no longer required. The query (65) is submitted again to decide whether the two subsystems 110 and 120 should be disconnected. If yes, the solenoid valves 7, 10 are deactivated (66), followed by the elimination (67) of liquid CO₂ and then the solenoid valves 9, 8 are deactivated (68). Then the algorithm queries again (61) to find out whether to activate the two subsystems 110, 120 simultaneously or not. If no, the algorithm finishes (71).

In other words, as seen in the algorithm outlined in Figure 2, the device 100 can make

the two subsystems 110, 120 work simultaneously (stage 61) or make the subsystem 120 work alone (stage 41) or make the subsystem 110 work alone (stage 51). For example, operation of the two subsystems 110, 120 can be alternate.

5 The device 100 is portable and installation can be completely "plug&play", both in new and existing machine-tools and it can be used in any of the most common machining operations. The device 100 is completely separate from the machine.

10 Furthermore, the invention is not limited to the specific embodiments described, but also covers, for example, variations performed by the expert on the material (for example, regarding selection of materials, dimensions, components, configuration, etc.), giving rise to the claimed variants.

CLAIMS

1.-A device (100) for cooling and lubricating a tool during a chip removal machining process, characterized in that it comprises:

– a first subsystem (110) for cryogenic cooling that comprises: a first entry (1) configured to introduce CO₂ in liquid state in a first conduit (a) of the device (100); a first exit (18) configured to supply CO₂ in liquid state from a second conduit (g) of the device (100); a third conduit (b) located between said first conduit (a) and second conduit (g); and means (2, 7, 8, 4, 11, 15, 16, 13, 14 d, h, c) for preventing the formation of dry ice in said first, second and third conduits (a, g, b);

– a second subsystem (120) for lubrication that comprises means (3, 5, 6, 9, 10, 12, 19, i, j, f, k, e, 20) for supplying micro-particles of a cutting oil in liquid state;

said first subsystem (110) and second subsystem (120) being independent from each other and said first subsystem (110) and second subsystem (120) being configured to operate both simultaneously or either one alone (110, 120).

2.-The device (100) of claim 1 wherein said means (2, 7, 8, 4, 11, 13, 14, 15, 16, d, h, c) for preventing the formation of dry ice in said first, second and third conduits (a, g, b) are implemented by means of means for pressurising said conduits (a, g, b) above the triple point of the CO₂ before injecting the CO₂ in liquid state through the exit (18).

3.-The device (100) of claim 2, wherein said means for pressurising said first, second and third conduits (a, g, b) above the triple point of the CO₂ comprises a second entry (2) configured to introduce CO₂ in gaseous state in a fourth conduit (d) of the device (100); a fifth conduit (h) placed after said fourth conduit (d); a first solenoid valve (7) configured to control the passage of CO₂ in liquid state between the first conduit (a) and the third conduit (b); a second solenoid valve (8) configured to control the passage of CO₂ in gaseous state between the fifth conduit (h) and a sixth conduit (c); a first no-return valve (15) disposed to communicate said first conduit (a) and third conduit (b), so that when said first solenoid valve (7) is closed, passage of CO₂ in gaseous state is allowed from the third conduit (b) towards the first conduit (a) before introducing the CO₂ in liquid state through the first entry (1); and a second no-return valve (16) disposed to communicate said third (b) and sixth conduit (c), so that when said second solenoid valve (8) is open, circulation of the CO₂ in gaseous state is allowed from the sixth conduit (c) towards the first solenoid valve (7) but not the other way around, impeding the advance of CO₂ in liquid state towards the second solenoid valve (8).

4.-The device (100) of claim 3, wherein said means for pressurising said first, second and third conduits (a, g, b) above the triple point of the CO₂ also comprise a first shut-off valve (13) placed on the first conduit (a) and a second shut-off valve (14) placed on the fourth conduit (d), configured to depressurise the first subsystem (110) if

necessary.

5.- The device (100) of either claims 3 or 4, wherein said means for pressurising said first, second and third conduits (a, g, b) above the triple point of the CO₂ also comprise a first pressure regulator (11) for CO₂ in liquid state and a second pressure regulator (4) for CO₂ in gaseous state, said first pressure regulator (11) being placed between the third (b) and second (g) conduits; and said second pressure regulator (4) being placed between said fourth (d) and fifth (h) conduits.

6.- The device (100) according to any of the previous claims, wherein said (3, 5, 6, 9, 10, 12, 19, i, j, f, k, e, 20) for supplying micro-particles of a cutting oil in liquid state, comprise: a third entry (3) configured to introduce pressurised air into a seventh conduit (f) of the device (100); a device (6) configured to supply cutting oil in liquid state through an eighth conduit (e); a third solenoid valve (9) configured to control the passage of pressurised air to the seventh conduit (f); a fourth solenoid valve (10) to control the passage of cutting oil to the eighth conduit (e); a coupling (12) designed to join said seventh (f) and eighth (e) conduits in a single conduit (20); and a nozzle (19) placed at the end of the exit of said conduit (20), said nozzle (19) being configured to pulverise the cutting oil by the Venturi effect so it can be injected.

7.- The device (100) of claim 6, wherein said coupling (12) is a T-shaped coupling where said seventh (f) and eighth (e) conduits are joined axially to said conduit (20).

8.- The device (100) of claim 7, wherein said conduit (20) is a hose with two coaxial channels: an internal conduit configured so the cutting oil can flow in liquid state, said internal conduit being surrounded by an outer wall, configured so the pressurised air can flow between the internal conduit and the outer wall.

9.- The device (100) of any of the claims 6 to 8, wherein said means (3, 5, 6, 9, 10, 12, 19, i, j, f, k, e, 20) for supplying micro-particles of a cutting oil in liquid state, comprise a third pressure regulator (5) located between a ninth conduit (i) placed at the exit of said third entry (3) and a tenth conduit (j) placed at the entry of said third solenoid valve (9).

10.- The device (100) according to any of the previous claims, further comprising control means (22) configured to control both the first subsystem (110) and the second subsystem (120).

11.- The device (100) according to any of the previous claims, comprising a plurality of magnetic legs configured to couple to a machine-tool.

12.- A method of operating a device (100) for cooling and lubricating a tool during a chip removal machining process, comprising said device (100) a first subsystem (110) for cryogenic cooling, comprising: a first entry (1) configured to introduce CO₂ in liquid state in a first conduit (a) of the device (100); a first exit (18) configured to supply CO₂ in liquid state from a second conduit (g) of the device (100); a third conduit (b) located between said first (a) and second conduit (g); and means (2, 7, 8, 4, 11, 13, 14, 15, 16,

d, h, c) for preventing the formation of dry ice in said first, second and third conduits (a, g, b); and a second subsystem (120) for lubrication, comprising means (3, 5, 6, 9, 10, 12, 19, i, j, f, k, e, 20) for supplying micro-particles of a cutting oil in liquid state; wherein said means (2, 7, 8, 4, 11, 13, 14, 15, 16, d, h, c) for preventing the formation of dry ice comprise means for pressurising said first, second and third conduits (a, g, b) above the triple point of the CO₂, wherein said means for pressurising said conduits (a, g, b) comprising: a second entry (2) configured to introduce CO₂ in gaseous state in a fourth conduit (d) of the device (100); a fifth conduit (h) located after said fourth conduit (d); a first solenoid valve (7) configured to control the passage of CO₂ in liquid state between the first conduit (a) and the third conduit (b); a second solenoid valve (8) configured to control the passage of CO₂ in gaseous state between the fifth conduit (h) and a sixth conduit (c); a first no-return valve (15) placed to communicate said first conduit (a) and third conduit (b); and a second no-return valve (16) placed to communicate said third conduit (b) and sixth conduit (c); and wherein said means (3, 5, 6, 9, 10, 12, 19, i, j, f, k, e, 20) for supplying micro-particles of a cutting oil in liquid state comprise: a third entry (3) configured to introduce pressurised air into a seventh conduit (f) of the device (100); a tank (6) configured to supply cutting oil in liquid state through an eighth conduit (e); a third solenoid valve (9) configured to control the passage of pressurised air in the seventh conduit (f); a fourth solenoid valve (10) for controlling the passage of cutting oil in the eighth conduit (e); a coupling (12) designed to join said seventh conduit (f) and eighth conduit (e) in a single ninth conduit (20), and a nozzle (19) placed at the output end of said ninth conduit (20), said nozzle (19) being configured to pulverise the cutting oil by the Venturi effect so it can be injected,

the method comprising the following stages for the injection of CO₂ in liquid state through the coupling (18):

- opening the second solenoid valve (8) to control the passage of CO₂ in gaseous state between the fifth conduit (h) and the sixth conduit (c);
- pressurising the first, second and third conduits (a, g, b) above the triple point of the CO₂;
- opening the first solenoid valve (7) that controls the passage of CO₂ in liquid state between the first conduit (a) and the third conduit (b);
- injecting CO₂ in liquid state through the first exit (18).

13.- The method of claim 12, which comprises the following stages to interrupt the injection of CO₂ in liquid state through the first exit (18):

- closing the first solenoid valve (7) that controls the passage of CO₂ in liquid state;
- sweeping at least the second and third conduits of CO₂ in liquid state (b, g) by

injecting CO₂ in gaseous state pressurised above the triple point;

- closing the second solenoid valve (8) that controls the CO₂ in gaseous state.

14.- The method for either claim 12 or 13, which comprises the following stages for simultaneous injection of CO₂ in liquid state and a spray formed by micro-particles of a cutting oil in liquid state:

- opening the second solenoid valve (8) to control the passage of CO₂ in gaseous state and opening the third solenoid valve (9) controlling the passage of pressurised air towards the seventh conduit (f);

- pressurising the first, second and third conduits (a, g, b) above the triple point of the CO₂;

- opening the first solenoid valve (7) that controls the passage of CO₂ in liquid state and opening the fourth solenoid valve (10) that controls the passage of the cutting oil.

15.- The method of claim 14, which comprises the following stages to interrupt the simultaneous injection of CO₂ in liquid state and a spray formed by lubricant micro-particles in liquid state:

- closing the first solenoid valve (7) that controls the passage of CO₂ in liquid state and closing the fourth solenoid valve (10) that controls the passage of the cutting oil;

- sweeping at least the second and third conduits of CO₂ in liquid state (b, g) by injecting CO₂ in gaseous state pressurised above the triple point;

- closing the second solenoid valve (8) to control the passage of CO₂ in gaseous state and closing the third solenoid valve (9) controlling the passage of pressurised air.

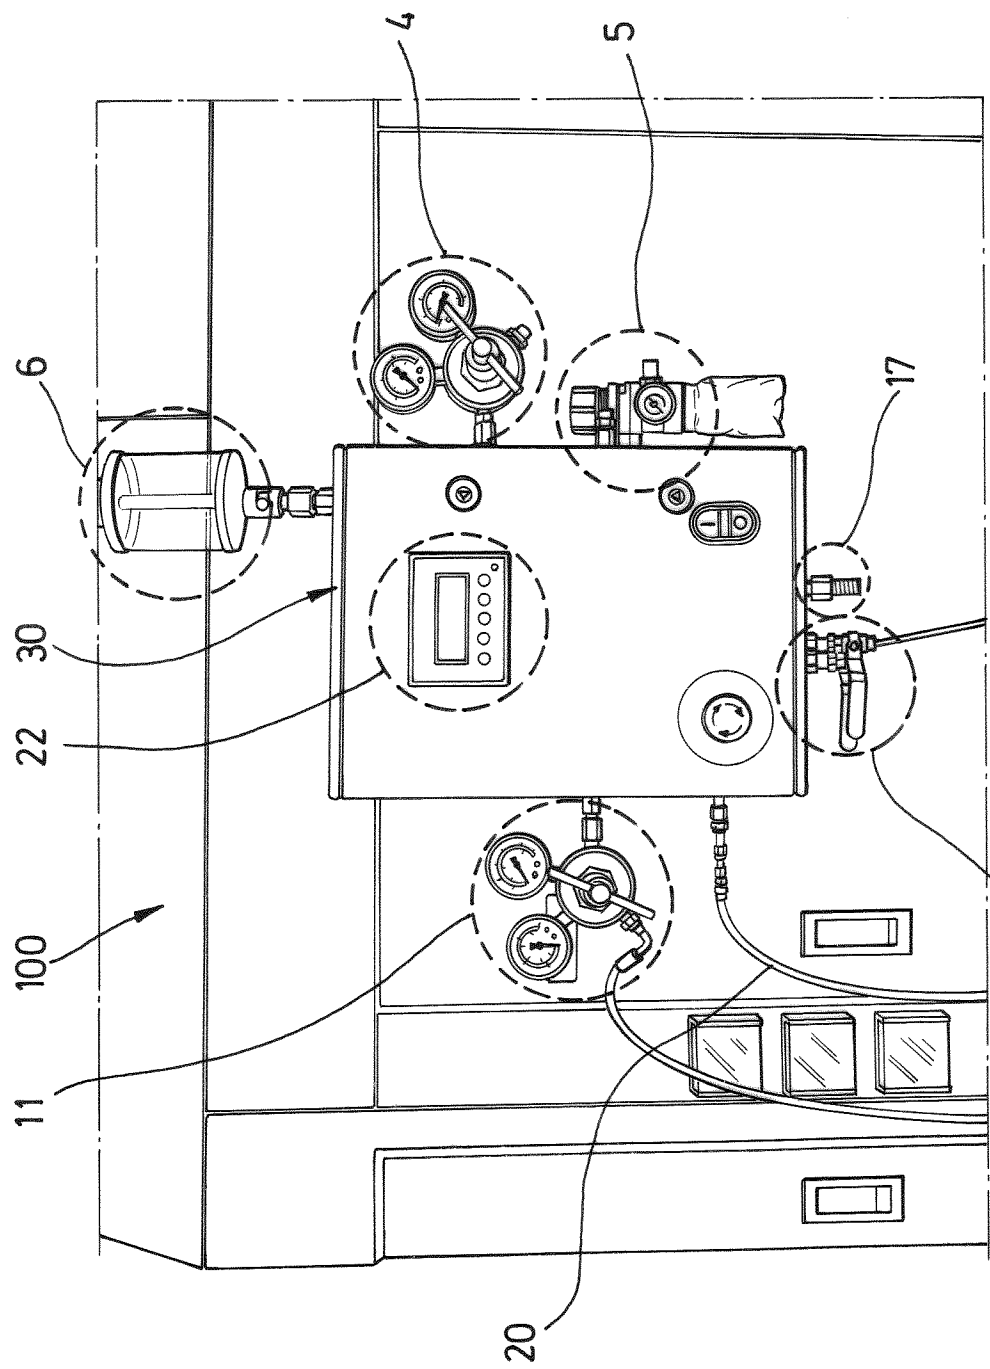


FIG.1A

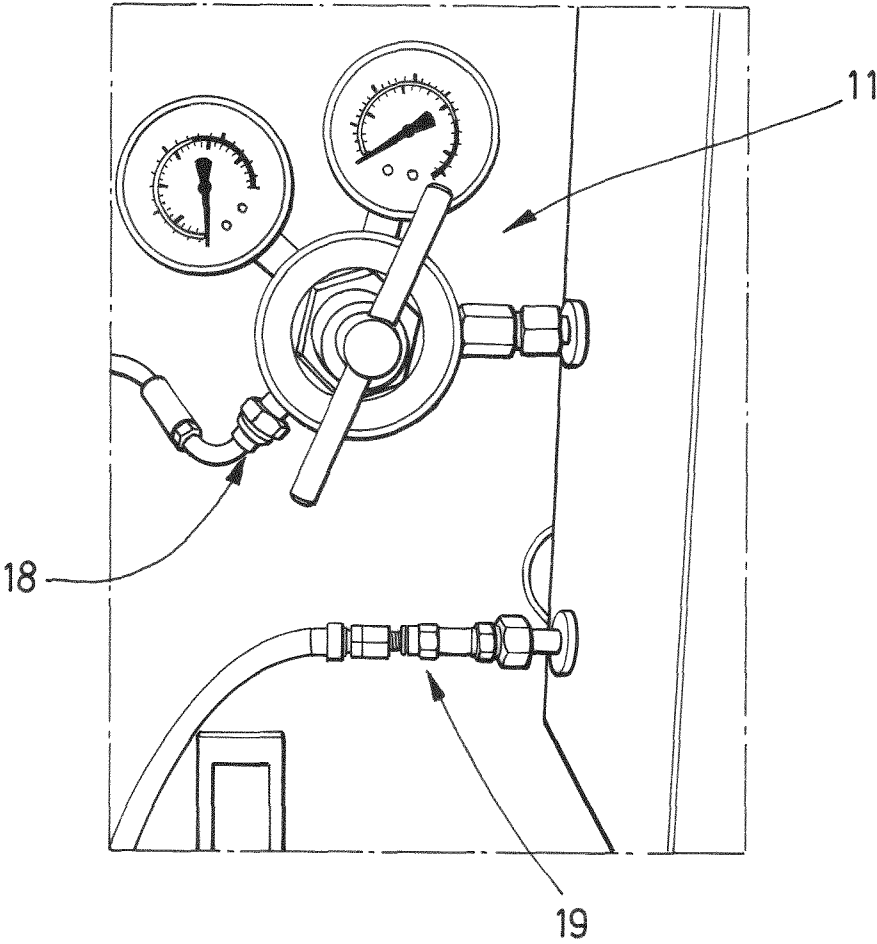


FIG.1B

3/10

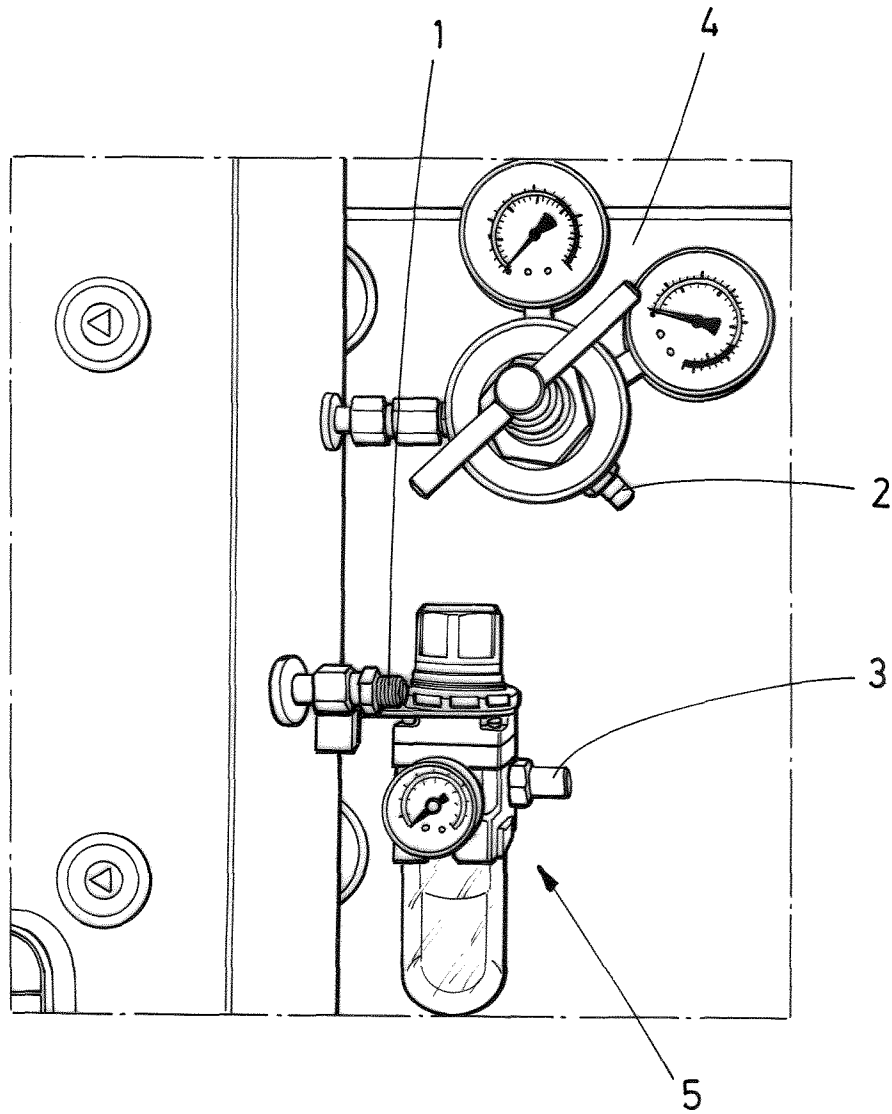


FIG.1C

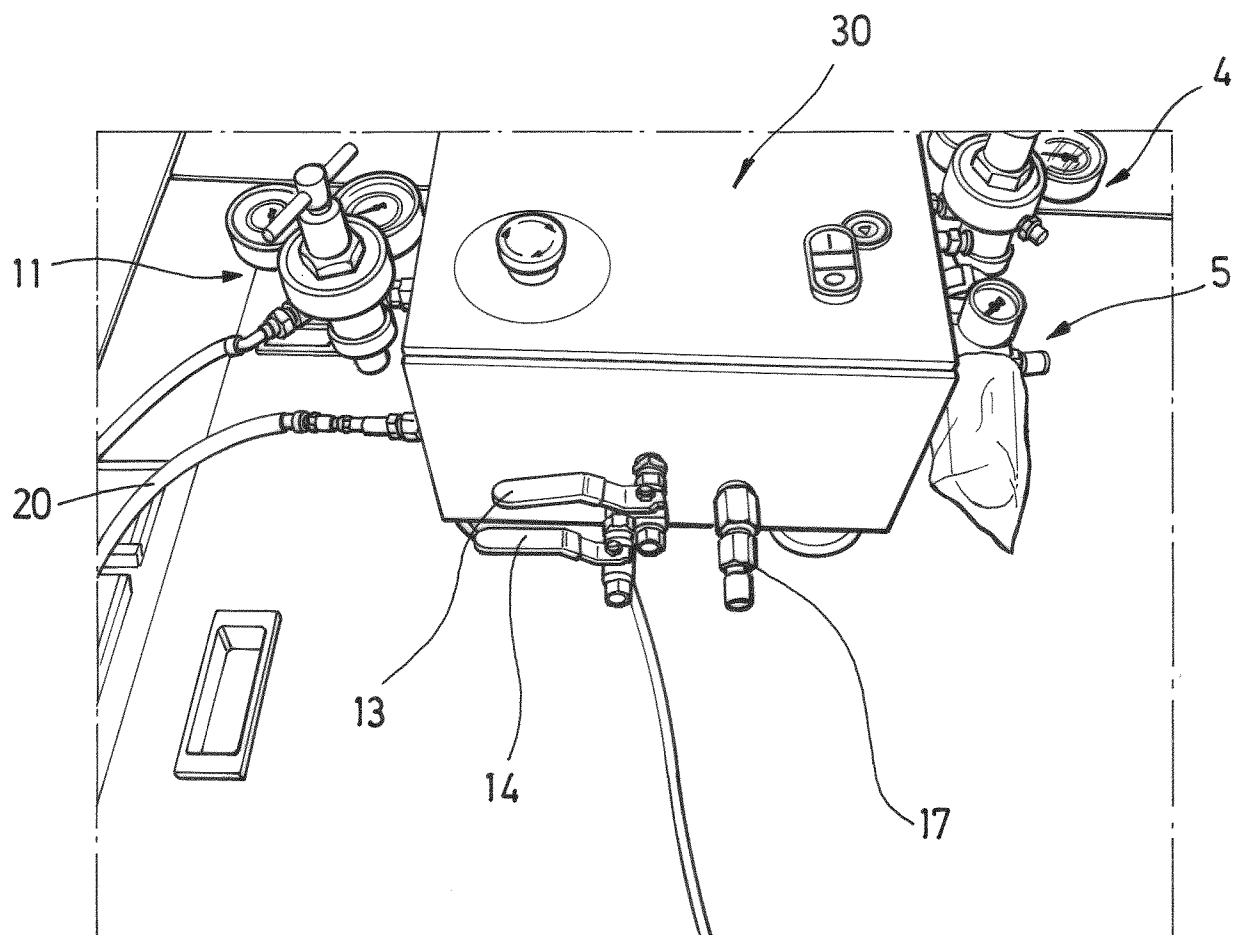


FIG.1D

5/10

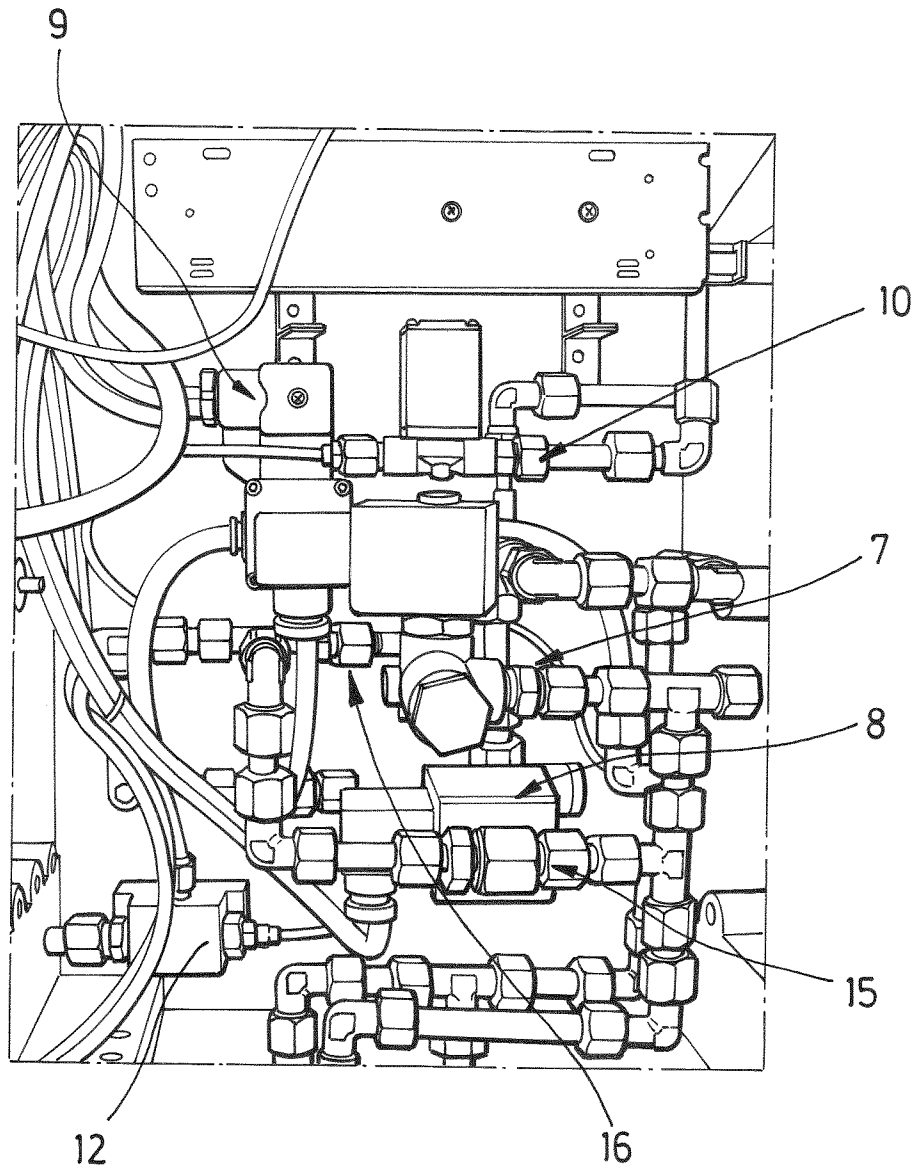


FIG.1E

6/10

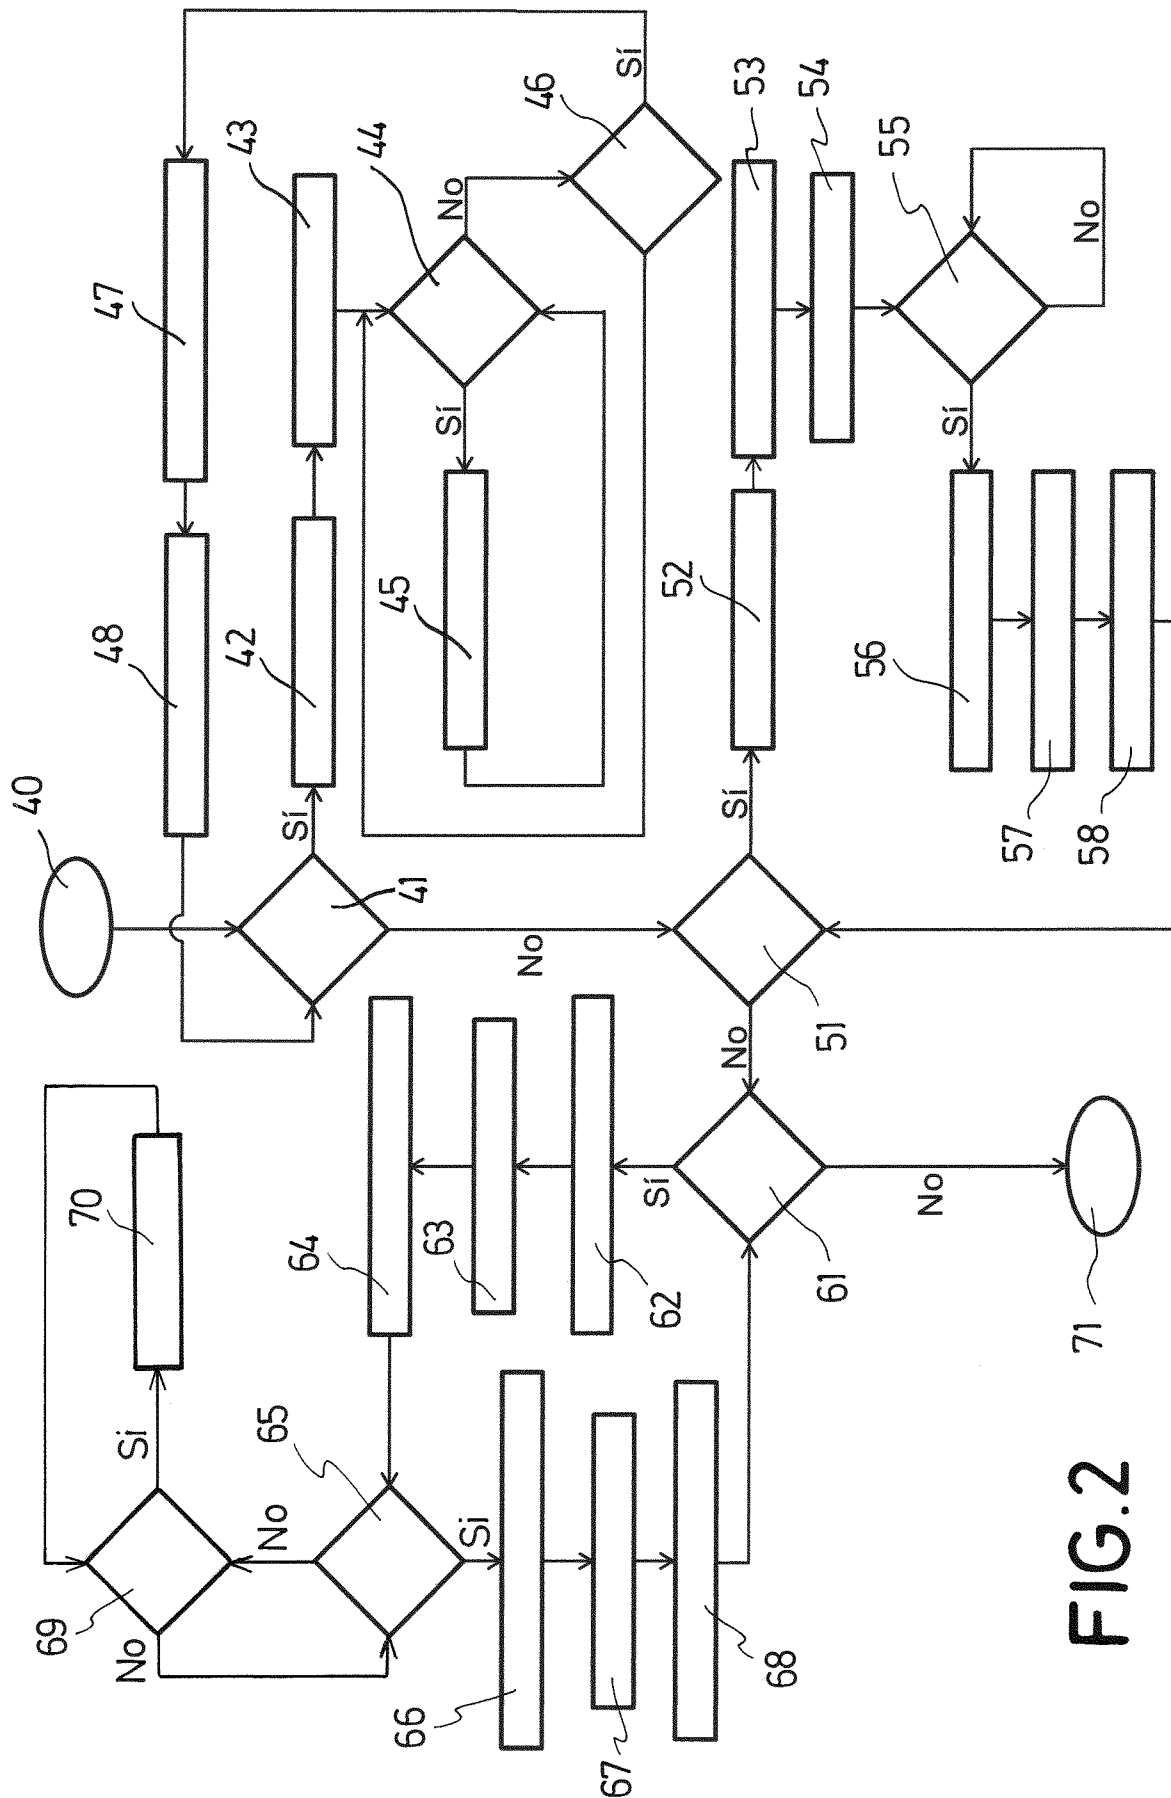


FIG. 2

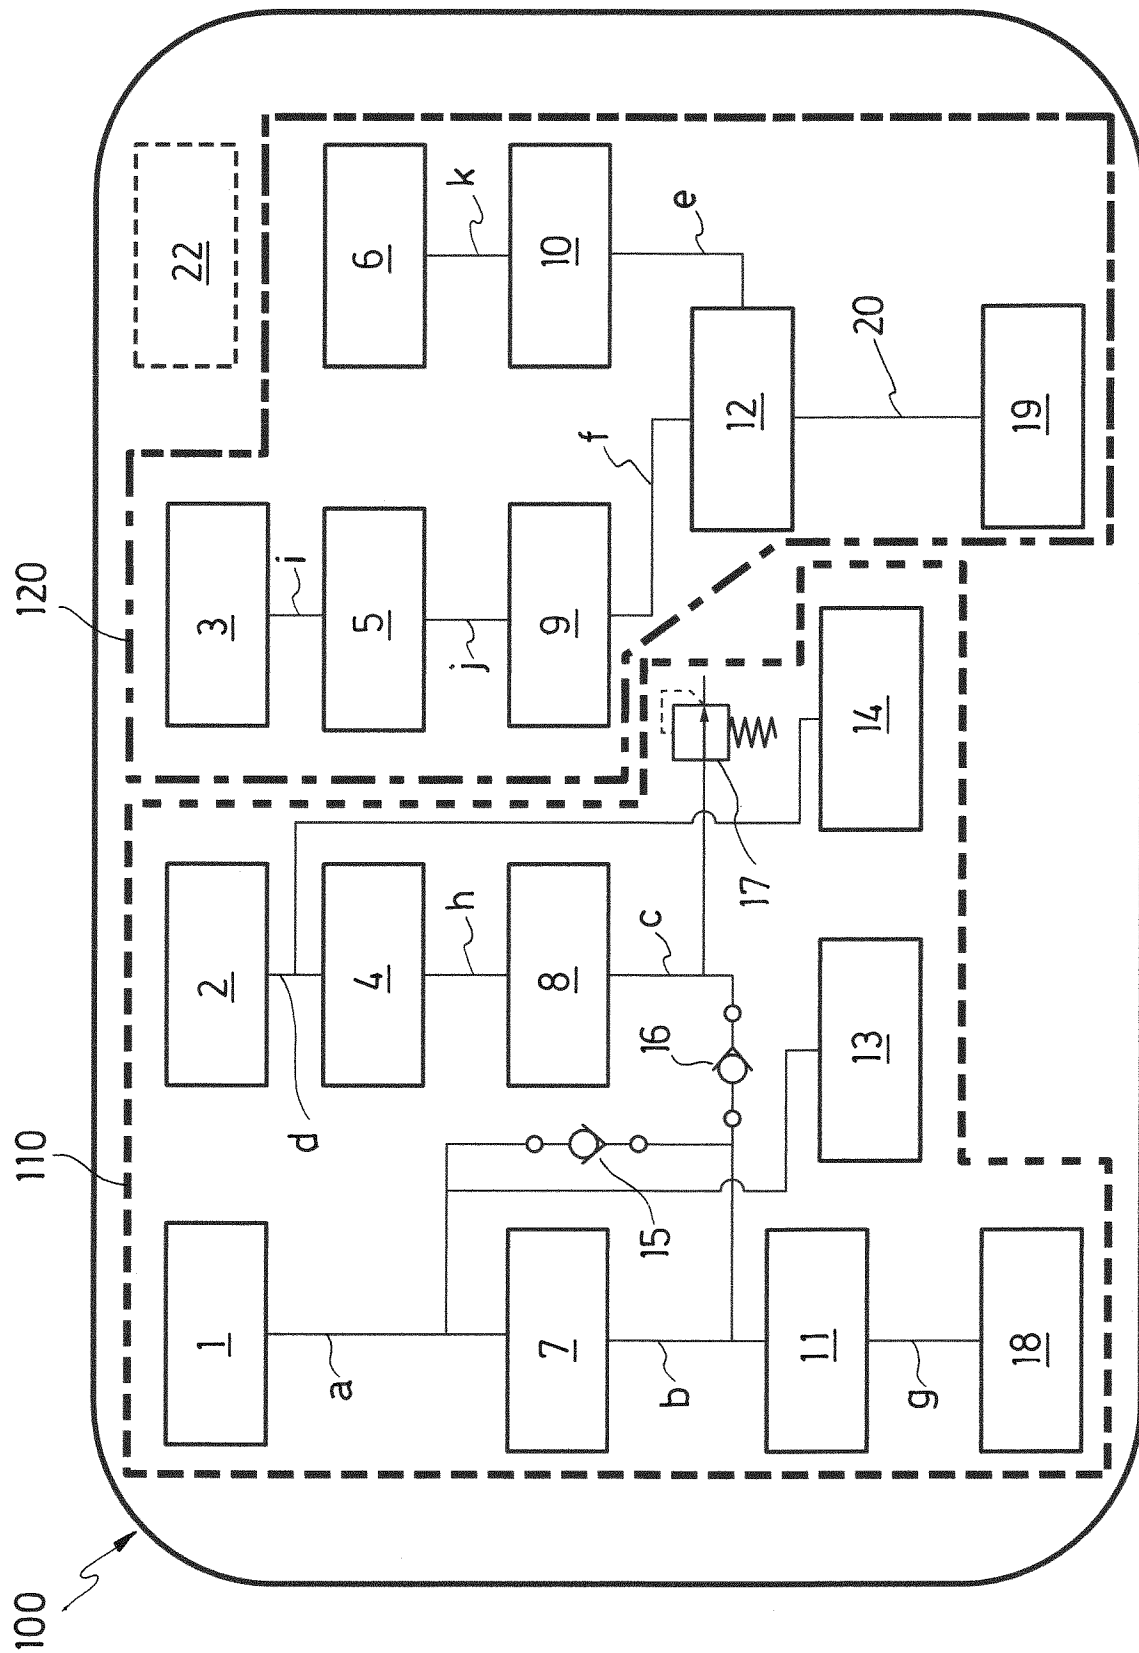


FIG. 3

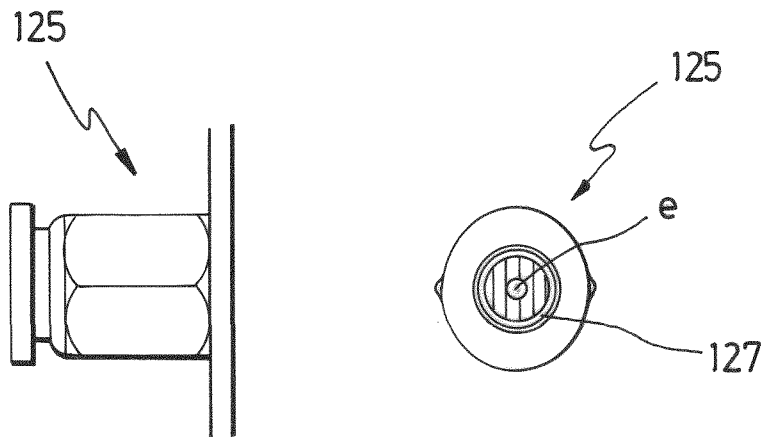


FIG.4

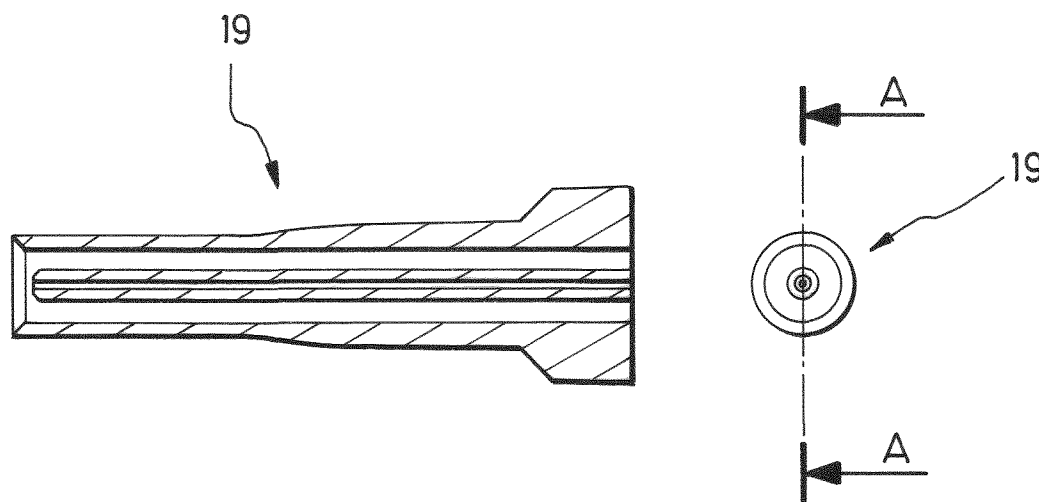


FIG.5

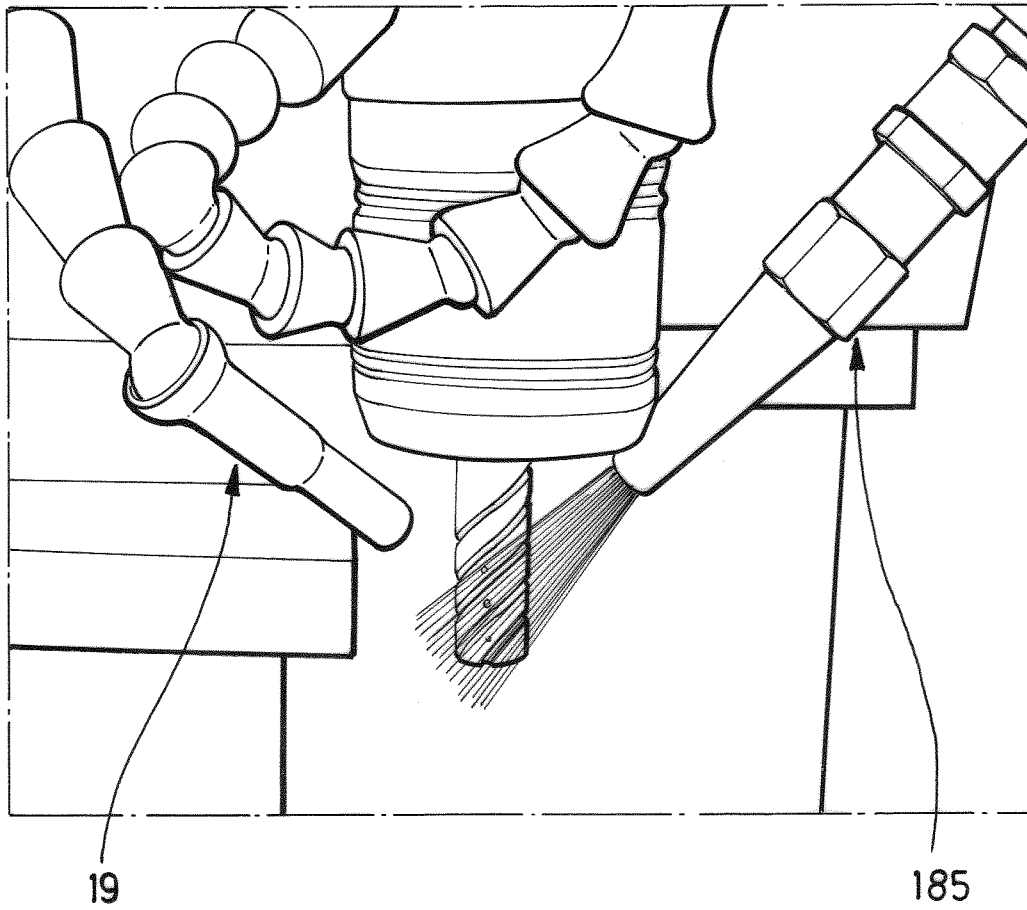


FIG.6

10 / 10

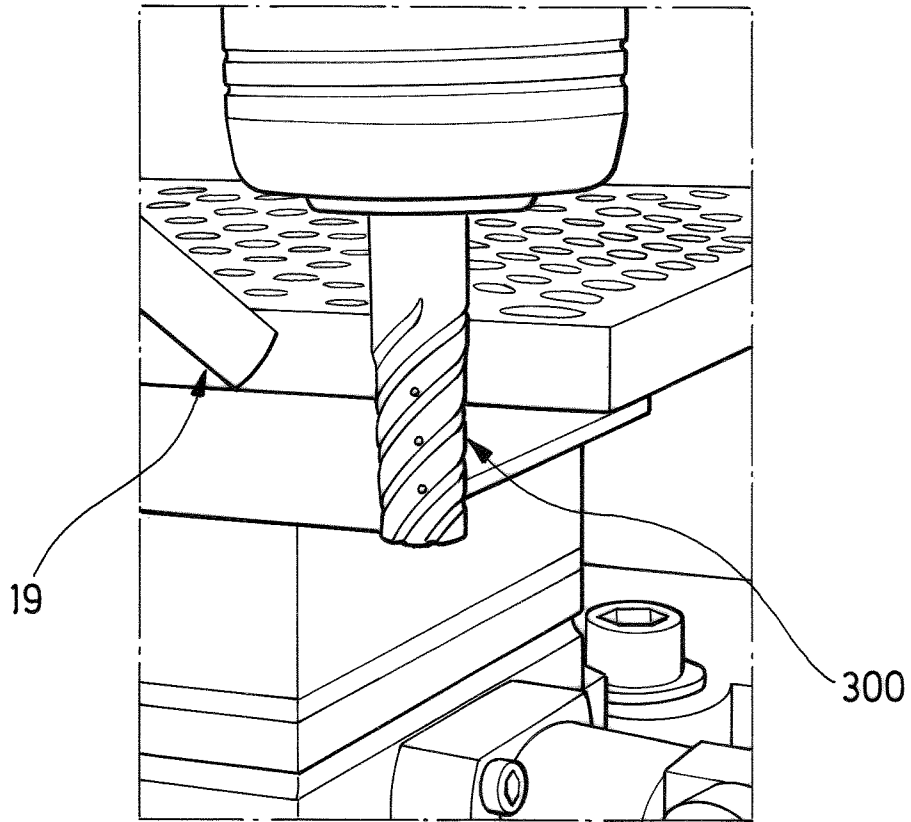


FIG. 7A

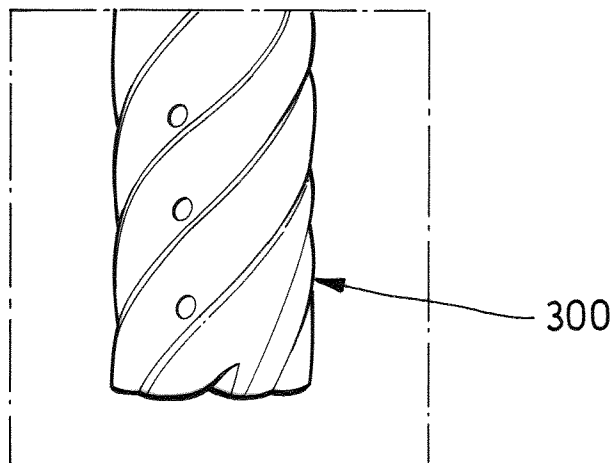


FIG. 7B

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/061412

A. CLASSIFICATION OF SUBJECT MATTER
INV. B23Q11/10
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B23Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 2 832 493 A1 (MAG IAS GMBH [DE]) 4 February 2015 (2015-02-04)	1,2,10
A	paragraphs [0003] - [0006]; figures 1-2	3-5, 12-15
Y	----- EP 2 837 448 A2 (FRANZ HAIMER MASCHB KG [DE]) 18 February 2015 (2015-02-18)	1,2,10
A	paragraphs [0004], [0007]; figures 1-2	
A	----- WO 03/026843 A1 (JAEGER WALTER [DE]; FORD WERKE AG [DE]; STOLL ALEXANDER [US]) 3 April 2003 (2003-04-03)	1
A	claims 1-7; figure 3	
A	----- WO 2009/129925 A1 (EX CELL O GMBH [DE]; HORN WOLFGANG [DE]; HAUS WALDEMAR [DE]; SCHMALZRI) 29 October 2009 (2009-10-29)	1
	claims 1-4; figures 1-3	
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 September 2017

Date of mailing of the international search report

08/11/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lasa Goñi, Andoni

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/061412

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 678 466 A (WAHL WILFRIED [DE]) 21 October 1997 (1997-10-21) cited in the application figures 1-3 -----	1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2017/061412

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-5, 10, 12-15

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-5, 10, 12-15

A device according to claim 1 with special means for preventing the formation of dry ice in the conduits.
Problem solved: alternative solution for preventing formation of dry ice in the conduits.

2. claims: 6-9

A device according to claim 1 with special means for supplying micro-particles of a cutting oil in liquid state.
Problem solved: alternative embodiment of the means for supplying micro-particles of a cutting oil in liquid state.

3. claim: 11

A device according to claim 1 comprising a plurality of magnetic legs.
Problem solved: easily couple the device to a machine tool

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/061412

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2832493	A1	04-02-2015	CN 104339229 A 11-02-2015
		DE 102013215057 A1 05-02-2015	
		EP 2832493 A1 04-02-2015	
		US 2015037110 A1 05-02-2015	
EP 2837448	A2	18-02-2015	CN 104368850 A 25-02-2015
		DE 102013108787 A1 19-02-2015	
		EP 2837448 A2 18-02-2015	
		JP 2015042438 A 05-03-2015	
		US 2015050097 A1 19-02-2015	
WO 03026843	A1	03-04-2003	AT 449663 T 15-12-2009
		CA 2457475 A1 03-04-2003	
		DE 10140718 A1 03-04-2003	
		EP 1420918 A1 26-05-2004	
		US 2004234350 A1 25-11-2004	
		WO 03026843 A1 03-04-2003	
WO 2009129925	A1	29-10-2009	DE 102008021049 B3 10-12-2009
		EP 2285532 A1 23-02-2011	
		US 2011166692 A1 07-07-2011	
		WO 2009129925 A1 29-10-2009	
US 5678466	A	21-10-1997	AT 153582 T 15-06-1997
		AU 684761 B2 08-01-1998	
		BR 9405951 A 19-12-1995	
		CA 2157474 A1 29-09-1994	
		CN 1119424 A 27-03-1996	
		CZ 9502319 A3 17-07-1996	
		DE 4309134 A1 29-09-1994	
		DK 0690766 T3 22-12-1997	
		EP 0690766 A1 10-01-1996	
		ES 2105675 T3 16-10-1997	
		FI 954439 A 20-09-1995	
		GR 3024449 T3 28-11-1997	
		JP 3393868 B2 07-04-2003	
		JP H08507970 A 27-08-1996	
		PL 310445 A1 11-12-1995	
		RU 2135343 C1 27-08-1999	
		SK 117795 A3 06-03-1996	
		US 5678466 A 21-10-1997	
		WO 9421424 A1 29-09-1994	