

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number
WO 01/89702 A2


- (51) International Patent Classification⁷: **B03B**
- (21) International Application Number: PCT/FI01/00494
- (22) International Filing Date: 22 May 2001 (22.05.2001)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:
20001218 22 May 2000 (22.05.2000) FI
- (71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HAUTALA, Jouko** [FI/FI]; Papusenkatu 21 A 6, FIN-33400 Tampere (FI).
- (74) Agent: **FORSSÉN & SALOMAA OY**; Yrjönkatu 30, FIN-00100 Helsinki (FI).

- (81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR UTILISING WASTE

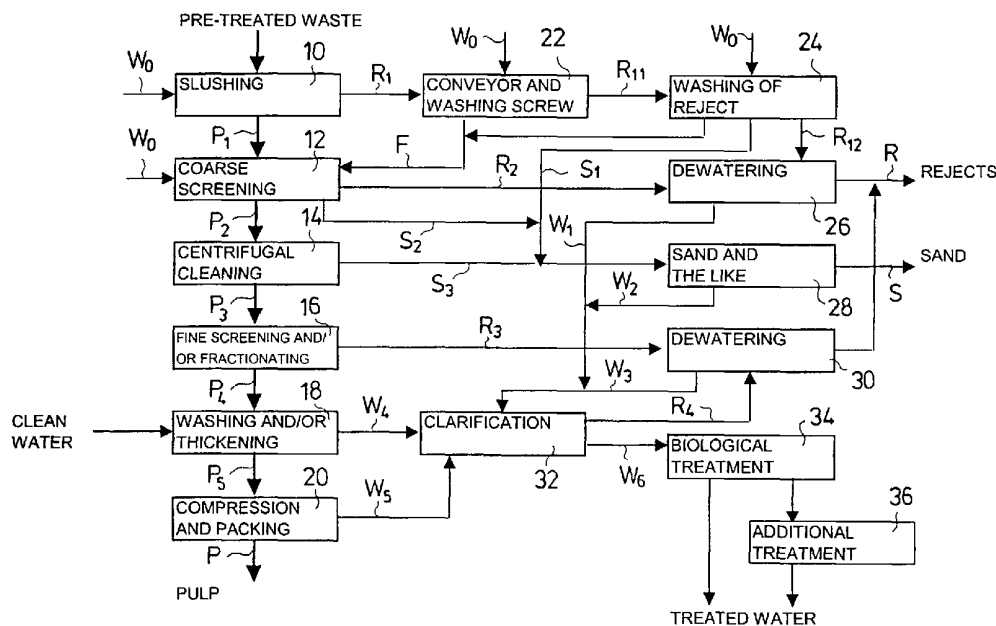

(57) **Abstract:** The invention relates to a method and a system for utilising waste that contains fibres and combustible material. Waste is slushed in a continuous-operation high-consistency pulper (10) to suspend in water the fibres contained in the waste, and from the pulper (10) are discharged substantially continuously fibre suspension (P₁) through a screen plate and non-defibrable material (R₁) by means of a mechanical transfer device (22). The fibre suspension (P₁) is sorted and cleaned for use as raw material in paper or board. The non-defibrable material (R₁) and the rejects (R₂-R₄) separated from the fibre suspension (P₁) in the sorting and cleaning stages are used as fuel in energy production and/or utilised as raw material.

WO 01/89702 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method and system for utilising waste

5 The invention relates to a method for utilising waste that contains fibres and combustible material.

The invention also relates to a system for utilising waste that contains fibres and combustible material.

10

In addition, the invention relates to a method for processing fibre in a paper or board mill that utilises recycled fibre pulp.

15 Conventionally, the options available in waste disposal and processing have been transport to landfill sites, incineration in mass incineration plants and – to a limited extent – recovery of recyclable materials. The last-mentioned option generally requires separation of wastes at source wherein recyclable waste fractions, such as, biowaste, paper and board, glass and metals are separated and collected separately. However, source separation is always insufficient, which
20 means that the amount of mixed waste is now, and will also be in future, considerable.

25 The form of energy recovery that has become popular recently is one in which recovered and/or refuse-derived fuel (REF, RDF) processed from waste is burned either in conventional boilers together with other fuel or as the main fuel in combustion plants specially designed for recovered/refuse-derived fuel. The wastes most suitable for energy recovery include packaging, paper and plastic wastes from industry and commerce as well as construction wastes, which can constitute as much as 70 to 80 % of the amount of waste usually transported to
30 landfills. Dry household waste can also be used in the production of energy

provided that, among other things, metals, glass and biowaste have been separated from it first.

Most economically, recovered fuel is produced from a source-separated
5 combustible waste fraction, i.e. the so-called energy fraction of waste. The
processing stages of this REF fuel (recovered fuel) typically include removal of
oversized pieces, crushing of waste, separation of metals as well as removal of
sand and stones. Finished REF fuel contains predominantly plastics, wood, paper
and board. The proportion of impurities in the fuel may be, for example, of the
10 order of 5 % depending of the sorting process. Recovered fuel can also be
produced from unsorted mixed waste by mechanical handling processes, in which
case the end product is called RDF fuel (refuse-derived fuel). A difference with
respect to the handling of source-separated waste is constituted by a more mixed
composition of the waste raw material, which is mainly shown as a higher
15 biowaste content. Consequently, more sorting stages are needed in the production
of RDF fuel than at an REF plant, for example, gravimetric separation stages, i.e.
sorting stages based on the size and density of particles, whereby heavy matter,
such as food scraps, can be efficiently separated from the fraction intended for
combustion. The composition of finished RDF fuel is very much like that of REF
20 fuel, but the proportion of impurities in it can be slightly higher, for example, of
the order of 8 %.

Energy recovery from waste should not be an end in itself, but rather aim for
sensible macroeconomical reclamation of wastes or for making them harmless. In
25 all reclamation of waste, the primary object should be recovery of materials
contained in waste when it is economically profitable and, only secondarily,
utilisation of waste as fuel. Landfilling should be the very last option.

WO application publication 98/18607 discloses a process for treatment of waste
30 that contains recyclable components, in which process waste is agitated in water
employing mechanical force, whereby the size of pieces in waste is reduced and

fibres are suspended in water. The heavy fraction containing metals, the lightweight fraction containing plastics and the fraction containing fibres are separated from the suspension in stages. The process is intended for treatment of packaging waste which contains different plastics and mixed materials, in particular board lined with plastic and/or metal foils, and metal cans. The fibre content of this kind of raw material is generally relatively low, wherefore the special problems associated with the recovery of fibres and with the quality of pulp have not been taken into consideration to a sufficient degree in the process. The publication has also failed to take into account matters that form an integral part of the recovery of fibres, such as, meeting of energy demand and circulation of waters.

The recovery of fibres from waste is also discussed, among other things, in GB patent 1,364,474 and in published GB application 2,026,019.

One object of the invention is to make it possible to recover a larger and higher quality portion than before of those fibres contained in waste which until now have been either passed to incineration or taken to a landfill site.

With a view to achieving this object as well as those coming out later, the arrangements according to the invention are characterised in that which is stated in the characterising part of the independent claims.

In the method according to the invention, waste is slushed in a continuous-operation high-consistency pulper in order to suspend in water the fibres contained in the waste, and from the pulper are discharged substantially continuously, on the one hand, fibre suspension through a screen plate and, on the other hand, non-defibrable material by means of a mechanical transfer device. The fibre suspension is sorted and cleaned for use as raw material in paper or board and the non-defibrable material as well as the rejects separated from the fibre

suspension in sorting and cleaning stages are used as fuel in energy production and/or utilised as raw material.

Advantageously, the pulper is provided with a screw conveyor, which moves non-defibrable material from the pulper to a reject drum. As the amount of reject is relatively high when slushing mixed waste, conventional arrangements for removal of reject are not sufficient. In order to make the recovery of fibres more effective, this material containing an abundance of plastics is washed first on the screw conveyor and then further in the reject drum and the washing waters used in both washing stages are passed so as to be mixed with the fibre suspension.

Advantageously, the pulper has been arranged to operate at a temperature of about 60 °C, in which connection, on the one hand, defibration is efficient and, on the other hand, bacteria and other micro-organisms carried with waste material do not cause any hygienic harm. Slushing consistency is generally about 10 %. The fibre suspension is discharged from the pulper through a screen plate in which the diameter of holes is 8 – 15 mm, most advantageously about 10 mm. The particles which are larger than this hole size are passed so as to be mixed with the non-defibrable material.

After slushing, the fibre suspension is course screened to remove the reject particles still remaining in it. In coarse screening, a perforated screen is used in which the diameter of holes is 2 – 4 mm, most advantageously about 3 mm. In that connection, pulp is sufficiently clean for the next process stage, which is usually centrifugal cleaning. The function of centrifugal cleaning is to remove sand and other heavy particles from the pulp. After that, the pulp is fine screened and possibly fractionated for various uses. As there is an abundance of relatively inexpensive raw material available, in the fibre recovery line according to the invention there is no need to attempt to maximise the yield of fibres, as in conventional recycling processes, but the quality of fibres can be optimised. Thus, fine screening can be enhanced and the amount of reject increased as compared

with conventional fibre recovery processes. Disposal of the increased reject volume presents no problem because said reject can be combusted together with the rejects derived from slushing and coarse screening.

5 After fine screening, the pulp is washed to improve the quality of the end product. Advantageously, the washed pulp is compressed in the end to a dry matter content of about 50 %, after which it is ready for transport to a site of use situated at a reasonable distance. Alternatively, the pulp can be dried for transport to a dry matter content of about 90 % or delivered as wet to a paper or board machine
10 located in the immediate vicinity.

The fibre recovery process according to the invention consumes a considerable amount of water, which makes it necessary to clean and recirculate the process waters. The waste waters produced in different process stages are collected,
15 treated and returned to the process. Cleaning can be accomplished, for example, as biological treatment, which is followed by clarification and, when needed, by further treatment stages for part of the water amount. The clean water necessary for the water balance of the system is introduced into the pulp washing stage at which it improves the quality of the end product.

20 Sand is separated from the reject fractions for transport, for example, to a landfill site or for use as earth filling. Water is removed mechanically from combustible reject fractions and it is passed so as to be cleaned. To combustion can be passed, among other things, the non-defibrable material which comes from slushing and
25 from which sand has been separated in a reject drum, the reject from coarse screening, the reject from fine screening as well as the fibre-containing sludge formed in clarification of waste water.

Advantageously, the waste utilised in the process according to the invention is dry
30 waste or mixed waste that has been pre-treated into a form suitable for recovered/refuse-derived fuel. The possible pre-treatment stages include a

reduction in size of the pieces of waste, for example, by crushing as well as removal of metals and other undesirable waste fractions. The waste raw material can also be replaced partially or totally with paper and/or board waste collected separately. In this case, too, the process differs from prior art fibre recovery lines, among other things, in the respect that the rejects from the fibre line have in it a clear and economically profitable site of use in the production of energy.

The method described above, in which fine screening is enhanced to improve the quality of fibre material and the reject portion increased as a result of it is passed to the energy production of the plant, is also particularly advantageous in the stock circulation of paper and board machines, in particular of OCC board machines, also when recycled fibre pulp is used as raw material. Today, to maximise the yield of fibres, the reject from screening is returned to the main stock flow, in which connection poor material circulates in the process. As a result of this, the runnability of the paper or board machine deteriorates and the quality of the end product decreases. Optimisation of fine screening and passing of the reject to the boiler of the mill offer a new possibility of optimising the quality of the end product in an economical manner.

In the following, the principle of the invention will be further described with reference to the appended figure which shows one system according to the invention for utilising waste.

Pre-treated waste is passed to a fibre separation process, which waste has been crushed and screened and from which non-combustible and undesirable fractions, such as metal, glass, stones, biowaste, etc. have been removed. The waste material is slushed in a continuous-operation high-consistency pulper 10, advantageously at a temperature of about 60 °C. A material stream P_1 containing fibres suspended in water and a material stream R_1 containing non-defibrable waste are discharged substantially continuously from the pulper 10. A screw conveyor 22 moves the reject fraction R_1 from the pulper 10 into a combined washing and drying drum 24

of the reject. The reject is washed by means of circulation water W_0 both on the screw conveyor 22 and in the washing drum 24, and fibre-containing washing waters F are returned to be mixed with the fibre suspension P_1 .

5 The fibre fraction P_1 taken out of the pulper 10 through a screen plate is passed to coarse screening 12, in which coarse impurities R_2 and sand S_2 which still remain in the fibre suspension are removed from it. The diameter of the holes in the screen plates used in the pulper 10 is 8 – 12 mm and most advantageously about 10 mm. In the coarse screening 12 of pulp, screen plates are used in which the
10 diameter of holes is 2 – 4 mm and most advantageously about 3 mm. A correctly selected hole size is required in order that, on the one hand, the screen shall not retain an excessive amount of fibres and, on the other hand, centrifugal cleaning 14 provided after the coarse screening 12 should function sufficiently well.

15 In the centrifugal cleaning stage 14, mainly sand and other heavy matter S_3 are separated from coarse-screened pulp P_2 . After the centrifugal cleaning 14, pulp P_3 is passed to a fine screening and/or fractionating stage 16, from which reject R_3 is passed to a dewatering stage 30 and accept P_4 is passed to pulp washing and/or thickening stages 18. The washing of pulp can comprise either one or two stages.
20 In the last process stage 20, washed pulp P_5 is compressed to a dry matter content of about 50 % and packed in transport containers for transport to a location of use situated at a reasonable distance.

Slushing reject R_{12} washed by means of the conveyor screw 22 and the reject
25 drum 24 is passed to dewatering 26, which can be accomplished, for example, by means of a screw press. The reject R_2 from the coarse screening 12 is processed together with the reject R_{12} coming from the slushing process. After dewatering, rejects R are passed to useful use, for example, to combustion.

30 Heavy sand-containing waste fractions $S_1 - S_3$ are also separated in the reject drum 24, in the coarse screening 12 of pulp and in the centrifugal cleaning 14, and

water is removed from these fractions in a processing stage 28, after which sand S can be transported to a landfill site or used as earth filling.

5 Rejects R_3 produced in the fine screening and fractionating are passed to the dewatering 30, which can be accomplished, for example, by means of a drainage band press, after which the rejects are passed to combustion.

10 Waste waters are produced, on the one hand, when water is removed from the rejects and sand (filtrates $W_1 - W_3$) and, on the other hand, in washing, thickening and compression of pulp (filtrates $W_4 - W_5$). These contaminated water fractions $W_4 - W_5$ are passed to clarification 32, from which fibre-containing sludge R_4 is passed together with the reject R_3 from the fine screening to the dewatering 30 and further to combustion. Clarified waste water W_6 is passed further to a biological treatment stage 34, after which the cleaned water can be circulated to
15 the beginning of the process for use as washing or dilution water in the pulper 10, in the coarse screening 12, on the screw conveyor 22 and/or in the reject drum 24. Alternatively, part of the biologically treated waste water can be passed to additional treatment stages 36, which may be, for example, ultra- or nanofiltration. The clean water necessary for the water balance of the process is
20 passed to the pulp washing stages 18.

In place of the pulper and the reject drum there may be a drum pulper, which, however, requires a larger space and higher investments than the arrangement shown in the figure. Moreover, removal of sand is more difficult to accomplish in
25 the drum pulper alternative.

Claims

1. A method for utilising waste that contains fibres and combustible material, **characterised** in that the method comprises the stages in which
 - 5 a) waste is slushed in a continuous-operation high-consistency pulper (10) to suspend in water the fibres contained in the waste,
 - b) from the pulper (10) are discharged substantially continuously fibre suspension (P_1) through a screen plate and non-defibrable material (R_1) by means of a mechanical transfer device (22),
 - 10 c) the fibre suspension (P_1) is sorted and cleaned for use as raw material in paper or board,
 - d) the non-defibrable material (R_1) and the rejects ($R_2 - R_4$) separated from the fibre suspension (P_1) in the sorting and cleaning stages are used as fuel in energy production and/or utilised as raw material.
- 15 2. A method according to claim 1, **characterised** in that the non-defibrable material (R_1) is moved from the pulper (10) by means of a screw conveyor (22) into a reject drum (24), the non-defibrable material (R_1) is washed in both of the devices (22, 24) and washing waters (F) are passed so as to be mixed
 - 20 with the fibre suspension (P_1).
3. A method according to claim 1 or 2, **characterised** in that the waste is slushed at a temperature of about 60 °C.
- 25 4. A method according to any one of claims 1 to 3, **characterised** in that the fibre suspension (P_1) is discharged from the pulper (10) through a screen plate in which the diameter of holes is 8 to 15 mm, most advantageously about 10 mm.
- 30 5. A method according to any one of claims 1 to 4, **characterised** in that after slushing, the fibre suspension (P_1) is coarse screened using a perforated screen

in which the diameter of holes is 2 to 4 mm, most advantageously about 3 mm.

- 5 6. A method according to any one of claims 1 to 5, **characterised** in that after slushing, the fibre suspension (P_1) is coarse screened, centrifugally cleaned, fine screened and washed, and finally the washed pulp is compressed to a dry matter content of about 50 %.
- 10 7. A method according to any one of claims 1 to 6, **characterised** in that the waste waters ($W_1 - W_5$) produced in the different stages of the process are treated and returned to the process, and that the clean water required by the process is introduced to a pulp washing stage (18).
- 15 8. A method according to any one of claims 1 to 7, **characterised** in that before slushing, the waste is pre-treated to reduce the size of pieces in it and to remove any undesirable waste fractions.
- 20 9. A method according to any one of claims 1 to 8, **characterised** in that the waste to be utilised is recovered fuel processed from source-separated combustible waste.
- 25 10. A system for utilising waste that contains fibres and combustible material, which system comprises a pulper (10) to separate fibres from non-defibrable material and devices (12, 14, 16, 18) for sorting and cleaning fibre suspension (P_1) separated from the waste, **characterised** in that the pulper (10) is a continuous-operation high-consistency pulper which has been provided with means for discharging the fibre suspension (P_1) substantially continuously through a screen plate and with a mechanical transfer device (22) for removing non-defibrable material (R_1) substantially continuously from the
30 pulper, and that the system comprises devices for using the non-defibrable

material (R_1) and the rejects ($R_2 - R_4$) separated by means of the sorting and cleaning devices (12, 14, 16,18) as fuel in the production of energy.

- 5 11. A system according to claim 10, **characterised** in that the pulper (10) has been provided with a screw conveyor (22) which has been arranged to move the non-defibrable material (R_1) from the pulper (10) into a reject drum (24), and that the screw conveyor (22) and the reject drum (24) have been provided with means for washing the non-defibrable material (R_1) and for passing washing water (F) so as to be mixed with the fibre suspension (P_1) discharged from the pulper (10).
- 10 12. A system according to claim 10 or 11, **characterised** in that the pulper (10) has been arranged to operate at a temperature of about 60 °C.
- 15 13. A system according to any one of claims 10 to 12, **characterised** in that the pulper (10) has been provided with a screen plate in which the diameter of holes is 8 to 15 mm, most advantageously about 10 mm.
- 20 14. A system according to any one of claims 10 to 13, **characterised** in that the pulper (10) is followed by a coarse screening device (12) in which the diameter of holes is 2 to 4 mm, most advantageously about 3 mm.
- 25 15. A system according to any one of claims 10 to 14, **characterised** in that it comprises devices (32, 34) for cleaning the waste waters ($W_1 - W_5$) produced in the different process stages and for returning them to the process.
- 30 16. A system according to any one of claims 10 to 15, **characterised** in that it comprises devices for reducing the size of pieces in the waste and for removing undesirable waste fractions before slushing.

17. A system according to any one of claims 10 to 15, **characterised** in that it has been arranged to utilise recovered fuel processed from source-separated combustible waste.
- 5 18. A method for treatment of fibre in a paper or board mill utilising recycled fibre pulp, in which method the pulp containing fibre material is passed after slushing to coarse screening, centrifugal cleaning and fine screening or fractionating, **characterised** in that in fine screening or fractionating, the quality of accept is optimised according to the end product which is
10 manufactured by changing, when needed, the proportion of reject, and at least part of the reject is passed, together with the reject from the coarse screening, to energy production.

