




(86) **Date de dépôt PCT/PCT Filing Date:** 2019/06/11
(87) **Date publication PCT/PCT Publication Date:** 2019/12/19
(45) **Date de délivrance/Issue Date:** 2024/02/13
(85) **Entrée phase nationale/National Entry:** 2020/12/01
(86) **N° demande PCT/PCT Application No.:** IB 2019/054844
(87) **N° publication PCT/PCT Publication No.:** 2019/239302
(30) **Priorité/Priority:** 2018/06/15 (IB PCT/IB2018/054427)

(51) **Cl.Int./Int.Cl.** *C09D 5/00* (2006.01),
E02D 31/00 (2006.01)
(72) **Inventeurs/Inventors:**
ALVAREZ-ALVAREZ, ABEL, ES;
PEREZ VIDAL, OSCAR, ES;
RODRIGUEZ MARTINEZ, CARLOS JAVIER, ES;
FERNANDEZ ALVAREZ, JOSE PAULINO, ES;
SUAREZ GARCIA, CARLOS, ES;
BLANCO IGLESIAS, HUGO, ES;
MELCONMIGUEL, JORGE, ES
(73) **Propriétaire/Owner:**
ARCELORMITTAL, LU
(74) **Agent:** SMART & BIGGAR LP

(54) **Titre : SUBSTRAT NON CONDUCTEUR REVETU D'UNE PEINTURE A TENEUR REDUITE EN OXYDE DE GRAPHENE ET
METHODES DE DETECTION D'UNE FUITE ET D'UNE DEFORMATION**
(54) **Title: A NON-CONDUCTIVE SUBSTRATE COATED WITH A REDUCED GRAPHENE OXIDE CONTAINING PAINT AND
METHODS OF DETECTING A LEAK AND A STRAIN DEFORMING IN SAME**

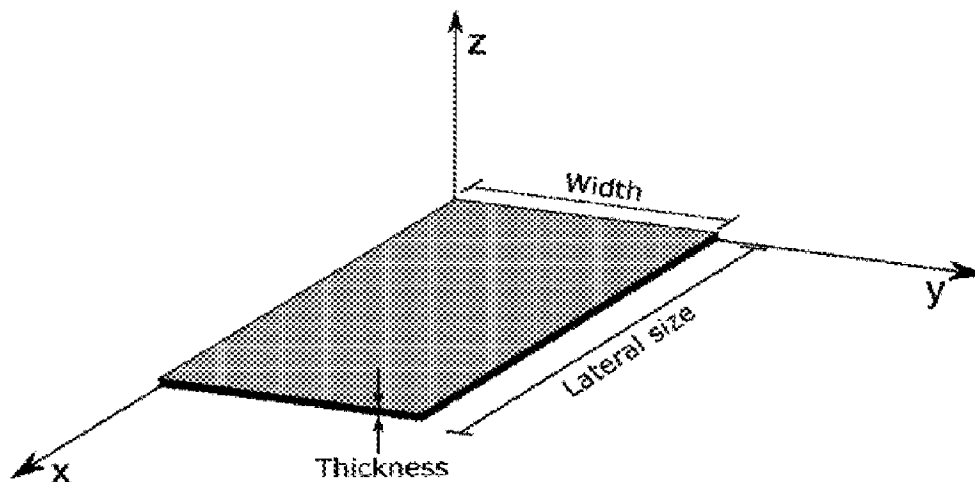

(57) **Abrégé/Abstract:**

The present invention relates to a non-conductive substrate being at least partially coated with a paint comprising reduced graphene oxide and a thermosetting polymer, the non-conductive substrate being directly coated by the paint, a method for the manufacture of this coated non-conductive substrate, methods for detecting leaks or strain deformation and the uses of said coated non-conductive substrate.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

19 December 2019 (19.12.2019)



(10) International Publication Number

WO 2019/239302 A1

(51) International Patent Classification:

C09D 5/00 (2006.01)

E02D 31/00 (2006.01)

(21) International Application Number:

PCT/IB2019/054844

(22) International Filing Date:

11 June 2019 (11.06.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PCT/IB2018/054427

15 June 2018 (15.06.2018)

IB

(71) Applicant: **ARCELORMITTAL** [LU/LU]; 24-26, Boulevard d'Avranches, L-1160 Luxembourg (LU).

(72) Inventors: **ALVAREZ-ALVAREZ, Abel**; C/Soto de Abajo (Grupo Nalon), N°1-4°A, 33100 Trubia-Oviedo, Asturias (ES). **PEREZ VIDAL, Oscar**; C/Ribera de Arriba 22 3°B, 33006 Oviedo, Asturias (ES). **RODRIGUEZ MARTINEZ, Carlos Javier**; Progreso Street, portal number 5, Floor 4 door B, 33209 Gijon, Asturias (ES). **FERNANDEZ ALVAREZ, José Paulino**; C/ la Vega 40 3°, 33600 Mieres Del Camino, Asturias (ES). **SUAREZ GARCIA, Carlos**; Calle Sahara 29 3A, 33208 Gijon, Asturias (ES). **BLANCO IGLESIAS, Hugo**; Camino de Prado Rodrigo, 35, 33429 La Fresneda (Siero), Asturias (ES). **MELCONMIGUEL, Jorge**; ArcelorMittal Global R&D, P.O. Box 90, 33400 Aviles, Asturias (ES).

(74) Agent: **PLAISANT, Sophie**; ArcelorMittal France, Research & Development, Intellectual Property, 6 rue André Campra, 93200 Saint-Denis (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A COATED NON-CONDUCTIVE SUBSTRATE

Figure 1

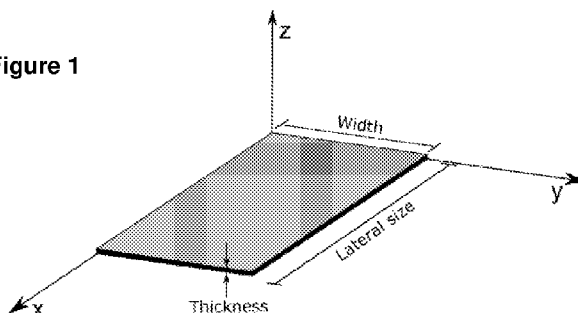

(57) Abstract: The present invention relates to a non-conductive substrate being at least partially coated with a paint comprising reduced graphene oxide and a thermosetting polymer, the non-conductive substrate being directly coated by the paint, a method for the manufacture of this coated non-conductive substrate, methods for detecting leaks or strain deformation and the uses of said coated non-conductive substrate.



WO 2019/239302 A1

A NON-CONDUCTIVE SUBSTRATE COATED WITH A REDUCED GRAPHENE OXIDE CONTAINING PAINT AND METHODS OF DETECTING A LEAK AND A STRAIN DEFORMING IN SAME

The present invention relates to a non-conductive substrate being at least partially coated with a paint comprising reduced graphene oxide and a thermosetting polymer, the non-conductive substrate being directly coated by the paint, a method for the manufacture of this coated non-conductive substrate, methods for detecting leak and strain deformation. It is particularly well suited for mining industry, electronic industry, plastic piping systems, clothing industry and engineering plastics used in automotive or aerospace industry.

It is known to use geomembranes, geotextiles or geosynthetic clay liners (GCL) as water barrier layers used when building water retention facilities (e.g. dams and ponds) or water guidance facilities (e.g. drainage and canals). These textiles can be deployed on a large scale and may potentially cover many thousands of square meters. Geotextiles can serve many purposes, but they are predominately not in themselves a barrier to water ingress. Where water barrier properties are required an additional waterproof layer is typically used. Geosynthetic clay liners (GCL) can be waterproof plastic membranes and/or composites containing clays. Clay lining is the traditional method of waterproofing water retention facilities. These offer improved performance over traditional clay earthworks and are used in reservoirs and landfills. Geomembrane are very low permeability synthetic membrane liner that are used with any geotechnical engineering related material so as to control fluid (or gas) migration in a human-made project, structure, or system.

A GCL typically comprises at least three layers: i.e. a layer of clay sandwiched between two geosynthetic layers. The two geosynthetic layers used to sandwich the clay can be any combination of woven or non-woven geotextile, geogrids, geonets or geomembranes. For example, the structure may comprise a strengthening or backing layer of geogrid or geonet and a non-woven geotextile. The strengthening layer can be a woven textile or net. The clay is often bentonite and may contain additives, such as polymeric binders and or stabilizers.

Water barrier layers, such as pond liners and GCL, usually require protection against damage to ensure they retain their barrier properties. A small hole in the liner can result in significant water leakage, especially over time. In some cases, for example in containing mining waste where the water is contaminated and is being

retained or directed to protect the environment, small amounts of leakage can have a significant effect and can cause substantial environmental harm, and potentially incur large costs to rectify. In such applications the integrity of the liner is critical, as is the ability to determine and monitor that integrity at all times.

5 Inspection of barrier integrity can include electrical inspection, where a voltage is applied to the surface of the insulating barrier and under the right conditions a circuit can be formed through any defects in the barrier material. For a circuit to be formed, an electrical conduction mechanism on the opposite side of the barrier to which the voltage is applied is required. Where an electrolyte, even a very
10 weak one, is present under the barrier, sufficient current can be carried to form a circuit through the defect and to the inspection equipment. For example, clay is often a sufficient electrolyte due to its salt and water content.

 To assist with the formation of a conductive pathway water can be used as part of the structure, to facilitate the inspection process. In cases where the clay is
15 dry it does not function as an electrolyte, so the conductive inspection mechanism becomes unreliable. In cases where multiple layers of insulator are present in the barrier layer no reliable mechanism for forming a circuit exists.

 The patent application WO2017/132734 discloses an electrically conductive textile incorporating graphene to detect leak. Incorporation of graphene into a textile
20 can be achieved by different methods including mixing the graphene into the polymer prior to forming the fiber. It is also possible to coat fibers or a textile with graphene to make the conductive textile. The graphene can be present as a powder or as a dispersion in a fluid to facilitate dispersion of the graphene in the polymer. Suitable methods of incorporation of graphene into the polymer include: Melt-
25 compounding of graphene into the polymer; in-situ polymerization of the polymer with the graphene, and; solution blending. In the Examples, graphene dispersed in ethanol, xylene, water or acrylic was used to coat the geotextiles. Graphene oxide dispersed in water was also deposited on the geotextile. It was followed by the reduction of graphene oxide into graphene using citric acid.

30 The patent application WO2017/177269 discloses geosynthetic clay liner incorporating an electrically conductive textile to detect leak. Said textile may incorporate conductive fibers or be coated with a conductive coating. The

conductive fibers preferably contain graphene, or are coated with graphene, or alternatively the textile itself may be coated with graphene. Incorporation of graphene into a textile can be achieved by many methods including mixing the graphene into the polymer prior to forming the fiber. It is also possible to coat fibers or a textile with graphene to make the conductive textile. The graphene can be present as a powder or as a dispersion in a fluid to facilitate dispersion of the graphene in the polymer. Methods of incorporation of graphene into the polymer can include: Melt- compounding of graphene into the polymer; in-situ polymerization of the polymer with the graphene, and; solution blending.

Melt- compounding of graphene into the polymer; in-situ polymerization of the polymer with the graphene, and; solution blending are techniques used for thermoplastic polymers.

However, in both patent applications W02017/177269 and W02017/132734, whether graphene or graphene oxide is dispersed into solvent such as xylene, ethanol, water before being deposited on the geotextile allowing a bad adherence of graphene on the geotextile; whether graphene is dispersed in acrylic before being deposited and melt on the geotextile resulting in a high risk of bad dispersion of the graphene since thermoplastics are known to be viscous polymers. The bad adherence and bad dispersion can result in a poor detection quality of leaks.

Additionally, there is a need to evaluate the strain deformation of the non- conductive substrates geomembranes, geotextiles or GCL. Indeed, very sensitive strain sensing devices are greatly needed for monitoring a state of such products for early detecting a defect that occurs in an extreme situation such as a natural disaster (e.g. earthquake) or in a usual situation such as wear.

Thus, a purpose of the invention is to improve the quality of the leak detection of non-conductive substrates. Additionally, the purpose is to detect the strain deformation of said non-conductive substrates to among others improve the life time of the substrates.

In accordance with a first aspect, the disclosure relates to a non-conductive substrate being at least partially coated on at least one side with a paint comprising reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and at least one thermosetting polymer, the non-conductive substrate being directly coated by the paint.

In accordance with another aspect, a non-conductive substrate is provided being at least partially coated on at least one side with a paint comprising reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and at least one thermosetting polymer, the non-conductive substrate being directly coated by the paint, wherein:

the reduced graphene oxide has a lateral size of 40 to 80 μm ,

the reduced graphene oxide has a weight percentage of oxygen between 2% and 10%, and the paint has a concentration of reduced graphene oxide between 0.5% and 4% by weight.

The following terms is defined:

- Reduced graphene oxide means graphene oxide that has been reduced. The reduced graphene oxide comprises one or a few layer(s) of graphene having some oxygen functional groups including ketone groups, carboxyl groups, epoxy groups and hydroxyl groups and
- Biopolymers are polymers produced by living organisms; in other words, they are polymeric biomolecules. Biopolymers contain monomeric units that are covalently bonded to form larger structures.

Other characteristics and advantages of the invention will become apparent from the following detailed description of the invention.

To illustrate the invention, various embodiments and trials of non-limiting examples will be described, particularly with reference to the following Figures:

Figure 1 illustrates an example of one nanoplatelet of reduced graphene oxide according to the present invention.

Figure 2 illustrates an example of a few nanoplatelets of reduced graphene oxide according to the present invention.

Figure 3a and 3b illustrate an example of a leak detection.

The invention relates to a non-conductive substrate being at least partially coated on at least one side with a paint comprising reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and at least one thermosetting polymer, the non-conductive substrate being directly coated by the paint.

Without willing to be bound by any theory, it seems that the paint including the reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and the

thermosetting polymer well adheres on the non-conductive substrate increasing the lifetime of the coated non-conductive substrate. Indeed, it is believed that thanks to the thermosetting polymer, the reduced graphene oxide is highly dispersed in the paint leading to an improvement of the detection quality. Finally, the paint deposited on the non-conductive substrate is an easy and simple system allowing the detection of leak and strain deformation.

Preferably, the reduced graphene oxide has a surface area below $290\text{m}^2.\text{gr}^{-1}$.
1. Preferably, the reduced graphene oxide has a surface area above $200\text{m}^2.\text{gr}^{-1}$.
When the surface area is equal or above to $300\text{m}^2.\text{gr}^{-1}$, it seems that the quality of the leak detection of non-conductive substrates decreases since the paint is too sensitive and therefore, the background noise is also detected.

The reduced graphene oxide can be produced from kish graphite as disclosed in the patent applications PCT/IB2017/000348 or PCT/IB2018/053416. It can also be produced from electrode scraps as disclosed in PCT/IB2018/053643.

Preferably, the non-conductive substrate is coated on both sides.

In a preferred embodiment, the coated non-conductive substrate is covered by a protective layer. The protective layer can be made of thermosetting polymers. In this case, the coated non-conductive substrate is protected against corrosion, etc.

Preferably, the lateral size of the reduced graphene oxide is between 1 and $80\mu\text{m}$, more preferably between 40 and $80\mu\text{m}$ and advantageously between 60 and $80\mu\text{m}$.

Preferably, the weight percentage of oxygen in the reduced graphene oxide is between 2 and 20% and preferably between 2 and 10%. Indeed, without willing to be bound by any theory, it is believed that the percentage of oxygen plays a role in the conductivity and electrical resistance of the paint.

Preferably, the reduced graphene oxide is not functionalized by a biopolymer. Indeed, without willing to be bound by any theory, it is believed that the biopolymer can decrease the sensitivity of the leak and strain deformation detection.

Preferably, the reduced graphene oxide is in a form of one or more nanoplatelets. Indeed, without willing to be bound by any theory, it is believed that the form of the reduced graphene oxide can play a role in the detection since it seems that the nanoplatelets can easily form a path in the paint wherein the

electricity runs. Figure 1 illustrates an example of one nanoplatelet of reduced graphene oxide. The lateral size means the highest length of the layer through the X axis, the thickness means the height of the layer through the Z axis and the width of the nanoplatelet is illustrated through the Y axis. Figure 2 illustrates an example of a few nanoplatelets of reduced graphene oxide.

Advantageously, the thickness of the paint is between below 2mm and preferably between 50 and 500 μ m.

Preferably, the concentration of the reduced graphene oxide in the paint is between 0.05 and 10% by weight, preferably between 0.05 and 7% by weight and advantageously between 0.5 and 4% by weight. Indeed, without willing to be bound by any theory, it seems that having the reduced graphene oxide in the above concentration can further improve the detection sensitivity in the case of strain because in that range the conductivity of the network of nanoparticles formed inside the thermosetting resin is more sensitive to deformations allowing to detect smaller strains.

Preferably, the paint does not comprise a thermoplastic polymer. In particular, the paint does not comprise acrylic polymer. Indeed, it is believed that the thermoplastic improves the viscosity of the paint leading to a bad dispersion of reduced graphene oxide and therefore a poor quality of the coated non-conductive substrate.

Advantageously, the thermosetting polymer is chosen from among: epoxy resin, Polyester resin, Polyurethanes, Polyurea/polyurethane, Vulcanized rubber, Urea-formaldehyde, Melamine resin, Benzoxazines, Polyimides, Bismaleimides, Cyanate esters, polycyanurates, Furan, Silicone resins, Thiolyte and Vinyl ester resins or a mixture thereof.

Preferably, the molar mass distribution of the polymer is below or equal to 1300 and advantageously between 700 and 1200.

Preferably, the non-conductive substrate is a textile or a plastic substrate. In particular, the textile is a geomembrane, a geotextile or a geosynthetic clay liner. Preferably, the geomembrane, the geotextile or the geosynthetic clay liner are woven or non-woven.

In a preferred embodiment, the plastic substrate is chosen from among: Poly(methyl methacrylate), Acrylonitrile Butadiene Styrene, Polyamides family, Polycarbonate, Polyvinyl chloride, Polypropylene, Polyethylene and Polyethylene terephthalate or a mixture thereof.

Preferably, the plastic substrate does not comprise Poly-4-vinylphenol, polyethersulfone or Polydimethylsiloxane. Indeed, without willing to be bound by any theory, it is believed that the presence of these polymers can reduce the detection sensitivity.

Advantageously, the paint does not comprise titanium dioxide or copper.

Preferably, the non-conductive substrate is coated with paint strips to form an alternation between painted and non-painted non-conductive substrate.

In another embodiment, the non-conductive substrate is coated with one entire layer of paint.

The second object of the present invention is a method for the manufacture of the non-conductive substrate being at least partially coated according to the present invention, comprising the successive following steps:

- A. mixing the reduced graphene oxide, a thermosetting monomer, a curing agent and optionally a solvent,
- B. depositing the mixture on the non-conductive substrate and
- C. a curing step.

Preferably, in step B), the mixing is performed as follows:

- i. The mixing of reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and a thermosetting base polymer and optionally a solvent,
- ii. The addition of a curing agent,
- iii. The mixing of the mixture obtained in step B).

Preferably, in step A), the solvent is chosen from among others: xylene, n-butanol, ethylbenzene, naphtha, n-butyl acetate, toluene, cyclic hydrocarbons, isopropanol and benzyl alcohol or a mixture thereof.

Preferably, in step A), the thermosetting monomer is chosen from: epoxy resin, ester, urethane, urea/polyurethane, Vulcanized rubber, Urea-formaldehyde, Melamine resin, Benzoxazines, imides, Bismaleimides, Cyanate esters, cyanurates, Furan, Silicone resins, Thiolyte and Vinyl ester resins or a mixture thereof.

Advantageously, in step A), the curing agent is chosen from among: polyamide, phenols, amines and polyaddition isocyanate or a mixture thereof.

Preferably, in step B), the deposition of the coating is performed by spin coating, spray coating, dip coating, film coating, coil coating, brush coating or spatula coating.

Preferably, in step C), the curing step is performed by drying at room temperature.

The third object of the present invention is a method for detecting a leak with the non-conductive substrate being at least partially coated according to the present invention comprising the following successive steps:

- a) applying an electric voltage to the non-conductive substrate being at least partially coated using an electronic system, and
- b) detecting a water leak through the non-conductive substrate when an electrical circuit is formed in the non-conductive substrate being at least partially coated.

Without willing to be bound by any theory, it is believed that as illustrated in Figures 3a and 3b, when the coated non-conductive substrate detects a leak, an electrical circuit is formed. Indeed, it seems that initially, the non-conductive substrate 1 coated with the paint 2 forms an open electrical circuit even with the application of an electric voltage applied by a voltage source 3. The coated non-conductive substrate is for example deposited on mining waste 4. When there is a leak 5, a conductive fluid (e.g. water) comes into contact with the paint 2 present on the non-conductive substrate 1 and close the circuit. Then, an emitter 6 indicates the leak.

Preferably, in step I), the electronic system comprises a power supply system and an emitter able to indicate the leak. For example, the power supply system is a battery. Preferably, the emitter is a light. Preferably, in step II), the light is a light emitting diode (LED). In this case, when the electrical circuit is closed as the leak is formed, the electronic system turns on the LED. Alternatively, the emitter is a computer able to indicate the leak by showing a map with the area affected by the leak.

The fourth object of the present invention is a method for detecting a strain deformation of the non-conductive substrate with the non-conductive substrate being at least partially coated according to the present invention comprising the following successive steps:

- 1. the application of an electric voltage to the non-conductive substrate being at least partially coated using an electronic system,
- 2. the measurement of the electrical resistance variation of the non-conductive substrate being at least partially coated.

Without willing to be bound by any theory, it is believed that in the paint, the reduced graphene oxide nanoparticles form a conductive network. When the material is subjected to a strain, the

internal geometry of the network which is stronger than the thermosetting changes in an important way. The consequence is a change in the electrical resistance of the paint.

In this case, preferably, the gauge factor, being the ratio of relative change in electrical resistance to the mechanical strain ϵ , is above 5.

Preferably, in step 1), the electronic system comprises a power supply system. Preferably, it is a battery.

Finally, the last object of the present invention is the use of a non-conductive substrate being at least partially coated according to the present invention for detecting a water leak of the non-conductive substrate or a strain deformation of the non-conductive substrate.

The invention will now be explained in trials carried out for information only. They are not limiting.

Examples:

Example 1: conductivity test

Different nanoparticles were mixed with an epoxy resin having a molar mass distribution between 700 and 1200, bisphenol A-(epichlorhydrin) epoxy resin having a molar mass distribution below or equal to 700 and xylene. The mixture was mixed and dispersed using a device called DISPERMAT. Then, a curing agent comprising polyamide was added in the mixture before being mixed. The mixture was deposited on poly(methylmethacrylate) (PMMA) substrate.

Then, an electric voltage (10V) was applied on all the trials using an electronic system including a battery. The electrical resistance was determined. The surface

area was measured by Brunauer–Emmett–Teller (BET). The conductivity of all Trials was calculated.

The results are in the following Table 1:

Trials	Nanoparticles				Nanoparticles Concentration in the paint (wt.%)	Sheet Resistance (Ω/sq)	Minimum Conductivity (S/m)
	Nature	Oxygen content (wt%)	Lateral size (μm)	Surface area (m^2/gr)			
1*	Reduced Graphene oxide (rGO)	Between 2 and 2.5	Around 70	287	0.5	2.7×10^6	3.7×10^{-3}
2*	rGO	Between 2 and 2.5	Around 70	287	0.75	6.7×10^4	1.5×10^{-1}
3*	rGO	Between 2 and 8	Around 70	287	0.5	3.6×10^8	2.8×10^{-5}
4*	rGO	Between 2 and 10	Around 30	287	0.6	4.8×10^{10}	2.1×10^{-7}
5	graphene	<2	> 5	-	0.5	$> 10^{12}$	$< 1 \times 10^{-8}$
6	graphene	<2	> 5	-	0.75	$> 10^{12}$	$< 1 \times 10^{-8}$

*: according to the present invention.

5

Trials 1 to 4 show a high conductivity and therefore a high sensitivity for detecting leak and strain deformation compared to Trials 5 and 6.

Example 2: leak detection test

10

Nanoplatelets of Reduced graphene oxide having from 1 to 5% by weight oxygen and a lateral size around $20\mu\text{m}$ was mixed with epoxy resin having a molar mass distribution between 700 and 1200, bisphenol A-(epichlorhydrin) epoxy resin having a molar mass distribution below or equal to 700 and xylene. A solvent comprising xylene, n-butanol, ethylbenzene and naphtha was added. The mixture was mixed and dispersed using a device called DISPERMAT. Then, a curing agent comprising polyamide was added in the mixture before being mixed. The mixture was deposited on a non-woven geotextile made of polyethylene terephthalate (PET). Then, a drying was performed at room temperature.

15

The coated geotextile was perforated to create a small hole and then it was positioned between two layers of mining wastes. An electronic system, comprising a battery and LEDS, was connected to the coated geotextiles. Water was poured on the top of the mining wastes. When the water flows through the hole in the coated geotextile, the electrical circuit is formed and the LEDS switch on.

The same test was performed by depositing paint strips to form a paint alternation on the geotextile. When water came into contact with the coated geotextile, the LEDs that switched on were the one closest to the geotextile in contact with water. Thus, if the geotextile is broad (i.e. hundreds of meters), it is possible to quickly see where the water leak happened thanks to the correlation between the position and the LEDs that are shining.

Example 3: Strain deformation test

Different nanoparticles were mixed with an epoxy resin having a molar mass distribution between 700 and 1200, bisphenol A-(epichlorhydrin) epoxy resin having a molar mass distribution below or equal to 700 and xylene. The mixture was mixed and dispersed using a device called DISPERMAT. Then, a curing agent comprising polyamide was added in the mixture before being mixed. The mixture was deposited on poly(methylmethacrylate) (PMMA) substrate.

Then, a tensile loading was applied on all the Trials and the gauge factor, being the ratio of relative change in electrical resistance, to the mechanical strain ϵ , was determined. The surface area was measured by Brunauer–Emmett–Teller (BET). A conventional strain gauge sensitivity being made of constantan® was added in comparison.

The results are in the following Table 2:

Trials	Nanoparticles				Nanoparticles Concentration in the paint (wt.%)	Strain (%)	Gauge factor
	Nature	Oxygen content (wt%)	Lateral size (μm)	Surface area (m^2/gr)			
7*	rGO	Between 2 and 2.5	Around 70	287	0.6	0.2	8
8*	rGO	Between 2 and 2.5	Around 70	287	0.6	0.4	27
9*	rGO	Between 2 and 2.5	Around 70	287	0.6	0.6	27
10*	rGO	Between 2 and 2.5	Around 70	287	0.6	0.8	30
12	conventional strain gauge	-	-	-	-	0.2	2
13	conventional strain gauge	-	-	-	-	0.4	2
14	conventional strain gauge	-	-	-	-	0.6	2
15	conventional strain gauge	-	-	-	-	0.8	2

*: according to the present invention.

- 5 Trials 7 to 10 show a high gauge factor and therefore a high sensitivity to detect the strain deformation compared to conventional strain gauge.

CLAIMS

1. A non-conductive substrate being at least partially coated on at least one side with a paint comprising reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and at least one thermosetting polymer, the non-conductive substrate being directly coated by the paint.
2. The non-conductive substrate according to claim 1, wherein the reduced graphene oxide has a lateral size of 1 to $80\mu\text{m}$.
3. The non-conductive substrate according to any one of claims 1 and 2, wherein the reduced graphene oxide has a weight percentage of oxygen between 2% and 20%.
4. The non-conductive substrate according to any one of claims 1 to 3, wherein the reduced graphene oxide is not functionalized by a biopolymer.
5. The non-conductive substrate according to any one of claims 1 to 4, wherein the reduced graphene oxide is in a form of one or more nanoplatelets.
6. The non-conductive substrate according to any one of claims 1 to 5, wherein the paint has a thickness below 2mm.
7. The non-conductive substrate according to any one of claims 1 to 6, wherein the paint has a concentration of the reduced graphene oxide between 0.05% and 10% by weight.
8. The non-conductive substrate according to any one of claims 1 to 7, wherein the paint does not comprise a thermoplastic polymer.
9. The non-conductive substrate according to any one of claims 1 to 8, wherein the paint is free of acrylic polymer.
10. The non-conductive substrate according to any one of claims 1 to 9, wherein the thermosetting polymer is selected from the group consisting of: epoxy resin, Polyester resin, Polyurethanes, Polyurea/polyurethane, Vulcanized rubber, Urea-formaldehyde,

Melamine resin, Benzoxazines resins, Polyimides, Bismaleimides resins, Cyanate esters resins, polycyanurates, Furan resin, Silicone resins, Thiolyte resin, Vinyl ester resins and a combination thereof.

11. The non-conductive substrate according to any one of claims 1 to 10, wherein the non-conductive substrate is a textile or a plastic substrate.
12. The non-conductive substrate according to claim 11, wherein the textile is a geomembrane, a geotextile or a geosynthetic clay liner.
13. The non-conductive substrate according to claim 11, wherein the plastic substrate is selected from the group consisting of: Poly(methyl methacrylate), Acrylonitrile Butadiene Styrene, Polyamides family, Polycarbonate, Polyvinyl chloride, Polypropylene, Polyethylene, Polyethylene terephthalate and a combination thereof.
14. The non-conductive substrate according to claim 11, wherein the plastic substrate does not comprise Poly-4-vinylphenol, polyethersulfone or Polydimethylsiloxane.
15. The non-conductive substrate according to any one of claims 1 to 14, wherein the paint does not comprise titanium dioxide or copper.
16. The non-conductive substrate according to any one of claims 1 to 15, wherein the non-conductive substrate is coated with paint strips to form an alternation between painted non-conductive substrate and non-painted non-conductive substrate.
17. The non-conductive substrate according to any one of claims 1 to 15, wherein the non-conductive substrate is coated with one entire layer of paint.
18. A non-conductive substrate being at least partially coated on at least one side with a paint comprising reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$ and at least one thermosetting polymer, the non-conductive substrate being directly coated by the paint, wherein:

the reduced graphene oxide has a lateral size of 40 to 80 μm ,

the reduced graphene oxide has a weight percentage of oxygen between 2% and 10%, and

the paint has a concentration of reduced graphene oxide between 0.5% and 4% by weight.

19. A method for the manufacture of the non-conductive substrate being at least partially coated according to any one of claims 1 to 18, comprising the successive following steps:
 - A. mixing the reduced graphene oxide having a surface area below $300\text{m}^2.\text{gr}^{-1}$, a thermosetting monomer, a curing agent and optionally a solvent,
 - B. depositing the mixture on the non-conductive substrate, and
 - C. a curing step.
20. The method according to claim 19, wherein in step A), the solvent is selected from the group consisting of: xylene, n-butanol, ethylbenzene, naphtha and a combination thereof.
21. The method according to any one of claims 19 and 20, wherein in step A), the thermosetting monomer is selected from the group consisting of: epoxy, ester, urethane, urea/polyurethane, rubber, Urea-formaldehyde monomer, Melamine, Benzoxazines, imides, Bismaleimides, Cyanate esters, cyanurates, Furan, Silicone, Thiolyte, Vinyl ester and a combination thereof.
22. The method according to any one of claims 19 to 21, wherein in step A), the curing agent is selected from the group consisting of: polyamide, phenols, amines, polyaddition isocyanate and a combination thereof.
23. The method according to any one of claims 19 to 22, wherein in step B), the deposition of the mixture is performed by spin coating, spray coating, dip coating, film coating, coil coating, brush coating or spatula coating.
24. The method according to any one of claims 19 to 23, wherein in step C), the curing step is performed by drying at room temperature.

25. A method for detecting a leak with the non-conductive substrate being at least partially coated according to any one of claims 1 to 18 or obtained from the method according to any one of claims 19 to 24 comprising the following successive steps:
- a) applying an electric voltage to the non-conductive substrate being at least partially coated using an electronic system, and
 - b) detecting a water leak through the non-conductive substrate when an electrical circuit is formed in the non-conductive substrate being at least partially coated.
26. The method according to claim 25, wherein in step a), the electronic system comprises a power supply system and an emitter able to indicate the leak.
27. The method according to claim 26, wherein the emitter is a computer or a light.
28. A method for detecting a strain deformation of the non-conductive substrate with the non-conductive substrate being at least partially coated according to any one of claims 1 to 18 or obtained from the method according to any one of claims 19 to 24 comprising the following successive steps:
- 1) applying an electric voltage to the non-conductive substrate being at least partially coated using an electronic system, and
 - 2) measuring an electrical resistance variation after deformations of the non-conductive substrate being at least partially coated.
29. The method according to claim 28, wherein in step 1), the electronic system comprises a power supply system.

Figure 1

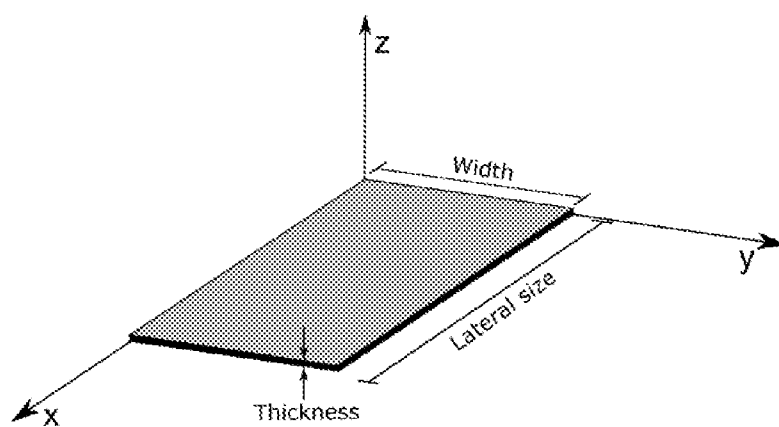


Figure 2

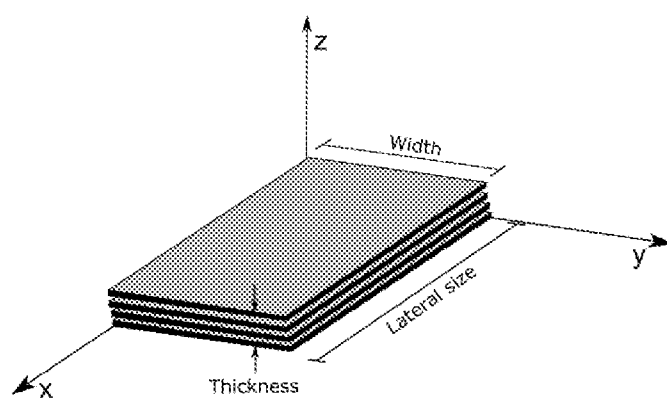


Figure 3a

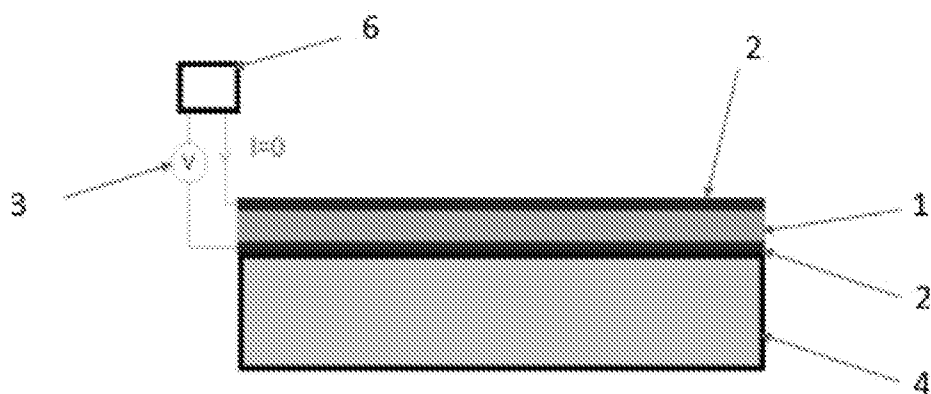


Figure 3b

