

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 January 2007 (25.01.2007)

PCT

(10) International Publication Number
WO 2007/011973 A1

(51) International Patent Classification:

C08F 210/14 (2006.01) **C08F 210/04** (2006.01)
C10M 143/08 (2006.01)

(21) International Application Number:

PCT/US2006/027943

(22) International Filing Date: 19 July 2006 (19.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/700,600 19 July 2005 (19.07.2005) US

(71) Applicant (for all designated States except US): **EXXON-MOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520-5200 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Margaret** [US/US]; 45 Richmond Drive, Skillman, NJ 08558 (US). **COKER, Catalina, L.** [US/US]; 3505 LaReforma, Baytown, TX 77521 (US). **WALZER, John, F.** [US/US]; 204 Lakeshore Drive, Seabrook, TX 77586 (US). **JIANG, Peijun** [CN/US]; 119 Mariner Cove Court, League City, TX 77573 (US).

(74) Agents: **BELL, Catherine, L.** et al.; ExxonMobil Chemical Company, Law Technology, P.O. Box 2149, Baytown, TX 77522-2149 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS TO PRODUCE LOW VISCOSITY POLY-ALPHA-OLEFINS

(57) Abstract: This invention relates to a process to produce a polyalpha-olefin comprising: 1) contacting one or more alpha-olefin monomers having 3 to 24 carbon atoms with an unbridged substituted bis cyclopentadienyl transition metal compound having: 1) at least one non-isoolefin substitution on both cyclopentadienyl rings, or 2) at least two substitutions on at least one cyclopentadienyl ring, a non-coordinating anion activator, and optionally an alkyl- aluminum compound, where the molar ratio of transition metal compound to activator is 10:1 to 0.1 :1, and if the alkyl aluminum compound is present then the molar ratio of alkyl aluminum compound to transition metal compound is 1 :4 to 4000:1, under polymerization conditions wherein: i) hydrogen is present at a partial pressure of Q.I to 50 psi, based upon the total pressure of the reactor or the concentration of the hydrogen is from 1 to 10,000 ppm or less by weight ; ii) wherein the alpha-olefin monomer(s) having 3 to 24 carbon atoms are present at 10 volume % or more based upon the total volume of the catalyst/activator/alkylaluminum compound solutions, monomers, and any diluents or solvents present in the reaction; iii) the residence time of the reaction is at least 5 minutes; iv) the productivity of the process is at least 43,000 grams of total product per gram of transition metal compound; v) the process is continuous or semi-continuous, and vi) the temperature in the reaction zone does not rise by more than 10 °C during the reaction; and vii) ethylene is not present at more than 30 volume % of the monomers entering the reaction zone; and 2) obtaining a polyalpha-olefin (PAO), optionally hydrogenating the PAO, wherein the PAO comprises at least 50 mole% of a C3 to C24 alpha-olefin monomer, and wherein the PAO has a kinematic viscosity at 1000C of 20 cSt or less.

WO 2007/011973 A1

PROCESS TO PRODUCE LOW VISCOSITY POLY-ALPHA-OLEFINS

INVENTORS: MARGARET WU
CATALINA COKER
5 JOHN WALZER
PEIJUN JIANG

Priority Claim

This invention claims the benefit of USSN 60/700,600, filed July 19, 2005.

10 Field of the Invention

This invention relates to a process to produce poly-alpha-olefins (PAOs) in the presence of a metallocene catalyst with a non-coordinating anion activator and hydrogen.

Description of Related Art

15 Efforts to improve upon the performance of natural mineral oil-based lubricants by the synthesis of oligomeric hydrocarbon fluids have been the subject of important research and development in the petroleum industry for at least fifty years. These efforts have led to the relatively recent market introduction of a number of synthetic lubricants. In terms of lubricant property improvement, the
20 thrust of the industrial research efforts involving synthetic lubricants have been towards fluids exhibiting useful viscosities over a wide temperature range, *i.e.*, improved viscosity index (VI), while also showing lubricities, thermal and oxidative stabilities and pour points equal to or better than those for mineral oil.

The viscosity-temperature relationship of a lubricating oil is one of the
25 critical criteria which must be considered when selecting a lubricant for a particular application. The mineral oils commonly used as a base for single and multigrade lubricants exhibit a relatively large change in viscosity with a change in temperature. Fluids exhibiting such a relatively large change in viscosity with temperature are said to have a low viscosity index. Viscosity index is an
30 empirical number which indicates the rate of change in the viscosity of an oil within a given temperature range. A high VI oil, for example, will thin out at elevated temperatures more slowly than a low VI oil. Usually, a high VI oil is

more desirable because it has higher viscosity at higher temperature, which translates into better lubrication and better protection of the contacting machine elements, preferably at high temperatures and or at temperatures over a wide range. VI is calculated according to ASTM method D 2270.

5 PAOs comprise a class of hydrocarbons manufactured by the catalytic oligomerization (polymerization to low-molecular-weight products) of linear α -olefin (LAO) monomers. These typically range from 1-octene to 1-dodecene, with 1-decene being a preferred material, although oligomeric copolymers of lower olefins such as ethylene and propylene may also be used, including
10 copolymers of ethylene with higher olefins as described in U.S. Patent 4,956,122 and the patents referred to therein. PAO products have achieved importance in the lubricating oil market. Typically there are two classes of synthetic hydrocarbon fluids (SHF) produced from linear alpha-olefins, the two classes of SHF being denoted as PAO and HVI-PAO (high viscosity index PAO's). PAO's and HVI-
15 PAO's of different viscosity grades are typically produced using promoted BF_3 or AlCl_3 catalysts.

Specifically, PAOs may be produced by the polymerization of olefin feed in the presence of a catalyst such as AlCl_3 , BF_3 , or BF_3 complexes. Processes for the production of PAOs are disclosed, for example, in the following patents: U.S.
20 Patents 3,149,178; 3,382,291; 3,742,082; 3,769,363; 3,780,128; 4,172,855 and 4,956,122, which are fully incorporated by reference. PAOs are also discussed in: Will, J.G. *Lubrication Fundamentals*, Marcel Dekker: New York, 1980.

Subsequent to polymerization, the PAO lubricant range products are typically hydrogenated in order to reduce the residual unsaturation, generally to a level of
25 greater than 90%. HVI-PAO's may also be conveniently made by the polymerization of an alpha-olefin in the presence of a polymerization catalyst such as Friedel-Crafts catalysts. These include, for example, aluminum trichloride, boron trifluoride, aluminum trichloride or boron trifluoride promoted with water, with alcohols such as ethanol, propanol, or butanol, with carboxylic
30 acids, or with esters such as ethyl acetate or ethyl propionate or ether such as diethyl ether, diisopropyl ether, etc. (See for example, the methods disclosed by U.S. Patents 4,149,178 or 3,382,291.) Other descriptions of PAO synthesis are

found in the following U.S. Patents: 3,742,082 (Brennan); 3,769,363 (Brennan); 3,876,720 (Heilman); 4,239,930 (Allphin); 4,367,352 (Watts); 4,413,156 (Watts); 4,434,408 (Larkin); 4,910,355 (Shubkin); 4,956,122 (Watts); and 5,068,487 (Theriot).

5 Another class of HVI-PAOs may be prepared by the action of a supported, reduced chromium catalyst with an alpha-olefin monomer. Such PAOs are described in U.S. Patents 4,827,073 (Wu); 4,827,064 (Wu); 4,967,032 (Ho et al.); 4,926,004 (Pelrine et al.); and 4,914,254 (Pelrine). Commercially available PAOs include SpectraSyn™ 2, 4, 5, 6, 8, 10, 40, 100 and SpectraSyn Ultra™ 150,
10 SpectraSyn Ultra™ 300, SpectraSyn Ultra™ 1000, etc. (ExxonMobil Chemical Company, Houston Texas).

Synthetic PAOs have found wide acceptability and commercial success in the lubricant field for their superiority to mineral based lubricants. In terms of lubricant property improvement, industrial research efforts on synthetic lubricants
15 have led to PAO fluids exhibiting useful viscosities over a wide range of temperature, *i.e.*, improved viscosity index, while also showing lubricity, thermal and oxidative stability and pour point equal to or better than mineral oil. These relatively new synthetic lubricants lower mechanical friction, enhancing mechanical efficiency over the full spectrum of mechanical loads and do so over a
20 wider range of operating conditions than mineral oil lubricants.

Performance requirements of lubricants are becoming increasingly stringent. New PAOs with improved properties, such as high viscosity index (VI), low pour point, reduced volatility, high shear stability, improved wear
25 performance, increased thermal and oxidative stability, and or wider viscosity range, are needed to meet new performance requirements for lubricants. New methods to provide such new PAOs with improved properties are also needed.

Efforts have been made to prepare various PAOs using metallocene catalyst systems. Examples include US 6,706,828 (equivalent to US 2004/0147693), where PAOs are produced from *meso*-forms of certain
30 metallocene catalysts under high hydrogen pressure with methyl alumoxane as a activator. Comparative example D of US 6,706,828, however, uses *rac*-dimethylsilylbis(2-methyl-indenyl)zirconium dichloride in combination with

methyllumoxane (MAO) at 100°C in the presence of hydrogen to produce polydecene. Likewise, WO 02/14384 discloses, among other things, in examples J and K the use of *rac*-ethyl-bis(indenyl)zirconium dichloride or *rac*-dimethylsilyl-bis(2-methyl-indenyl) zirconium dichloride in combination with

5 MAO at 40 °C (at 200 psi hydrogen or 1 mole of hydrogen) to produce isotactic polydecene reportedly having a Tg of -73.8°C, a KV₁₀₀ of 702 cSt, and a VI of 296; or to produce polydecene reportedly having a Tg of -66 °C, a KV₁₀₀ of 1624, and a VI of 341, respectively. Further WO 99/67347 discloses in example 1 the use of ethylidene bis(tetrahydroindenyl)zirconium dichloride in combination with

10 MAO at 50°C to produce a polydecene having an Mn of 11,400 and 94% vinylidene double bond content.

Others have made various PAOs, such as polydecene, using various metallocene catalysts not typically known to produce polymers or oligomers with any specific tacticity. Examples include WO 96/23751, EP 0 613 873, US

15 5,688,887, US 6,043,401, WO 03/020856 (equivalent to US 2003/0055184), US 5,087,788, US 6,414,090, US 6,414,091, US 4,704,491, US 6,133,209, and US 6,713,438.

To date however, PAO's made with metallocenes have not found wide applicability in the marketplace, particularly the lubricant marketplace, due to

20 inefficient process, cost and property deficits. The instant invention address such and other needs by providing new PAO's having excellent property combinations and an improved process to produce them.

US 6,548,724 (equivalent to US 2001/0041817 and US 6,548,723)

25 disclose production of oligomer oils using certain metallocene catalysts, typically in combination with methyl alumoxane. Column, 20, line 40 to 44 of US 6,548,724 indicates that Examples, 10-11 indicate that di, tri or tetra substitutions on the cyclopentadienyl rings of the metallocenes are useful for production of high viscosity polyalphaolefins, (viscosities in the range of 20 to 5000 cSt at 100°C)

30 with improved yields whereas penta alkyl substituted cyclopentadienyl rings are poor."

PCT/US06/21231 filed June 2, 2006 claiming the benefit of USSN 60/700,600, filed July 19, 2005 describes the production of liquids from monomers having 5 to 24 carbon atoms using racemic metallocenes and non-coordinating anion activators.

5 Other references of interest include: EP0284708, US5846896, US5679812, EP0321852, US4962262 EP0513380, US2004/0230016, and US6642169.

Summary of Invention

10 This invention relates to a process to produce a polyalpha-olefin comprising:

1) contacting one or more alpha-olefin monomers having 3 to 24 carbon atoms with an unbridged substituted bis cyclopentadienyl transition metal compound having: 1) at least one non-isoolefin substitution on each
15 cyclopentadienyl ring, or 2) at least two substitutions on at least one cyclopentadienyl ring, preferably having at least two substitutions on each cyclopentadienyl ring, a non-coordinating anion activator, and optionally an alkyl-aluminum compound, where the molar ratio of transition metal compound to activator is 10:1 to 0.1:1, and if the alkyl aluminum compound is present then the
20 molar ratio of alkyl aluminum compound to transition metal compound is 1:4 to 4000:1, under polymerization conditions wherein:

- i) hydrogen is present at a partial pressure of 1 to 50 psi or a hydrogen concentration of 10 to 10,000 ppm, based upon the total pressure of the reactor;
- ii) wherein the alpha-olefin monomer(s) having 3 to 24 carbon atoms are
25 present at 10 volume % or more based upon the total volume of the catalyst/activator/alkylaluminum compound solutions, monomers, and any diluents or solvents present in the reaction;
- iii) the residence time of the reaction is at least 5 minutes;
- iv) the productivity of the process is at least 43,000 g of total product per
30 gram of transition metal compound;
- v) the process is continuous or semi-continuous,

vi) the temperature in the reaction zone does not rise by more than 10 °C during the reaction; and

vii) ethylene is not present at more than 30 volume % of the monomers entering the reaction zone;

5 and

2) obtaining a polyalpha-olefin (PAO), optionally hydrogenating the PAO, wherein the PAO comprises at least 50 mole% of a C3 to C24 alpha-olefin monomer, and wherein the PAO has a kinematic viscosity at 100°C of 20 cSt or less.

10

Detailed Description of the Invention

As used herein, the new numbering scheme for the Periodic Table of the Elements is used as set out in CHEMICAL AND ENGINEERING NEWS, 63(5), 27 (1985).

15 Unless otherwise stated all pressures in psi are psig.

For purposes of this invention and the claims thereto, when a polymer or oligomer is referred to as comprising an olefin, the olefin present in the polymer or oligomer is the polymerized or oligomerized form of the olefin, respectively. Likewise the use of the term polymer is meant to encompass homopolymers and
20 copolymers, where copolymers include any polymer having two or more chemically distinct monomers. Likewise the use of the term oligomer is meant to encompass homooligomers and cooligomers, where cooligomers include any oligomer or having two or more chemically distinct monomers.

For purposes of this disclosure, the term oligomer refers to compositions
25 having 2-75 mer units and the term polymer refers to compositions having 76 or more mer units. A mer is defined as a unit of an oligomer or polymer that originally corresponded to the olefin(s) used in the oligomerization or polymerization reaction. For example, the mer of polydecene would be decene.

For the purposes of this invention and the claims thereto the term
30 "Polyalpha-olefin," "polyalphaolefin," or "PAO" includes homooligomers, cooligomers, homopolymers and copolymers of C3 or greater alpha-olefin monomers.

For the purposes of this invention and the claims thereto the active species in a catalytic cycle may comprise the neutral or ionic forms of the catalyst.

The term "catalyst system" is defined to mean a catalyst precursor/activator pair, such as a metallocene/activator pair. When "catalyst system" is used to describe such a pair before activation, it means the unactivated catalyst (precatalyst) together with an activator and, optionally, a co-activator (such as a trialkylaluminum compound). When it is used to describe such a pair after activation, it means the activated catalyst and the activator or other charge-balancing moiety. Additionally, the catalyst system may optionally comprise a co-activator and/or other charge-balancing moiety.

"Catalyst precursor" is also often referred to as precatalyst, catalyst, precursor, metallocene, transition metal compound, unactivated catalyst, or transition metal complex. These words are used interchangeably. Activator and cocatalyst are also used interchangeably. A scavenger is a compound that is typically added to facilitate oligomerization or polymerization by scavenging impurities. Some scavengers may also act as activators and may be referred to as co-activators. A co-activator which is not a scavenger may also be used in conjunction with an activator in order to form an active catalyst with a transition metal compound. In some embodiments, a co-activator can be pre-mixed with the transition metal compound to form an alkylated transition metal compound, also referred to as an alkylated catalyst compound or alkylated metallocene.

For purposes of this invention and the claims thereto noncoordinating anion (NCA) is defined to mean an anion which either does not coordinate to the catalyst metal cation or that coordinates only weakly to the metal cation. An NCA coordinates weakly enough that a neutral Lewis base, such as an olefinically or acetylenically unsaturated monomer, can displace it from the catalyst center. Any metal or metalloid that can form a compatible, weakly coordinating complex with the catalyst metal cation may be used or contained in the noncoordinating anion. Suitable metals include, but are not limited to, aluminum, gold, and platinum. Suitable metalloids include, but are not limited to, boron, aluminum, phosphorus, and silicon. A subclass of non-coordinating anions comprises stoichiometric activators, which can be either neutral or ionic. The terms ionic activator, and

stoichiometric ionic activator can be used interchangeably. Likewise, the terms neutral stoichiometric activator and Lewis acid activator can be used interchangeably.

In addition, a reactor is any container(s) in which a chemical reaction
5 occurs.

“Isoolefin” is a branched alkene having at least one tertiary or quaternary carbon atom and which possess at least one C₁ to C₁₈ alkyl branch along at least a portion of each chain. Preferably the alkyl branch is C₁ to C₁₂.

10 Polyalpha-olefins

In a preferred embodiment, this invention relates to liquid polyalpha-olefins (PAO's) comprising more than 50 mole % of one or more C₃ to C₂₄ alpha-olefin monomers, preferably 55 mole % or more, preferably 60 mole % or more, preferably 65 mole % or more, preferably 70 mole % or more, preferably 75 mole
15 % or more, preferably 80 mole % or more, preferably 85 mole % or more, preferably 90 mole % or more, preferably 95 mole % or more, preferably 100 mole % based on the total moles of monomers present in the polyalpha-olefin, as measured by Carbon -13 NMR.

For purposes of this invention and the claims thereto, a liquid is defined to
20 be a material that flows at room temperature, having a pour point of less than 25°C, and with no melting point above 0°C and a kinematic viscosity at 25°C of 30,000 cSt or less.

In another embodiment, any of the polyalpha-olefins described herein preferably have less than 300 ppm of Group 4 metals (preferably Ti, Hf or Zr),
25 preferably less than 200 ppm, preferably less than 100 ppm, preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

In another embodiment, any of the polyalpha-olefins described herein preferably have less than 300 ppm of Ti, preferably less than 200 ppm, preferably
30 less than 100 ppm, preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

In another embodiment, any of the polyalpha-olefins described herein preferably have less than 300 ppm of Hf, preferably less than 200 ppm, preferably less than 100 ppm, preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

5 In another embodiment, any of the polyalpha-olefins described herein preferably have less than 300 ppm of Zr, preferably less than 200 ppm, preferably less than 100 ppm, preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

10 In another embodiment, any of the polyalpha-olefins described herein preferably have less than 100 ppm of Group 13 metals (preferably B or Al), preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

In another embodiment, any of the polyalpha-olefins described herein preferably have less than 100 ppm of boron, preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

15 In another embodiment, any of the polyalpha-olefins described herein preferably have less than 600 ppm of aluminum, preferably less than 500 ppm, preferably less than 600 ppm, preferably less than 300 ppm, preferably less than 300 ppm, preferably less than 10 ppm, preferably less than 50 ppm, preferably less than 10 ppm, as measured by ASTM 5185.

20 In another embodiment, any of the polyalpha-olefins described herein preferably have an Mw (weight average molecular weight) of 100,000 or less, preferably between 100 and 80,000, preferably between 250 and 60,000, preferably between 280 and 50,000, preferably between 336 and 40,000 g/mol. (Preferred Mw's include those from 224 to 55,100, preferably from 392 to 30,000, preferably 800 to 24,000, preferably 2,000 to 37,5000 g/mol. Alternately preferred Mw's include 224 to about 6790 and 224 to about 2720).

25 In another embodiment, any of the polyalpha-olefins described herein preferably have an Mn (number average molecular weight) of 50,000 or less, preferably between 200 and 40,000, preferably between 250 and 30,000, preferably between 500 and 20,000 g/mol. (Preferred Mn's include those from 280 to 10,000, preferably from 280 to 4000. Alternately preferred Mn's include

those from 200 to 20,900, preferably 280, to 10,000, preferably 200 to 7000, preferably 200 to 2000, preferably 280 to 2900, preferably 280 to 1700, preferably 200 to 500.)

In another embodiment, any of the polyalpha-olefins described herein preferably have an Mw/Mn of greater than 1 and less than 5, preferably less than 4, preferably less than 3, preferably less than 2.5, preferably less than 2. Alternately any of the polyalpha-olefins described herein preferably have an Mw/Mn of between 1 and 2.5, alternately between 1 and 3.5.

The Mw, Mn and Mz are measured by GPC method using a column for medium to low molecular weight polymers, tetrahydrofuran as solvent and polystyrene as calibration standard, correlated with the fluid viscosity according to a power equation. Unless otherwise indicated Mw values reported herein are GPC values and not calculated from kinematic viscosity at 100°C.

In a preferred embodiment of this invention, any PAO described herein may have a pour point of less than 0 °C (as measured by ASTM D 97), preferably less than -10 °C, preferably less than -20 °C, preferably less than -25°C, preferably less than -30°C, preferably less than -35°C, preferably less than -40 °C, preferably less than -55 °C, preferably between -10 and -80 °C, preferably between -15°C and -70°C.

In a preferred embodiment of this invention, any PAO described herein may have a kinematic viscosity (at 40°C as measured by ASTM D 445) from about 3 to about 1,000 cSt, preferably from about 4 cSt to about 500 cSt at 40 °C, alternately from about 4 to about 4 cSt, preferably from about 5 cSt to about 400 cSt, preferably from about 5 cSt to about 300 cSt at 40 °C.

25

In another embodiment according to the present invention, any polyalpha olefin described herein may have a kinematic viscosity at 100°C from about 1.5 to about 20 cSt, preferably from about 1.7 to about 15 cSt, preferably from about 1.8 cSt to about 12 cSt.

In another embodiment according to the present invention any polyalpha olefin described herein may have a kinematic viscosity at 100°C from 1.8 to 12

30

cSt and a flash point of 150 °C or more, preferably 200 °C or more (as measured by ASTM D 56).

In another embodiment according to the present invention any polyalpha olefin described herein may have a dielectric constant of 2.5 or less (1 kHz at 23 °C as determined by ASTM D 924).

In another embodiment according to the present invention any polyalpha olefin described herein may have a specific gravity of 0.75 to 0.96 g/cm³, preferably 0.80 to 0.94 g/cm³.

The PAO's prepared herein, particularly those of low viscosity (such as those with a KV₁₀₀ of 20 cSt or less), are especially suitable for high performance automotive engine oil formulations either by themselves or by blending with other fluids, such as Group II, Group II+, Group III, Group III+ or lube base stocks derived from hydroisomerization of wax fractions from Fisher-Tropsch hydrocarbon synthesis from CO/H₂ syn gas, or other Group IV or Group V base stocks. PAOs having KV₁₀₀'s from 3 cSt to 8 cSt are also preferred grades for high performance automotive engine oil or industrial oil formulations.

In another embodiment according to the present invention, any polyalpha olefin described herein may have a viscosity index (VI) of 90 or more, preferably 100 or more, alternately from 100 to 300, alternately from 120 to 280, alternately from 100 to 300, alternately from 140 to 300,. For many lower viscosity fluids made from 1-decene or 1-decene equivalent feeds (KV₁₀₀ of 3 to 10 cSt), the preferred VI range is from 90 to 200. Viscosity index is determined according to ASTM Method D 2270-93 [1998].

All kinematic viscosity values reported for fluids herein are measured at 100 °C unless otherwise noted. Dynamic viscosity can then be obtained by multiplying the measured kinematic viscosity by the density of the liquid. The units for kinematic viscosity are in m²/s, commonly converted to cSt or centistokes (1cSt=10⁻⁶ m²/s or 1 cSt = 1 mm²/sec).

The PAO's produced according to this invention are typically dimers, trimers, tetramers, or higher oligomers of one or more C3 to C24 olefin monomers, preferably one or more C4 to C20 alpha-olefin monomers, preferably one or more C5 to C20 linear alpha-olefin monomers. Alternatively, an alpha-

olefin with alkyl substituent at least 2 carbons away from the olefinic double bond can also be used. Typically, the PAO's produced herein are usually a mixture of many different oligomers. The smallest oligomers from these alpha-olefins have carbon number ranging from C10 to C20. These small oligomers are usually
5 separated from the higher oligomers with carbon number of greater than C20, for example C24 and higher which are typically used as high performance fluids. These separated C10 to C20 oligomer olefins or the corresponding paraffins after hydrogenation can be used in specialty applications, such as drilling fluids, solvents, paint thinner, etc with excellent biodegradability, toxicity, viscosities,
10 etc. The high performance fluid fraction in the C20, or C30 and higher fractions typically have lower viscosities making them beneficial for some applications, such as better fuel economy, better biodegradability, better low temperature flow properties, or lower volatility. Because of their usually narrow molecular weight distribution, they have superior shear stability. the PAOs described herein can be
15 further blended with proper additives, including antioxidants, antiwear additives, friction modifiers, dispersants, detergents, corrosion inhibitors, defoamants, extreme pressure additives, seal swell additives, and optionally viscosity modifiers, etc. Description of typical additives can be found in the book "Lubricant Additives" Chemistry and Applications, ed. L. R. Rudnick, Marcel
20 Dekker, Inc., New York, 2003.

In another embodiment, any of the PAO's described herein may have pour points of less than 0°C, alternately less than -45 °C, alternately less than -75 °C.

In a preferred embodiment, the PAO's of this invention have a KV₁₀₀ of 1.5-20 cSt and a pour point of less than 0°C, preferably less than -45 °C,
25 preferably less than -75 °C. Alternately preferred PAO's have KV₁₀₀ of 1.5-15 cSt and a pour point of less than 0°C, preferably less than -45 °C, preferably less than -75 °C. In another preferred embodiment, the PAO's of this invention have a KV₁₀₀ of 1.5 to 10 cSt and a pour point of less than 0°C, preferably less than -45 °C, preferably less than -75 °C.

30 In another embodiment, the PAO's produced herein have a volatility as measured by Noack Volatility test (ASTM D5800) of 25 wt% or less, preferably 20 wt% or less, preferably 14 wt% or less.

In another embodiment, the PAO's produced herein have a Bromine number of 1.8 or more.

The PAOs produced herein are liquids. For purposes of this invention and the claims thereto, a liquid is defined to be a material that flows at room
5 temperature, having a pour point of less than 25°C, and with no melting point above 0°C and a kinematic viscosity at 25°C of 30,000 cSt or less.

In a preferred embodiment, the product produced herein has a selectivity of 80 % or more for C20 and greater hydrocarbons, preferably 85% or more, preferably 90% or more, more preferably 95% or more, preferably 98% or more,
10 preferably 99% or more for C20 and greater hydrocarbons.

In a preferred embodiment, the productivity of the process is at least 43,000 g of total product per gram of transition metal compound, preferably at least 45,000g of total product per gram of transition metal compound, preferably at least 50,000 g of total product per gram of transition metal compound,
15 preferably at least 55,000g of total product per gram of transition metal compound, preferably at least 60,000g of total product per gram of transition metal compound, preferably at least 75,000g of total product per gram of transition metal compound, preferably at least 100,000g of total product per gram of transition metal compound.

20 In a preferred embodiment, the product produced herein has a selectivity of 60 % or less for C20 or less hydrocarbons, preferably 50% or less, preferably 40% or less, more preferably 20% or less, preferably 10% or less, preferably 5% or less for C20 or less hydrocarbons (% by weight unless otherwise noted).

In a preferred embodiment, the product produced herein has a selectivity
25 of 60 % or less for C10 dimer, preferably 50% or less, preferably 40% or less, more preferably 30% or less for C10 dimer (% by weight unless otherwise noted).

Process

This invention relates to an improved process to produce poly-alpha-
30 olefins. This improved process employs metallocene catalysts together with one or more non-coordinating anion activators. The metallocene catalysts are unbridged, substituted bis cyclopentadienyl transition metal compounds. One

preferred class of catalysts are highly substituted metallocenes that give high catalyst productivity and with low product viscosity. Another preferred class of metallocenes are unbridged and substituted cyclopentadienes, including unbridged and substituted or unsubstituted indenenes and or fluorenes. One aspect of the processes described herein also includes treatment of the feed olefins to remove catalyst poisons, such as peroxides, oxygen, sulfur, nitrogen-containing organic compounds, and or acetylenic compounds. This treatment is believed to increase catalyst productivity, typically more than 5 fold, preferably more than 10 fold.

In a preferred embodiment, this invention relates to a continuous or semi-continuous process to produce a polyalpha-olefin comprising:

- 1) contacting at least one alpha-olefin monomer, (whether a single monomer type or a mixture of two or more monomers), having 3 to 24 carbon atoms with an unbridged substituted bis cyclopentadienyl transition metal compound having: 1) at least one non-isoolefin substitution on each cyclopentadienyl ring, or 2) at least two substitutions on at least one cyclopentadienyl ring, preferably having at least two substitutions on each cyclopentadienyl ring, a non-coordinating anion activator, and optionally an alkyl-aluminum compound, where the molar ratio of transition metal compound to activator is 10:1 to 0.1:1, and if the alkyl aluminum compound is present then the molar ratio of alkyl aluminum compound to transition metal compound is 1:4 to 4000:1, under polymerization conditions wherein hydrogen is present at a partial pressure of 50 psi (345 kPa) or less, based upon the total pressure of the reactor (preferably between 1 psi (7 kPa) and 50 psi, preferably between 3 psi (20kPa) and 40 psi (276kPa), preferably between 5 psi (35kPa) and 30 psi (207kPa), preferably 25 psi (173 kPa) or less, preferably 10 psi (69 kPa) or less, or hydrogen is present at a concentration of 10 to 10,000 ppm by weight, preferably 25 to 7,500 ppm, preferably 25 to 5,000 ppm, and wherein the alpha-olefin monomer(s) having 3 to 24 carbon atoms are present at 10 volume % or more based upon the total volume of the catalyst/activator/co-activator solutions, monomers, and any diluents or solvents present in the reaction and ethylene is not present at more than 30 volume % of the monomers entering the reaction zone, wherein the residence

time of the reaction is at least 5 minutes, and the temperature in the reaction zone does not rise by more than 10 °C during the reaction; and

- 2) obtaining a polyalpha-olefin (PAO), optionally hydrogenating the PAO, and obtaining a PAO, comprising at least 50 mole% of a C3 to C24 alpha-olefin monomer, wherein the polyalpha-olefin has a kinematic viscosity at 100°C of 20 cSt or less (preferably 15 cSt or less), and preferably a pour point of 0 °C or less;


wherein the productivity of the process is at least 43,000 g of total product per mmol of transition metal compound.

10

In a preferred embodiment, this invention relates to a process to produce a liquid poly-alpha-olefin having a KV₁₀₀ of 20 cSt or less comprising:

- a) contacting in a reaction zone, in the presence of hydrogen (preferably from 10 to 10,000 ppm by weight of hydrogen), one or more C3 to C20 alpha-olefin monomers with a non-coordinating anion activator and a transition metal compound represented by the formula:

15

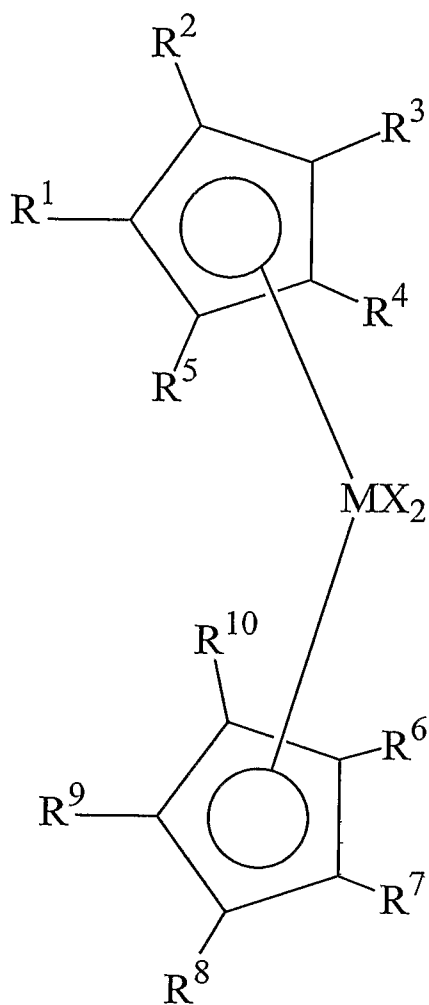

- where M is a Group 4 metal preferably titanium, zirconium or hafnium, preferably zirconium or hafnium, each X is a hydrogen, halogen, hydride radicals,
- 5 hydrocarbyl radicals, substituted hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, silylcarbyl radicals, substituted silylcarbyl radicals, germylcarbyl radicals, or substituted germylcarbyl radicals; or both X are joined and bound to the metal atom to form a metallacycle ring containing from about 3 to about 20 carbon atoms; or both together can be an olefin, diolefin or
- 10 aryne ligand;
- and R^1 to R^{10} are independently, a radical group which is a hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, silylcarbyl or germylcarbyl, (preferably hydrogen, or a C_1 to C_{20} hydrocarbyl, a substituted C_1 to C_{20} hydrocarbyl, or a heteroatom), provided that: 1) at least one of R^1 to R^5 is not

hydrogen or an isoolefin and at least one of R⁶ to R¹⁰ is not hydrogen or an isoolefin, or 2) at least two of R¹ to R⁵ are not hydrogen, (and preferably at least two of R⁶ to R¹⁰ are not hydrogen) where any two adjacent R¹ to R⁵ groups may form a C4 to C20 cyclic or polycyclic moiety (such as substituted or unsubstituted indene or substituted or unsubstituted fluorene), and where any two adjacent R⁶ to R¹⁰ groups may form a C4 to C20 cyclic or polycyclic moiety (such as substituted or unsubstituted indene or substituted or unsubstituted fluorene), and provided that ethylene is not present at more than 30 volume % of the monomers entering the reaction zone, where:

- i) the productivity of the process is at least 43,000 g of total product per mmol of transition metal compound, and
 - ii) the process is continuous or semi-continuous, and
 - iii) the temperature in the reaction zone does not rise by more than 10 °C during the reaction (preferably not more than 7 °C, preferably not more than 5 °C, preferably not more than 3 °C); and
- b) obtaining a liquid poly-alpha-olefin having a KV₁₀₀ of 20 cSt or less.

By continuous is meant a system that operates (or is intended to operate) without interruption or cessation. For example a continuous process to produce a polymer would be one where the reactants (such as monomers and catalyst components) are continually introduced into one or more reactors and polymer product is continually withdrawn. By semi-continuous is meant a system that operates (or is intended to operate) with periodic interruption. For example a semi-continuous process to produce a polymer would be one where the reactants (such as monomers and catalyst components) are continually introduced into one or more reactors and polymer product is intermittently withdrawn.

A batch process is not continuous or semi-continuous.

In a preferred embodiment of this invention the oligomerization reaction temperature is controlled by several means, such as continuous or semi-continuous operation, by heat removal, rate of catalyst or feed addition or solvent addition. Since catalyst solution, feed olefins and/or solvents are usually at room or ambient temperature, their addition to the reactor can mitigate the heat of

reaction and can help maintain constant reaction temperature. This mode of operation can control the temperature to within 10°C of desired reaction temperature, usually preferred to be within 7°C of desired temperature, preferred to be within 5°C of desired temperature or preferred to be within 3°C of desired temperature over a 30 minute period, preferably for the entire reaction.

Usually, a reactor, containing a small amount of starting liquid is pre-heated to within 10°C of the desired reaction temperature in a semi-continuous run. This starting liquid can be feed olefins, catalyst components, solvents or polyalpha-olefins heels from previous runs, or polyalpha-olefin products from previous runs or any other appropriate liquids. Usually, part of the feed olefins, solvent or PAO heels from previous runs or PAO products from previous runs are more preferred starting liquid. When the reactor is at desired temperature, feed olefins; catalyst components, hydrogen of proper amount, solvents and other components were added continuously at proper rates. Usually in a semi-continuously run, the range of addition for the catalyst solution and the feed olefins are controlled so that addition of both streams are completed at the same time. As the polymerization reaction starts at the reaction temperature, heat is released. In order to control the reaction temperature to be as constant as possible, heat removal by several methods as mentioned above is employed. Or if the reaction rate is not high enough to maintain the reaction temperature, external heating is supplied to the reactor to maintain a desired temperature. After addition is completed, the reaction is allowed to proceed for the desired amount of time to obtain highest feed olefin conversion.

In a continuous mode of operation, the operation is similar to the semi-continuous run, except when the reactor is filled up to a pre-determined level, a pre-determined amount of reaction product is withdrawn from the reactor while the addition of all components is continued. The rate of feed addition and the amount of reaction product withdrawn from the reactor determine the reaction time or residence time. This can be pre-determined to obtain high feed olefin conversion and high reactor throughput for economical operation.

In this process, several factors are critical for optimum results. First is the proper choice of catalyst components. An un-bridged, substituted metallocene

activated by a non-coordinating anion (NCA) with small amount of trialkylaluminum is an effective catalyst. The metallocene components can be dihalide (preferably dichloride) or dialkyls. But, usually, the di-alkyl form of the metallocene is the more preferred catalyst for use in combination with an NCA.

5 When the metallocene di-halide is used, it typically requires addition of tri-alkylaluminum to promote the reaction. In this case the molar ratio of tri-alkylaluminum to metallocene is anywhere from 4 to 4000, preferably 8 to 500. When the metallocene dialkyls are used, (such as bis(tetrahydroindenyl) zirconium dimethyl, bis(1,2-dimethylcyclopentadienyl) zirconium dimethyl, 10 bis(1,3-dimethylcyclopentadienyl) zirconium dimethyl, bis(1,2,4-trimethylcyclopentadienyl) zirconium dimethyl, bis(tetramethylcyclopentadienyl)zirconium dimethyl or bis(methyl-3-n-butylcyclopentadienyl)zirconium dimethyl, or many other dialkyl metallocenes, etc.), a small amount of tri-alkylaluminums is needed to give the optimum catalyst 15 productivity. In this case the molar ratio of trialkylaluminum to metallocene is typically 2 to 500, preferably 3 to 200, more preferably 3 to 100 or 3 to 10. . The amount of NCA used is also critical. The molar ratio of metallocene to NCA can ranged from 10 to 0.1. The more preferred molar ratio of metallocene to NCA is close to 1 to 1 or 0.5 to 2.

20 In addition, the amount of metallocene concentration is critical. In order to achieve the highest catalyst productivity, highest selectivity to lube range product and best temperature control and operability, the preferred amount of metallocene per gram of olefin feeds ranges from 1 microgram (or 0.001 milligram)/gram to 1 milligram/gram of olefins. When amounts of catalyst components used are too 25 high, the temperature control becomes difficult, product selectivity suffers and catalyst cost becomes un-economical.

The amount of hydrogen present in the reactor is also important. Usually smaller amount of hydrogen is preferred. The hydrogen head pressure is usually maintained at below 100 psi, preferably below 50 psi, preferably below 30 psi, 30 preferably below 20 psi, preferably below 10 psi. Usually, lower hydrogen pressure while maintaining an activity boost is preferred. Too high a hydrogen pressure will hydrogenate the starting alpha-olefin feeds into corresponding

alkane. When this hydrogenation of raw material occurs, the product yield and selectivity will suffer significantly. Therefore, it is preferred to maintain reactor hydrogen pressure below 100 psi, more preferably below 50 psi to minimize the hydrogenation of feed stock into low value alkanes. Likewise a minimum amount of hydrogen is also desired, preferably the hydrogen is present at least 1 psi, preferably at least 5 psi.

The reaction time or residence time is also important for high conversion of the feed olefins. Usually longer reaction time or residence time favors higher feed olefin conversion. However, to balance high conversion and the high reactor throughput, the reaction time or residence time is usually between 5 minutes to 30 hours, more preferred 10 minutes to 16 hours, more preferred 20 minutes to 10 hours.

By proper choice of metallocenes, activated with NCA, and by proper choice of reaction operation conditions, including the amount of catalyst used, and with right amount of trialkylaluminum as scavenger, residence time or reaction time, and amount of hydrogen, we produce polyalpha-olefins with high catalyst productivity of more than 43,000 gram total product per gram of metallocene used. This high productivity makes the process economically and commercially attractive.

In an alternate embodiment, the feed alpha-olefin, diluent or solvent stream comprises less than 300 ppm of heteroatom containing compounds.

After the reaction is completed in the semi-continuous run or the product withdrawn from the continuous run, the crude product can be worked up by deactivating the catalyst by addition of small amount of oxygen, CO₂ gas, air, water, alcohol, acids or any other catalyst poison agents; washing the product with dilute aqueous sodium hydroxide or hydrochloric acid solution and water; and separating the organic layer. The organic layer typically contains un-reacted olefins, olefin oligomers and solvent. The product fractions can be separated from solvent and un-reacted starting olefins by distillation. The product fractions can be further fractionated into light fractions and residual fractions. These fractions typically have unsaturated double bond per each molecule. The double bonds are mostly vinylidene with some 1,2-disubstituted olefins or tri-substituted olefins.

These double bonds are suitable for further functionalization into other functional fluids or performance additives according to well-known olefin functionalization reaction, such as alkylation with aromatic containing compounds, with maleic anhydrides, with CO/H₂ via hydroformulation reactions, etc. The residual
5 fractions, usually have low or no light hydrocarbons with less than 24 carbons can be used as high performance fluids if their bromine number is below 2. If the bromine number is above 2, it can be readily hydrogenated by conventional lube hydrofinishing process and converted into fully saturated paraffin fluids with bromine number less than 2, usually significantly less than 2. Usually, lower
10 bromine number is more preferred, as it indicate better oxidative stability. These hydrogenated, saturated hydrocarbon paraffins are used as high performance lubricant base stocks or used as high performance functional fluids after proper formulation. Description of the typical lubricant or functional fluids formulation can be found in the book and the references in "Synthetic Lubricants and High –
15 Performance Functional Fluids", 2nd edition, ed. by L. R. Rudnick and R. L. Shubkin, Marcel Dekker, Inc., N.Y. 1999.

Alternatively, the crude product from the polymerization reactor can be worked up by absorbing the catalyst components and scavenger components and any other heteroatom containing components using a solid sorbant. This is a
20 preferred method and is used in the examples below. In this method, a catalyst de-activator as described above is added to the crude reaction product or a solid absorbent, such as alumina, acid clay, Celite, or a cheap filter aid, is added to the crude product and stirred for a pre-determined amount of time, usually greater than 5 minutes. Then the solid is filtered and the filtrate is ready for further
25 distillation or fractionation. This method is described more fully in concurrently filed patent application USSN 60/_____, filed July 19, 2006 (Attorney Docket Number 2006EM037).

In another embodiment, the process further comprises contacting PAO produced herein with hydrogen under typical hydrogenation conditions with
30 hydrogenation catalyst.

Metallocene Catalyst Compounds

For purposes of this invention and the claims thereto, the terms "hydrocarbyl radical," "hydrocarbyl," and hydrocarbyl group" are used interchangeably throughout this document. Likewise the terms "group," "radical," and "substituent" are also used interchangeably throughout this document. For purposes of this disclosure, "hydrocarbyl radical" is defined to be a C₁-C₁₀₀ radical and may be linear, branched, or cyclic. When cyclic, the hydrocarbon radical may be aromatic or non-aromatic. "Hydrocarbon radical" is defined to include substituted hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, silylcarbyl radicals, and germylcarbyl radicals as these terms are defined below. Substituted hydrocarbyl radicals are radicals in which at least one hydrogen atom has been substituted with at least one functional group such as NR*₂, OR*, SeR*, TeR*, PR*₂, AsR*₂, SbR*₂, SR*, BR*₂, SiR*₃, GeR*₃, SnR*₃, PbR*₃ and the like or where at least one non-hydrocarbon atom or group has been inserted within the hydrocarbyl radical, such as -O-, -S-, -Se-, -Te-, -N(R*)-, =N-, -P(R*)-, =P-, -As(R*)-, =As-, -Sb(R*)-, =Sb-, -B(R*)-, =B-, -Si(R*)₂-, -Ge(R*)₂-, -Sn(R*)₂-, -Pb(R*)₂- and the like, where R* is independently a hydrocarbyl or halocarbyl radical, and two or more R* may join together to form a substituted or unsubstituted saturated, partially unsaturated or aromatic cyclic or polycyclic ring structure.

Halocarbyl radicals are radicals in which one or more hydrocarbyl hydrogen atoms have been substituted with at least one halogen (e.g. F, Cl, Br, I) or halogen-containing group (e.g. CF₃).

Substituted halocarbyl radicals are radicals in which at least one halocarbyl hydrogen or halogen atom has been substituted with at least one functional group such as NR*₂, OR*, SeR*, TeR*, PR*₂, AsR*₂, SbR*₂, SR*, BR*₂, SiR*₃, GeR*₃, SnR*₃, PbR*₃ and the like or where at least one non-carbon atom or group has been inserted within the halocarbyl radical such as -O-, -S-, -Se-, -Te-, -N(R*)-, =N-, -P(R*)-, =P-, -As(R*)-, =As-, -Sb(R*)-, =Sb-, -B(R*)-, =B-, -Si(R*)₂-, -Ge(R*)₂-, -Sn(R*)₂-, -Pb(R*)₂- and the like, where R* is independently a hydrocarbyl or halocarbyl radical provided that at least one halogen atom remains

on the original halocarbyl radical. Additionally, two or more R* may join together to form a substituted or unsubstituted saturated, partially unsaturated or aromatic cyclic or polycyclic ring structure.

Silylcarbyl radicals (also called silylcarbyls) are groups in which the silyl functionality is bonded directly to the indicated atom or atoms. Examples include
5 SiH₃, SiH₂R*, SiHR*₂, SiR*₃, SiH₂(OR*), SiH(OR*)₂, Si(OR*)₃, SiH₂(NR*₂), SiH(NR*₂)₂, Si(NR*₂)₃, and the like where R* is independently a hydrocarbyl or halocarbyl radical and two or more R* may join together to form a substituted or unsubstituted saturated, partially unsaturated or aromatic cyclic or polycyclic ring
10 structure.

Germylcarbyl radicals (also called germylcarbyls) are groups in which the germyl functionality is bonded directly to the indicated atom or atoms. Examples include GeH₃, GeH₂R*, GeHR*₂, GeR*₃, GeH₂(OR*), GeH(OR*)₂, Ge(OR*)₃, GeH₂(NR*₂), GeH(NR*₂)₂, Ge(NR*₂)₃, and the like where R* is independently a
15 hydrocarbyl or halocarbyl radical and two or more R* may join together to form a substituted or unsubstituted saturated, partially unsaturated or aromatic cyclic or polycyclic ring structure.

Polar radicals or polar groups are groups in which a heteroatom functionality is bonded directly to the indicated atom or atoms. They include
20 heteroatoms of groups 1-17 of the periodic table (except carbon and hydrogen) either alone or connected to other elements by covalent bonds or other interactions such as ionic bonds, van der Waals forces, or hydrogen bonding. Examples of functional heteroatom containing groups include carboxylic acids, acid halides, carboxylic esters, carboxylic salts, carboxylic anhydrides, aldehydes and their
25 chalcogen (Group 14) analogues, alcohols and phenols, ethers, peroxides and hydroperoxides, carboxylic amides, hydrazides and imides, amidines and other nitrogen analogues of amides, nitriles, amines and imines, azos, nitros, other nitrogen compounds, sulfur acids, selenium acids, thiols, sulfides, sulfoxides, sulfones, phosphines, phosphates, other phosphorus compounds, silanes, boranes,
30 borates, alanes, aluminates. Functional groups may also be taken broadly to include organic polymer supports or inorganic support material such as alumina, and silica. Preferred examples of polar groups include NR*₂, OR*, SeR*, TeR*,

PR*₂, AsR*₂, SbR*₂, SR*, BR*₂, SnR*₃, PbR*₃ and the like where R* is independently a hydrocarbyl, substituted hydrocarbyl, halocarbyl or substituted halocarbyl radical as defined above and two R* may join together to form a substituted or unsubstituted saturated, partially unsaturated or aromatic cyclic or polycyclic ring structure.


In using the terms "substituted or unsubstituted cyclopentadienyl ligand", "substituted or unsubstituted indenyl ligand", "substituted or unsubstituted fluorenyl ligand" and "substituted or unsubstituted tetrahydroindenyl ligand", the substitution to the aforementioned ligand may be hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, silylcarbyl, or germylcarbyl. The substitution may also be within the ring giving heterocyclopentadienyl ligands, heteroindenyl ligands, heterofluorenyl ligands, or heterotetrahydroindenyl ligands, each of which can additionally be substituted or unsubstituted.

In some embodiments, the hydrocarbyl radical is independently selected from methyl, ethyl, ethenyl, and isomers of propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, eicosyl, heneicosyl, docosyl, tricosyl, tetracosyl, pentacosyl, hexacosyl, heptacosyl, octacosyl, nonacosyl, triacontyl, propenyl, butenyl, pentenyl, hexenyl, heptenyl, octenyl, nonenyl, decenyl, undecenyl, dodecenyl, tridecenyl, tetradecenyl, pentadecenyl, hexadecenyl, heptadecenyl, octadecenyl, nonadecenyl, eicosenyl, heneicosenyl, docosenyl, tricosenyl, tetracosenyl, pentacosenyl, hexacosenyl, heptacosenyl, octacosenyl, nonacosenyl, triacontenyl, propynyl, butynyl, pentynyl, hexynyl, heptynyl, octynyl, nonynyl, decynyl, undecynyl, dodecynyl, tridecynyl, tetradecynyl, pentadecynyl, hexadecynyl, heptadecynyl, octadecynyl, nonadecynyl, eicosynyl, heneicosynyl, docosynyl, tricosynyl, tetracosynyl, pentacosynyl, hexacosynyl, heptacosynyl, octacosynyl, nonacosynyl, triacontynyl, butadienyl, pentadienyl, hexadienyl, heptadienyl, octadienyl, nonadienyl, and decadienyl. Also included are isomers of saturated, partially unsaturated and aromatic cyclic and polycyclic structures wherein the radical may additionally be subjected to the types of substitutions described above. Examples include phenyl, methylphenyl,

dimethylphenyl, ethylphenyl, diethylphenyl, propylphenyl, dipropylphenyl, benzyl, methylbenzyl, naphthyl, anthracenyl, cyclopentyl, cyclopentenyl, cyclohexyl, cyclohexenyl, methylcyclohexyl, cycloheptyl, cycloheptenyl, norbornyl, norbornenyl, adamantyl and the like. For this disclosure, when a radical is listed, it indicates that radical type and all other radicals formed when that radical type is subjected to the substitutions defined above. Alkyl, alkenyl and alkynyl radicals listed include all isomers including where appropriate cyclic isomers, for example, butyl includes *n*-butyl, 2-methylpropyl, 1-methylpropyl, *tert*-butyl, and cyclobutyl (and analogous substituted cyclopropyls); pentyl includes *n*-pentyl, cyclopentyl, 1-methylbutyl, 2-methylbutyl, 3-methylbutyl, 1-ethylpropyl, and neopentyl (and analogous substituted cyclobutyls and cyclopropyls); butenyl includes *E* and *Z* forms of 1-butenyl, 2-butenyl, 3-butenyl, 1-methyl-1-propenyl, 1-methyl-2-propenyl, 2-methyl-1-propenyl and 2-methyl-2-propenyl (and cyclobutenyls and cyclopropenyls). Cyclic compound having substitutions include all isomer forms, for example, methylphenyl would include ortho-methylphenyl, meta-methylphenyl and para-methylphenyl; dimethylphenyl would include 2,3-dimethylphenyl, 2,4-dimethylphenyl, 2,5-dimethylphenyl, 2,6-diphenylmethyl, 3,4-dimethylphenyl, and 3,5-dimethylphenyl. Examples of cyclopentadienyl and indenyl ligands are illustrated below as anionic ligands.

A "ring carbon atom" is a carbon atom that is part of a cyclic ring structure. By this definition, an indenyl ligand has nine ring carbon atoms; a cyclopentadienyl ligand has five ring carbon atoms and a fluorenyl ligand has 13 carbon atoms. Thus an indene is equivalent to a Cp ring with two alkyl radical substituents and a fluorene is equivalent to a Cp ring with four alkyl radical substituents.

The metallocene compounds (pre-catalysts), useful herein are preferably cyclopentadienyl derivatives of titanium, zirconium and hafnium. In general, useful titanocenes, zirconocenes and hafnocenes may be represented by the following formulae:



wherein:

M is the metal center, and is a Group 4 metal preferably titanium, zirconium or hafnium, preferably zirconium or hafnium;

Cp and Cp* are the same or different cyclopentadienyl rings that are each bonded to M, and 1) both Cp and Cp* are substituted with at least one non-isoolefin

- 5 substituent", or 2) Cp is substituted with from two to five substituents "R", preferably both Cp and Cp* are substituted with from two to five substituents "R", each substituent group R being, independently, a radical group which is a hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, silylcarbyl or germylcarbyl, or Cp and Cp* are the same or different
- 10 cyclopentadienyl rings in which any two adjacent R groups are optionally joined to form a substituted or unsubstituted, saturated, partially unsaturated, or aromatic cyclic or polycyclic substituent;

X₁ and X₂ are, independently, hydrogen, halogen, hydride radicals, hydrocarbyl radicals, substituted hydrocarbyl radicals, halocarbyl radicals, substituted

- 15 halocarbyl radicals, silylcarbyl radicals, substituted silylcarbyl radicals, germylcarbyl radicals, or substituted germylcarbyl radicals; or both X are joined and bound to the metal atom to form a metallacycle ring containing from about 3 to about 20 carbon atoms; or both together can be an olefin, diolefin or aryne ligand.

20

- Table A depicts representative constituent moieties for the metallocene components of formula 2. The list is for illustrative purposes only and should not be construed to be limiting in any way. A number of final components may be formed by permuting all possible combinations of the constituent moieties with
- 25 each other. When hydrocarbyl radicals including alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, cycloalkynyl and aromatic radicals are disclosed in this application the term includes all isomers. For example, butyl includes n-butyl, 2-methylpropyl, 1-methylpropyl, tert-butyl, and cyclobutyl; pentyl includes n-
- 30 pentyl, 1-methylbutyl, 2-methylbutyl, 3-methylbutyl, 1-ethylpropyl, neopentyl, cyclopentyl and methylcyclobutyl; butenyl includes E and Z forms of 1-butenyl, 2-butenyl, 3-butenyl, 1-methyl-1-propenyl, 1-methyl-2-propenyl, 2-methyl-1-propenyl and 2-methyl-2-propenyl. This includes when a radical is bonded to

another group, for example, propylcyclopentadienyl include n-propylcyclopentadienyl, isopropylcyclopentadienyl and cyclopropylcyclopentadienyl. In general, the ligands or groups illustrated in Table A include all isomeric forms. For example, dimethylcyclopentadienyl includes 1,2-dimethylcyclopentadienyl and 1,3-dimethylcyclopentadienyl; methylindenyl includes 1-methylindenyl, 2-methylindenyl, 3-methylindenyl, 4-methylindenyl, 5-methylindenyl, 6-methylindenyl and 7-methylindenyl; methylethylphenyl includes ortho-methylethylphenyl, meta-methylethylphenyl and para-methylethylphenyl. To illustrate members of the transition metal component, select any combination of the species listed in Tables A.

TABLE A -

M	Cp, Cp*
titanium	cyclopentadienyl
zirconium	methylcyclopentadienyl
hafnium	dimethylcyclopentadienyl
	trimethylcyclopentadienyl
	tetramethylcyclopentadienyl
	ethylcyclopentadienyl
	diethylcyclopentadienyl
	propylcyclopentadienyl
	dipropylcyclopentadienyl
	butylcyclopentadienyl
	dibutylcyclopentadienyl
	pentylcyclopentadienyl
	dipentylcyclopentadienyl
	hexylcyclopentadienyl
	dihexylcyclopentadienyl
	heptylcyclopentadienyl
	diheptylcyclopentadienyl
	octylcyclopentadienyl
	dioctylcyclopentadienyl
	nonylcyclopentadienyl
	dinonylcyclopentadienyl
	decylcyclopentadienyl
	didecylcyclopentadienyl
	undecylcyclopentadienyl
	dodecylcyclopentadienyl
	tridecylcyclopentadienyl

	tetradecylcyclopentadienyl
	pentadecylcyclopentadienyl
	hexadecylcyclopentadienyl
	heptadecylcyclopentadienyl
	octadecylcyclopentadienyl
	nonadecylcyclopentadienyl
	eicosylcyclopentadienyl
	heneicosylcyclopentadienyl
	docosylcyclopentadienyl
	tricosylcyclopentadienyl
	tetracosylcyclopentadienyl
	pentacosylcyclopentadienyl
	hexacosylcyclopentadienyl
	heptacosylcyclopentadienyl
	octacosylcyclopentadienyl
	nonacosylcyclopentadienyl
	triacontylcyclopentadienyl
	cyclohexylcyclopentadienyl
	phenylcyclopentadienyl
	diphenylcyclopentadienyl
	triphenylcyclopentadienyl
	tetraphenylcyclopentadienyl
	tolylcyclopentadienyl
	benzylcyclopentadienyl
	phenethylcyclopentadienyl
	cyclohexylmethylcyclopentadienyl
	naphthylcyclopentadienyl
	methylphenylcyclopentadienyl
	methylnaphthylcyclopentadienyl
	methylethylcyclopentadienyl
	methylpropylcyclopentadienyl
	methylbutylcyclopentadienyl
	methylpentylcyclopentadienyl
	methylhexylcyclopentadienyl
	methylheptylcyclopentadienyl
	methyloctylcyclopentadienyl
	methylnonylcyclopentadienyl
	methyldecylcyclopentadienyl
	vinylcyclopentadienyl
	propenylcyclopentadienyl
	butenylcyclopentadienyl

	indenyl
	methylindenyl
	dimethylindenyl
	trimethylindenyl
	tetramethylindenyl
	pentamethylindenyl
	methylpropylindenyl
	dimethylpropylindenyl
	methyldipropylindenyl
	methylethylindenyl
	methylbutylindenyl
	ethylindenyl
	propylindenyl
	butylindenyl
	pentylindenyl
	hexylindenyl
	heptylindenyl
	octylindenyl
	nonylindenyl
	decylindenyl
	phenylindenyl
	(fluorophenyl)indenyl
	(methylphenyl)indenyl
	biphenylindenyl
	(bis(trifluoromethyl)phenyl)indenyl
	napthylindenyl
	phenanthrylindenyl
	benzylindenyl
	benzindenyl
	cyclohexylindenyl
	methylphenylindenyl
	ethylphenylindenyl
	propylphenylindenyl
	methylnapthylindenyl
	ethylnapthylindenyl
	propylnapthylindenyl
	(methylphenyl)indenyl
	(dimethylphenyl)indenyl
	(ethylphenyl)indenyl
	(diethylphenyl)indenyl
	(propylphenyl)indenyl

	(dipropylphenyl)indenyl
	methyltetrahydroindenyl
	ethyltetrahydroindenyl
	propyltetrahydroindenyl
	butyltetrahydroindenyl
	phenyltetrahydroindenyl
	(diphenylmethyl)cyclopentadienyl
	trimethylsilylcyclopentadienyl
	triethylsilylcyclopentadienyl
	trimethylgermylcyclopentadienyl
	trifluoromethylcyclopentadienyl
	cyclopenta[<i>b</i>]thienyl
	cyclopenta[<i>b</i>]furanyl
	cyclopenta[<i>b</i>]selenophenyl
	cyclopenta[<i>b</i>]tellurophenyl
	cyclopenta[<i>b</i>]pyrrolyl
	cyclopenta[<i>b</i>]phospholyl
	cyclopenta[<i>b</i>]arsolyl
	cyclopenta[<i>b</i>]stibolyl
	methylcyclopenta[<i>b</i>]thienyl
	methylcyclopenta[<i>b</i>]furanyl
	methylcyclopenta[<i>b</i>]selenophenyl
	methylcyclopenta[<i>b</i>]tellurophenyl
	methylcyclopenta[<i>b</i>]pyrrolyl
	methylcyclopenta[<i>b</i>]phospholyl
	methylcyclopenta[<i>b</i>]arsolyl
	methylcyclopenta[<i>b</i>]stibolyl
	dimethylcyclopenta[<i>b</i>]thienyl
	dimethylcyclopenta[<i>b</i>]furanyl
	dimethylcyclopenta[<i>b</i>]pyrrolyl
	dimethylcyclopenta[<i>b</i>]phospholyl
	trimethylcyclopenta[<i>b</i>]thienyl
	trimethylcyclopenta[<i>b</i>]furanyl
	trimethylcyclopenta[<i>b</i>]pyrrolyl
	trimethylcyclopenta[<i>b</i>]phospholyl
	ethylcyclopenta[<i>b</i>]thienyl
	ethylcyclopenta[<i>b</i>]furanyl
	ethylcyclopenta[<i>b</i>]pyrrolyl
	ethylcyclopenta[<i>b</i>]phospholyl
	diethylcyclopenta[<i>b</i>]thienyl
	diethylcyclopenta[<i>b</i>]furanyl

	diethylcyclopenta[<i>b</i>]pyrrolyl
	diethylcyclopenta[<i>b</i>]phospholyl
	triethylcyclopenta[<i>b</i>]thienyl
	triethylcyclopenta[<i>b</i>]furanyl
	triethylcyclopenta[<i>b</i>]pyrrolyl
	triethylcyclopenta[<i>b</i>]phospholyl
	propylcyclopenta[<i>b</i>]thienyl
	propylcyclopenta[<i>b</i>]furanyl
	propylcyclopenta[<i>b</i>]pyrrolyl
	propylcyclopenta[<i>b</i>]phospholyl
	dipropylcyclopenta[<i>b</i>]thienyl
	dipropylcyclopenta[<i>b</i>]furanyl
	dipropylcyclopenta[<i>b</i>]pyrrolyl
	dipropylcyclopenta[<i>b</i>]phospholyl
	tripropylcyclopenta[<i>b</i>]thienyl
	tripropylcyclopenta[<i>b</i>]furanyl
	tripropylcyclopenta[<i>b</i>]pyrrolyl
	tripropylcyclopenta[<i>b</i>]phospholyl
	butylcyclopenta[<i>b</i>]thienyl
	butylcyclopenta[<i>b</i>]furanyl
	butylcyclopenta[<i>b</i>]pyrrolyl
	butylcyclopenta[<i>b</i>]phospholyl
	dibutylcyclopenta[<i>b</i>]thienyl
	dibutylcyclopenta[<i>b</i>]furanyl
	dibutylcyclopenta[<i>b</i>]pyrrolyl
	dibutylcyclopenta[<i>b</i>]phospholyl
	tributylcyclopenta[<i>b</i>]thienyl
	tributylcyclopenta[<i>b</i>]furanyl
	tributylcyclopenta[<i>b</i>]pyrrolyl
	tributylcyclopenta[<i>b</i>]phospholyl
	ethylmethylcyclopenta[<i>b</i>]thienyl
	ethylmethylcyclopenta[<i>b</i>]furanyl
	ethylmethylcyclopenta[<i>b</i>]pyrrolyl
	ethylmethylcyclopenta[<i>b</i>]phospholyl
	methylpropylcyclopenta[<i>b</i>]thienyl
	methylpropylcyclopenta[<i>b</i>]furanyl
	methylpropylcyclopenta[<i>b</i>]pyrrolyl
	methylpropylcyclopenta[<i>b</i>]phospholyl
	butylmethylcyclopenta[<i>b</i>]thienyl
	butylmethylcyclopenta[<i>b</i>]furanyl
	butylmethylcyclopenta[<i>b</i>]pyrrolyl

	butylmethylcyclopenta[<i>b</i>]phospholyl
	cyclopenta[<i>c</i>]thienyl
	cyclopenta[<i>c</i>]furanyl
	cyclopenta[<i>c</i>]selenophenyl
	cyclopenta[<i>c</i>]tellurophenyl
	cyclopenta[<i>c</i>]pyrrolyl
	cyclopenta[<i>c</i>]phospholyl
	cyclopenta[<i>c</i>]arsolyl
	cyclopenta[<i>c</i>]stibolyl
	methylcyclopenta[<i>c</i>]thienyl
	methylcyclopenta[<i>c</i>]furanyl
	methylcyclopenta[<i>c</i>]selenophenyl
	methylcyclopenta[<i>c</i>]tellurophenyl
	methylcyclopenta[<i>c</i>]pyrrolyl
	methylcyclopenta[<i>c</i>]phospholyl
	methylcyclopenta[<i>c</i>]arsolyl
	methylcyclopenta[<i>c</i>]stibolyl
	dimethylcyclopenta[<i>c</i>]thienyl
	dimethylcyclopenta[<i>c</i>]furanyl
	dimethylcyclopenta[<i>c</i>]pyrrolyl
	dimethylcyclopenta[<i>c</i>]phospholyl
	trimethylcyclopenta[<i>c</i>]thienyl
	trimethylcyclopenta[<i>c</i>]furanyl
	trimethylcyclopenta[<i>c</i>]pyrrolyl
	trimethylcyclopenta[<i>c</i>]phospholyl
	ethylcyclopenta[<i>c</i>]thienyl
	ethylcyclopenta[<i>c</i>]furanyl
	ethylcyclopenta[<i>c</i>]pyrrolyl
	ethylcyclopenta[<i>c</i>]phospholyl
	diethylcyclopenta[<i>c</i>]thienyl
	diethylcyclopenta[<i>c</i>]furanyl
	diethylcyclopenta[<i>c</i>]pyrrolyl
	diethylcyclopenta[<i>c</i>]phospholyl
	triethylcyclopenta[<i>c</i>]thienyl
	triethylcyclopenta[<i>c</i>]furanyl
	triethylcyclopenta[<i>c</i>]pyrrolyl
	triethylcyclopenta[<i>c</i>]phospholyl
	propylcyclopenta[<i>c</i>]thienyl
	propylcyclopenta[<i>c</i>]furanyl
	propylcyclopenta[<i>c</i>]pyrrolyl
	propylcyclopenta[<i>c</i>]phospholyl

	dipropylcyclopenta[<i>c</i>]thienyl
	dipropylcyclopenta[<i>c</i>]furanyl
	dipropylcyclopenta[<i>c</i>]pyrrolyl
	dipropylcyclopenta[<i>c</i>]phospholyl
	tripropylcyclopenta[<i>c</i>]thienyl
	tripropylcyclopenta[<i>c</i>]furanyl
	tripropylcyclopenta[<i>c</i>]pyrrolyl
	tripropylcyclopenta[<i>c</i>]phospholyl
	butylcyclopenta[<i>c</i>]thienyl
	butylcyclopenta[<i>c</i>]furanyl
	butylcyclopenta[<i>c</i>]pyrrolyl
	butylcyclopenta[<i>c</i>]phospholyl
	dibutylcyclopenta[<i>c</i>]thienyl
	dibutylcyclopenta[<i>c</i>]furanyl
	dibutylcyclopenta[<i>c</i>]pyrrolyl
	dibutylcyclopenta[<i>c</i>]phospholyl
	tributylcyclopenta[<i>c</i>]thienyl
	tributylcyclopenta[<i>c</i>]furanyl
	tributylcyclopenta[<i>c</i>]pyrrolyl
	tributylcyclopenta[<i>c</i>]phospholyl
	ethylmethylcyclopenta[<i>c</i>]thienyl
	ethylmethylcyclopenta[<i>c</i>]furanyl
	ethylmethylcyclopenta[<i>c</i>]pyrrolyl
	ethylmethylcyclopenta[<i>c</i>]phospholyl
	methylpropylcyclopenta[<i>c</i>]thienyl
	methylpropylcyclopenta[<i>c</i>]furanyl
	methylpropylcyclopenta[<i>c</i>]pyrrolyl
	methylpropylcyclopenta[<i>c</i>]phospholyl
	butylmethylcyclopenta[<i>c</i>]thienyl
	butylmethylcyclopenta[<i>c</i>]furanyl
	butylmethylcyclopenta[<i>c</i>]pyrrolyl
	butylmethylcyclopenta[<i>c</i>]phospholyl
	pentamethylcyclopentadienyl
	tetrahydroindenyl
	mehtyltetrahydroindenyl
	dimethyltetrahydroindenyl

In a preferred embodiment of the invention, when used with an NCA, Cp is the same as Cp* and is a substituted or unsubstituted indenyl or tetrahydroindenyl ligand. Most preferred substituted and unsubstituted indenyl or

tetrahydroindenyl ligands include having a substituent in the 2-position of the indenyl or tetrahydroindenyl ring, indenyl, tetrahydroindenyl, 4,7-dimethylindenyl and 5,6-dimethylindenyl.

- 5 Preferred metallocene compounds (pre-catalysts) which, according to the present invention, provide catalyst systems which are specific to the production of low viscosity poly- α -olefins include:
- Bis(1,2-dimethylcyclopentadienyl)zirconium dichloride
Bis(1,3-dimethylcyclopentadienyl)zirconium dichloride
10 Bis(1,2,3-trimethylcyclopentadienyl)zirconium dichloride
Bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride
Bis(1,2,3,4-tetramethylcyclopentadienyl)zirconium dichloride
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-2-ethylcyclopentadienyl)zirconium dichloride
15 Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-2-n-butylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-3-ethylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dichloride
20 Bis(1-methyl-3-n-pentylcyclopentadienyl)zirconium dichloride
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)zirconium dichloride
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)zirconium dichloride
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)zirconium dichloride
Bis(1,2-diethylcyclopentadienyl)zirconium dichloride
25 Bis(1,3-diethylcyclopentadienyl)zirconium dichloride
Bis(1,2-di-n-propylcyclopentadienyl)zirconium dichloride
Bis(1,2-di-n-butylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-2,4-diethylcyclopentadienyl)zirconium dichloride
Bis(1,2-diethyl-4-n-propylcyclopentadienyl)zirconium dichloride
30 Bis(1,2-diethyl-4-n-butylcyclopentadienyl)zirconium dichloride
Bis(1-methyl-3-i-propylcyclopentadienyl)zirconium dichloride
Bis(1-ethyl-3-i-propylcyclopentadienyl)zirconium dichloride

- (1,2-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride
 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride
 (1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)zirconium dichloride
 (1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)zirconium dichloride
 5 (1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)zirconium dichloride
 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride
 (1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)zirconium dichloride
 10 (1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)zirconium dichloride
 Bis(indenyl)zirconium dichloride
 Bis(1-methylindenyl)zirconium dichloride
 Bis(2-methylindenyl)zirconium dichloride
 Bis(4-methylindenyl)zirconium dichloride
 15 Bis(4,7-dimethylindenyl)zirconium dichloride
 Bis(4,5,6,7-tetrahydroindenyl)zirconium dichloride
 Bis(4,5,6,7-tetrahydro-2-methylindenyl)zirconium dichloride
 Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)zirconium dichloride
 (Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)zirconium dichloride
 20 The preferred catalysts also include the zirconium dihalides, di-methyl, di-isobutyl, di-n-octyl or other di-alkyl analogs of the above compounds, and the hafnium dichloride, dihalides, or the hafnium di-methyl or di-alkyl analogs of the above compounds.

Particularly preferred catalyst compounds also include bis(1,2-
 25 dimethylcyclopentadienyl)zirconium dichloride, bis(1,3-dimethylcyclopentadienyl)zirconium dichloride, bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride and
 bis(tetramethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-2-ethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-ethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-n-
 30 propylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-n-

butylcyclopentadienyl)zirconium dichloride, bis(4,5,6,7-tetrahydro indenyl)zirconium dichloride, bis(indenyl)zirconium dichloride, bis(1,2-dimethylcyclopentadienyl)zirconium dimethyl, bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl, bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl and bis(tetramethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-2-ethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-ethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl, bis(4,5,6,7-tetrahydro indenyl)zirconium dichloride, bis(indenyl)zirconium dimethyl.

Activators and Catalyst Activation

The catalyst precursors, when activated by a commonly known activator such as non-coordinating anion activator, form active catalysts for the polymerization or oligomerization of olefins. Activators that may be used include Lewis acid activators such as triphenylboron, tris-perfluorophenylboron, tris-perfluorophenylaluminum and the like and or ionic activators such as dimethylanilinium tetrakis-perfluorophenylborate, triphenylcarboniumtetrakis-perfluorophenylborate, dimethylaniliniumtetrakis-perfluorophenylaluminate, and the like.

A co-activator is a compound capable of alkylating the transition metal complex, such that when used in combination with an activator, an active catalyst is formed. Co-activators include alumoxanes such as methylalumoxane, modified alumoxanes such as modified methylalumoxane, and aluminum alkyls such as trimethylaluminum, tri-isobutylaluminum, triethylaluminum, and tri-isopropylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum, tri-n-decylaluminum or tri-n-dodecylaluminum. Co-activators are typically used in combination with Lewis acid activators and ionic activators when the pre-catalyst is not a dihydrocarbyl or dihydride complex. Sometimes co-activators are also used as scavengers to deactivate impurities in feed or reactors.

Particularly preferred co-activators include alkylaluminum compounds represented by the formula: R_3Al , where each R is, independently, a C1 to C18 alkyl group, preferably each R is, independently, selected from the group consisting of methyl, ethyl, n-propyl, iso-propyl, iso-butyl, n-butyl, t-butyl, n-
 5 pentyl, iso-pentyl, neopentyl, n-hexyl, iso-hexyl, n-heptyl, iso-heptyl, n-octyl, iso-octyl, n-nonyl, n-decyl, n-undecyl, n-dodecyl, n-tridecyl, n-tetradecyl, n-pentadecyl, n-hexadecyl, n-heptadecyl, n-octadecyl, and their iso-analogs.

Ionic activators (at times used in combination with a co-activator) may be used in the practice of this invention. Preferably, discrete ionic activators such as
 10 $[Me_2PhNH][B(C_6F_5)_4]$, $[Ph_3C][B(C_6F_5)_4]$, $[Me_2PhNH][B((C_6H_3-3,5-(CF_3)_2))_4]$, $[Ph_3C][B((C_6H_3-3,5-(CF_3)_2))_4]$, $[NH_4][B(C_6H_5)_4]$ or Lewis acidic activators such as $B(C_6F_5)_3$ or $B(C_6H_5)_3$ can be used, where Ph is phenyl and Me is methyl. Preferred co-activators, when used, are alumoxanes such as methylalumoxane, modified alumoxanes such as modified methylalumoxane, and aluminum alkyls
 15 such as tri-isobutylaluminum, and trimethylaluminum, triethylaluminum, and triisopropylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum, tri-n-decylaluminum or tri-n-dodecylaluminum.

It is within the scope of this invention to use an ionizing or stoichiometric activator, neutral or ionic, such as tri(n-
 20 butyl)ammoniumtetrakis(pentafluorophenyl) borate, a trisperfluorophenyl boron metalloid precursor or a trisperfluoronaphthyl boron metalloid precursor, polyhalogenated heteroborane anions (WO 98/43983), boric acid (U.S. Patent No. 5,942,459) or combination thereof.

Examples of neutral stoichiometric activators include tri-substituted boron,
 25 tellurium, aluminum, gallium and indium or mixtures thereof. The three substituent groups are each independently selected from alkyls, alkenyls, halogen, substituted alkyls, aryls, arylhalides, alkoxy and halides. Preferably, the three groups are independently selected from halogen, mono or multicyclic (including halosubstituted) aryls, alkyls, and alkenyl compounds and mixtures thereof,
 30 preferred are alkenyl groups having 1 to 20 carbon atoms, alkyl groups having 1 to 20 carbon atoms, alkoxy groups having 1 to 20 carbon atoms and aryl groups having 3 to 20 carbon atoms (including substituted aryls). More preferably, the

three groups are alkyls having 1 to 4 carbon groups, phenyl, naphthyl or mixtures thereof. Even more preferably, the three groups are halogenated, preferably fluorinated, aryl groups. Most preferably, the neutral stoichiometric activator is trisperfluorophenyl boron or trisperfluoronaphthyl boron.

5 Ionic stoichiometric activator compounds may contain an active proton, or some other cation associated with, but not coordinated to, or only loosely coordinated to, the remaining ion of the ionizing compound. Such compounds and the like are described in European publications EP-A-0 570 982, EP-A-0 520 732, EP-A-0 495 375, EP-B1-0 500 944, EP-A-0 277 003 and EP-A-0 277 004,
10 and U.S. Patent Nos. 5,153,157, 5,198,401, 5,066,741, 5,206,197, 5,241,025, 5,384,299 and 5,502,124 and U.S. Patent Application Serial No. 08/285,380, filed August 3, 1994, all of which are herein fully incorporated by reference.

 Ionic catalysts can be prepared by reacting a transition metal compound with an activator, such as $B(C_6F_5)_3$, which upon reaction with the hydrolyzable
15 ligand (X') of the transition metal compound forms an anion, such as $[B(C_6F_5)_3(X')]^-$, which stabilizes the cationic transition metal species generated by the reaction. The catalysts can be, and preferably are, prepared with activator components which are ionic compounds or compositions. However preparation of activators utilizing neutral compounds is also contemplated by this invention.

20 Compounds useful as an activator component in the preparation of the ionic catalyst systems used in the process of this invention comprise a cation, which is preferably a Bronsted acid capable of donating a proton, and a compatible non-coordinating anion which anion is relatively large (bulky), capable of stabilizing the active catalyst species which is formed when the two
25 compounds are combined and said anion will be sufficiently labile to be displaced by olefinic diolefinic and acetylenically unsaturated substrates or other neutral Lewis bases such as ethers, nitriles and the like. Two classes of compatible non-coordinating anions have been disclosed in EPA 277,003 and EPA 277,004 published 1988: 1) anionic coordination complexes comprising a plurality of
30 lipophilic radicals covalently coordinated to and shielding a central charge-bearing metal or metalloid core, and 2) anions comprising a plurality of boron atoms such as carboranes, metallacarboranes and boranes. In a preferred

embodiment, the stoichiometric activators include a cation and an anion component, and may be represented by the following formula: $(L^{**}-H)_d^+ (A^{d-})$ wherein L^{**} is a neutral Lewis base; H is hydrogen; $(L^{**}-H)^+$ is a Bronsted acid; A^{d-} is a non-coordinating anion having the charge $d-$ d is an integer from 1 to 3.

5 The cation component, $(L^{**}-H)_d^+$ may include Bronsted acids such as protons or protonated Lewis bases or reducible Lewis acids capable of protonating or abstracting a moiety, such as an alkyl or aryl, from the precatalyst after alkylation.

 The activating cation $(L^{**}-H)_d^+$ may be a Bronsted acid, capable of
 10 donating a proton to the alkylated transition metal catalytic precursor resulting in a transition metal cation, including ammoniums, oxoniums, phosphoniums, silyliums, and mixtures thereof, preferably ammoniums of methylamine, aniline, dimethylamine, diethylamine, N-methylaniline, diphenylamine, trimethylamine, triethylamine, N,N-dimethylaniline, methyldiphenylamine, pyridine, p-bromo
 15 N,N-dimethylaniline, p-nitro-N,N-dimethylaniline, phosphoniums from triethylphosphine, triphenylphosphine, and diphenylphosphine, oxoniums from ethers such as dimethyl ether, diethyl ether, tetrahydrofuran and dioxane, sulfoniums from thioethers, such as diethyl thioethers and tetrahydrothiophene, and mixtures thereof. The activating cation $(L^{**}-H)_d^+$ may also be a moiety such
 20 as silver, tropylium, carbeniums, ferroceniums and mixtures, preferably carboniums and ferroceniums; most preferably triphenyl carbonium. The anion component A^{d-} include those having the formula $[M^{k+}Q_n]^{d-}$ wherein k is an integer from 1 to 3; n is an integer from 2-6; $n - k = d$; M is an element selected from Group 13 of the Periodic Table of the Elements, preferably boron or
 25 aluminum, and Q is independently a hydride, bridged or unbridged dialkylamido, halide, alkoxide, aryloxy, hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, and halosubstituted-hydrocarbyl radicals, said Q having up to 20 carbon atoms with the proviso that in not more than one occurrence is Q a halide. Preferably, each Q is a fluorinated hydrocarbyl group having 1 to 20
 30 carbon atoms, more preferably each Q is a fluorinated aryl group, and most preferably each Q is a pentafluoryl aryl group. Examples of suitable A^{d-} also

include diboron compounds as disclosed in U.S. Pat. No. 5,447,895, which is fully incorporated herein by reference.

- Illustrative, but not limiting examples of boron compounds which may be used as an activating cocatalyst in combination with a co-activator in the preparation of the improved catalysts of this invention are tri-substituted ammonium salts such as: trimethylammonium tetraphenylborate, triethylammonium tetraphenylborate, tripropylammonium tetraphenylborate, tri(*n*-butyl)ammonium tetraphenylborate, tri(*tert*-butyl)ammonium tetraphenylborate, N,N-dimethylanilinium tetraphenylborate, N,N-diethylanilinium tetraphenylborate, N,N-dimethyl-(2,4,6-trimethylanilinium) tetraphenylborate, trimethylammonium tetrakis(pentafluorophenyl)borate, triethylammonium tetrakis(pentafluorophenyl)borate, tripropylammonium tetrakis(pentafluorophenyl)borate, tri(*n*-butyl)ammonium tetrakis(pentafluorophenyl)borate, tri(*sec*-butyl)ammonium tetrakis(pentafluorophenyl)borate, N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate, N,N-diethylanilinium tetrakis(pentafluorophenyl)borate, N,N-dimethyl-(2,4,6-trimethylanilinium) tetrakis(pentafluorophenyl)borate, trimethylammonium tetrakis-(2,3,4,6-tetrafluorophenyl) borate, triethylammonium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, tripropylammonium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, tri(*n*-butyl)ammonium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, dimethyl(*tert*-butyl)ammonium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, N,N-dimethylanilinium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, N,N-diethylanilinium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, N,N-dimethyl-(2,4,6-trimethylanilinium) tetrakis-(2,3,4,6-tetrafluorophenyl)borate, trimethylammonium tetrakis(perfluoronaphthyl)borate, triethylammonium tetrakis(perfluoronaphthyl)borate, tripropylammonium tetrakis(perfluoronaphthyl)borate, tri(*n*-butyl)ammonium tetrakis(perfluoronaphthyl)borate, tri(*tert*-butyl)ammonium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium tetrakis(perfluoronaphthyl)borate, N,N-diethylanilinium

- tetrakis(perfluoronaphthyl)borate, N,N-dimethyl-(2,4,6-trimethylanilinium)
 tetrakis(perfluoronaphthyl)borate, trimethylammonium
 tetrakis(perfluorobiphenyl)borate, triethylammonium
 tetrakis(perfluorobiphenyl)borate, tripropylammonium
 5 tetrakis(perfluorobiphenyl)borate, tri(*n*-butyl)ammonium
 tetrakis(perfluorobiphenyl)borate, tri(*tert*-butyl)ammonium
 tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium
 tetrakis(perfluorobiphenyl)borate, N,N-diethylanilinium
 tetrakis(perfluorobiphenyl)borate, N,N-dimethyl-(2,4,6-trimethylanilinium)
 10 tetrakis(perfluorobiphenyl)borate, trimethylammonium tetrakis(3,5-
 bis(trifluoromethyl)phenyl)borate, triethylammonium tetrakis(3,5-
 bis(trifluoromethyl)phenyl)borate, tripropylammonium tetrakis(3,5-
 bis(trifluoromethyl)phenyl)borate, tri(*n*-butyl)ammonium tetrakis(3,5-
 bis(trifluoromethyl)phenyl)borate, tri(*tert*-butyl)ammonium tetrakis(3,5-
 15 bis(trifluoromethyl)phenyl)borate, N,N-dimethylanilinium tetrakis(3,5-
 bis(trifluoromethyl)phenyl)borate, N,N-diethylanilinium tetrakis(3,5-
 bis(trifluoromethyl)phenyl)borate, N,N-dimethyl-(2,4,6-trimethylanilinium)
 tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, and dialkyl ammonium salts such
 as: di(*iso*-propyl)ammonium tetrakis(pentafluorophenyl)borate, and
 20 dicyclohexylammonium tetrakis(pentafluorophenyl)borate; and other salts such as
 tri(*o*-tolyl)phosphonium tetrakis(pentafluorophenyl)borate, tri(2,6-
 dimethylphenyl)phosphonium tetrakis(pentafluorophenyl)borate, tropillium
 tetraphenylborate, triphenylcarbenium tetraphenylborate, triphenylphosphonium
 tetraphenylborate, triethylsilylium tetraphenylborate,
 25 benzene(diazonium)tetraphenylborate, tropillium
 tetrakis(pentafluorophenyl)borate, triphenylcarbenium
 tetrakis(pentafluorophenyl)borate, triphenylphosphonium
 tetrakis(pentafluorophenyl)borate, triethylsilylium
 tetrakis(pentafluorophenyl)borate, benzene(diazonium)
 30 tetrakis(pentafluorophenyl)borate, tropillium tetrakis-(2,3,4,6-
 tetrafluorophenyl)borate, triphenylcarbenium tetrakis-(2,3,4,6-
 tetrafluorophenyl)borate, triphenylphosphonium tetrakis-(2,3,4,6-

- tetrafluorophenyl)borate, triethylsilylium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, benzene(diazonium) tetrakis-(2,3,4,6-tetrafluorophenyl)borate, tropillium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluoronaphthyl)borate, triphenylphosphonium
- 5 tetrakis(perfluoronaphthyl)borate, triethylsilylium tetrakis(perfluoronaphthyl)borate, benzene(diazonium) tetrakis(perfluoronaphthyl)borate, tropillium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylphosphonium tetrakis(perfluorobiphenyl)borate, triethylsilylium
- 10 tetrakis(perfluorobiphenyl)borate, benzene(diazonium) tetrakis(perfluorobiphenyl)borate, tropillium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylphosphonium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triethylsilylium tetrakis(3,5-
- 15 bis(trifluoromethyl)phenyl)borate, and benzene(diazonium) tetrakis(3,5-bis(trifluoromethyl)phenyl)borate.

- Most preferably, the ionic stoichiometric activator $(L^{**}-H)_d^+ (A^{d-})$ is N,N-dimethylanilinium tetrakis(perfluorophenyl)borate, N,N-dimethylanilinium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium
- 20 tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, or triphenylcarbenium
- 25 tetra(perfluorophenyl)borate.

- The catalyst precursors can also be activated with cocatalysts or activators that comprise non-coordinating anions containing metalloïd-free cyclopentadienide ions. These are described in U.S. Patent Publication 2002/0058765 A1, published on 16 May 2002, and for the instant invention,
- 30 require the addition of a co-activator to the catalyst pre-cursor. "Compatible" non-coordinating anions are those which are not degraded to neutrality when the initially formed complex decomposes. Further, the anion will not transfer an

anionic substituent or fragment to the cation so as to cause it to form a neutral transition metal compound and a neutral by-product from the anion. Preferred non-coordinating anions useful in accordance with this invention are those that are compatible, stabilize the transition metal complex cation in the sense of balancing its ionic charge at +1, yet retain sufficient lability to permit displacement by an ethylenically or acetylenically unsaturated monomer during polymerization. These types of cocatalysts are sometimes used with scavengers such as but not limited to tri-*iso*-butylaluminum, tri-*n*-octylaluminum, tri-*n*-hexylaluminum, triethylaluminum or trimethylaluminum.

10 Invention processes also can employ cocatalyst compounds or activator compounds that are initially neutral Lewis acids but form a cationic metal complex and a noncoordinating anion, or a zwitterionic complex upon reaction with the alkylated transition metal compounds. The alkylated metallocene compound is formed from the reaction of the catalyst pre-cursor and the co-activator. For example, tris(pentafluorophenyl) boron or aluminum act to abstract a hydrocarbyl ligand to yield an invention cationic transition metal complex and stabilizing noncoordinating anion, see EP-A-0 427 697 and EP-A-0 520 732 for illustrations of analogous Group-4 metallocene compounds. Also, see the methods and compounds of EP-A-0 495 375. For formation of zwitterionic complexes using analogous Group 4 compounds, see U.S. Patents 5,624,878; 20 5,486,632; and 5,527,929.

 Additional neutral Lewis-acids are known in the art and are suitable for abstracting formal anionic ligands. See in particular the review article by E. Y.-X. Chen and T.J. Marks, "Cocatalysts for Metal-Catalyzed Olefin Polymerization: Activators, Activation Processes, and Structure-Activity Relationships", *Chem. Rev.*, 100, 1391-1434 (2000).

 When the cations of noncoordinating anion precursors are Bronsted acids such as protons or protonated Lewis bases (excluding water), or reducible Lewis acids such as ferrocenium or silver cations, or alkali or alkaline earth metal cations such as those of sodium, magnesium or lithium, the catalyst-precursor-to-activator molar ratio may be any ratio. Combinations of the described activator compounds may also be used for activation.

When an ionic or neutral stoichiometric activator (such as an NCA) is used, the catalyst-precursor-to-activator molar ratio is from 1:10 to 1:1; 1:10 to 10:1; 1:10 to 2:1; 1:10 to 3:1; 1:10 to 5:1; 1:2 to 1.2:1; 1:2 to 10:1; 1:2 to 2:1; 1:2 to 3:1; 1:2 to 5:1; 1:3 to 1.2:1; 1:3 to 10:1; 1:3 to 2:1; 1:3 to 3:1; 1:3 to 5:1; 1:5 to 1:1; 1:5 to 10:1; 1:5 to 2:1; 1:5 to 3:1; 1:5 to 5:1; 1:1 to 1:1.2. The catalyst-precursor-to-co-activator molar ratio is from 1:500 to 1:1, 1:100 to 100:1; 1:75 to 75:1; 1:50 to 50:1; 1:25 to 25:1; 1:15 to 15:1; 1:10 to 10:1; 1:5 to 5:1, 1:2 to 2:1; 1:100 to 1:1; 1:75 to 1:1; 1:50 to 1:1; 1:25 to 1:1; 1:15 to 1:1; 1:10 to 1:1; 1:5 to 1:1; 1:2 to 1:1; 1:10 to 2:1. Preferred activators and activator/co-activator combinations include methylalumoxane, modified methylalumoxane, mixtures of methylalumoxane with dimethylanilinium tetrakis(pentafluorophenyl)borate or tris(pentafluorophenyl)boron, and mixtures of trimethyl aluminum with dimethylanilinium tetrakis(pentafluorophenyl)borate or tris(pentafluorophenyl)boron. In some embodiments, scavenging compounds are used with stoichiometric activators. Typical aluminum or boron alkyl components useful as scavengers are represented by the general formula R^xJZ_2 where J is aluminum or boron, R^x is as previously defined above, and each Z is independently R^x or a different univalent anionic ligand such as halogen (Cl, Br, I), alkoxide (OR^x) and the like. Most preferred aluminum alkyls include triethylaluminum, diethylaluminum chloride, tri-*iso*-butylaluminum, tri-*n*-octylaluminum, tri-*n*-hexylaluminum, trimethylaluminum and the like. Preferred boron alkyls include triethylboron. Scavenging compounds may also be alumoxanes and modified alumoxanes including methylalumoxane and modified methylalumoxane.

In an alternate embodiment, alkylalumoxane compounds (such as methylalumoxane, and modified methylalumoxane) are present in the reaction zone at less than 3 mg of alumoxane/gram of olefin feed, preferably less than 1 mg of alumoxane/gram of olefin feed, preferably less than 0.5 mg of alumoxane/g of olefin feed.

Supported Catalysts

Supported catalysts and or supported catalyst systems may be used to prepare PAO's. To prepare uniform supported catalysts, the catalyst precursor

preferably dissolves in the chosen solvent. The term "uniform supported catalyst" means that the catalyst precursor, the activator, and or the activated catalyst approach uniform distribution upon the support's accessible surface area, including the interior pore surfaces of porous supports. Some embodiments of supported catalysts prefer uniform supported catalysts; other embodiments show no such preference.

Useful supported catalyst systems may be prepared by any method effective to support other coordination catalyst systems, effective meaning that the catalyst so prepared can be used for oligomerizing or polymerizing olefins in a heterogeneous process. The catalyst precursor, activator, co-activator (if needed), suitable solvent, and support may be added in any order or simultaneously.

By one method, the activator, dissolved in an appropriate solvent such as toluene, may be stirred with the support material for 1 minute to 10 hours to prepare the supported catalyst. The total solution volume (of the catalyst solution, the activator solution or both) may be greater than the pore volume of the support, but some embodiments limit the total solution volume below that needed to form a gel or slurry (about 90% to 400 %, preferably about 100-200%, of the pore volume). The mixture is optionally heated from 30-200 °C during this time. The catalyst precursor may be added to this mixture as a solid, if a suitable solvent is employed in the previous step, or as a solution. Alternatively, the mixture can be filtered, and the resulting solid mixed with a catalyst precursor solution. Similarly, the mixture may be vacuum dried and mixed with a catalyst precursor solution. The resulting catalyst mixture is then stirred for 1 minute to 10 hours, and the supported catalyst is either filtered from the solution and vacuum dried or subjected to evaporation to remove the solvent.

Alternatively, the catalyst precursor and activator may be combined in solvent to form a solution. The support is then added to the solution, and the resulting mixture is stirred for 1 minute to 10 hours. The total activator/catalyst-precursor solution volume may be greater than the pore volume of the support, but some embodiments limit the total solution volume below that needed to form a gel or slurry (about 90% to 400 %, preferably about 100-200% of the pore volume). After stirring, the residual solvent is removed under vacuum, typically at ambient

temperature and over 10-16 hours; however, greater or lesser times and temperatures may be used.

The catalyst precursor may also be supported absent the activator; in this case, the activator (and co-activator if needed) is added to a the liquid phase of a
5 slurry process. For example, a solution of catalyst precursor may be mixed with a support material for a period of about 1 minute to 10 hours. The resulting precatalyst mixture may be filtered from the solution and dried under vacuum or treated with evaporation to remove the solvent. The total catalyst-precursor-solution volume may be greater than the support's pore volume, but some
10 embodiments limit the total solution volume below that needed to form a gel or slurry (about 90% to 400 %, preferably about 100-200% of the pore volume).

Additionally, two or more different catalyst precursors may be placed on the same support using any of the support methods disclosed above. Likewise, two or more activators or an activator and a co-activator, may be placed on the
15 same support. Suitable solid particle supports are typically comprised of polymeric or refractory oxide materials, each being preferably porous. Any support material that has an average particle size greater than 10 μm is suitable for use in this invention. Various embodiments select a porous support material, such as for example, talc, inorganic oxides, inorganic chlorides, for example
20 magnesium chloride and resinous support materials such as polystyrene polyolefin or polymeric compounds or any other organic support material and the like. Some embodiments select inorganic oxide materials as the support material including Group-2, -3, -4, -5, -13, or -14 metal or metalloid oxides. Some embodiments select the catalyst support materials to include silica, alumina, silica-alumina, and
25 their mixtures. Other inorganic oxides may serve either alone or in combination with the silica, alumina, or silica-alumina. These are magnesia, titania, zirconia, and the like. Lewis acidic materials such as montmorillonite and similar clays may also serve as a support. In this case, the support can optionally double as an activator component. But additional activator may also be used. In some cases, a
30 special family of solid support commonly known as MCM-41 can also be used. MCM-41 is a new class of unique crystalline support and can be prepared with tunable pore size and tunable acidity when modified with a second component. A

detailed description of this class of materials and their modification can be found in US 5,264,203.

The support material may be pretreated by any number of methods. For example, inorganic oxides may be calcined, chemically treated with
5 dehydroxylating agents such as aluminum alkyls and the like, or both.

As stated above, polymeric carriers will also be suitable in accordance with the invention, see for example the descriptions in WO 95/15815 and U.S. patent 5,427,991. The methods disclosed may be used with the catalyst
10 compounds, activators or catalyst systems of this invention to adsorb or absorb them on the polymeric supports, particularly if made up of porous particles, or may be chemically bound through functional groups bound to or in the polymer chains.

Useful catalyst carriers may have a surface area of from 10-700 m²/g, and or a pore volume of 0.1-4.0 cc/g and or an average particle size of 10-500 μm.
15 Some embodiments select a surface area of 50-500 m²/g, and or a pore volume of 0.5-3.5 cc/g, and or an average particle size of 20-200 μm. Other embodiments select a surface area of 100-400 m²/g, and or a pore volume of 0.8-3.0 cc/g, and or an average particle size of 30-100 μm. Invention carriers typically have a pore size of 10-1000 Angstroms, alternatively 50-500 Angstroms, or 75-350
20 Angstroms. The metallocenes and or the metallocene/activator combinations are generally deposited on the support at a loading level of 10-100 micromoles of catalyst precursor per gram of solid support; alternately 20-80 micromoles of catalyst precursor per gram of solid support; or 40-60 micromoles of catalyst precursor per gram of support. But greater or lesser values may be used provided
25 that the total amount of solid catalyst precursor does not exceed the support's pore volume.

The metallocenes and or the metallocene/activator combinations can be supported for gas-phase, bulk, or slurry polymerization, or otherwise as needed. Numerous support methods are known for catalysts in the olefin polymerization
30 art, particularly alumoxane-activated catalysts; all are suitable for use herein. See, for example, U.S. Patents 5,057,475 and 5,227,440. An example of supported ionic catalysts appears in WO 94/03056. U.S. Patent 5,643,847 and WO

96/04319A which describe a particularly effective method. Both polymers and inorganic oxides may serve as supports, see U.S. Patents 5,422,325, 5,427,991, 5,498,582 and 5,466,649, and international publications WO 93/11172 and WO 94/07928.

- 5 In another preferred embodiment, the metallocene and or activator (with or without a support) are combined with an alkylaluminum compound, preferably a trialkylaluminum compound, prior to entering the reactor. Preferably the alkylaluminum compound is represented by the formula: R_3Al , where each R is independently a C1 to C20 alkyl group; preferably the R groups are independently
- 10 selected from the group consisting of methyl, ethyl, propyl, isopropyl, butyl, isobutyl, n-butyl, pentyl, isopentyl, n-pentyl, hexyl, isohexyl, n-hexyl, heptyl, octyl, isooctyl, n-octyl, nonyl, isononyl, n-nonyl, decyl, isodecyl, n-decyl, undecyl, isoundecyl, n-undecyl, dodecyl, isododecyl, and n-dodecyl, preferably isobutyl, n-octyl, n-hexyl, and n-dodecyl. Preferably the alkylaluminum
- 15 compound is selected from tri-isobutyl aluminum, tri n-octyl aluminum, tri-n-hexyl aluminum, and tri-n-dodecyl aluminum.

Monomers

- In a preferred embodiment the catalyst compounds described herein are
- 20 used to polymerize or oligomerize any unsaturated monomer or monomers. Preferred monomers include C_3 to C_{24} olefins, preferably C_4 to C_{20} olefins, more preferably C_5 to C_{20} olefins, more preferably C_6 to C_{14} olefins, more preferably C_8 to C_{12} olefins. In some embodiments preferred monomers include linear, branched or cyclic alpha-olefins, preferably C_3 to C_{20} alpha-olefins, preferably C_6
- 25 to C_{14} alpha-olefins, and more preferably C_8 to C_{12} alpha-olefins. Preferred olefin monomers may be one or more of hexene, heptene, octene, nonene, decene, dodecene, 3-methyl-1-butene, and tetradecene.

- In a preferred embodiment, the process described herein may be used to produce homo-oligomers or co-oligomers (for the purposes of this invention and
- 30 the claims thereto, a co-oligomer may comprise two, three, four, or more different monomer units). Preferred oligomers produced herein include homo-oligomers or co-oligomers of any of the above monomers. In a preferred embodiment the

oligomer is a homo-oligomer of any C₈ to C₁₂ alpha-olefin. Preferably the oligomer is a homo-oligomer of 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, or 1-dodecene. Preferably the oligomer is a homo-oligomer of decene. In another embodiment the oligomer is a co-oligomer comprising
5 decene and one or more of any of the monomers listed above.

The alpha-olefins used to make PAOs include, but are not limited to, C₅ to C₂₄ alpha-olefins, with the C₆ to C₁₄ alpha-olefins, such as 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene and 1-tetradecene being preferred. A preferred group of polyalpha-olefins are poly-1-
10 hexene, poly1-heptene, poly-1-octene, poly-1-nonene, poly-1-decene, poly1-undecene, poly-1-dodecene, poly-1-tridecene, and poly-1-tetradecene, although the dimers of higher olefins in the range of C₁₂ to C₁₈ can be present in the final products. Useful PAO's are preferably dimers, trimers, tetramers, pentamers, and higher oligomers or polymers with carbon numbers starting from C₂₀ and higher
15 made from C₄ to C₁₈ alpha-olefins in one embodiment, and oligomers or polymers with carbon number starting from C₂₀ and higher made from C₆ to C₁₄ alpha-olefins in another embodiment. Suitable olefins include 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undodecene and 1-dodecene, 1-tridecene, 1-tetradecene. In one embodiment, the olefin is 1-decene, and the
20 PAO is a mixture of dimers, trimers, tetramers and pentamers (and higher) of 1-decene. In another embodiment, the olefin is 1-decene, and the PAO is a mixture of trimers, tetramers and pentamers (and higher) of 1-decene. In another embodiment, the olefin is 1-octene, and the PAO is a mixture of trimers, tetramers and pentamers (and higher) of 1-octene. In another embodiment, the olefin is 1-
25 hexene, and the PAO is a mixture of tetramers and pentamers (and higher) of 1-hexene.

In another embodiment, the monomers comprise propylene and or butene, or combination of propylene and/or butene with another alpha-olefin or other olefins, choosing from C₅ to C₂₀ alpha-olefins.

30 In a preferred embodiment, the PAO comprises two or more monomers, preferably three or more monomers, preferably four or more monomers, preferably five or more monomers. For example, a C₈, C₁₀, C₁₂-linear alpha-

olefin mixture, or a C6, C7, C8, C9, C10, C11, C12, C13, C14-linear alpha-olefin mixture, or a C4, C6, C8, C10, C12, C14, C16, C18-linear alpha-olefin mixture can be used as a feed.

In an alternate embodiment, the PAO comprises less than 50 mole% of C2, 5 C3 and C4 monomers, preferably less than 40 mole%, preferably less than 30 mole %, preferably less than 20 mole%, preferably less than 10 mole%, preferably less than 5 mole%, preferably less than 3 mole %, preferably 0%. Specifically, in an alternate embodiment, the PAO comprises less than 50 mole% of ethylene, propylene and butene, preferably less than 40 mole%, preferably less than 30 mole 10 %, preferably less than 20 mole%, preferably less than 10 mole%, preferably less than 5 mole%, preferably less than 3 mole %, preferably 0%. In another embodiment, the PAO comprises less than 40 mole% of ethylene. In another embodiment, the PAO comprises less than 40 mole% of propylene. In another embodiment, the PAO comprises less than 40 mole% of butene. In another 15 embodiment, the PAO comprises less than 10 mole% of ethylene. In another embodiment, the PAO comprises less than 10 mole% of propylene. In another embodiment, the PAO comprises less than 10 mole% of butene. In another embodiment, the PAO comprises less than 1 mole% of ethylene. In another embodiment, the PAO comprises less than 1 mole% of propylene. In another 20 embodiment, the PAO comprises less than 1 mole% of butene.

In a preferred embodiment, ethylene, propylene and butene monomers are present in the PAO at less than 1 weight %.

The alpha-olefins used herein can be produced directly from ethylene growth process as practiced by several commercial production processes, or they 25 can be produced from Fischer-Tropsch hydrocarbon synthesis from CO/H₂ syngas, or from metathesis of internal olefins with ethylene, or from cracking of petroleum or Fischer-Tropsch synthetic wax at high temperature, or any other alpha-olefin synthesis routes. A preferred feed for this invention is preferably at least 80 weight % alpha-olefin (preferably linear alpha olefin), preferably at least 30 90 weight % alpha-olefin (preferably linear alpha olefin), more preferably 100% alpha-olefin (preferably linear alpha olefin). However, alpha-olefin mixtures can also be used as feeds in this invention, especially if the other components are

internal-olefins, branched olefins, paraffins, cyclic paraffins, aromatics (such as toluene and or xylenes). These components have diluent effects and are believed to not have a substantial detrimental effect on the polymerization of alpha-olefins. In other words, the process described herein can selectively convert alpha-olefins in a mixture and leave the other components unreacted. This is particularly useful when ethylene is not present in the mixture. This technology can be used to separate out alpha-olefins from a mixture by selectively reacting them with polymerization or oligomerization catalyst systems completely eliminating the need to separate alpha-olefins from the remainder of the components in a mixed feedstream. This is economically advantageous, for example, in a process utilizing Fisher-Tropsch synthesis olefin product streams containing alpha-olefins, internal-olefins and branched olefins. Such a mixture can be fed to the oligomerization technology as described herein and to selectively react away the alpha-olefin. No separate step to isolate the alpha-olefin is needed. Another example of the utility of this process involves alpha-olefins produced by the metathesis of internal olefins with ethylene, which may contain some internal olefins. This mixed olefin base stock feed can be reacted as is in the polymerization / oligomerization process of the present invention, which selectively converts the alpha-olefins into lube products. Thus one can use the alpha-olefin for the base stock synthesis without having to separate the alpha-olefin from internal olefin. This can bring a significant improvement in process economics. The feed olefins can be the mixture of olefins produced from other linear alpha-olefin process containing C4 to C20 alpha-olefins as described in Chapter 3 "Routes to Alpha-Olefins" of the book Alpha Olefins Applications Handbook, Edited by G. R. Lappin and J. D. Sauer, published by Marcel Dekker, Inc. N. Y. 1989.

In a preferred embodiment, the PAO's produced herein may contain monomers having branches at least 2, preferably at least 3 carbons away from the alpha-unsaturation, such 4-methyl-1-decene, 4-ethyl-1-decene, or 4-methyl-1-hexene, 4-methyl-1-pentene, etc. These olefins may be present in the linear alpha-olefins from the manufacturing process or they can be added deliberately. The

copolymers of slightly branched alpha-olefins with completely linear alpha-olefins have improved low temperature properties.

In a preferred embodiment, any of the PAO's described herein may comprise at least 50 mole% 5 to 24 carbon atoms and from 0.5 to 20 mole% ethylene, where at least 80% of the ethylene present in the polyalpha-olefin is present in runs of 1 to 35 carbons or less as measured by Carbon 13 NMR. Preferably any of the PAO's described herein may comprise at least 60 mole% 5 to 24 carbon atoms (preferably at least 70 mole%, preferably at least 80 mole%, preferably at least 85 mole%, preferably at least 90 mole%, preferably at least 95 mole%) and from 0.5 to 20 mole% ethylene (preferably from 1 to 15 mole%, preferably from 2 to 10 mole %, preferably form 2 to 5 mole%), where at least 80% (preferably at least 85%, preferably at least 90%, preferably at least 95%, preferably at least 98%, preferably 100%) of the ethylene present in the polyalpha-olefin is present in runs of 1 to 35 carbons (preferably 1 to 30, preferably 1 to 25, preferably 1 to 20, preferably 1 to 15, preferably 1 to 10, preferably 1 to 5) as measured by Carbon 13 NMR.

Polymerization/Oligomerization Process

Many polymerization/oligomerization processes and reactor types used for metallocene-catalyzed polymerizations or oligomerizations such as solution, slurry, and bulk polymerization or oligomerization processed can be used in this invention. In some embodiments, if a solid or supported catalyst is used, a slurry or continuous fixed bed or plug flow process is suitable. In a preferred embodiment, the monomers are contacted with the metallocene compound and the activator in the solution phase, bulk phase, or slurry phase, preferably in a continuous stirred tank reactor or a continuous tubular reactor. In a preferred embodiment, the temperature in any reactor used herein is from -10°C to 250 °C, preferably from 30°C to 220 °C, preferably from 50°C to 180 °C, preferably from 60°C to 170 °C. In a preferred embodiment, the pressure in any reactor used herein is from 0.1 to 100 atmospheres, preferably from 0.5 to 75 atmospheres, preferably from 1 to 50 atmospheres. In another embodiment, the pressure in any reactor used herein is from 1 to 50,000 atmospheres, preferably 1 to 25,000

atmospheres. In another embodiment, the monomer(s), metallocene and activator are contacted for a residence time of 1 second to 100 hours, preferably 30 seconds to 50 hours, preferably 2 minutes to 6 hours, preferably 1 minute to 4 hours. In another embodiment solvent or diluent is present in the reactor and is preferably
5 selected from the group consisting of butanes, pentanes, hexanes, heptanes, octanes, nonanes, decanes, undecanes, dodecanes, tridecanes, tetradecanes, pentadecanes, hexadecanes, toluene, o-xylene, m-xylene, p-xylene, mixed xylenes, ethylbenzene, isopropylbenzene, and n-butylbenzene; preferably toluene and or xylenes and or ethylbenzene, normal paraffins (such as Norpar solvents
10 available for ExxonMobil Chemical Company in Houston, Texas), or isoparaffin solvents (such as Isopar solvents available for ExxonMobil Chemical Company in Houston, Texas). These solvents or diluents are usually pre-treated in same manners as the feed olefins.

Typically, in the processes of this invention, one or more transition metal
15 compounds, one or more activators, and one or more monomers are contacted to produce polymer or oligomer. These catalysts may be supported and as such will be particularly useful in the known slurry, solution, or bulk operating modes conducted in single, series, or parallel reactors. If the catalyst, activator or co-activator is a soluble compound, the reaction can be carried out in a solution
20 mode. Even if one of the components is not completely soluble in the reaction medium or in the feed solution, either at the beginning of the reaction or during or at the later stages of the reaction, a solution or slurry type operation is still applicable. In any instance, the catalyst components, dissolved or suspended
25 insolvents, such as toluene or other conveniently available aromatic solvents, or in aliphatic solvent, or in the feed alpha-olefin stream, are fed into the reactor under inert atmosphere (usually nitrogen or argon blanketed atmosphere) to allow the polymerization or oligomerization to take place. The polymerization or
oligomerization can be run in a batch mode, where all the components are added into a reactor and allowed to react to a pre-designed degree of conversion, either
30 to partial conversion or full conversion. Subsequently, the catalyst is deactivated by any possible means, such as exposure to air or water, or by addition of alcohols or solvents containing deactivating agents. The polymerization or oligomerization

can also be carried out in a semi-continuous operation, where feeds and catalyst system components are continuously and simultaneously added to the reactor so as to maintain a constant ratio of catalyst system components to feed olefin(s). When all feeds and catalyst components are added, the reaction is allowed to proceed to a pre-determined stage. The reaction is then discontinued by catalyst deactivation in the same manner as described for batch operation. The polymerization or oligomerization can also be carried out in a continuous operation, where feeds and catalyst system components are continuously and simultaneously added to the reactor so to maintain a constant ratio of catalyst system and feed olefins. The reaction product is continuously withdrawn from the reactor, as in a typical continuous stirred tank reactor (CSTR) operation. The residence times of the reactants are controlled by a pre-determined degree of conversion. The withdrawn product is then typically quenched in the separate reactor in a similar manner as other operation. In a preferred embodiment, any of the processes to prepare PAO's described herein are continuous processes. Preferably the continuous process comprises the steps of a) continuously introducing a feed stream comprising at least 10 mole % of the one or more C5 to C24 alpha-olefins into a reactor, b) continuously introducing the metallocene compound and the activator into the reactor, and c) continuously withdrawing the polyalpha-olefin from the reactor. In another embodiment, the continuous process comprises the step of maintaining a partial pressure of hydrogen in the reactor of 200 psi (1379 kPa) or less, based upon the total pressure of the reactor, preferably 150 psi (1034 kPa) or less, preferably 100 psi (690 kPa) or less, preferably 50 psi (345 kPa) or less, preferably 25 psi (173 kPa) or less, preferably 10 psi (69 kPa) or less. Alternately the hydrogen, if present is present in the reactor at 1000ppm or less by weight, preferably 750 ppm or less, preferably 500 ppm or less, preferably 250 ppm or less, preferably 100 ppm or less, preferably 50 ppm or less, preferably 25 ppm or less, preferably 10 ppm or less, preferably 5 ppm or less. Alternately the hydrogen, if present, is present in the feed at 1000ppm or less by weight, preferably 750 ppm or less, preferably 500 ppm or less, preferably 250 ppm or less, preferably 100 ppm or less, preferably 50 ppm or less, preferably 25 ppm or less, preferably 10 ppm or less, preferably 5 ppm or less.

Preferred reactors range in size from 2 ml and up. Usually, it is preferable to use reactors larger than one liter in volume for commercial production. The production facility may have one single reactor or several reactors arranged in series or in parallel or in both to maximize productivity, product properties and general process efficiency. The reactors and associated equipments are usually pre-treated to ensure proper reaction rates and catalyst performance. The reaction is usually conducted under inert atmosphere, where the catalyst system and feed components will not be in contact with any catalyst deactivator or poison which is usually polar oxygen, nitrogen, sulfur or acetylenic compounds.

One or more reactors in series or in parallel may be used in the present invention. The transition metal compound, activator and when required, co-activator, may be delivered as a solution or slurry in a solvent or in the alpha-olefin feed stream, either separately to the reactor, activated in-line just prior to the reactor, or preactivated and pumped as an activated solution or slurry to the reactor. Polymerizations/oligomerizations are carried out in either single reactor operation, in which monomer, or several monomers, catalyst/activator/co-activator, optional scavenger, and optional modifiers are added continuously to a single reactor or in series reactor operation, in which the above components are added to each of two or more reactors connected in series. The catalyst components can be added to the first reactor in the series. The catalyst component may also be added to both reactors, with one component being added to first reaction and another component to other reactors. In one preferred embodiment, the precatalyst is activated in the reactor in the presence of olefin. In another embodiment, the precatalyst such as the dichloride form of the metallocenes is pre-treated with alkylaluminum reagents, especially, triisobutylaluminum, tri-n-hexylaluminum and/ or tri-n-octylaluminum, followed by charging into the reactor containing other catalyst component and the feed olefins, or followed by pre-activation with the other catalyst component to give the fully activated catalyst, which is then fed into the reactor containing feed olefins. In another alternative, the pre-catalyst metallocene is mixed with the activator and/or the co-activator and this activated catalyst is then charged into reactor, together with feed olefin

stream containing some scavenger or co-activator. In another alternative, the whole or part of the co-activator is pre-mixed with the feed olefins and charged into the reactor at the same time as the other catalyst solution containing metallocene and activators and/or co-activator.

5 In some embodiments, a small amount of poison scavenger, such as trialkylaluminum (trimethylaluminum, triethylaluminum, triisopropylaluminum, triisobutylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum) or methylalumoxane is added to the feed olefin stream to further improve catalyst activity. In a preferred embodiment, the monomers are contacted with an
10 alkylaluminum compound, preferably a trialkylaluminum compound, prior to being introduced into the reactor. In another preferred embodiment, the metallocene and or activator are combined with an alkylaluminum compound, preferably a trialkylaluminum compound, prior to entering the reactor. Preferably the alkylaluminum compound is represented by the formula: R_3Al , where each R
15 is independently a C1 to C20 alkyl group, preferably the R groups are independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, butyl, isobutyl, n-butyl, pentyl, isopentyl, n-pentyl, hexyl, isohexyl, n-hexyl, heptyl, octyl, isoocetyl, n-octyl, nonyl, isononyl, n-nonyl, decyl, isodecyl, n-ecyl, undecyl, isoundecyl, n-undecyl, dodecyl, isododecyl, and n-dodecyl,
20 preferably isobutyl, n-octyl, n-hexyl, and n-dodecyl. Preferably the alkylaluminum compound is selected from tri-isobutylaluminum, tri n-octylaluminum, tri-n-hexylaluminum, and tri-n-dodecylaluminum.

In one embodiment of any of the process described herein the feed olefins and or solvents are treated to remove catalyst poisons, such as peroxides, oxygen
25 or nitrogen-containing organic compounds or acetylenic compounds. The treatment of the linear alpha-olefin with an activated 13X molecular sieve and a de-oxygenate catalyst, i.e., a reduced copper catalyst, increased catalyst productivity more than 10-fold. Alternatively, the feed olefins and or solvents are treated with an activated molecular sieve, such as 3A, 4A, 8A or 13X molecular
30 sieve, and/or in combination with an activated alumina or an activated de-oxygenated catalyst. Such treatment will increase catalyst productivity 2- to 10-fold or more. The improved process also includes special treatment of the feed

olefins to remove catalyst poisons, such as peroxides, oxygen, sulfur or nitrogen-containing organic compounds or other trace impurities. This treatment can increase catalyst productivity substantially (typically more than 10-fold).

Preferably the feed olefins are contacted with a molecular sieve, activated alumina, silica gel, oxygen removing catalyst, and or purifying clays to reduce the heteroatom-containing compounds in the feed, preferably below 50 ppm, preferably below 10 ppm.

The catalyst compositions can be used individually or can be mixed with other known polymerization catalysts to prepare polymer or oligomer blends. Monomer and catalyst selection allows polymer or oligomer blend preparation under conditions analogous to those using individual catalysts. Polymers having increased MWD are available from polymers made with mixed catalyst systems and can thus be achieved. Mixed catalyst can comprise two or more catalyst precursors and or two or more activators.

Generally, when using metallocene catalysts, after pre-treatment of feed olefins, solvents, diluents and after precautions to keep the catalyst component stream(s) and reactor free of impurities, the reaction should proceed well. In some embodiments, when using metallocene catalysts, particularly when they are immobilized on a support, the complete catalyst system will additionally comprise one or more scavenging compounds. Here, the term scavenging compound means a compound that removes polar impurities from the reaction environment. These impurities adversely affect catalyst activity and stability. Typically, purifying steps are usually used before introducing reaction components to a reaction vessel. But such steps will rarely allow polymerization or oligomerization without using some scavenging compounds. Normally, the polymerization process will still use at least small amounts of scavenging compounds.

Typically, the scavenging compound will be an organometallic compound such as the Group-13 organometallic compounds of U.S. Patents 5,153,157, 5,241,025 and WO-A-91/09882, WO-A-94/03506, WO-A-93/14132, and that of WO 95/07941. Exemplary compounds include triethylaluminum, triethylborane, tri-*iso*-butylaluminum, diisobutylaluminum hydride, methylalumoxane, *iso*-butylalumoxane, and tri-*n*-octylaluminum. Those scavenging compounds having

bulky or C₆-C₂₀ linear hydrocarbyl substituents connected to the metal or metalloid center usually minimize adverse interaction with the active catalyst. Examples include triethylaluminum, but more preferably, bulky compounds such as tri-*iso*-butyl aluminum, tri-*iso*-prenyl aluminum, and long-chain linear alkyl-

5 substituted aluminum compounds, such as tri-*n*-hexyl aluminum, tri-*n*-octyl aluminum, or tri-*n*-dodecyl aluminum. When alumoxane is used as the activator, any excess over that needed for activation will scavenge impurities and additional scavenging compounds may be unnecessary. Alumoxanes also may be added in scavenging quantities with other activators, e.g., methylalumoxane,

10 [Me₂HNPh]⁺[B(pfp)₄]⁻ or B(pfp)₃, where pfp is perfluorophenyl (C₆F₅), Me is methyl and Ph is phenyl.

In a preferred embodiment ethylene is present in the feed at 10 mole% or less, preferably 0.5 to 8 moles %, preferably 0.5 to 5 mole%, preferably from 1 to 3 mole%

15 The PAO's described herein can also be produced in homogeneous solution processes. Generally this involves polymerization or oligomerization in a continuous reactor in which the polymer formed and the starting monomer and catalyst materials supplied, are agitated to reduce or avoid concentration or temperature gradients. Temperature control in the reactor is generally obtained by

20 balancing the heat of polymerization and with reactor cooling by reactor jackets or cooling coils or a cooled side-stream of reactant to cool the contents of the reactor, auto refrigeration, pre-chilled feeds, vaporization of liquid medium (diluent, monomers or solvent) or combinations of the above. Adiabatic reactors with pre-chilled feeds may also be used. The reactor temperature depends on the catalyst

25 used and the product desired. Higher temperatures tend to give lower molecular weights and lower temperatures tend to give higher molecular weights, however this is not a hard and fast rule. In general, the reactor temperature preferably can vary between about 0 °C and about 300 °C, more preferably from about 10 °C to about 230 °C, and most preferably from about 25 °C to about 200 °C. Usually, it

30 is important to control the reaction temperature as pre-determined. In order to produce fluids with narrow molecular distribution, such as to promote the highest possible shear stability, it is useful to control the reaction temperature to obtain

minimum of temperature fluctuation in the reactor or over the course of the reaction time. If multiple reactors are used in series or in parallel, it is useful to keep the temperature constant in a pre-determined value to minimize any broadening of molecular weight distribution. In order to produce fluids with
5 broad molecular weight distribution, one can adjust the reaction temperature swing or fluctuation, or as in series operation, the second reactor temperature is preferably higher than the first reactor temperature. In parallel reactor operation, the temperatures of the two reactors are independent. Or one can use two types of metallocene catalysts.

10 The pressure in any reactor used herein can vary from about 0.1 atmosphere to 100 atmosphere (1.5 psi to 1500 psi), preferably from 0.5 bar to 75 atm (8 psi-1125 psi), most preferably from 1.0 to 50 atm (15 psi to 750 psi). The reaction can be carried out under the atmosphere of nitrogen or with some hydrogen. Sometimes a small amount of hydrogen is added to the reactor to
15 improve the catalyst. The amount of hydrogen is preferred to keep at such a level to improve catalyst productivity, but not induce any hydrogenation of olefins, especially the feed alpha-olefins because the conversion of alpha-olefins into saturated paraffins is very detrimental to the efficiency of the process. The amount of hydrogen partial pressure is preferred to be kept low, less than 50 psi,
20 preferably less than 25 psi, preferably less than 10 psi, preferably less than 5 psi.. In a particularly preferred embodiment in any of the process described herein the concentration of hydrogen in the reactant phase is less than 10,000 ppm, 100 ppm, preferably less than 50 ppm, preferably less than 10 ppm.. In a particularly preferred embodiment in any of the process described herein the concentration of
25 hydrogen in the reactor is kept at a partial pressure of preferably 50 psi (345 kPa) or less, preferably 10 psi (69 kPa) or less. Alternately, in any process described herein hydrogen, if present, is present in the reactor and or feed at 10,000 ppm or less, preferably 1000 ppm or less by weight, preferably 750 ppm or less, preferably 500 ppm or less, preferably 250 ppm or less, preferably 100 ppm or
30 less, preferably 50 ppm or less, preferably 25 ppm or less.

The reaction time or reactor residence time is usually dependent on the type of catalyst used, the amount of catalyst used, and the desired conversion

level. Different metallocenes have different activities. Usually, a higher degree of alkyl substitution on the cyclopentadienyl ring, or bridging improves catalyst productivity. Catalysts such as bis(1,2,3,4-tetramethylcyclopentadienyl)zirconium dichloride or bis(1,2,4-tri methylcyclopentadienyl)zirconium dichloride, (1,2,3,4-
5 tetramethylcyclopentadienyl)(1,3-di methylcyclopentadienyl)zirconium dichloride or (1,2,4-tri methylcyclopentadienyl)(1,3-di methylcyclopentadienyl)zirconium dichloride or their dialkyl analogs have desirable high productivity and stability than unsubstituted metallocenes. Usually the amount of catalyst components used is determinative. High amount of catalyst loading tends to gives high conversion
10 at short reaction time. However, high amount of catalyst usage make the production process uneconomical and difficult to manage the reaction heat or to control the reaction temperature. Therefore, it is useful to choose a catalyst with maximum catalyst productivity to minimize the amount of metallocene and the amount of activators needed. When the catalyst system is metallocene plus
15 methylalumoxane, the range of methylalumoxane used is typically in the range of 0.1 milligram (mg) to 500 mg/g of alpha-olefin feed. A more preferred range is from 0.05 mg to 10 mg/g of alpha-olefin feed. Furthermore, the molar ratios of the aluminum to metallocene (Al/M molar ration) range from 2 to 4000, preferably 10 to 2000, more preferably 50 to 1000, preferably 100 to 500. When
20 the catalyst system is metallocene plus a Lewis Acid or an ionic promoter with NCA component, the metallocene use is typically in the range of 0.01 microgram to 500 micrograms of metallocene component/gram of alpha-olefin feed. Usually the preferred range is from 0.1 microgram to 100 microgram of metallocene component per gram of alpha-olefin feed. Furthermore, the molar ratio of the
25 NCA activator to metallocene is in the range from 0.1 to 10, preferably 0.5 to 5, preferably 0.5 to 3. If a co-activator of alkylaluminum compound is used, the molar ratio of the Al to metallocene is in the range from 1 to 1000, preferably 2 to 500, preferably 4 to 400.

Typically one prefers to have the highest possible conversion (close to
30 100%) of feed alpha-olefin in shortest possible reaction time. However, in CSTR operation, sometimes it is beneficial to run the reaction at an optimum conversion, which is slightly less than 100% conversion. There are also occasions, when

partial conversion is more desirable when the narrowest possible MWD of the product is desirable because partial conversion can avoid a MWD broadening effect. If the reaction is conducted to less than 100% conversion of the alpha-olefin, the unreacted starting material after separation from other product and solvents/diluents can be recycled to increase the total process efficiency.

Desirable residence times for any process described herein are in the range from 1 minutes to 20 hours, typically 5 minutes to 10 hours. Each of these processes may also be employed in single reactor, parallel or series reactor configurations. The liquid processes comprise contacting olefin monomers with the above described catalyst system in a suitable diluent or solvent and allowing said monomers to react for a sufficient time to produce the desired polymers or oligomers. Hydrocarbon solvents both aliphatic and aromatic are suitable. Aromatics such as toluene, xylenes, ethylbenzene, propylbenzene, cumene, t-butylbenzene are suitable. Alkanes, such as hexane, heptane, pentane, isopentane, and octane, Norpar or Isopar solvents from ExxonMobil Chemical Company in Houston, Texas are also suitable. Generally, toluene is most suitable to dissolve catalyst components. Norpar, Isopar solvent or hexanes are preferred as reaction diluents. Oftentimes, a mixture of toluene and Norpar or Isopar is used as diluent or solvent.

The process can be carried out in a continuous stirred tank reactor or plug flow reactor, or more than one reactor operated in series or parallel. These reactors may have or may not have internal cooling and the monomer feed may or may not be refrigerated. See the general disclosure of U.S. patent 5,705,577 for general process conditions.

When a solid supported catalyst is used for the conversion, a slurry polymerization/oligomerization process generally operates in the similar temperature, pressure and residence time range as described previously. In a slurry polymerization or oligomerization, a suspension of solid catalyst, promoters, monomer and comonomers are added. The suspension including diluent is intermittently or continuously removed from the reactor. The catalyst is then separated from the product by filtration, centrifuge or settlement. The fluid is then distilled to remove solvent, any unreacted components and light product. A

portion or all of the solvent and unreacted component or light components can be recycled for reuse.

If the catalyst used is un-supported, is a solution catalyst, when the reaction is complete or when the product is withdrawn from the reactor (such as in a CSTR), the product may still contain soluble, suspended or mixed catalyst components. These components are preferably deactivated or removed. Any of the usual catalyst deactivation methods or aqueous wash methods can be used to remove the catalyst component. Typically, the reaction is deactivated by addition of stoichiometric amount or excess of air, moisture, alcohol, isopropanol, etc. The mixture is then washed with dilute sodium hydroxide or with water to remove catalyst components. The residual organic layer is then subjected to distillation to remove solvent, which can be recycled for reuse. The distillation can further remove any light reaction product from C18 and less. These light components can be used as diluent for further reaction. Or they can be used as olefinic raw material for other chemical synthesis, as these light olefin product have vinylidene unsaturation, most suitable for further functionalization to convert in high performance fluids. Or these light olefin products can be hydrogenated to be used as high quality paraffinic solvents.

Polymerization or oligomerization in absence of hydrogen is also advantageous to provide polymers or oligomers with high degree of unsaturated double bonds. These double bonds can be easily converted into functionalized fluids with multiple performance features. Examples for converting these polymers with MW greater than 300 can be found in preparation of ashless dispersants, by reacting the polymers with maleic anhydride to give PAO-succinic anhydride which can then reacted with amines, alcohols, polyether alcohols to convert into dispersants. Examples for such conversion can be found in the book "Lubricant Additives: Chemistry and Application," ed. By Leslie R. Rudnick, p. 143-170.

In another embodiment, any of polyalphaolefins produced herein is hydrogenated. In particular the polyalpha-olefin is preferably treated to reduce heteroatom containing compounds to less than 600 ppm, and then contacted with hydrogen and a hydrogenation catalyst to produce a polyalpha-olefin having a

bromine number less than 1.8. In a preferred embodiment, the treated polyalpha-olefin comprises 100 ppm of heteroatom containing compounds or less, preferably 10 ppm of heteroatom containing compounds or less. (A heteroatom containing compound is a compound containing at least one atom other than carbon and hydrogen.) Preferably the hydrogenation catalyst is selected from the group consisting of supported Group 7, 8, 9, and 10 metals, preferably the hydrogenation catalyst selected from the group consisting of one or more of Ni, Pd, Pt, Co, Rh, Fe, Ru, Os, Cr, Mo, and W, supported on silica, alumina, clay, titania, zirconia, or mixed metal oxide supports. A preferred hydrogenation catalyst is nickel supported on kieselguhr, or platinum or palladium supported on alumina, or cobalt-molybdenum supported on alumina. Usually, a high nickel content catalyst, such as 60% Ni on Kieselguhr catalyst is used, or a supported catalyst with high amount of Co-Mo loading. Alternately, the hydrogenation catalyst is nickel supported on kieselguhr, silica, alumina, clay or silica-alumina.

In a preferred embodiment the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst at a temperature from 25 to 350°C, preferably 100 to 300°C. In another preferred embodiment the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst for a time period from 5 minutes to 100 hours, preferably from 5 minutes to 24 hours. In another preferred embodiment the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst at a hydrogen pressure of from 25 psi to 2500 psi, preferably from 100 to 2000 psi. In another preferred embodiment the hydrogenation process reduces the number of mm triad groups in a polyalpha-olefin by 1 to 80 %. Preferably the PAO has 10 to 80% less mm triad groups than the polyalpha-olefin prior to contact with the hydrogen and hydrogenation catalyst. For further information on hydrogenation of PAO's please see US 5,573,657 and "Lubricant Base Oil Hydrogen Refining Processes" (page 119 to 152 of **Lubricant Base Oil and Wax Processing**, by **Avilino Sequeira, Jr., Marcel Dekker, Inc., NY, 1994**).

This hydrogenation process can be accomplished in a slurry reactor in a batch operation or in a continuous stirred tank reactor (CSTR), where the catalyst in 0.001 wt% to 20 wt% of the PAO feed or preferably 0.01 to 10 wt%, hydrogen and the polyalpha-olefins are continuously added to the reactor to allow for certain

residence time, usually 5 minutes to 10 hours to allow complete hydrogenation of the unsaturated olefins and to allow proper conversion of the mm diads. The amount of catalyst added is usually very small just to compensate for the catalyst deactivation. The catalyst and hydrogenated PAO are continuously withdrawn
5 from the reactor. The product mixture was then filtered, centrifuged or settled to remove the solid hydrogenation catalyst. The catalyst can be regenerated and reused. The hydrogenated PAO can be used as is or further distilled or fractionated to the right component if necessary. In some cases, when the hydrogenation catalyst show no catalyst deactivation over long term operation, the
10 stir tank hydrogenation process can be carried out in a manner where a fixed amount of catalyst is maintained in the reactor, usually 0.1 wt% to 10% of the total reactant, and only hydrogen and PAO feed are continuously added at certain feed rate and only hydrogenated PAO was withdrawn from the reactor.

The hydrogenation process can also be accomplished by a fixed bed
15 process, in which the solid catalyst is packed inside a tubular reactor and heated to reactor temperature. Hydrogen and PAO feed can be fed through the reactor simultaneously from the top or bottom or countercurrently to maximize the contact between hydrogen, PAO and catalyst and to allow best heat management. The feed rate of the PAO and hydrogen are adjusted to give proper residence to
20 allow complete hydrogenation of the unsaturated olefins in the feed and to allow desirable conversion of mm triads in the process. The hydrogenated PAO fluid can be used as is or further distilled or fractionated to give the right component, if necessary. Usually, the finished hydrocarbon PAO fluids have bromine number less than 2 and have reduced amount of mm triads than the unhydrogenated PAO.
25 The new poly-alpha-olefins when used alone or blended with other fluid has unique lubrication properties.

In another embodiment, a novel lubricant of the present invention comprises the PAO's produced in this invention, together with one or more other base stocks, including Group I to Group V base stocks with viscosity range from
30 1.5 to 100 cSt at 100°C to formulate suitable viscosity grades. In addition, additives of one or more of: thickeners, VI improvers, antioxidants, anti-wear additives, detergent/dispersant/inhibitor (DDI) packages, and/or anti-rust additives

may be added. In a preferred embodiment the PAO's produced herein are combined with one or more of dispersants, detergents, friction modifiers, traction improving additives, demulsifiers, defoamants, chromophores (dyes), and/or haze inhibitors. These fully formulated lubricants can be used in automotive crank case
5 oil (engine oil), industrial oil, grease, or gas turbine engine oil. These are examples of additives used in finished lubricant formulations. Additional information on the use of PAO's in the formulations of full synthetic, semi-synthetic or part synthetic lubricant or functional fluids can be found in "Synthetic Lubricants and High-Performance Functional Fluids", 2nd Ed. L. Rudnick, etc.
10 Marcel Dekker, Inc., N.Y. (1999). Additional information on additives used in product formulation can be found in "Lubricants and Lubrications, Ed. By T. Mang and W. Dresel, by Wiley-VCH GmbH, Weinheim 2001.

In another embodiment, this invention relates to:

- 15 1. A process to produce a polyalpha-olefin comprising:
 - 1) contacting one or more alpha-olefin monomers having 3 to 24 carbon atoms with an unbridged substituted bis cyclopentadienyl transition metal compound having: 1) at least one non-isoolefin substitution on both cyclopentadienyl rings, or 2) at least two substitutions on at least one
20 cyclopentadienyl ring, a non-coordinating anion activator, and optionally an alkyl-aluminum compound, where the molar ratio of transition metal compound to activator is 10:1 to 0.1:1, and if the alkyl aluminum compound is present then the molar ratio of alkyl aluminum compound to transition metal compound is 1:4 to 4000:1, under polymerization conditions wherein:
25 i) hydrogen is present at a partial pressure of 0.1 to 50 psi, based upon the total pressure of the reactor or the concentration of the hydrogen is from 1 to 10,000 ppm or less by weight ;
ii) wherein the alpha-olefin monomer(s) having 3 to 24 carbon atoms are present at 10 volume % or more based upon the total volume of the
30 catalyst/activator/alkylaluminum compound solutions, monomers, and any diluents or solvents present in the reaction;
iii) the residence time of the reaction is at least 5 minutes;

iv) the productivity of the process is at least 43,000 grams of total product per gram of transition metal compound;

v) the process is continuous or semi-continuous, and

vi) the temperature in the reaction zone does not rise by more than 10 °C during the reaction; and


vii) ethylene is not present at more than 30 volume % of the monomers entering the reaction zone;

and

2) obtaining a polyalpha-olefin (PAO), optionally hydrogenating the PAO, wherein the PAO comprises at least 50 mole% of a C3 to C24 alpha-olefin monomer, and wherein the PAO has a kinematic viscosity at 100°C of 20 cSt or less.

2. The process of paragraph 1 wherein the transition metal compound is represented by the formula:

15

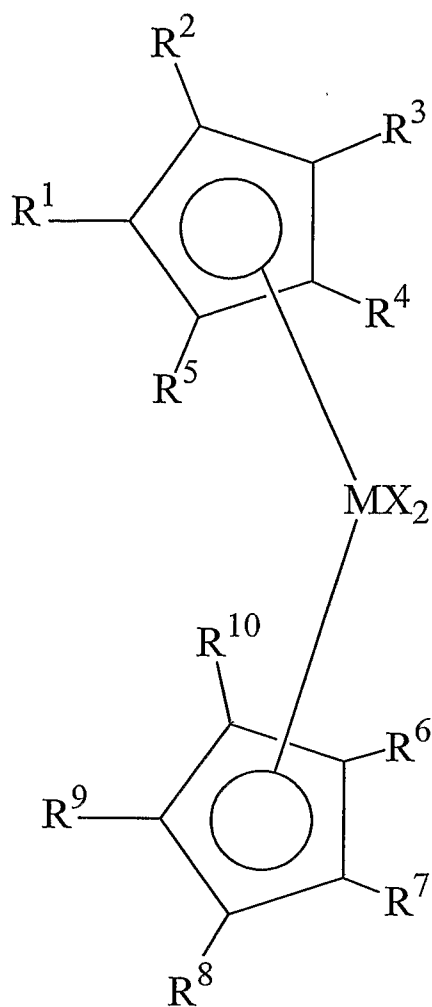

where M is a Group 4 metal;

each X is a hydrogen, halogen, hydride radicals, hydrocarbyl radicals, substituted

5 hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, silylcarbyl radicals, substituted silylcarbyl radicals, germylcarbyl radicals, or substituted germylcarbyl radicals, or both X are joined and bound to the metal atom to form a metallacycle ring containing from about 3 to about 20 carbon atoms, or both together can be an olefin, diolefin or aryne ligand; and

10 R^1 to R^{10} are independently, a radical group which is a hydrogen, a heteroatom, hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, silylcarbyl or germylcarbyl, provided that: 1) at least one of R^1 to R^5 is not hydrogen or an isoolefin and at least one of R^6 to R^{10} is not hydrogen or an isoolefin or 2) at least two of R^1 to R^5 are not hydrogen, or 3) at least two of R^1 to

R⁵ are not hydrogen and at least two of R⁶ to R¹⁰ are not hydrogen, and where any two adjacent R¹ to R⁵ groups may form a C4 to C20 cyclic or poly cyclic moiety, and where any two adjacent R⁶ to R¹⁰ groups may form a C4 to C20 cyclic or poly cyclic moiety.

- 5 3. The process of paragraph 1 or 2 wherein the PAO has a pour point of 0 °C or less.
4. The process of paragraph 1, or 3 wherein the PAO has a pour point of -40 °C or less and a kinematic viscosity at 100 °C of 15cSt or less.
5. The process of any of paragraphs 1 to 4 wherein the PAO has a pour point
10 of -55 °C or less and a kinematic viscosity at 100 °C of 10cSt or less.
6. The process of any of paragraphs 1 to 5 wherein the polyalpha-olefin is polydecene having an Mw/Mn of between 1 and 3.5.
7. The process of any of paragraphs 1 to 6 wherein the polyalpha-olefin has a Bromine number of 1.8 or more.
- 15 8. The process of any of paragraphs 1 to 7 wherein the polyalpha-olefin has a Kinematic viscosity at 100°C of from 1.5 to 15 cSt.
9. The process of any of paragraphs 1 to 8 wherein the polyalpha-olefin has a Kinematic viscosity at 100°C of from 1.7 to 12 cSt.
10. The process of any of paragraphs 1 to 9 wherein the polyalpha-olefin has a
20 kinematic viscosity at 40°C of from 3 to 1,000 cSt.
11. The process of any of paragraphs 1 to 10 wherein the polyalpha-olefin has a Viscosity Index of 90 or more.
12. The process of any of paragraphs 1 to 11 wherein the polyalpha-olefin has a Viscosity Index of 90 to 200.
- 25 13. The process of any of paragraphs 1 to 12 wherein the polyalpha-olefin has a pour point of -40°C or less.
14. The process of any of paragraphs 1 to 13 wherein the polyalpha-olefin has a weight average molecular weight of 100 to 50,000 g/mol.
15. The process of any of paragraphs 1 to 14 wherein the polyalpha-olefin has
30 a weight average molecular weight of 336 to 40,000 g/mol.
16. The process of any of paragraphs 1 to 15 wherein the monomers having 3 to 24 carbon atoms are present at 55 mole% or more.

17. The process of any of paragraphs 1 to 16 wherein monomers having 5 to 24 carbon atoms are present at 55 mole% or more.
18. The process of any of paragraphs 1 to 17 wherein the polyalpha-olefin(s) are selected from the group consisting of 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene, 1-hexadecene, 1-heptadecene, 1-octadecene, 1-nonadecene, 1-eicosene, 1-uneicosene, 1-docosene, 1-tricosene, 1-tetracosene, 1-pentacosene, 1-hexacosene, 4-methyl-1-pentene, 4-phenyl-1-butene, and 5-phenyl-1-pentene.
19. The process of any of paragraphs 1 to 18 wherein the polyalpha-olefin(s) are selected from the group consisting of 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene and 1-hexadecene.
20. The process of any of paragraphs 1 to 19 wherein the polyalpha-olefin(s) are selected from the group consisting of 1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene and 1-hexadecene.
21. The process of any of paragraphs 1 to 20 wherein the polyalpha-olefin comprises octene, decene, and dodecene.
22. The process of any of paragraphs 1 to 21 wherein the polyalpha-olefin has a dielectric constant of 2.5 or less (1 kHz at 23 °C).
23. The process of any of paragraphs 1 to 22 wherein the polyalpha-olefin has a flash point of 150°C or more.
24. The process of any of paragraphs 1 to 23 wherein the polyalpha-olefin has a specific gravity of 0.75 to 0.96 g/cm³.
25. The process of any of paragraphs 1 to 24 wherein ethylene, propylene and butene monomers are present at less than 1 weight %.
26. The process of any of paragraphs 1 to 25 wherein the monomers having 5 to 24 carbon atoms are present at 60 mole% or more.
27. The process of any of paragraphs 1 to 26 wherein the monomers having 5 to 24 carbon atoms are present at 70 mole% or more.
28. The process of any of paragraphs 1 to 27 further comprising

- 1) optionally treating the polyalpha-olefin to reduce heteroatom containing compounds to less than 600 ppm,
 - 2) optionally separating the polyalpha-olefins from solvents or diluents;
 - 5 3) contacting the polyalpha-olefin with hydrogen and a hydrogenation catalyst; and
 - 4) obtaining a polyalpha-olefin having a bromine number less than 1.8.
29. The process of paragraph 28 wherein the polyalpha-olefin is treated to
10 remove heteroatom containing compounds prior to contacting with the hydrogen and or the hydrogenation catalyst.
30. The process of paragraph 29 wherein the treated polyalpha-olefin comprises 100 ppm of heteroatom containing compounds or less.
31. The process of paragraph 29 wherein the treated polyalpha-olefin
15 comprises 10 ppm of heteroatom containing compounds or less.
32. The process of any of paragraphs 1 to 31 where scavenger is present and comprises methylalumoxane and or modified methylalumoxane.
33. The process of any of paragraphs 1 to 32 wherein the activator comprises one or more of N,N-dimethylanilinium tetra(pentafluorophenyl)borate, N,N-
20 dialkylphenylanilinium tetra(pentafluorophenyl)borate (where the alkyl is a C1 to C18 alkyl group), trityl tetra(pentafluorophenyl)borate, tris(pentafluorophenyl)boron, tri-alkylammonium tetra(pentafluorophenyl)borate (where the alkyl is a C1 to C18 alkyl group), tetra-alkylammonium tetra(pentafluorophenyl)borate (where the alkyl is a C1 to C18 alkyl group).
- 25 34. The process of any of paragraphs 1 to 33 wherein the transition metal compound comprises one or more of:
- bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride;
- bis(1,3-dimethylcyclopentadienyl)zirconium dichloride;
- bis(tetramethylcyclopentadienyl)zirconium dichloride;
- 30 bis(pentamethylcyclopentadienyl)zirconium dichloride;
- bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl;
- bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl;

bis(tetramethylcyclopentadienyl)zirconium dimethyl; or
bis(pentamethylcyclopentadienyl)zirconium dimethyl.

35. The process of any of paragraphs 1 to 34 wherein the transition metal compound comprises one or more of:

- 5 Bis(1,2-dimethylcyclopentadienyl)zirconium dichloride,
Bis(1,3-dimethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,3-trimethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,3,4-tetramethylcyclopentadienyl)zirconium dichloride,
- 10 Bis(1,2,3,4,5-pentamethylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-ethylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-ethylcyclopentadienyl)zirconium dichloride,
- 15 Bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-n-pentylcyclopentadienyl)zirconium dichloride,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)zirconium dichloride,
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)zirconium dichloride,
- 20 Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1,2-diethylcyclopentadienyl)zirconium dichloride,
Bis(1,3-diethylcyclopentadienyl)zirconium dichloride,
Bis(1,2-di-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1,2-di-n-butylcyclopentadienyl)zirconium dichloride,
- 25 Bis(1-methyl-2,4-diethylcyclopentadienyl)zirconium dichloride,
Bis(1,2-diethyl-4-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1,2-diethyl-4-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-i-propylcyclopentadienyl)zirconium dichloride,
Bis(1-ethyl-3-i-propylcyclopentadienyl)zirconium dichloride,
- 30 (1,2-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride,
(1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)zirconium dichloride,

- (1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)zirconium dichloride,
(1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)zirconium
dichloride,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride,
5 (1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)zirconium
dichloride,
(1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)zirconium dichloride,
Bis(indenyl)zirconium dichloride,
Bis(1-methylindenyl)zirconium dichloride,
10 Bis(2-methylindenyl)zirconium dichloride,
Bis(4-methylindenyl)zirconium dichloride,
Bis(4,7-dimethylindenyl)zirconium dichloride,
Bis(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
Bis(4,5,6,7-tetrahydro-2-methylindenyl)zirconium dichloride,
15 Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)zirconium dichloride,
(Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
Bis(1,2-dimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,3-trimethylcyclopentadienyl)zirconium dimethyl,
20 Bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,3,4-tetramethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-2-ethylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dimethyl,
25 Bis(1-methyl-2-n-butylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-ethylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-n-pentylcyclopentadienyl)zirconium dimethyl,
30 Bis(1,2-dimethyl-4-ethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)zirconium dimethyl,

- Bis(1,2-diethylcyclopentadienyl)zirconium dimethyl,
 Bis(1,3-diethylcyclopentadienyl)zirconium dimethyl,
 Bis(1,2-di-n-propylcyclopentadienyl)zirconium dimethyl,
 Bis(1,2-di-n-butylcyclopentadienyl)zirconium dimethyl,
 5 Bis(1-methyl-2,4-diethylcyclopentadienyl)zirconium dimethyl,
 Bis(1,2-diethyl-4-n-propylcyclopentadienyl)zirconium dimethyl,
 Bis(1,2-diethyl-4-n-butylcyclopentadienyl)zirconium dimethyl,
 Bis(1-methyl-3-i-propylcyclopentadienyl)zirconium dimethyl,
 Bis(1-ethyl-3-i-propylcyclopentadienyl)zirconium dimethyl,
 10 (1,2-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dimethyl,
 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dimethyl,
 (1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)zirconium dimethyl,
 (1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)zirconium dimethyl,
 (1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)zirconium
 15 dimethyl,
 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dimethyl,
 (1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)zirconium
 dimethyl,
 (1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)zirconium dimethyl,
 20 Bis(indenyl)zirconium dimethyl,
 Bis(1-methylindenyl)zirconium dimethyl,
 Bis(2-methylindenyl)zirconium dimethyl,
 Bis(4-methylindenyl)zirconium dimethyl,
 Bis(4,7-dimethylindenyl)zirconium dimethyl,
 25 Bis(4,5,6,7-tetrahydroindenyl)zirconium dimethyl,
 Bis(4,5,6,7-tetrahydro-2-methylindenyl)zirconium dimethyl,
 Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)zirconium dimethyl, or
 (Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)zirconium dimethyl.
 36. The process of any of paragraphs 1 to 34 wherein the transition metal
 30 compound comprises one or more of:
 Bis(1,2-dimethylcyclopentadienyl)hafnium dichloride,
 Bis(1,3-dimethylcyclopentadienyl)hafnium dichloride,

- Bis(1,2,3-trimethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,4-trimethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,3,4-tetramethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)hafnium dichloride,
5 Bis(1-methyl-2-ethylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-ethylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-n-propylcyclopentadienyl)hafnium dichloride,
10 Bis(1-methyl-3-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-n-pentylcyclopentadienyl)hafnium dichloride,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)hafnium dichloride,
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)hafnium dichloride,
15 Bis(1,2-diethylcyclopentadienyl)hafnium dichloride,
Bis(1,3-diethylcyclopentadienyl)hafnium dichloride,
Bis(1,2-di-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1,2-di-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-2,4-diethylcyclopentadienyl)hafnium dichloride,
20 Bis(1,2-diethyl-4-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1,2-diethyl-4-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-i-propylcyclopentadienyl)hafnium dichloride,
Bis(1-ethyl-3-i-propylcyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dichloride,
25 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)hafnium
dichloride,
30 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dichloride,
(1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)hafnium
dichloride,

- (1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)hafnium dichloride,
Bis(indenyl)hafnium dichloride,
Bis(1-methylindenyl)hafnium dichloride,
Bis(2-methylindenyl)hafnium dichloride,
5 Bis(4-methylindenyl)hafnium dichloride,
Bis(4,7-dimethylindenyl)hafnium dichloride,
Bis(4,5,6,7-tetrahydroindenyl)hafnium dichloride,
Bis(4,5,6,7-tetrahydro-2-methylindenyl)hafnium dichloride,
Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)hafnium dichloride,
10 (Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)hafnium dichloride,
Bis(1,2-dimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,3-dimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,3-trimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,4-trimethylcyclopentadienyl)hafnium dimethyl,
15 Bis(1,2,3,4-tetramethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2-ethylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2-n-butylcyclopentadienyl)hafnium dimethyl,
20 Bis(1-methyl-3-ethylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-n-pentylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)hafnium dimethyl,
25 Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-diethylcyclopentadienyl)hafnium dimethyl,
Bis(1,3-diethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-di-n-propylcyclopentadienyl)hafnium dimethyl,
30 Bis(1,2-di-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2,4-diethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-diethyl-4-n-propylcyclopentadienyl)hafnium dimethyl,

- Bis(1,2-diethyl-4-n-butylcyclopentadienyl)hafnium dimethyl,
 Bis(1-methyl-3-i-propylcyclopentadienyl)hafnium dimethyl,
 Bis(1-ethyl-3-i-propylcyclopentadienyl)hafnium dimethyl,
 (1,2-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dimethyl,
 5 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dimethyl,
 (1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)hafnium dimethyl,
 (1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)hafnium dimethyl,
 (1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)hafnium dimethyl,
 (1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dimethyl,
 10 (1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)hafnium dimethyl,
 (1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)hafnium dimethyl,
 Bis(indenyl)hafnium dimethyl,
 Bis(1-methylindenyl)hafnium dimethyl,
 Bis(2-methylindenyl)hafnium dimethyl,
 15 Bis(4-methylindenyl)hafnium dimethyl,
 Bis(4,7-dimethylindenyl)hafnium dimethyl,
 Bis(4,5,6,7-tetrahydroindenyl)hafnium dimethyl,
 Bis(4,5,6,7-tetrahydro-2-methylindenyl)hafnium dimethyl,
 Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)hafnium dimethyl, or
 20 (Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)hafnium dimethyl.

37. The process of any of paragraphs 1 to 34 wherein the transition metal compound comprises one or more of:

- bis(1,2-dimethylcyclopentadienyl)zirconium dichloride, bis(1,3-dimethylcyclopentadienyl)zirconium dichloride, bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride and
 25 bis(tetramethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-2-ethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-ethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dichloride, bis(4,5,6,7-tetrahydroindenyl)zirconium dichloride, bis(indenyl)zirconium dichloride,
 30

- bis(1,2-dimethylcyclopentadienyl)zirconium dimethyl, bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl, bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl, bis(tetramethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-2-ethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-ethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl, bis(4,5,6,7-tetrahydro indenyl)zirconium dichloride, or bis(indenyl)zirconium dimethyl.
- 10 38. The process of any of paragraphs 1 to 37 wherein an alkylaluminum compound is present and the alkylaluminum compound is represented by the formula: R_3Al , where each R is, independently, selected from the group consisting of methyl, ethyle, n-propyl, iso-propyl, iso-butyl, n-butyl, t-butyl, n-pentyl, iso-pentyl, neopentyl, n-hexyl, iso-hexyl, n-heptyl, iso-heptyl, n-octyl, iso-octyl, n-nonyl, n-decyl, n-undecyl, n-dodecyl, n-tridecyl, n-tetradecyl, n-pentadecyl, n-hexadecyl, n-heptadecyl, n-octadecyl, and their iso-analogs.
- 15 39. The process of any of paragraphs 1 to 38 wherein the process is a continuous process.
40. The process of paragraph 39 wherein the process is a continuous process
- 20 comprising:
- a) continuously introducing a feed stream comprising at least 10 mole% of the one or more C3 to C24 alpha-olefins into a reactor,
 - b) continuously introducing the transition metal compound and the activator into the reactor,
 - 25 c) optionally continuously introducing co-activator into the reactor, and
 - d) continuously withdrawing the polyalpha-olefin from the reactor.
41. The process of paragraph 40 further comprising maintaining a concentration of hydrogen in the reactor of 10,000 ppm or less by weight.
- 30 42. The process of paragraph 40 or 41 wherein the process further comprises:
- 1) optionally, continuously treating the polyalpha-olefin to reduce heteroatom containing compounds to less than 600 ppm,

- 2) optionally, continuously fractionating the polyalpha-olefin to separate the light and heavy fractions, where the heavy fractions have 20 or more carbons,
 - 3) continuously contacting the polyalpha-olefin with hydrogen and a
5 hydrogenation catalyst,
 - 4) continuously obtaining a polyalpha-olefin having a bromine number less than 1.8.
43. The process of any of paragraphs 1 to 42 wherein the temperature in the reactor is from -10°C to 250 °C.
- 10 44. The process of paragraph 43 wherein the temperature is from 30°C to 220 °C.
45. The process of paragraph 43 wherein the temperature is from 50°C to 180 °C.
46. The process of paragraph 43 wherein the temperature is from 70°C to 150
15 °C.
47. The process of any of paragraphs 1 to 46 wherein the monomers, metallocene and activator are contacted for a residence time of 5 minutes to 100 hours.
48. The process of any of paragraphs 1 to 47 wherein solvent or diluent is
20 present.
49. The process of paragraph 48 wherein the solvent or diluent is selected from the group consisting of butanes, pentanes, hexanes, heptanes, octanes, nonanes, decanes, undecanes, dodecanes, tridecanes, tetradecanes, pentadecanes, hexadecanes, benzene, toluene, o-xylene, m-xylene, p-xylene, mixed xylenes,
25 ethylbenzene, isopropylbenzene, and n-butylbenzene.
50. The process of any of paragraphs 1 to 49 wherein the monomers are contacted with the transition metal compound and the activator in a reactor and the reactor is a continuous stirred tank reactor.
51. The process of any of paragraphs 1 to 50 wherein catalyst residual is
30 removed from the product by contacting with a solid sorbent.

52. The process of any of paragraphs 1 to 51 where the monomers are contacted with the transition metal compound and the activator in the solution phase.
53. The process of any of paragraphs 1 to 52 where the monomers are
5 contacted with the transition metal compound and the activator in the slurry phase.
54. The process of any of paragraphs 1 to 53 wherein the monomers are contacted with an alkylaluminum compound prior to being introduced into the reactor
55. The process of any of paragraphs 1 to 53 where the metallocene and or
10 activator are combined with an alkylaluminum compound prior to entering the reactor.
56. The process of paragraph 54 where the alkylaluminum compound is selected from tri-isobutylaluminum, tri-n-octylaluminum, tri-n-hexylaluminum, and tri-n-dodecylaluminum.
- 15 57. The process of any of paragraphs 1 to 54 where an alkylaluminum compound is present and the compound is selected from tri-isobutylaluminum, tri-n-octylaluminum, tri-n-hexylaluminum, and tri-n-dodecylaluminum.
58. The process of any of paragraphs 1 to 57 where in the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst selected from the group
20 consisting of supported Group 7, 8, 9, and 10 metals.
59. The process of any of paragraphs 1 to 57 wherein the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst selected from the group consisting of one or more of Ni, Pd, Pt, Co, Rh, Fe, Ru, Os, Cr, Mo, and W, supported on silica, alumina, clay, titania, zirconia, or mixed metal oxide supports.
- 25 60. The process of paragraph 59 wherein where the hydrogenation catalyst is nickel supported on keisleghur, silica, alumina, clay or silica-alumina.
61. The process of any of paragraphs 1 to 60 wherein the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst at a temperature from 25 to 350°C.
- 30 62. The process of any of paragraphs 1 to 61 wherein the product produced has 60 wt % or less C10 dimer.

63. The process of any of paragraphs 1 to 62 wherein the product produced has 40 wt % or less C10 dimer.

64. The process of any of paragraphs 1 to 63 wherein the process further comprises:

- 5 1) catalyst residual is removed from the polyalpha-olefin by contacting the polyalpha-olefin with a solid sorbent,
- 2) optionally, treating the polyalpha-olefin to reduce heteroatom containing compounds to less than 600 ppm,
- 3) optionally, fractionating the polyalpha-olefin to separate the light
10 and heavy fractions, where the heavy fractions have 20 or more carbons,
- 4) contacting the polyalpha-olefin with hydrogen and a hydrogenation catalyst, and
- 5) obtaining a polyalpha-olefin having a bromine number less than
1.8.

15

Examples

Fluid properties were measured by following standard methods, except when described otherwise: kinematic viscosity at 40 and 100°C in cSt by ASTM 445 method; pour point by ASTM D97 method; and viscosity index (VI)
20 according to ASTM D2270.

The following examples are for purposes of illustration only and are non-limiting examples.

The 1-decene used for all of the experiments was purified by mixing 1 liter of untreated raw material with 20 grams of activated 13X molecular sieve, (which
25 was activated by calcining at 200°C for at least four hours under a stream of purging dry nitrogen gas), and 10 grams of Oxi-Clear catalyst (purchased from Altech Associates, Inc of Deerfield, IL 60115) for at least two days inside a glove box under a dry, inert atmosphere of nitrogen. The molecular sieve and de-oxygenation catalyst were then removed by filtration in the glove box to provide
30 purified 1-decene. Alternatively, the feeds were purified by passing through a bed of activated 13X molecular sieve alone under nitrogen atmosphere.

The Data in Table 3 were generated as follows. The polymerization/oligomerization reaction was generally carried out under nitrogen (N₂) inert atmosphere or argon inert atmosphere. In a small scale screening experiment, 2.96 grams of purified 1-decene was added into a small stainless steel reactor fitted with glass liner with a total reactor volume of 5.5 ml, an agitator and a temperature controller, followed by addition of 2 micromole of tri-n-octylaluminum and 0.04 micromole of N,N-dimethylanilinium tetrakis(perfluorophenyl)borate solution of 1 micromole/liter. The reactor was then heated to the desired reaction temperature and the desired amount of metallocene catalyst in toluene (0.04 micromole of metallocene catalyst solution of 1 micromole/liter), was added to initiate the polymerization reaction. After 3 hours, the reaction was quenched by addition of carbon dioxide (CO₂) gas of equal moles as the metallocene catalyst. The polymerization / oligomerization product was isolated by stripping the reactor contents, from about room temperature to 50 °C, under high vacuum for at least 2 hours to remove solvent, unreacted starting material and dimer, i.e., any component having less than thirty carbon atoms. The product properties, including molecular weight and Mw/Mn, were analyzed by gel permeation chromatography using tetrahydrofuran as the solvent and polystyrene as the calibration standard. The residual fluid viscosity was calculated by a correlation equation, which correlated the Mw by GPC to fluid viscosity as described in Table 3.

Experiments PD-1 to PD-103 In the experiments below in Table 3, 40 nmol of catalyst, 40 nmol of activator (N,N-dimethylanilinium tetrakis(perfluorophenyl)borate), 2 micromol of TNOAl (tri-n-octylaluminum), 4.00 mL of 1-decene, and 1.00 mL of toluene were used. Each experiment was run for 90 minutes.

Table 3. 1-Decene Batch Oligomerizations

Ex #	Catalys t ^a	Tem p (°C)	H ₂ pressur e (psia) ^b	C20+ Yield (g)	Conversio n (%) to C20+	GPC Mw	GPC Mn	PDI Mw/Mn	Viscosity ^c at 100 °C (cS)
PD-1	1	80	0	0.3646	12.3	2,024	1,757	1.2	5.9
PD-2	1	100	0	0.5614	18.9	1,503	1,394	1.1	4.1
PD-3	1	120	0	0.5624	19.0	1,257	1,194	1.1	3.3
PD-4	1	80	0	0.3751	12.7	2,174	1,873	1.2	6.4
PD-5	1	100	0	0.6060	20.4	1,457	1,359	1.1	3.9
PD-6	1	120	0	0.8420	28.4	1,302	1,224	1.1	3.4
PD-7	1	100	44.7	1.9434	65.6	1,267	1,203	1.1	3.3
PD-8	1	120	44.7	2.0314	68.5	-	-	-	-
PD-9	1	120	54.7	2.0621	69.6	-	-	-	-
PD-10	1	100	54.7	2.1813	73.6	1,295	1,231	1.1	3.4
PD-11	2	100	0	0.1413	4.8	3,258	2,569	1.3	10.1
PD-12	2	120	0	0.1984	6.7	1,777	1,593	1.1	5.0
PD-13	2	100	0	0.1914	6.5	3,462	2,695	1.3	10.8
PD-14	2	120	0	0.2129	7.2	1,743	1,568	1.1	4.9
PD-15	2	120	44.7	0.9971	33.6	1,620	1,489	1.1	4.5
PD-16	2	120	54.7	0.9083	30.6	1,547	1,432	1.1	4.2
PD-17	3	100	0	0.1225	4.1	1,511	1,402	1.1	4.1
PD-18	3	120	0	0.2995	10.1	1,224	1,170	1.0	3.1
PD-19	3	100	0	0.3620	12.2	1,480	1,383	1.1	4.0
PD-20	3	120	0	0.1434	4.8	1,231	1,163	1.1	3.2
PD-21	3	100	54.7	1.2840	43.3	1,345	1,278	1.1	3.6
PD-22	3	100	44.7	1.8752	63.3	1,372	1,303	1.1	3.6
PD-23	3	100	54.7	1.5646	52.8	1,357	1,284	1.1	3.6
PD-24	3	120	44.7	0.5144	17.4	1,175	1,125	1.0	3.0
PD-25	4	100	0	0.0179	0.6	5,305	3,804	1.4	103.4
PD-26	4	120	0	0.0565	1.9	2,437	2,037	1.2	7.3
PD-27	4	100	0	0.0221	0.7	5,729	3,995	1.4	117.1
PD-28	4	120	0	0.0462	1.6	2,495	2,059	1.2	7.5
PD-29	4	100	34.7	0.6167	20.8	4,274	3,190	1.3	73.1
PD-30	4	100	54.7	0.0643	2.2	3,614	2,759	1.3	11.3
PD-31	4	120	34.7	0.0992	3.3	2,114	1,820	1.2	6.2
PD-32	4	120	44.7	0.0935	3.2	2,585	2,140	1.2	7.8
PD-33	4	100	34.7	0.0630	2.1	3,922	2,932	1.3	12.3
PD-34	4	100	54.7	0.0653	2.2	3,645	2,785	1.3	11.4
PD-35	5	80	0	0.5352	18.1	2,438	2,034	1.2	7.3
PD-36	5	100	0	0.8795	29.7	1,609	1,480	1.1	4.5
PD-37	5	120	0	0.5211	17.6	1,308	1,232	1.1	3.4
PD-38	5	80	0	0.4908	16.6	2,642	2,184	1.2	8.0
PD-39	5	100	0	0.8901	30.0	1,583	1,448	1.1	4.4
PD-40	5	120	0	0.7976	26.9	1,354	1,281	1.1	3.6

PD-41	5	100	54.7	1.3083	44.1	1,401	1,327	1.1	3.7
PD-42	5	120	34.7	1.4062	47.4	1,211	1,145	1.1	3.1
PD-43	5	120	44.7	1.3556	45.7	1,212	1,159	1.0	3.1
PD-44	5	100	34.7	1.3702	46.2	1,433	1,343	1.1	3.9
PD-45	5	100	54.7	1.5293	51.6	1,430	1,342	1.1	3.8
PD-46	6	100	54.7	2.2348	75.4	-	-	-	-
PD-47	6	120	54.7	1.8615	62.8	-	-	-	-
PD-48	7	100	54.7	1.4172	47.8	-	-	-	-
PD-49	7	100	54.7	1.2324	41.6	1,551	1,446	1.1	4.3
PD-50	7	100	54.7	1.2878	43.4	-	-	-	-
PD-51	7	120	54.7	1.0333	34.9	-	-	-	-
PD-52	8	100	44.7	0.3415	11.5	1,137	1,061	1.1	2.8
PD-53	8	100	54.7	0.3734	12.6	1,119	1,051	1.1	2.8
PD-54	8	120	44.7	0.2420	8.2	1,239	1,112	1.1	3.2
PD-55	8	120	54.7	0.2318	7.8	1,229	1,094	1.1	3.2
PD-56	8	100	54.7	0.3621	12.2	1,135	1,064	1.1	2.8
PD-57	8	120	44.7	0.2421	8.2	1,189	1,074	1.1	3.0
PD-58	8	120	44.7	0.1473	5.0	1,289	1,127	1.1	3.4
PD-59	9	100	54.7	1.6228	54.8	-	-	-	-
PD-60	9	120	54.7	0.3539	11.9	-	-	-	-
PD-61	9	120	54.7	0.6742	22.7	-	-	-	-
PD-62	10	100	44.7	1.4583	49.2	1,194	1,105	1.1	3.0
PD-63	10	100	44.7	1.6585	56.0	1,234	1,142	1.1	3.2
PD-64	10	120	44.7	1.4781	49.9	1,110	1,048	1.1	2.8
PD-65	10	120	44.7	0.2079	7.0	1,141	1,058	1.1	2.9
PD-66	10	120	54.7	1.3328	45.0	1,076	1,017	1.1	2.6
PD-67	10	100	44.7	1.4456	48.8	1,212	1,123	1.1	3.1
PD-68	10	100	54.7	1.7571	59.3	1,185	1,101	1.1	3.0
PD-69	10	120	44.7	0.9474	32.0	1,097	1,040	1.1	2.7
PD-70	10	120	44.7	0.8823	29.8	1,066	1,010	1.1	2.6
PD-71	10	120	54.7	0.0495	1.7	1,225	1,128	1.1	3.1
PD-72	11	100	0	0.7898	26.6	1,318	1,193	1.1	3.5
PD-73	11	100	44.7	1.2999	43.9	1,271	1,156	1.1	3.3
PD-74	11	100	54.7	1.7127	57.8	1,276	1,160	1.1	3.3
PD-75	11	120	0	0.6013	20.3	1,129	1,042	1.1	2.8
PD-76	11	120	44.7	1.9060	64.3	1,135	1,056	1.1	2.8
PD-77	11	120	54.7	1.8636	62.9	1,117	1,034	1.1	2.8
PD-78	11	100	0	0.8842	29.8	1,330	1,201	1.1	3.5
PD-79	11	100	44.7	1.6737	56.5	1,290	1,169	1.1	3.4
PD-80	11	100	54.7	1.9463	65.7	1,296	1,177	1.1	3.4
PD-81	11	120	0	0.6646	22.4	1,139	1,059	1.1	2.9
PD-82	11	120	44.7	1.9115	64.5	1,152	1,058	1.1	2.9
PD-83	11	120	54.7	1.8410	62.1	1,131	1,045	1.1	2.8
PD-84	11	100	0	0.6138	20.7	1,349	1,216	1.1	3.6
PD-85	11	100	44.7	1.4443	48.7	1,296	1,172	1.1	3.4
PD-86	11	100	54.7	1.5584	52.6	1,310	1,188	1.1	3.4

PD-87	11	120	0	0.7822	26.4	1,157	1,068	1.1	2.9
PD-88	11	120	44.7	1.8857	63.6	1,140	1,028	1.1	2.9
PD-89	12	100	0	1.0660	36.0	1,485	1,311	1.1	4.0
PD-90	12	100	44.7	1.2387	41.8	1,411	1,256	1.1	3.8
PD-91	12	100	54.7	1.1749	39.6	1,445	1,285	1.1	3.9
PD-92	12	120	0	0.6507	22.0	1,216	1,109	1.1	3.1
PD-93	12	120	44.7	1.4787	49.9	1,202	1,104	1.1	3.1
PD-94	12	120	54.7	1.8587	62.7	1,167	1,075	1.1	2.9
PD-95	12	100	0	1.1199	37.8	1,476	1,304	1.1	4.0
PD-96	12	100	54.7	1.1552	39.0	1,422	1,267	1.1	3.8
PD-97	12	120	0	0.4124	13.9	1,210	1,110	1.1	3.1
PD-98	12	100	0	1.0271	34.7	1,503	1,323	1.1	4.1
PD-99	12	100	44.7	1.4780	49.9	1,420	1,259	1.1	3.8
PD-100	12	100	54.7	1.2133	40.9	1,416	1,263	1.1	3.8
PD-101	12	120	0	0.8040	27.1	1,206	1,104	1.1	3.1
PD-102	12	120	44.7	0.5413	18.3	1,197	1,102	1.1	3.1
PD-103	12	120	54.7	1.0399	35.1	1,161	1,067	1.1	2.9

^a1 is (1,3-Me,*n*-Bu-Cp)₂ZrMe₂, 2 is (*n*-Pr-Cp)₂HfMe₂, 3 is (Me₄Cp)₂HfMe₂, 4 is Cp₂HfMe₂, 5 is (*n*-Pr-Cp)₂ZrMe₂, 6 is (Me₄Cp)₂ZrMe₂, 7 is (MeCp)₂ZrMe₂, 8 is (Me₅Cp)₂ZrMe₂, 9 is (*n*-Pr-Cp)(Me₄-Cp)ZrMe₂, 10 is (1,3-diMe-Cp)₂ZrMe₂, 11 is (EtCp)₂ZrMe₂, 12 is (*n*-BuCp)₂ZrMe₂. ^bPressure is given for the mixture of 95%

- 5 N₂ / 5% hydrogen. ^cViscosity of fluid at 100°C was estimated based on a correlation developed between GPC Mw and measured viscosity. For Mw < 4000, *viscosity at 100°C in cS* = 0.0034(Mw) – 1.0174. For Mw > 4000, *viscosity at 100°C in cS* = 0.000002(Mw)² + 0.0102(Mw) – 7.0186.
- 10 Examples 1A to 8A. In a 600 ml autoclave, a solution containing 90 gram of purified 1-decene and 4 gram of tri-*n*-octylaluminum (TNOAL) solution containing 20 mg TNOAL per gram of solution in toluene solvent were added. The reactor was pressurized with hydrogen to appropriate pressure indicated in Table 1A. The mixture was heated to reaction temperature with slow agitation.
- 15 Under this condition, a catalyst solution, containing 20 gram toluene, 0.5 gram TNOAL solution and 1.60 mg catalyst A (1-Me-3-*n*-BuCp)₂ZrMe₂ and 3.84 mg of activator (dimethylaniliniumperfluorotetraphenylborate), was added slowly

over a period of 15 minutes to 30 minutes while maintaining reaction temperature within 10°C of the set temperature. The reaction mixture was stirred for 4 hours. The reactor was cooled down to room temperature and then 10 grams of activated alumina were added to the reaction mixture to deactivate the catalyst and to
5 absorb the catalyst. The alumina was then filtered to remove the solid and any catalyst residual. The residual organic layer was analyzed by Gas Chromatography to obtain conversion and product selectivity. The organic layer was further fractionated to remove solvent, unreacted olefins, and light fraction, usually C20 olefins and smaller, to give a residual fraction. If indicated, the
10 residual fraction was further hydrogenated with hydrogen with 2 wt% of a 50% Nickle on Kieselguhr catalyst at 200°C and 800 psi hydrogen pressure for 4 hours. The viscometric properties of the hydrogenated product were similar to the unhydrogenated products. For convenience, the viscometric properties of this unhydrogenated residual fraction were reported in Table 1A. The catalyst
15 productivity was calculated as the grams of total product made from feed olefins per gram of metallocene metal.

In comparison, Table 2A shows the examples of US6548724 using metallocene and NCA activator to produce fluids. The catalyst productivities were calculated on the same basis as Example 1 to 9. As the data show, Examples
20 1 to 8 have high catalyst productivity in grams of product per gram of metallocene. The highest catalyst productivity Table 2 A appears to be 41.6 kg/g metallocene.

Examples 1 through 8 were conducted generally as described above, with
25 additional experimental details provided in Table 1 below. Table 2 presents selected data taken from Examples 14 to 18 of US 6,548,724.

Table 1A

Example	1	2	3	4	5
Catalyst	A	A	A	A	A
Rxn Temp, °C	120	100	121	120	120
H ₂ pressure psi	0	10	10	30	60
Decene*, g	90	90	90	90	90
Catalyst*, mg	1.6	1.6	1.6	1.6	1.6
Activator*, mg	3.84	3.84	3.84	3.84	3.84
TNOAL, mg	90	90	90	90	90
Wt% Conversion of feed olefins	61.5	82.9	89.1	89	85.4
Wt % Selectivity to C ₂₀	49.3	32.7	53.3	53.7	55.2
Product Property					
KV100 °C, cSt	4.65	5.02	4.42	4.38	4.39
KV40 °C, cSt	20.3	22.01	18.86	18.87	18.68
Viscosity Index	153	164	152	147	151
Productivity					
g product/g metallocene	34,594	46,623	50,105	50,063	48,038

A = (1-Me-3-n-BuCp)₂ZrMe₂, B = (Me₄Cp)₂ZrCl₂, Activator = dimethylaniliniumperfluorotetraphenylborate, TNOAL = tri-n-octyl-aluminum, * = Solution weight, grams in reaction flask

5

Table 1A (Continued)

	6	7	8
Catalyst	B	B	B
Rxn Temp, °C	120	100	60
H ₂ pressure psi	30	30	30
Decene*, g	90	90	90
Catalyst*, mg	1.6	1.6	1.6
Activator*, mg	3.84	3.84	3.84
TNOAL, mg			
Wt% Conversion of feed olefins	78.8	75.7	83.6
Wt % Selectivity to C ₂₀	79.8	64.4	16.7
Product Property			
KV100 °C, cSt	3.94	4.29	11.06
KV40 °C, cSt	16.25	18.19	65.46
Viscosity Index	143	149	162
Productivity			
g product/g metallocene	44,332	42,638	47,000

A = (1-Me-3-n-BuCp)₂ZrMe₂, B = (Me₄Cp)₂ZrCl₂, Activator = dimethylaniliniumperfluorotetraphenylborate, TNOAL = tri-n-octyl-aluminum, * = Solution weight, grams in reaction flask

10

Table 2A

US 6,548,724 example no	14	15	16	17	18
Catalyst	Cp_2ZrMe_2	Cp_2ZrMe_2	Cp_2ZrMe_2	$(\text{iPrCp})_2\text{ZrCl}_2$	$(\text{iPrCp})_2\text{ZrCl}_2$
Mole wt, g/mole	251.5	251.5	251.5	376.1	376.1
Catalyst wt., mg	8.8025	8.8025	8.8025	13.1635	13.1635
Activator Z, mg	11.1	28.035	28.035	28.035	28.035
TIBA, gram	0.1572	0.1572	0.1572	0.1572	0.1572
H ₂ pressure, psi	0	0	50	0	50
1-decene feed, gram	882	1096	1049	1072	1047
Temp. °C	100	110	110	110	110
% dimer selectivity	24.9	35.7	40.7	35.9	41.6
100°C Kv, cSt	11.4	6.7	6.7	5.4	5.3
Pour point, °C	-57	-59	-59	-66	-69
Viscosity Index	160				
Catalyst Productivity					
g product/g catalyst metallocene	12,178	17,870	41,636	18,437	40,392

TIBA = tri-isobutylaluminum, Activator Z = N, Ndimethylanilinium
tetra(perfluorophenyl)borate,

5

Example 9

Batch Runs – In these runs, a catalyst solution containing 10 mg TNOAL, 1.6 mg catalyst 1 and 3.84 mg of dimethylaniliniumperfluorotetraphenylborate in 20 gram toluene solution was added to an autoclave containing 90 gram of 1-decene and 80 mg of TNOAL heated to reaction temperature under hydrogen pressure. The reaction was then discontinued after 4 hours by injecting 10 gram of solid alumina. The product was isolated by filtration to remove any solid residual, distilled at 100°C under vacuum to remove toluene or unreacted olefins followed by distillation at 160°C/<1 milli-torr vacuum to remove light ends. The reaction conditions and residual olefinic polymer properties and compositions are summarized in Table 4. In all of the following experiments the molar ratio of TNOAl scavenger to catalyst was 60, and the molar ratio of activator to catalyst was 1.0. The residual fraction of some runs was further hydrogenated with hydrogen with 2 wt% of a 50% Nickle on Kieselguhr catalyst at 200°C and 800 psi hydrogen pressure for 4 hours.

20

Table 4. 1-Decene Oligomerization in Batch Reactor

Run	A	B	C	D	E	F
Catalyst	1	1	1	1	1	1
Temp (°C)	120	80	100	121	120	120
H ₂ pressure (psi)	0	10	10	10	30	60
Wt% Conversion of starting olefin	61.5	72.4	82.9	89.1	89	85.4
Wt% Lube selectivity	50.7	92.3	63.3	46.7	46.3	44.8
Viscosity at 100 °C, cS	4.65	10.11	5.02	4.42	4.38	4.39
Viscosity at 40 °C, cS	20.3	56.67	22.01	18.86	18.87	18.68
VI	140	156	130	139	135	139
Pour point, °C	< -60	nm	nm	nm	< -61	< -61
g lube/ g Zr	17,539	37,589	29,505	23,410	23,179	21,521
g total product / g Zr	34,594	40,725	46,623	50,105	50,063	48,038
% 1-decene hydrogenated	0.0			0.8	3.1	6.4
Olefin Content by H-NMR analysis						
Total olefins/1000 C	27.5				27.4	26.3
Mole% olefin type distribution						
1,2-disubstituted olefins	4.3				4.0	3.5
Tri-substituted olefins	19.2				24.0	26.7
Vinylidene olefins	76.5				72.0	69.8

nm = not measured

Example 10 - Continuous Runs.

- 5 This set of experiments was carried out in a continuous reactor process. 1-decene and toluene used in the runs were sparged with nitrogen and then purified through a 5-Angstrom molecular sieve. The metallocene catalyst used was Catalyst 1, preactivated with N,N-dimethylanilinium tetra(pentafluorophenyl)borate with equal molar amounts of metallocene and activator in toluene solution. The
- 10 experiments were conducted in a series dual-reactor continuous process. Both of the reactors were 1-liter autoclave reactors. All feeds were introduced into the first reactor and products were continuously withdrawn from the second reactor. Both of the reactors were controlled at the same reaction temperature. The product isolation and hydrogenation were similar to that of Example 9. The

polymerization conditions and product properties after hydrogenation are summarized in Table 5.

Table 5. 1-Decene Oligomerization in Continuous Process

Metallocene	1	1	1	1
Temp (°C)	100	100	120	120
1-decene, mL/min	40	40	40	40
H ₂ , scc/min	5	20	5	20
Catalyst, mol/min	2.48×10^{-6}	2.48×10^{-6}	2.48×10^{-6}	2.48×10^{-6}
Wt% Olefin Conversion	59.8	76.4	73.2	83.8
Wt% Lube selectivity (C ₃₀ +)	87.2	81.7	59.2	52.3
Wt% C ₂₀ selectivity	12.8	18.3	40.8	47.7
Viscosity at 100 °C, cS	8.05	6.53	4.58	4.36
Viscosity at 40 °C, cS	43.43	32.50	20.00	18.54
VI	161	160	151	150
Pour point, °C	-60.9	-60.3	-51	-45
g lube/ g metallocene	15,924	19,049	13,220	13,378

5 Catalyst 1 is (1,3-Me,*n*-Bu-Cp)₂ZrMe₂

Example 11

Experimental procedures: 100 grams of pure 1-butene or propylene were charged
 10 into a 600-ml autoclave at room temperature, followed by the proper amount of hydrogen if hydrogen was added(see Table 6 below). The reactor was then heated to reaction temperature. At reaction temperature, catalyst solution containing all catalyst components were added in three stages to reactors, so that reaction temperature was maintained as constant as possible. The reaction was
 15 quenched after 16 hours and lube product (C₂₀ and above) was isolated in similar manner as in Example 9 above. The results and certain reaction conditions of propylene and 1-butene oligomerizations are summarized in following Table 6. The product fluids have low viscosities and were produced with productivity of more than 43,000 g total product/g of metallocene catalyst. Furthermore, the lube
 20 product produced from propylene or 1-butene has good VI and low pour points, suitable for high performance liquids.

Example No.	11A	11B
Reaction Temperature, oC	110	80
hydrogen pressure, psi	30	30
Feed Olefins	propylene	1-butene
Wt, grams	100	100
Catalyst solution in addition funnel		
Toluene, grams	40	20
TIBA, mg	26	12.7
Metallocene, mg	1.47	1.824
Activator, mg	3.205	3.2048
Wt% Conversion by GC	67.52	87.52
Product Selectivity		
light ends (<C24), wt%	78.4	54.12565
lube, (C25 and above)wt%	21.6	45.87435
Lube Properties		
V100oC, cS	10.02	9.68
V40oC, cS	102.77	94.39
VI	70	75
Pour Point,oC	-30	-32
Bromine Number		25.6
GPC		
Mw	1000	782
Mn	868	710
Mw/Mn	1.152	1.101
g total pdt/g metallocene	45,932	47,982
TIBA is trisiobutylaluminum, Activator = N,N-dimethylanilinium tetra(perfluorophenyl)borate, Catalyst A = bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl		

5

All documents described herein are incorporated by reference herein, including any priority documents and/or testing procedures, except to the extent they are inconsistent with this specification. As is apparent from the foregoing general description and the specific embodiments, while forms of the invention have been illustrated and described, various modifications can be made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited thereby.

10

CLAIMS:

1. A process to produce a polyalpha-olefin comprising:

1) contacting one or more alpha-olefin monomers having 3 to 24 carbon atoms with an unbridged substituted bis cyclopentadienyl transition metal compound having: 1) at least one non-isoolefin substitution on both cyclopentadienyl rings, or 2) at least two substitutions on at least one cyclopentadienyl ring, a non-coordinating anion activator, and optionally an alkyl-aluminum compound, where the molar ratio of transition metal compound to activator is 10:1 to 0.1:1, and if the alkyl aluminum compound is present then the molar ratio of alkyl aluminum compound to transition metal compound is 1:4 to 4000:1, under polymerization conditions wherein:

i) hydrogen is present at a partial pressure of 0.1 to 50 psi, based upon the total pressure of the reactor or the concentration of the hydrogen is from 1 to 10,000 ppm or less by weight ;

ii) wherein the alpha-olefin monomer(s) having 3 to 24 carbon atoms are present at 10 volume % or more based upon the total volume of the catalyst/activator/alkylaluminum compound solutions, monomers, and any diluents or solvents present in the reaction;

iii) the residence time of the reaction is at least 5 minutes;

iv) the productivity of the process is at least 43,000 grams of total product per gram of transition metal compound;

v) the process is continuous or semi-continuous, and


vi) the temperature in the reaction zone does not rise by more than 10 °C during the reaction; and

vii) ethylene is not present at more than 30 volume % of the monomers entering the reaction zone;

and

2) obtaining a polyalpha-olefin (PAO), optionally hydrogenating the PAO, wherein the PAO comprises at least 50 mole% of a C3 to C24 alpha-olefin monomer, and wherein the PAO has a kinematic viscosity at 100°C of 20 cSt or less.

2. The process of claim 1 wherein the transition metal compound is represented by the formula:

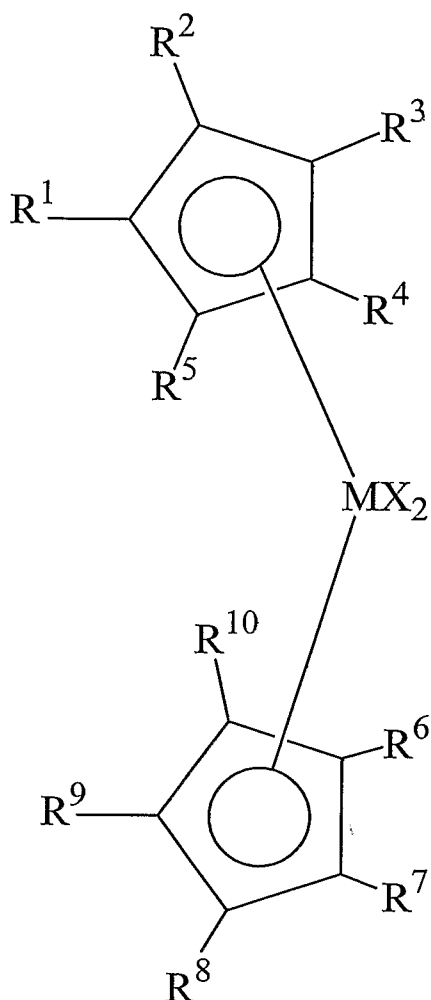

where M is a Group 4 metal;
each X is a hydrogen, halogen, hydride radicals, hydrocarbyl radicals, substituted hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, silylcarbyl radicals, substituted silylcarbyl radicals, germylcarbyl radicals, or substituted germylcarbyl radicals, or both X are joined and bound to the metal atom to form a metallacycle ring containing from about 3 to about 20 carbon atoms, or both together can be an olefin, diolefin or aryne ligand; and

R^1 to R^{10} are independently, a radical group which is a hydrogen, a heteroatom, hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, silylcarbyl or germlylcarbyl, provided that: 1) at least one of R^1 to R^5 is not hydrogen or an isoolefin and at least one of R^6 to R^{10} is not hydrogen or an isoolefin or 2) at least two of R^1 to R^5 are not hydrogen, or 3) at least two of R^1 to R^5 are not hydrogen and at least two of R^6 to R^{10} are not hydrogen, and where any two adjacent R^1 to R^5 groups may form a C4 to C20 cyclic or poly cyclic moiety, and where any two adjacent R^6 to R^{10} groups may form a C4 to C20 cyclic or poly cyclic moiety.

3. The process of claim 1 or 2 wherein the PAO has a pour point of 0 °C or less.
4. The process of claim 1, or 3 wherein the PAO has a pour point of -40 °C or less and a kinematic viscosity at 100 °C of 15cSt or less.
5. The process of any of claims 1 to 4 wherein the PAO has a pour point of -55 °C or less and a kinematic viscosity at 100 °C of 10cSt or less.
6. The process of any of claims 1 to 5 wherein the polyalpha-olefin is polydecene having an Mw/Mn of between 1 and 3.5.
7. The process of any of claims 1 to 6 wherein the polyalpha-olefin has a Bromine number of 1.8 or more.
8. The process of any of claims 1 to 7 wherein the polyalpha-olefin has a Kinematic viscosity at 100°C of from 1.5 to 15 cSt.
9. The process of any of claims 1 to 8 wherein the polyalpha-olefin has a Kinematic viscosity at 100°C of from 1.7 to 12 cSt.

10. The process of any of claims 1 to 9 wherein the polyalpha-olefin has a Kinematic viscosity at 40°C of from 3 to 1,000 cSt.
11. The process of any of claims 1 to 10 wherein the polyalpha-olefin has a Viscosity Index of 90 or more.
12. The process of any of claims 1 to 11 wherein the polyalpha-olefin has a Viscosity Index of 90 to 200.
13. The process of any of claims 1 to 12 wherein the polyalpha-olefin has a pour point of -40°C or less.
14. The process of any of claims 1 to 13 wherein the polyalpha-olefin has a weight average molecular weight of 100 to 50,000 g/mol.
15. The process of any of claims 1 to 14 wherein the polyalpha-olefin has a weight average molecular weight of 336 to 40,000 g/mol.
16. The process of any of claims 1 to 15 wherein the monomers having 3 to 24 carbon atoms are present at 55 mole% or more.
17. The process of any of claims 1 to 16 wherein monomers having 5 to 24 carbon atoms are present at 55 mole% or more.
18. The process of any of claims 1 to 17 wherein the polyalpha-olefin(s) are selected from the group consisting of 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene, 1-hexadecene, 1-heptadecene, 1-octadecene, 1-nonadecene, 1-eicosene, 1-uneicosene, 1-docosene, 1-tricosene, 1-tetracosene, 1-pentacosene, 1-hexacosene, 4-methyl-1-pentene, 4-phenyl-1-butene, and 5-phenyl-1-pentene.

19. The process of any of claims 1 to 18 wherein the polyalpha-olefin(s) are selected from the group consisting of 1- pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene and 1-hexadecene.
20. The process of any of claims 1 to 19 wherein the polyalpha-olefin(s) are selected from the group consisting of 1-hexene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene and 1-hexadecene.
21. The process of any of claims 1 to 20 wherein the polyalpha-olefin comprises octene, decene, and dodecene.
22. The process of any of claims 1 to 21 wherein the polyalpha-olefin has a dielectric constant of 2.5 or less (1 kHz at 23 °C).
23. The process of any of claims 1 to 22 wherein the polyalpha-olefin has a flash point of 150°C or more.
24. The process of any of claims 1 to 23 wherein the polyalpha-olefin has a specific gravity of 0.75 to 0.96 g/cm³.
25. The process of any of claims 1 to 24 wherein ethylene, propylene and butene monomers are present at less than 1 weight %.
26. The process of any of claims 1 to 25 wherein the monomers having 5 to 24 carbon atoms are present at 60 mole% or more.
27. The process of any of claims 1 to 26 wherein the monomers having 5 to 24 carbon atoms are present at 70 mole% or more.
28. The process of any of claims 1 to 27 further comprising

- 1) optionally treating the polyalpha-olefin to reduce heteroatom containing compounds to less than 600 ppm,
- 2) optionally separating the polyalpha-olefins from solvents or diluents;
- 3) contacting the polyalpha-olefin with hydrogen and a hydrogenation catalyst; and
- 4) obtaining a polyalpha-olefin having a bromine number less than 1.8.

29. The process of claim 28 wherein the polyalpha-olefin is treated to remove heteroatom containing compounds prior to contacting with the hydrogen and or the hydrogenation catalyst.

30. The process of claim 29 wherein the treated polyalpha-olefin comprises 100 ppm of heteroatom containing compounds or less.

31. The process of claim 29 wherein the treated polyalpha-olefin comprises 10 ppm of heteroatom containing compounds or less.

32. The process of any of claims 1 to 31 where scavenger is present and comprises methylalumoxane and or modified methylalumoxane.

33. The process of any of claims 1 to 32 wherein the activator comprises one or more of N,N-dimethylanilinium tetra(pentafluorophenyl)borate, N,N-dialkylphenylanilinium tetra(pentafluorophenyl)borate (where the alkyl is a C1 to C18 alkyl group), trityl tetra(pentafluorophenyl)borate, tris(pentafluorophenyl)boron, tri-alkylammonium tetra(pentafluorophenyl)borate (where the alkyl is a C1 to C18 alkyl group), tetra-alkylammonium tetra(pentafluorophenyl)borate (where the alkyl is a C1 to C18 alkyl group).

34. The process of any of claims 1 to 33 wherein the transition metal compound comprises one or more of:

bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride;
bis(1,3-dimethylcyclopentadienyl)zirconium dichloride;
bis(tetramethylcyclopentadienyl)zirconium dichloride;
bis(pentamethylcyclopentadienyl)zirconium dichloride;
bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl;
bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl;
bis(tetramethylcyclopentadienyl)zirconium dimethyl; or
bis(pentamethylcyclopentadienyl)zirconium dimethyl.

35. The process of any of claims 1 to 34 wherein the transition metal compound comprises one or more of:

Bis(1,2-dimethylcyclopentadienyl)zirconium dichloride,
Bis(1,3-dimethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,3-trimethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,3,4-tetramethylcyclopentadienyl)zirconium dichloride,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-ethylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-ethylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-n-pentylcyclopentadienyl)zirconium dichloride,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)zirconium dichloride,
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1,2-diethylcyclopentadienyl)zirconium dichloride,
Bis(1,3-diethylcyclopentadienyl)zirconium dichloride,
Bis(1,2-di-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1,2-di-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2,4-diethylcyclopentadienyl)zirconium dichloride,

Bis(1,2-diethyl-4-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1,2-diethyl-4-n-butylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-3-i-propylcyclopentadienyl)zirconium dichloride,
Bis(1-ethyl-3-i-propylcyclopentadienyl)zirconium dichloride,
(1,2-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride,
(1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)zirconium dichloride,
(1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)zirconium dichloride,
(1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)zirconium
dichloride,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dichloride,
(1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)zirconium
dichloride,
(1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)zirconium dichloride,
Bis(indenyl)zirconium dichloride,
Bis(1-methylindenyl)zirconium dichloride,
Bis(2-methylindenyl)zirconium dichloride,
Bis(4-methylindenyl)zirconium dichloride,
Bis(4,7-dimethylindenyl)zirconium dichloride,
Bis(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
Bis(4,5,6,7-tetrahydro-2-methylindenyl)zirconium dichloride,
Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)zirconium dichloride,
(Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
Bis(1,2-dimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,3-trimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,3,4-tetramethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-2-ethylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-2-n-butylcyclopentadienyl)zirconium dimethyl,

Bis(1-methyl-3-ethylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-n-pentylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-diethylcyclopentadienyl)zirconium dimethyl,
Bis(1,3-diethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-di-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-di-n-butylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-2,4-diethylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-diethyl-4-n-propylcyclopentadienyl)zirconium dimethyl,
Bis(1,2-diethyl-4-n-butylcyclopentadienyl)zirconium dimethyl,
Bis(1-methyl-3-i-propylcyclopentadienyl)zirconium dimethyl,
Bis(1-ethyl-3-i-propylcyclopentadienyl)zirconium dimethyl,
(1,2-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dimethyl,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dimethyl,
(1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)zirconium dimethyl,
(1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)zirconium dimethyl,
(1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)zirconium dimethyl,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)zirconium dimethyl,
(1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)zirconium dimethyl,
(1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)zirconium dimethyl,
Bis(indenyl)zirconium dimethyl,
Bis(1-methylindenyl)zirconium dimethyl,
Bis(2-methylindenyl)zirconium dimethyl,
Bis(4-methylindenyl)zirconium dimethyl,
Bis(4,7-dimethylindenyl)zirconium dimethyl,
Bis(4,5,6,7-tetrahydroindenyl)zirconium dimethyl,

Bis(4,5,6,7-tetrahydro-2-methylindenyl)zirconium dimethyl,
Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)zirconium dimethyl, or
(Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)zirconium dimethyl.

36. The process of any of claims 1 to 34 wherein the transition metal compound comprises one or more of:

Bis(1,2-dimethylcyclopentadienyl)hafnium dichloride,
Bis(1,3-dimethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,3-trimethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,4-trimethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,3,4-tetramethylcyclopentadienyl)hafnium dichloride,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-2-ethylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-2-n-propylcyclopentadienyl)zirconium dichloride,
Bis(1-methyl-2-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-ethylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-n-pentylcyclopentadienyl)hafnium dichloride,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)hafnium dichloride,
Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1,2-diethylcyclopentadienyl)hafnium dichloride,
Bis(1,3-diethylcyclopentadienyl)hafnium dichloride,
Bis(1,2-di-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1,2-di-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-2,4-diethylcyclopentadienyl)hafnium dichloride,
Bis(1,2-diethyl-4-n-propylcyclopentadienyl)hafnium dichloride,
Bis(1,2-diethyl-4-n-butylcyclopentadienyl)hafnium dichloride,
Bis(1-methyl-3-i-propylcyclopentadienyl)hafnium dichloride,
Bis(1-ethyl-3-i-propylcyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dichloride,

(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)hafnium dichloride,
(1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)hafnium
dichloride,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dichloride,
(1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)hafnium
dichloride,
(1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)hafnium dichloride,
Bis(indenyl)hafnium dichloride,
Bis(1-methylindenyl)hafnium dichloride,
Bis(2-methylindenyl)hafnium dichloride,
Bis(4-methylindenyl)hafnium dichloride,
Bis(4,7-dimethylindenyl)hafnium dichloride,
Bis(4,5,6,7-tetrahydroindenyl)hafnium dichloride,
Bis(4,5,6,7-tetrahydro-2-methylindenyl)hafnium dichloride,
Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)hafnium dichloride,
(Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)hafnium dichloride,
Bis(1,2-dimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,3-dimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,3-trimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,4-trimethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,3,4-tetramethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2,3,4,5-pentamethylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2-ethylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-ethylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-n-pentylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-dimethyl-4-ethylcyclopentadienyl)hafnium dimethyl,

Bis(1,2-dimethyl-4-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-dimethyl-4-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-diethylcyclopentadienyl)hafnium dimethyl,
Bis(1,3-diethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-di-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-di-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-2,4-diethylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-diethyl-4-n-propylcyclopentadienyl)hafnium dimethyl,
Bis(1,2-diethyl-4-n-butylcyclopentadienyl)hafnium dimethyl,
Bis(1-methyl-3-i-propylcyclopentadienyl)hafnium dimethyl,
Bis(1-ethyl-3-i-propylcyclopentadienyl)hafnium dimethyl,
(1,2-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dimethyl,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dimethyl,
(1,2-dimethylcyclopentadienyl)(methylcyclopentadienyl)hafnium dimethyl,
(1,2-dimethylcyclopentadienyl)(ethylcyclopentadienyl)hafnium dimethyl,
(1,2-dimethylcyclopentadienyl)(1,2-di-n-butylcyclopentadienyl)hafnium dimethyl,
(1,3-dimethylcyclopentadienyl)(cyclopentadienyl)hafnium dimethyl,
(1,3-dimethylcyclopentadienyl)(1,2-dimethylcyclopentadienyl)hafnium dimethyl,
(1,3-dimethylcyclopentadienyl)(1,3-diethylcyclopentadienyl)hafnium dimethyl,
Bis(indenyl)hafnium dimethyl,
Bis(1-methylindenyl)hafnium dimethyl,
Bis(2-methylindenyl)hafnium dimethyl,
Bis(4-methylindenyl)hafnium dimethyl,
Bis(4,7-dimethylindenyl)hafnium dimethyl,
Bis(4,5,6,7-tetrahydroindenyl)hafnium dimethyl,
Bis(4,5,6,7-tetrahydro-2-methylindenyl)hafnium dimethyl,
Bis(4,5,6,7-tetrahydro-4,7-dimethylindenyl)hafnium dimethyl, or
(Cyclopentadienyl)(4,5,6,7-tetrahydroindenyl)hafnium dimethyl.

37. The process of any of claims 1 to 34 wherein the transition metal compound comprises one or more of:

bis(1,2-dimethylcyclopentadienyl)zirconium dichloride, bis(1,3-dimethylcyclopentadienyl)zirconium dichloride, bis(1,2,4-trimethylcyclopentadienyl)zirconium dichloride and bis(tetramethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-2-ethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-ethylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dichloride, bis(4,5,6,7-tetrahydro indenyl)zirconium dichloride, bis(indenyl)zirconium dichloride, bis(1,2-dimethylcyclopentadienyl)zirconium dimethyl, bis(1,3-dimethylcyclopentadienyl)zirconium dimethyl, bis(1,2,4-trimethylcyclopentadienyl)zirconium dimethyl, bis(tetramethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-2-ethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-ethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-propylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl, bis(4,5,6,7-tetrahydro indenyl)zirconium dichloride, or bis(indenyl)zirconium dimethyl.

38. The process of any of claims 1 to 37 wherein an alkylaluminum compound is present and the alkylaluminum compound is represented by the formula: R_3Al , where each R is, independently, selected from the group consisting of methyl, ethyle, n-propyl, iso-propyl, iso-butyl, n-butyl, t-butyl, n-pentyl, iso-pentyl, neopentyl, n-hexyl, iso-hexyl, n-heptyl, iso-heptyl, n-octyl, iso-octyl, n-nonyl, n-decyl, n-undecyl, n-dodecyl, n-tridecyl, n-tetradecyl, n-pentadecyl, n-hexadecyl, n-heptadecyl, n-octadecyl, and their iso-analogs.

39. The process of any of claims 1 to 38 wherein the process is a continuous process.

40. The process of claim 39 wherein the process is a continuous process comprising:

- a) continuously introducing a feed stream comprising at least 10 mole% of the one or more C3 to C24 alpha-olefins into a reactor,
 - b) continuously introducing the transition metal compound and the activator into the reactor,
 - c) optionally continuously introducing co-activator into the reactor, and
 - d) continuously withdrawing the polyalpha-olefin from the reactor.
41. The process of claim 40 further comprising maintaining a concentration of hydrogen in the reactor of 10,000 ppm or less by weight.
42. The process of claim 40 or 41 wherein the process further comprises:
- 1) optionally, continuously treating the polyalpha-olefin to reduce heteroatom containing compounds to less than 600 ppm,
 - 2) optionally, continuously fractionating the polyalpha-olefin to separate the light and heavy fractions, where the heavy fractions have 20 or more carbons,
 - 3) continuously contacting the polyalpha-olefin with hydrogen and a hydrogenation catalyst,
 - 4) continuously obtaining a polyalpha-olefin having a bromine number less than 1.8.
43. The process of any of claims 1 to 42 wherein the temperature in the reactor is from -10°C to 250 °C.
44. The process of claim 43 wherein the temperature is from 30°C to 220 °C.
45. The process of claim 43 wherein the temperature is from 50°C to 180 °C.
46. The process of claim 43 wherein the temperature is from 70°C to 150 °C.
47. The process of any of claims 1 to 46 wherein the monomers, metallocene and activator are contacted for a residence time of 5 minutes to 100 hours.

48. The process of any of claims 1 to 47 wherein solvent or diluent is present.
49. The process of claim 48 wherein the solvent or diluent is selected from the group consisting of butanes, pentanes, hexanes, heptanes, octanes, nonanes, decanes, undecanes, dodecanes, tridecanes, tetradecanes, pentadecanes, hexadecanes, benzene, toluene, o-xylene, m-xylene, p-xylene, mixed xylenes, ethylbenzene, isopropylbenzene, and n-butylbenzene.
50. The process of any of claims 1 to 49 wherein the monomers are contacted with the transition metal compound and the activator in a reactor and the reactor is a continuous stirred tank reactor.
51. The process of any of claims 1 to 50 wherein catalyst residual is removed from the product by contacting with a solid sorbent.
52. The process of any of claims 1 to 51 where the monomers are contacted with the transition metal compound and the activator in the solution phase.
53. The process of any of claims 1 to 52 where the monomers are contacted with the transition metal compound and the activator in the slurry phase.
54. The process of any of claims 1 to 53 wherein the monomers are contacted with an alkylaluminum compound prior to being introduced into the reactor
55. The process of any of claims 1 to 53 where the metallocene and or activator are combined with an alkylaluminum compound prior to entering the reactor.
56. The process of claim 54 where the alkylaluminum compound is selected from tri-isobutylaluminum, tri-n-octylaluminum, tri-n-hexylaluminum, and tri-n-dodecylaluminum.

57. The process of any of claims 1 to 54 where an alkylaluminum compound is present and the compound is selected from tri-isobutylaluminum, tri-n-octylaluminum, tri-n-hexylaluminum, and tri-n-dodecylaluminum.

58. The process of any of claims 1 to 57 where in the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst selected from the group consisting of supported Group 7, 8, 9, and 10 metals.

59. The process of any of claims 1 to 57 wherein the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst selected from the group consisting of one or more of Ni, Pd, Pt, Co, Rh, Fe, Ru, Os, Cr, Mo, and W, supported on silica, alumina, clay, titania, zirconia, or mixed metal oxide supports.

60. The process of claim 59 wherein where the hydrogenation catalyst is nickel supported on keisleghur, silica, alumina, clay or silica-alumina.

61. The process of any of claims 1 to 60 wherein the polyalpha-olefin is contacted with hydrogen and a hydrogenation catalyst at a temperature from 25 to 350°C.

62. The process of any of claims 1 to 61 wherein the product produced has 60 wt % or less C10 dimer.

63. The process of any of claims 1 to 62 wherein the product produced has 40 wt % or less C10 dimer.

64. The process of any of claims 1 to 63 wherein the process further comprises:

- 1) catalyst residual is removed from the polyalpha-olefin by contacting the polyalpha-olefin with a solid sorbent,
- 2) optionally, treating the polyalpha-olefin to reduce heteroatom containing compounds to less than 600 ppm,

- 3) optionally, fractionating the polyalpha-olefin to separate the light and heavy fractions, where the heavy fractions have 20 or more carbons,
- 4) contacting the polyalpha-olefin with hydrogen and a hydrogenation catalyst, and
- 5) obtaining a polyalpha-olefin having a bromine number less than 1.8.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/027943

A. CLASSIFICATION OF SUBJECT MATTER

INV. C08F210/14 C10M143/08 C08F210/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/041817 A1 (BAGHERI VAHID ET AL) 15 November 2001 (2001-11-15) paragraphs [0027], [0028]; claims; examples 9-13	1-64
X	& US 6 548 723 B1 15 April 2003 (2003-04-15) cited in the application claims; examples	1-64
X	WO 02/14384 A (UNIROYAL CHEMICAL COMPANY, INC) 21 February 2002 (2002-02-21) cited in the application claims; examples	1-64

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 November 2006

Date of mailing of the international search report

15/11/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kaumann, Edgar

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/027943

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96/23751 A (BASF AKTIENGESELLSCHAFT; ROESCH, JOACHIM; MUELLER, HANS-JOACHIM; SCHWE) 8 August 1996 (1996-08-08) cited in the application the whole document -----	1-64
A	WO 03/020856 A (PENNZOIL-QUAKER STATE COMPANY; SONG, WEI; HEILMAN, WILLIAM, J) 13 March 2003 (2003-03-13) cited in the application page 3, line 20 - page 10, line 28 page 12, line 25 - page 16, line 6 claims; examples -----	1-64
A	US 5 811 379 A (ROSSI ET AL) 22 September 1998 (1998-09-22) the whole document -----	1-64
A	US 5 177 276 A (BEACH ET AL) 5 January 1993 (1993-01-05) claims; examples -----	1-64
A	EP 0 403 866 A (MITSUI TOATSU CHEMICALS, INCORPORATED) 27 December 1990 (1990-12-27) claims; examples 5,6 -----	1-64
A	US 4 956 122 A (WATTS ET AL) 11 September 1990 (1990-09-11) cited in the application the whole document -----	1-64
A	US 4 413 156 A (WATTS, JR. ET AL) 1 November 1983 (1983-11-01) cited in the application the whole document -----	1-64
A	US 4 910 355 A (SHUBKIN ET AL) 20 March 1990 (1990-03-20) cited in the application the whole document -----	1-64
A	EP 0 284 708 A1 (COSDEN TECHNOLOGY [US] FINA TECHNOLOGY [US]) 5 October 1988 (1988-10-05) cited in the application claims -----	1-64

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/027943

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001041817	A1	15-11-2001	AT 283293 T 15-12-2004
		AU 6798900 A 24-04-2001	
		BR 0007167 A 31-07-2001	
		CA 2351329 A1 29-03-2001	
		CN 1321169 A 07-11-2001	
		DE 60016169 D1 30-12-2004	
		DE 60016169 T2 08-12-2005	
		EP 1141043 A1 10-10-2001	
		ES 2231239 T3 16-05-2005	
		ID 29402 A 30-08-2001	
		JP 2003510382 T 18-03-2003	
		PT 1141043 T 31-01-2005	
		RU 2235756 C2 10-09-2004	
		TW 548280 B 21-08-2003	
		WO 0121675 A1 29-03-2001	
		US 2001041818 A1 15-11-2001	
US 6548723	B1	NONE	
WO 0214384	A	21-02-2002	AU 8317701 A 25-02-2002
		BR 0113185 A 16-09-2003	
		CA 2416894 A1 21-02-2002	
		EP 1309633 A2 14-05-2003	
		JP 2004506758 T 04-03-2004	
		JP 2006206925 A 10-08-2006	
		MX PA03001289 A 30-06-2003	
		US 6858767 B1 22-02-2005	
WO 9623751	A	08-08-1996	EP 0807096 A1 19-11-1997
WO 03020856	A	13-03-2003	BR 0212176 A 20-07-2004
		CA 2462169 A1 13-03-2003	
		CN 1549852 A 24-11-2004	
		EP 1442104 A1 04-08-2004	
		JP 2005501957 T 20-01-2005	
		ZA 200401214 A 14-06-2004	
US 5811379	A	22-09-1998	AU 732240 B2 12-04-2001
		AU 3385597 A 07-01-1998	
		DE 69707453 D1 22-11-2001	
		DE 69707453 T2 16-05-2002	
		EP 0906348 A1 07-04-1999	
		JP 2000513397 T 10-10-2000	
		WO 9748741 A1 24-12-1997	
		US 6017859 A 25-01-2000	
US 5177276	A	05-01-1993	US 5420372 A 30-05-1995
EP 0403866	A	27-12-1990	AU 610780 B2 23-05-1991
		AU 5620490 A 17-01-1991	
		BR 9002634 A 20-08-1991	
		CA 2018145 A1 05-12-1990	
		KR 9302702 B1 09-04-1993	
		NO 902455 A 06-12-1990	
US 4956122	A	11-09-1990	NONE
US 4413156	A	01-11-1983	NONE

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/027943

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4910355	A	20-03-1990	CA 2001802 A1	02-05-1990
			DE 68904404 D1	25-02-1993
			DE 68904404 T2	06-05-1993
			EP 0370275 A1	30-05-1990
			JP 2191232 A	27-07-1990
			JP 2691188 B2	17-12-1997
EP 0284708	A1	05-10-1988	AT 133690 T	15-02-1996
			CA 1341344 C	05-03-2002
			CN 87107013 A	19-10-1988
			CN 1118353 A	13-03-1996
			DE 3751694 D1	14-03-1996
			DE 3751694 T2	01-08-1996
			ES 2082745 T3	01-04-1996
			JP 9157322 A	17-06-1997
			JP 2669832 B2	29-10-1997
			JP 63295607 A	02-12-1988
			KR 9508155 B1	25-07-1995