

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
8 February 2007 (08.02.2007)

PCT

(10) International Publication Number  
WO 2007/015269 A1(51) International Patent Classification:  
*F03B 13/14* (2006.01)

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:  
PCT/IN2006/000273

(22) International Filing Date: 1 August 2006 (01.08.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
694/KOL/2005 2 August 2005 (02.08.2005) IN

(71) Applicant and

(72) Inventor: GHOUSE, Syed, Mohammed [IN/IN]; #11-4-636, AC Guards, Hyderabad 500 004 (IN).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(74) Agents: DASWANI, M., S. et al.; Daswani &amp; Daswani, Daswani House, Green Acres, 23B Ahiripukur, 1st Lane, Kolkata 700 019 (IN).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FREE FLOATING WAVE ENERGY CONVERTER

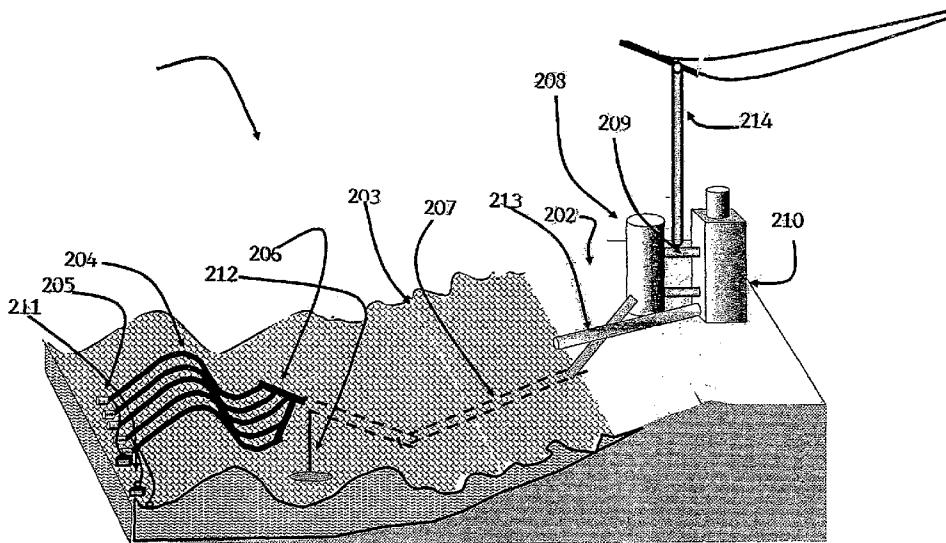

WO 2007/015269 A1

(57) Abstract: A wave energy converter comprising a flexible pipe (204) and an inlet (205). The flexible pipe (204) floats on the water surface, following the wave form. Slugs of water and air enter, one after the other, through the inlet (205). Because the flexible pipe (204) follows the shape of the wave, water is transported through a manifold (206) to a pressure chamber (208) connected to a generator (210).

**TITLE OF THE INVENTION**

Free floating wave energy converter

**FIELD OF THE INVENTION**

5 This invention relates to ocean energy and more particularly wave energy converters (WEC). As against the rest of the state of the art WEC systems, which mostly capture energy from the undulations of waves or surge, almost all in the vertical axis, according to the present invention, energy is extracted from the wave propagation in the horizontal plane. A 'Flexible Pipe' floats on the surface  
10 of water and adapts to the waveform. Air and water are trapped in the pipe and segregated - due to gravity, into discrete segments or "Slugs" in the crests and troughs, respectively. The segments get pushed by the waves as they propagate from one end of it to the other. Thus, energy is extracted by virtue of the propagation of waves. The segments can flow even against pressure, if applied  
15 at the Outlet. The total pressure in a pipe will be the function of the cumulative differential pressure of all the water segments in that pipe - less losses."

**DESCRIPTION OF PRIOR ART**

20 The Wave Energy Converters (WEC) has been known for many years, it was only during the last decade and a half or so that serious efforts were initiated towards exploiting it commercially. Several ocean wave energy conversion devices have since been developed, but only a few matured to full-scale trial stage, but none yet implemented fully on a commercial scale. The main  
25 disadvantage of the wave power is the uneconomical cost of extracting wave energy.

30 Although several Wave Energy Converters (WEC) and many patents relating thereto are available in the world today, yet efforts are on to find truly economical and practicable solutions, particularly for application on a global

scale. The main problem has been the complexity and high cost of the systems, which are further compounded by the vagaries and harshness of the ocean.

5 The World Energy Council estimates that 2TW of energy could be harvested from the world's oceans, the equivalent of twice the world's electricity production. However, since waves are neither steady nor concentrated enough it has not yet been possible to extract and supply wave energy viably. The major problem with designing wave energy converters has been in handling the vast range of power variations in the ocean waves, from approximately average of 50  
10 kW/m, peaking to 10 MW/m (a 1:200 ratio).

Further the focus has mostly been on improving efficiency of the devices - through ever more sophistication. As such, the state of the art, wave energy converters (WEC's) have become highly sophisticated, specialized and proprietary  
15 technologies. This translates into cost escalation, besides increasing the degree of difficulty in implementation and maintenance. Most importantly, it is unlikely that of any WEC of today, can be implemented with generic resources. The devices might be highly sophisticated, even more energy efficient, but perhaps, not as cost effective - in terms of cost / kW.

20

Hence, a truly cost effective and simpler solution, which also offers a high degree of survivability, ease of implementation and maintenance, was required.

25

The present invention could possibly be the simplest and most cost effective solution, to the vexing problem of wave energy extraction and integration into the grid.

### Types of Wave Energy Converters

30

The state of the art power conversion devices have been generally classified into the following basic categories, namely:

**Floats or Pitching Devices (Heaving buoys)**

5 These devices generate electricity from the bobbing or pitching action of a floating object. The object can be mounted to a floating raft or to a device fixed on the ocean floor. To generate large amounts of energy, a multitude of these devices must be deployed, each with its own piston and power take off equipment.

10

**Oscillating Water Columns (OWC)**

These devices generate electricity from the wave-driven rise and fall of water in a cylindrical shaft. The rising and falling water column drives air in and out of the top of the shaft, powering an air-driven turbine.

15

**Wave Surge or Focusing Devices (Overtopping)**

These shoreline devices, also called "tapered channel" or "tapchan" systems, rely on a shore-mounted structure to channel and concentrate the waves, driving them into an elevated reservoir. Water flow of this reservoir is used to generate 20 electricity, using standard hydropower technologies.

**Hinged Contour Converters**

It is system of buoys consisting of tubular steel cylinders, attached to one another by hinges capable of interacting with a much large ocean area along its 25 length. The force which the waves exert in moving each segment relative to its neighbors is captured by hydraulic rams that press fluid into accumulators, which, in turn, power a number of generators.

References is also made to USA Patent no. 4,672,222 which provides an 30 apparatus for producing electricity from wave motion on a body of water

comprising of self stabilized and modularly expandable system of independently operative point absorbers with respective drive transmission and electrical generators.

5 It has, therefore, been long felt need to develop such wave energy converter, which overcomes the disadvantages of prior art, and energy is obtained at cheaper rate by simpler method and apparatus.

10 The present invention is quite unlike the rest of the state of the art systems. Its uniqueness lies mainly in its principle of operation, as against the rest of the state of the art *WEC* systems, which mostly capture energy from the undulations of waves in the vertical axis or surge, the *FFWEC* of the present invention extracts energy from the wave propagation in the horizontal plane.

15 Further, and most importantly, the *FFWEC* has no contacting components and moving part; besides the 'flexible pipe(s)' itself. Thus, the *FFWEC* is very simple in design, construction, operations, and easy to maintain.

## SUMMARY OF THE INVENTION

20 The *FFWEC* of the present invention consists basically of flexible pipes which float on ocean waves and convert the horizontal or progressive wave motion directly into kinetic energy, by pumping or pushing air and water through the "Flexible Pipes", which can be employed to drive conventional hydroelectricity generators or pump ocean water into reservoirs, etc.

25 The *FFWEC* of the present invention comprises essentially of a normally buoyant "Flexible Pipe" of adequate length, or plurality thereof, that floats on the ocean surface and adapts to the wave form, suitably moored so as to maintain the fore and aft axis generally perpendicular to the waves direction. A special "Inlet", integrally attached at the mouth of the flexible pipe ingests graduated

slugs / segments of air and water into the flexible pipe, synchronous with the waves. The device works by using the advancing waves (wave progression) to push separate 'slugs' of water and air along the length of the pipe, thereby building up the pressure until it is sufficiently high to drive a turbine or pump 5 ocean water into reservoirs, etc. Several such pipes could be grouped together; in series and / or parallel, to make a wave energy form.

According to the present invention, energy is extracted from the wave propagation in the horizontal plane whereas in the rest of the state of the art 10 WEC systems mostly capture energy from the undulations of waves or surge, almost all in the vertical axis.

According to the present invention water and air enter/get sucked into the 'flexible pipe' through the "Inlet", and water gets collected in the troughs 15 below and air trapped in the crests above, in distinct "segments", all along the length of the pipe. As waves propagate along the length of the pipe, all the segments follow the motion of the waves, with each "segment" moving along with the corresponding wave. A continuous flow of water and air is thus created.

20 However, the above is true only when the water in the pipe is split up into distinct segments, with the water and air being in the troughs and crests, respectively. Else, neither pressure nor flow can develop in the pipe. Therefore, the 'flexible pipe' can also be termed as a non-positive displacement wave pump.

25

If some resistance is applied at the outlet the water in the troughs will get pushed up the inclines of the previous crests, consequently increasing the pressure in the pipe. If the backpressure exceeds the total pressure head, the system stalls. The pressure is highest at the outlet, and progressively reduces up

the Pipe", till it becomes negative near the outlet, thus water/air get sucked in as the waves progress.

5 An Inlet is a floatable apparatus, flexibly attached at the throat of the "Flexible Pipe" through an "Inflexible Pipe", kept afloat by means of one plurality of buoyancy tanks, inflexible or flexible, with or without provision for controlling buoyancy thereof, either individually or collectively, so as to provide the desirable buoyancy and even ceasing operation by completely sinking or floating the apparatus.

10

The Inlet functions to impart some Kinetic Energy to the water slug at the time of "zero" start and subsequently to ingest graduated amount / volume of air and water, synchronous with the waves.

15

In case of inclement wave climate, the inlet functions to ingest only water so as to sink the flexible pipe or plurality thereof, wherein flow ceases. And whenever required, ingest only air so as to float the pipe wholly, wherein flow ceases.

20

The "Outlet" is a rigid pipe or a coupling, located at the end of the "Flexible Pipe", which could be further connected to a conventional hydropower generator or a reservoir, via a 'pressure chamber'. At near-shore locations, where reflective waves are expected, additional lengths of 'rigid pipes' may be attached to the Outlet for conveying the fluid flow to the generator-turbine or reservoir.

25

With the rest of the conditions remaining constant, an increase in the number of 'flexible pipes' and length, will enhances the flow volume and pressure, respectively.

At near-shore locations, where reflective waves are expected, additional lengths of 'rigid pipes' may be attached to the 'flexible pipe' for conveying the fluid flow to the generator housing / turbine or any other energy converter or to a reservoir.

5

### **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG.1 depicts the principle of the present invention.

10 FIG 2 is an artist's impression of free floating wave energy converter and

FIG 2 (b) depicts a preferred embodiment.

FIG 3 shows air and water slugs under in a flexible pipe during idling and

15 pressure flow conditions.

FIG. 4 shows a typical inlet.

FIG. 5 shows inlet with buoyancy control.

20

FIG. 6 shows inlet with inflatable buoyancy tank and control.

FIG. 7 shows inlet with plurality of inflatable buoyancy tanks and control.

### **25 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Embodiments of the present invention will be described below specifically with reference to accompanying drawings.

30 A good example of the "Flexible Pipe" WEC is surfing. As a surfer rides down a wave, it follows him, but not the water. In another example, say, if a thin

and flexible sheet of impermeable material is spread out on a wave train and some water is poured on it, the water will immediately get collected in the troughs and start flowing along with the waves. Now, instead of the sheet above, let us use a hollow flexible pipe, as described in paragraph below:

5

When the FFWEC is idling, i.e., with no load applied at the outlet, the water slugs remain in the trough part of the waves as it progresses. Whereas, under operating load the water slugs get pushed up the crest of the preceding wave all along the Flexible Pipe. This aspect has been illustrated at Fig 1 (a) and 10 (b), respectively.

FIG.1 of the accompanying drawings illustrates the behavior of the air and water segment in a flexible pipe arrangement. For ease of understanding, we have considered the waves to be regular curves, such as "U" tubes / 15 manometers connected in series 101. Let us also assume that, initially, water is filled uniformly in all the trough segments of the pipe 102, with air being trapped in the crest segments 103. It can be seen that, since all the segments are connected in series, any force applied at any point on the pipe will be transmitted throughout the length of the pipe. Thus, if pneumatic pressure is applied at one 20 end of the pipe 104, it will 'push' all the water segments up the crest slope of the proceeding wave 105. In other words, a pressure head will be created, which will be equal to the sum total of all the height displacements of the water segments.

For example, if there are 3 waves of H 1 mtr. each (water displacement in 25 each segment), the cumulative head will be = 3 mtrs. (max.) 106 (which can theoretically be increased till infinity).

Now, instead of above experiment, if we consider a wave train, the opposite will happen; that is, pressure will be generated and the water / air

segments will start flowing in the pipe along with the wave train. The invention exploits this characteristic of the wave motion.

The energy that can be generated by a pipe can be calculated by:  $P/l =$   
5  $0.55 H_c^2 \times T_s$  per unit crest length, with  $H_c$  being the significant wave height and  $T_s$  the period of the wave. This is the total power per length of the wave and as this energy is being extracted from the surface, the energy that is below the wave would rise up to replace it, till almost all of the energy that existed above and below the wave is progressively extracted. Therefore, the maximum energy  
10 which the "flexible pipe" can extract will be all along its length - much more than that by a "point absorber".

During normal operating conditions, the Flexible Pipe can be made to float with the crests portion remaining above the water surface and the troughs  
15 going below it. By doing so the effective wave height can be increased from the actual wave to that assumed by the Flexible Pipe. This also helps when the actual wave heights increase. The Flexible Pipe absorbs the slack.

Fig. 2 depicts an artist's impression of the FFWEC which describes the  
20 arrangement 201 depicting the Waves moving towards the shore 202 reflected waves near shore ('turbulence' area) 203, plurality of 'Flexible Pipe' - 'Air-Water "Inlet"' 204 - 205, respectively, further connected to the 'manifold 206, further to the 'hard pipe' in the 'turbulence' area 207, terminating at the 'Air-Water Pressure Chamber' 208, with "Air" and 'Water' piping 209 connected to  
25 the generators 210 and depiction of the moorings 211, 'hard pipe supports' 212, drain pipe 213 and grid power supply 214.

Fig. 2 (b) is an enlarged view of the preferred embodiment essentially comprising the "Flexible Pipe", Inlet 204 -205 and Outlet 215 the outlet may  
30 further be connected to the other components.

Fig. 3 of the present invention depicts a flexible pipe floating on waves 301, with water and air slugs in sustained flow 302 & 303. A water reservoir / tank located at an elevation towards the outlet side of the flow representing the 5 extent of pressure-head on the flow 304, with the direction of wave motion being from left to right 305. With no back pressure (no water in the tank) the water slugs remain in the troughs 302 and when with water in the tank, the slugs are pushed up the preceding wave crests 306 & 307.

10 It is preferable that the air and water slugs are ingested appropriate for the operating conditions. As such, in each phase of the wave, normally water and air are alternately ingested from trough to crest and vice versa, respectively. This does not pose any problem if the load is either turned off or varied during operation.

15

Incidentally, with the above possibility, we could categorize the FFWEC as a "Linear Absorber" type as against the "Point Absorber".

20 The water mass on the surface of the ocean does not move along with the waves, only the waveform does. Further, ocean waves posses two types of energy - kinetic and potential. The former is by the virtue of the horizontal progression of waveform and the latter due to heaving motion or the height difference between the wave crest and trough - wave height. Since water inside the flexible pipe flows at the wave velocity and in phase with the waves, at the 25 time of initial start the Inlet must ingest and accelerate slugs of water from the initial "zero" relative velocity to that of the waves, both at the right moment and within a very short period of time (less than a half wave period). This is achieved by making use of either one or both the types of the wave energy mentioned above.

30

The FFWEC of the present invention is the only WEC to have an inherent survival capability. During severe wave climate, the "Flexible Pipes" can be simply submerged, by ingesting only water (no air). Since the pipes will essentially be made of specific gravity (SG) higher than that of water "one", they 5 will sink when filled mostly with water. To raise them again, the pneumatic pressure that would generally be available in the "pressure chamber" would be used to purge the water out of the pipes. When the pipes resurface, the system will be at "zero start state" (with no water in the Pipes).

10 Before commencing operation (flow), the flexible Pipe and the Inlet assembly are to be kept empty; else the inertia of the water already collected in the Flexible Pipe will impede zero speed start. During operation, the air and water intake phases or timing can be adjusted / tuned by altering the buoyancy. In both the above cases only water is ingested to sink the flexible pipe. This is 15 achieved by completely deflating the flexible tanks or flooding the inflexible tanks of the Inlet, as applicable. For stopping, flow the buoyancy of the Inlet buoyancy tank is increased to an extent where the mouth of the Inlet cannot enter the waves. Thus, only "air" is ingested and eventually the flow stops.

20 Alternatively, the buoyancy of the individual tanks can be varied such that the apparatus tilts either forward and back, thereby enabling adjustment of the water / air ingestion timing and even preventing the mouth of the Inflexible Pipe from ingesting water altogether. Consequently, the flow will stop after all 25 the water slugs flow out. The flow must not be stopped either by cutting off the inflow or outflow. If resorted to it could cause severe damage to the Pipes. The apparatus need not essentially have any moving or contacting components. Whatever control devices required are preferably located on shore. All components of the above apparatus are made of appropriate dimensions and material.

Certain design principles to achieve the desired results are discussed in the succeeding paragraphs.

The basic embodiment in Fig.-4 shows, the cavity being a single  
5 Inflexible Pipe 400 protruding sufficiently ahead of the buoyancy tank 401 which normally floats on the surface of water, through the mouth 402 of which both air and water enter and the outlet of which 403 being fixedly connected with the flexible pipe 404. Further, the apparatus additionally and generally consists of a suspension rod 405 with ballast 406, including mooring ring 407  
10 and mooring 408 line, all suspended vertically below it with the total weight and the fulcrum thus created providing and enhancing stability to the assembly, particularly in the vertical axis, in order to minimize the pitching motion of the assembly around its lateral axis. Further more, in order to minimize the torque that would be created by the moment arm formed due to the distance between  
15 the centre of pressure (CP) 409 and center of gravity (CG) 410, both being kept co-centric or nearest thereto. The Flexible Pipe, which trails the apparatus, provides the directional stability. As such, it remains nearly in upright position and rightly aligned as it floats up and down the waves.

20 The Inlet generally faces the oncoming waves 410. The inflexible Pipe projects sufficiently ahead of the main assembly (like a gun from the turret of a tank) and is made to float at an appropriate height above the still water level, by adjusting the buoyancy. Therefore, it enters near the trough 411 and exists at the crest 412 of the waves as they pass (for explaining the sequence, the wave in the  
25 drawing is shown as stationary while the Inlet is shown in three positions, moving from right to the left). When a wave strikes the mouth of the Inflexible Pipe the water which enters it is separated from the main water body, while continuing to move through it at the same wave velocity. The water phase commences from the trough of an oncoming 413 wave and lasts till its crest and

the air phase from thereon till the next trough 414. Thus, alternating intake of water and air slugs is appropriately synchronized with the waves.

5 The above apparatus has no controlling devices, but can yet function under fair wave climatic conditions, with average efficiency and reliability.

10 In another embodiment, added to the above assembly is a provision for controlling and regulating the buoyancy, whereby the air and water ingestion timing and volume can be controlled to a certain degree, besides making it possible to sink the apparatus / system in bad weather or stop operations by cutting off the water intake and totally float the flexible pipes. The modification is described in detail below.

15 Fig. 5, illustrates the above embodiment comprising of an inlet apparatus 501, the buoyancy tank 502, having a pneumatic duct 506, connected through a hose 505 to the pressure chamber with control devices preferably located thereat, for varying the pneumatic pressure in the buoyancy tank. By varying the pneumatic pressure in the buoyancy tank, water is pushed in/out through a water breathing tube 507, the top end of which is fixedly attached to the bottom of the 20 buoyancy tank and the lower end opening into the sea below, consequently varying the Inlet buoyancy, thereby controlling the air and water intake timing and volume. The rest of the arrangements of this embodiment remain similar to those described in Fig. 4 above.

25 In another embodiment which is illustrated by Fig. 6, the buoyancy tank 602 being inflatable and directly connected with the pneumatic hose 605 as above, but without the air duct and water breathing tube (the rest of the arrangements being similar to the previous embodiment described in the above paragraph). As can be appreciated, the buoyancy can be varied by inflating – 30 deflating the inflatable buoyancy tank.

In yet another embodiment illustrated by Fig. 7, two or more inflatable buoyancy tanks 702, connected individually, in groups or jointly through respective hoses 705 and 706 with the "pressure chamber", which is normally shore-based, the pneumatic pressure and controls and switching devices generally installed at the pressure chamber, the variable buoyancy tanks suitably arranged on the Inlet apparatus whereby the angle of rotation around the lateral axis of the Inlet apparatus and its buoyancy, can be controlled.

10 The inflatable variable buoyancy tanks could be in the shape of doughnuts, as shown in the diagram, spherical or of any other suitable shape as in Fig. 6 and its principle operation is also similar to it.

15 In the above embodiment, plurality of rigid buoyancy tanks similar in construction to the one explained at Fig. 5 above are used instead of the flexible buoyancy tanks.

**Advantages of the present invention:**

From the foregoing, it could be appreciated that the FFWEC could offer several 20 advantages over the state of the art wave energy conversion systems. These are as follows:

- The simplest WEC concept comprising of no contacting parts
- Least Cost/KW (only flexible pipes absorb the wave energy).
- Utilizes components and sub-systems that are readily available (we only 25 need to select the most suitable components).
- The technologies used are well matured (mostly 'brick and mortar - minimum hi-tech).
- Has very high survivability factor under stormy conditions (it submerges, like a submarine).

- Large-scale deployment possible, within a short time period utilising local resources.
- Highly cost competitive - Design & Development, Capital, O&M and Production, etc. as compared with the existing state of the art WEC systems and comparable with the conventional electricity generating systems.
- Very easy to install / un-install and maintain. Only the 'flexible pipes' and rigid pipes are to be laid on the ocean. The same being very light in weight can be implemented with the help of standard vessels and crew even on a very large scale.
- Conventional mooring system.
- The concept is rather simple. Involved R&D is not envisaged, i.e. fast tracking - concept evaluation and prototype testing through to commercial deployment.
- Does not pose threat to marine life - eco-friendly.
- The invention is technically feasible and commercially viable.

## CLAIMS:

1. A wave energy converter essentially comprising of a flexible pipe, and an "Inlet" apparatus

5

wherein, the said flexible pipe, or plurality thereof, having adequate length and diameter, with adaptability to follow the wave form, floatable from nearly above to below the surface of the waves, with an "Inlet" integrally attached to its throat and terminating at an outlet and the entire apparatus 10 suitably moored, generally facing the oncoming waves.

2. A wave energy converter as claimed in claim 1, wherein the "Inlet" apparatus includes an inflexible pipe, the rear end of which fixedly attached to the throat of the said flexible pipe and frontward portion projecting sufficiently 15 ahead of a buoyancy tank, or plurality thereof arranged in the vertical plane or in tandem, either or both, with the said inflexible pipe being fixedly and suitably attached to the said buoyancy tank or plurality thereof,

20 wherein, some ballast is fixedly attached vertically below the said apparatus onto a rod, the top end of the rod being fixedly and suitably attached to the said Inflexible Pipe,

25 wherein, a mooring ring or provision for attaching a mooring line is fixedly attached at the lower end of the said rod,

wherein, the whole assembly having the adequate buoyancy so as to keep the Inflexible Pipe normally afloat with all components of the above apparatus being of appropriate dimensions and material.

30 3. A wave energy converter as claimed in claim 2, further comprising of a water breathing tube, wherein the top end of the said water breathing tube is

attached fixedly to the bottom of the said buoyancy tank and the lower end opening into the sea below it

5 wherein, from the topmost portion of the said buoyancy tank, a pneumatic duct connecting to a pneumatic hose, with the said pneumatic hose further connecting with control devices.

10 4. A wave energy converter as claimed in claim 3, further comprising plurality of buoyancy tanks, pneumatic ducts and hose ducts thereof, with the hoses further connecting to the respective control devices.

5. A wave energy converter as claimed in claim 2, wherein the buoyancy tank being inflatable and directly connected with the pneumatic hose, with the said hose further connecting with the said controlling devices.

15

6. A wave energy converter as claimed in claim 5, further comprising plurality of buoyancy tanks and hoses ducts thereof, with the hoses further connecting to the pressure chamber, with the respective control devices.

20 7. A wave energy converter as claimed in claim 1 to 6, having suitable means, such as pipes, hoses and the like, for conveying the pressure and flow of the "slugs" of water and air emanating from the outlet of the flexible pipe, to run conventional generators or pumping water into reservoirs, with the said generators located preferably onshore,

25

wherein, further the pneumatic pressure chambers and controlling devices are also located onshore, the said pneumatic pressure chambers and controlling devices, in turn having pneumatic hoses connecting the "Inlet" buoyancy control tanks and on/off devices for pumping air into the flexible pipe when required.

30

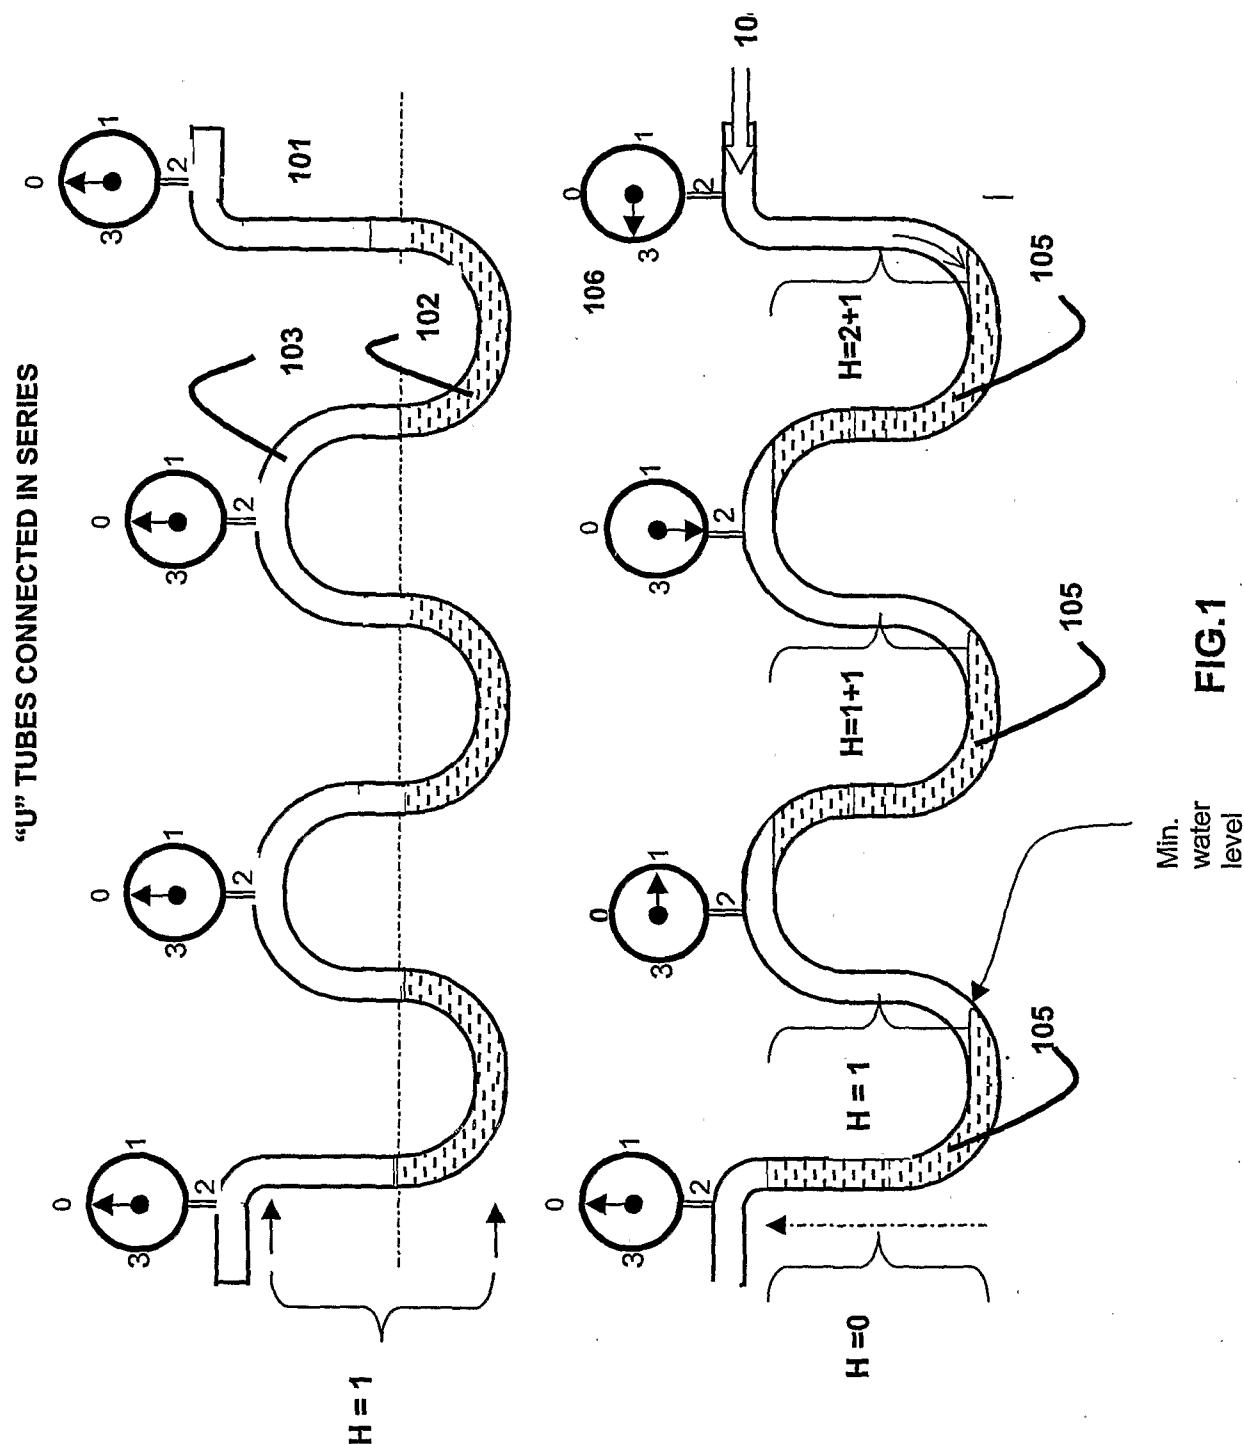


FIG. 1

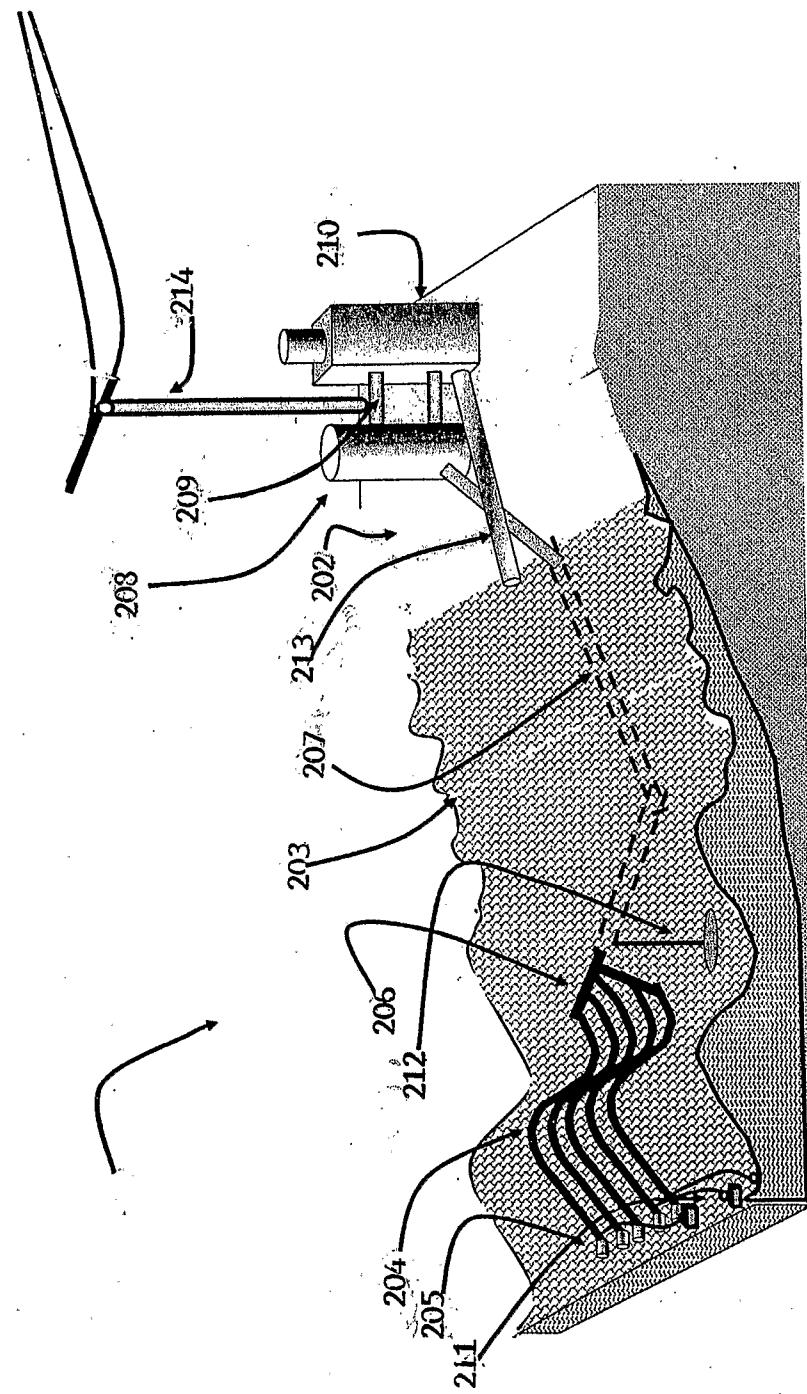


FIG.2

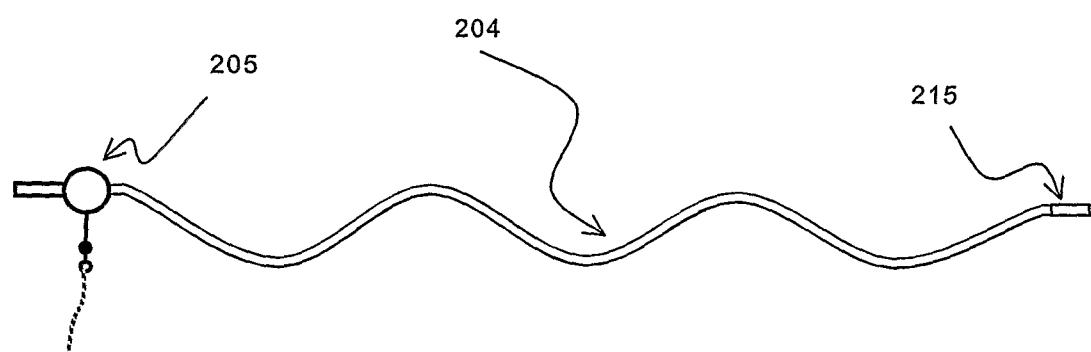


FIG. 2 (b) PREFERRED EMBODIMENT

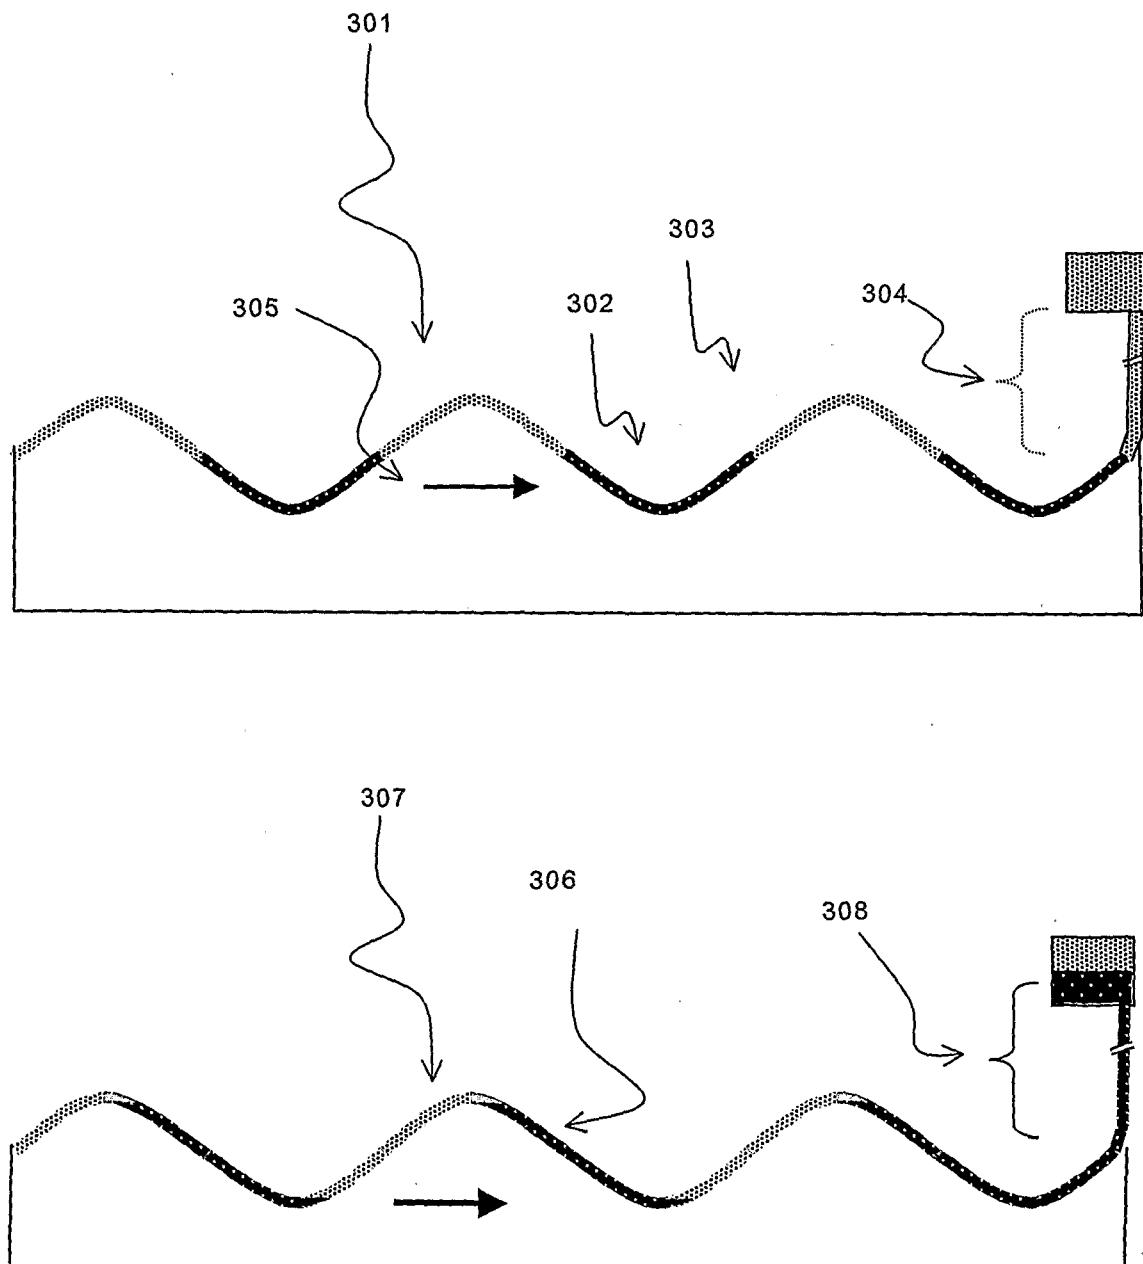


FIG. 3 FLEXIBLE PIPE "SLUGS UNDER PRESSURE"

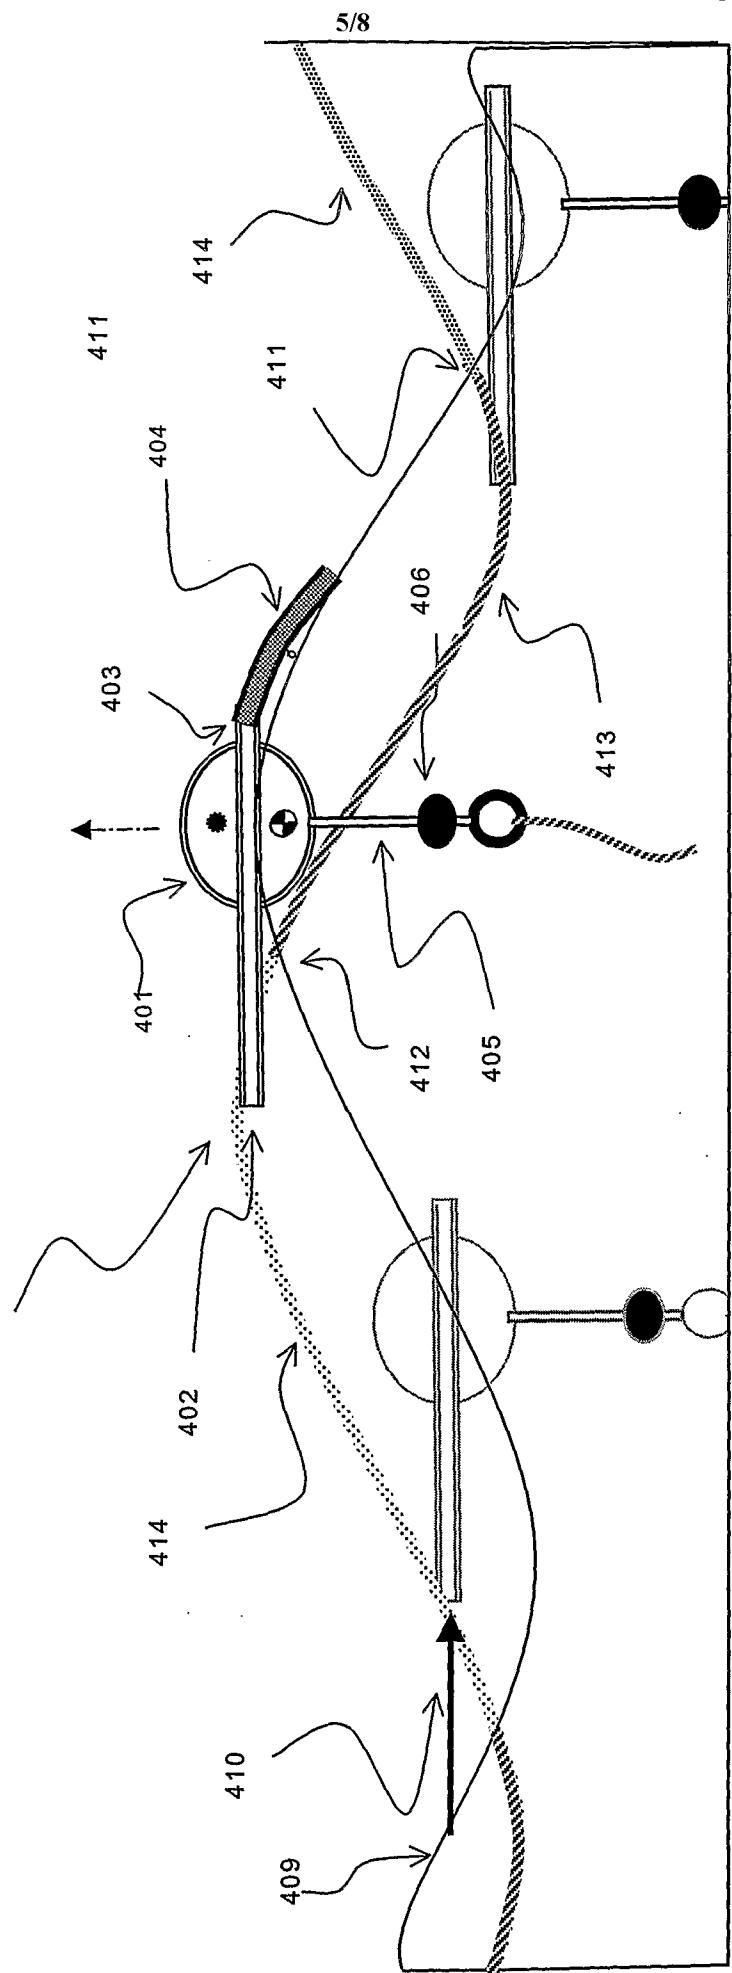


FIG. 4  
SINGLE PIPE TYPE INLET

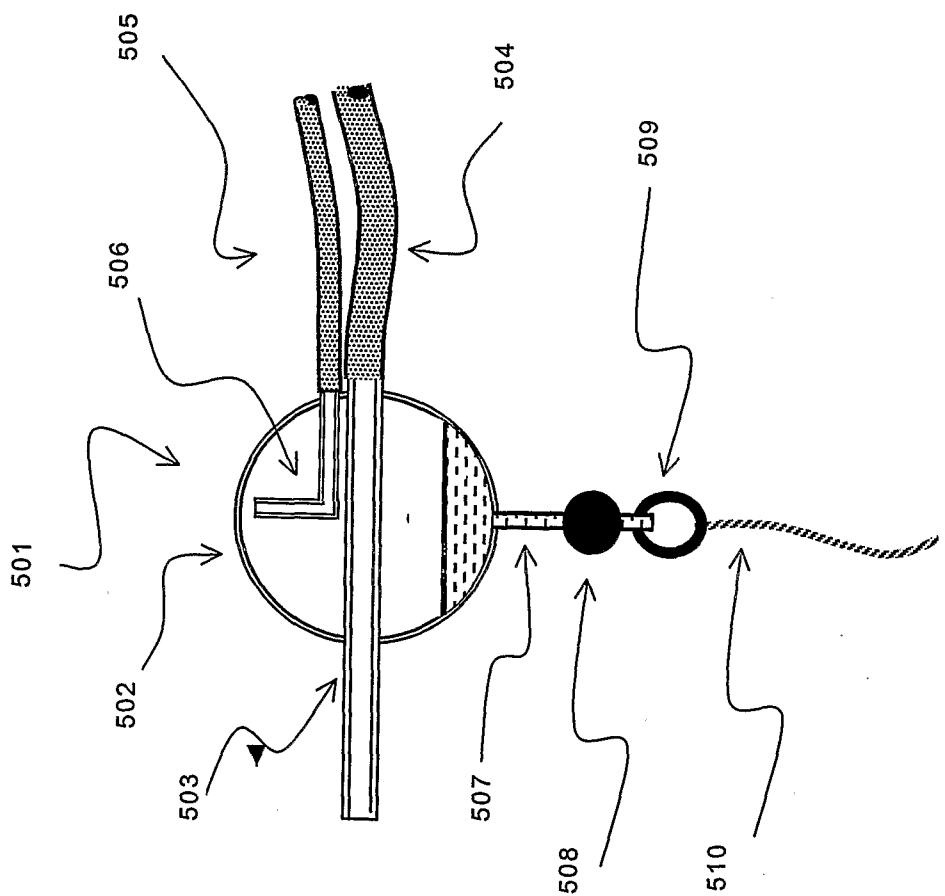
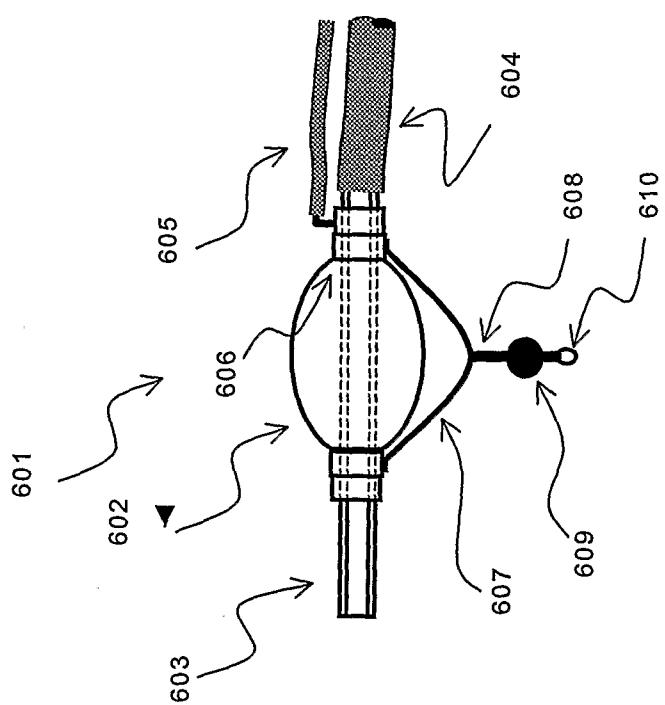


FIG. 5 - INLET VARIABLE BUOYANCY



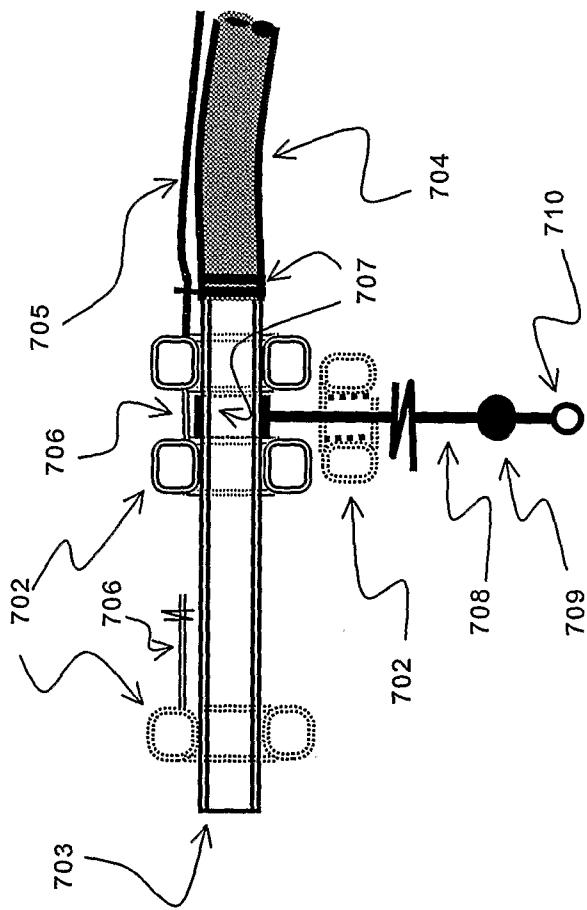


Fig. 7 INLET - INFLATABLE BUOYANCY TANK WITH CONTROL

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/IN2006/000273

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. F03B13/14

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
F03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p><b>DATABASE WPI</b>  Section PQ, Week 198526  Derwent Publications Ltd., London, GB;  Class Q55, AN 1985-158007  XP002372600 "Wave power installation guide  - has ballast tank at start section of  pipe and uniformly positioned check valves  over pipe length to increase pressure  head"  -&amp; SU 1 129 407 A (LEVCHENKO G T;  RADZIKOVSKI A N)  15 December 1984 (1984-12-15)  abstract</p> <p style="text-align: center;">----- -/-</p>	1,7

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the International search

10 November 2006

Date of mailing of the International search report

23/11/2006

Name and mailing address of the ISA/  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

de Rooij, Mathieu

## INTERNATIONAL SEARCH REPORT

International application No PCT/IN2006/000273
---

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Week 199414 Derwent Publications Ltd., London, GB; AN 1994-116500 XP002406517 "Wave driven power generating unit-has meshed filter placed on conical headpiece, and anchor, and flexible sleeve made of separate sections connected to each other by flanges" -& RU 2 004 837 C (RUMYANTSEV) 15 December 1993 (1993-12-15) abstract -----	1,2,7
X	GB 2 024 957 A (BRITISH PETROLEUM CO) 16 January 1980 (1980-01-16) page 1, line 114 - page 2, line 58; figures -----	1
X	WO 84/00583 A (HERTZ KRISTIAN DAHL) 16 February 1984 (1984-02-16) abstract; figure 1 page 1, line 20 - page 2, line 21 -----	1
P, X	WO 2006/067421 A (SALT ANTHONY [GB]) 29 June 2006 (2006-06-29) abstract; figures page 1, line 20 - page 4, line 31 page 14, line 5 - line 10 page 20, line 15 - page 23, line 11 page 24, line 32 - page 26, line 3 -----	1,7
A	US 3 335 667 A (JAMES MURPHY) 15 August 1967 (1967-08-15) figure 1 -----	1
A	JP 03 151572 A (TOI SETSUO) 27 June 1991 (1991-06-27) abstract; figures -----	1
2		

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IN2006/000273

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
SU 1129407	A	15-12-1984	NONE			
RU 2004837	C	15-12-1993	NONE			
GB 2024957	A	16-01-1980	NONE			
WO 8400583	A	16-02-1984	AU DK EP GB JP NL NO	1824983 A 347582 A 0115511 A1 2133477 A 59501374 T 8320232 A 841311 A		23-02-1984 04-02-1984 15-08-1984 25-07-1984 02-08-1984 02-07-1984 03-04-1984
WO 2006067421	A	29-06-2006	NONE			
US 3335667	A	15-08-1967	NONE			
JP 3151572	A	27-06-1991	NONE			