



- (51) **International Patent Classification:**
F28D 9/00 (2006.01) *F28F 3/04* (2006.01)
- (21) **International Application Number:**
PCT/EP2012/053883
- (22) **International Filing Date:**
7 March 2012 (07.03.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11161423.6 7 April 2011 (07.04.2011) EP
- (71) **Applicant (for all designated States except US):** ALFA
LAVAL CORPORATE AB [SE/SE]; P. O. Box 73, SE-
221 00 Lund (SE).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** BLOMGREN, Ralf
[SE/SE]; Älgvägen 13, SE-239 34 Skanör (SE).
- (74) **Agent:** ÖBERG, Markus; Alfa Laval Corporate AB, Pat-
ent Department, P.O. Box 73, SE-221 00 Lund (SE).

(81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** PLATE HEAT EXCHANGER

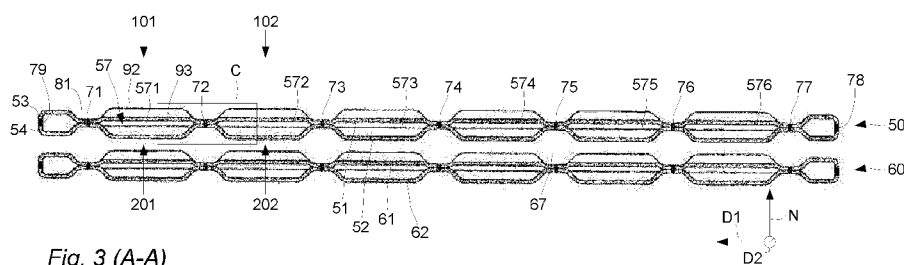


Fig. 3 (A-A)

(57) **Abstract:** A stack of heat transfer plates configured to be arranged within a block-type heat exchanger. The stack of heat transfer plates comprises pairs (50, 60) of heat transfer plates that are stacked such that a flow path (67) for a first fluid is formed between the stacked pairs of heat transfer plates, where- in a pair (50) of the stacked pairs of heat transfer plates comprises a first heat transfer plate (51) and a second heat transfer plate (52) that are joined such that a flow path (57) for a second fluid is formed between the first and second heat transfer plates. The pair (50) of heat transfer plates comprises corrugations (101, 102) that are arranged on a respective side of an elongated joint (72) that joins the first and second heat transfer plates. A related plate heat exchanger is also disclosed.



PLATE HEAT EXCHANGER

Technical Field

The invention relates to a stack of heat transfer plates configured to be arranged within an enclosure formed by a certain type of plate heat exchanger. The certain type of plate heat exchanger comprises a top head, a bottom
5 head and four side panels that are bolted together with a set of corner girders to form the enclosure for the stack of heat transfer plates.

Background Art

Today several different types of plate heat exchangers exist, which are
10 employed in various applications depending on their type. One certain type of plate heat exchanger is assembled by bolting a top head, a bottom head and four side panels to a set of corner girders to form a box-like enclosure around a stack of heat transfer plates. This certain type of plate heat exchanger is often referred to as a block-type heat exchanger. One example of a commercially available block-type heat exchanger is the heat exchanger offered by
15 Alfa Laval AB under the product name Compabloc.

A block-type heat exchanger typically has fluid inlets and fluid outlets arranged on the side panels while baffles are attached to the stack of heat transfer plates for directing a fluid back and forth through channels formed
20 between heat transfer plates in the stack of heat transfer plates.

Since the stack of heat transfer plates is surrounded by the top head, the bottom head and the four side panels, the heat exchanger may withstand high pressure levels in comparison with many other types of plate heat exchangers. Still, the block-type heat exchanger is compact, it has good heat
25 transfer properties and may withstand hard usage without breaking.

The stack of heat transfer plates is sometimes referred to as a plate pack and has a special, block-like design that is characteristic for block-type heat exchangers. The stack of heat transfer plates is often all-welded and no gaskets are needed between heat transfer plates for proper sealing of flow
30 channels that are formed between the plates. This makes a block-type heat

exchanger suitable for operation with a wide range of aggressive fluids, at high temperatures and at high pressures.

During maintenance of the block-type heat exchanger, the stack of heat transfer plates may be accessed and cleaned by removing e.g. two side panels and flushing the stack of heat transfer plates with a detergent. It is also possible to replace the stack of heat transfer plates with a new stack, which may be identical or different from the previous stack as long as it is capable of being properly arranged within the heat exchanger.

Generally, the block-type heat exchanger is suitable not only as a conventional heat exchanger but also as a condenser or reboiler. In the two latter cases the heat exchanger may comprise additional inlets/outlets for a condensate, which may eliminate the need for a special separator unit.

The design of the block-type heat exchanger with its stack of heat transfer plates provides, as indicated, a combination of advantages and properties that are quite specific for the type, and prior arts discloses a number of embodiments. For example, EP165179 discloses a heat exchanger in the form of a block with a plate pack arranged in the centre of the block. EP639258 discloses a similar heat exchanger with a plate pack that is surrounded by top and bottom heads and four side panels.

The prior art show block-type heat exchangers with a respective internal stack of heat transfer plates. In comparison with several other types of plate heat exchangers, these block-type heat exchangers have a compact design and may withstand high pressure levels. However, it is estimated that the particular designs may be improved in respect of the capability of efficiently transferring heat through plates in the stack of heat transfer plates, while still assuring that relatively high pressures levels may be handled.

Summary

It is an object of the invention to improve the above-described block-type heat exchanger. In particular, it is an object to provide a more efficient design that provides for improved heat transfer within the stack of heat trans-

fer plates while still ensuring that the heat exchanger may withstand high pressure levels.

To fulfill these objects a stack of heat transfer plates is provided, which is configured to be arranged within an enclosure formed by a top head, a bottom head and four side panels that are bolted together with a set of corner girders. The stack of heat transfer plates comprises pairs of heat transfer plates that are stacked such that a flow path for a first fluid is formed between the stacked pairs of heat transfer plates. A pair of the stacked pairs of heat transfer plates comprises a first heat transfer plate and a second heat transfer plate that are joined such that a flow path for a second fluid is formed between the first and second heat transfer plates. The first heat transfer plate and the second heat transfer plate are joined by a plurality of elongated joints, such that the flow path for the second fluid comprises multiple parallel flow channels. Further, the pair of first and second heat transfer plates comprises corrugations that are arranged on a respective side of said plurality of elongated joints.

The elongated joint is, by virtue of being arranged between corrugations, capable of holding the plates together when fluid is passed between the first and second plates at high pressure levels. At the same time, the corrugations provide for efficient heat transfer. Also, the particular design of the stack may facilitate implementation of a number of additional features that are described below, which include e.g. a particular way of joining the pairs of heat transfer plates in the stack.

Typically, the joint may be a weld but may also be a brazed or soldered section or a section where the plates are joined by some other suitable method of joining. Generally, all or most of the pairs of the stacked pairs of heat transfer plates may comprise a respective first heat transfer plate and a respective second heat transfer plate. These heat transfer plates are then joined such that the flow path for the second fluid is formed between the respective first and second heat transfer plates. Thus, each pair of the stacked pairs of heat transfer plates may comprise a respective first and second heat

transfer plate that are joined such that a flow path for the second fluid is formed between the respective first and second heat transfer plate.

The first heat transfer plate may comprise elongated joint grooves along which the elongated joints are arranged.

5 The joint grooves may extend unbroken along the flow path formed between the first and second heat transfer plates.

 The second heat transfer plate may comprise elongated joint grooves along which the elongated joints are arranged, wherein the joint grooves of the first and second heat transfer plates abut each other such that the heat
10 transfer plates are joined at the joint grooves.

 The joints may comprise two at least partially overlapping joint sections.

 The corrugations may be symmetrical.

 The pair of heat transfer plates may comprise a first set of opposite,
15 elongated side joints that join the first and second heat transfer plates.

 The pair of heat transfer plates may comprise a second set of opposite, elongated side joints that are transverse the first set of elongated side joints. The second set of opposite, elongated side joints joins the pair of heat transfer plates with a similar pair of heat transfer plates, such that the flow path for
20 the first fluid comprises a free-flow path between the second set of side joints. In this context, a free-flow path may be defined as a flow path for the first fluid where there are, between the elongated side joints that joins the pairs, no contact points between the pairs of heat transfer plates. Free-flow is advantageous in that there are less possibilities for e.g. bacteria or deposits from the
25 first fluid to form in the flow path.

 The free-flow path between the second set of side joints may be interrupted by at least one support for reducing bulging of heat transfer plates. The support typically reduces bulging of heat transfer plates when the stack of heat transfer plates is used in high-temperature applications where thermal
30 expansion may occur.

Each of the first heat transfer plate and the second heat transfer plate may comprise corrugations that are arranged on a respective side of the elongated joint.

5 The pair of heat transfer plates may comprise sets of corrugations that are arranged between a plurality of elongated joints that join the first and second heat transfer plates.

The corrugations may comprise ridges and grooves that extend in a direction that is 45°-90° transverse a direction along which the elongated joint extends.

10 The first heat transfer plate and the second heat transfer plate may have similar shapes and the second heat transfer plate may be, in relation to the first heat transfer plate, turned 180° around an axis that is parallel to the plane of the second heat transfer plate.

15 The pair of heat transfer plates may have a rectangular shape and may comprise four corners that are welded to linings that at least partially surround the set of corner girders.

According to another aspect a plate heat exchanger is provided, which comprises a stack of heat transfer plates that may include any one of the above described features. The plate heat exchanger also comprises a top
20 head, a bottom head and four side panels that are bolted together with a set of corner girders to form an enclosure in which the stack of heat transfer plates is arranged.

Still other objectives, features, aspects and advantages of the invention will appear from the following detailed description as well as from the draw-
25 ings.

Brief Description of the Drawings

Embodiments of the invention will now be described, by way of example, with reference to the accompanying schematic drawings, in which
30 Fig. 1 is an exploded view of a block-type heat exchanger with a stack of heat transfer plates,

Fig. 2 is a top view of pairs of heat transfer plates that are used for the stack of heat transfer plates of Fig. 1,

Fig. 3 is a cross-sectional view along section A-A of Fig. 2,

Fig. 4 is a cross-sectional view along section B-B of Fig. 2,

5 Fig. 5 is an enlarged view of section C of Fig. 3, and

Fig. 6 is a cross-sectional view of a further embodiment of two pairs of heat transfer plates.

Detailed description

10 With reference to Fig. 1 a plate heat exchanger 2 of a block-type is shown. The plate heat exchanger 2 comprises a top head 15, a bottom head 16 and four side panels 11, 12, 13, 14 that are bolted together with a set of (typically four) corner girders 21-24 for assembling the plate heat exchanger 2. When assembled, the plate heat exchanger 2 has a box-like or block-like
15 shape and an enclosure is formed by the top head 15, the bottom head 16 and the side panels 11-14. A stack of heat transfer plates 30 is arranged within the enclosure and comprises, as will be described in further detail, a number of pairs of heat transfer plates. The stack of heat transfer plates 30 also has a box-like or block-like shape, which shape corresponds to the shape of
20 the enclosure formed by the heads 15, 16 and the side panels 11-14. The stack of heat transfer plates 30 has at its corners four linings 31-34 that are arranged to face the corner girders 21-24.

The assembly of the plate heat exchanger 2 is typically performed by using conventional methods and bolts (not shown) that attach the mentioned
25 components to each other via bolt holes like holes 35 and 36. In brief, assembling the plate heat exchanger 2 includes arranging the stack of heat transfer plates 30 on the bottom head 16, sliding the corner girders 21-24 into the linings 31-34 and bolting them to the bottom head 16. A channel end plate 38 is arranged on top of the stack of heat transfer plates 30 and the top head
30 15 is bolted to the corner girders 21-24. Thereafter the side panels 11-14 are bolted to the corner girders 21-24 and to the heads 15, 16. Generally, the

plate heat exchanger 2 also has a base 17 that facilitates attachment of the plate heat exchanger 2 to the ground.

Gaskets (not shown) are arranged on the side panels 11-14 at sections that face the corner girders 21-24 and the heads 15, 16, such that the enclosure formed by the heads 15, 16 and side panels 11-14 is properly sealed for preventing leakage from the plate heat exchanger 2.

A first side panel 11 and a second side panel 12 of the side panels 11-14 comprise inlets and outlets for two fluids. In detail, the first side panel 11 has an inlet 41 and an outlet 42 for a first fluid. The inlet 41 and outlet 42 of the first panel 11 form a flow path for the first fluid in combination with the stack of heat transfer plates 30, where the flow path extends from the inlet 41, within the stack of heat transfer plates 30 and to the outlet 42. This flow path is illustrated by the broken arrows that extend in directions parallel to the direction D1. Conventional baffles, such as baffle 39, are connected to sides of the stack of heat transfer plates 30 for directing the flow of the first fluid in a number of passes within the stack 30 (four passes in the illustrated figure).

The second side panel 12 has an inlet 43 and an outlet 44 for a second fluid. The inlet 43 and outlet 44 of the second side panel 12 form a flow path for the second fluid in combination with the stack of heat transfer plates 30, where the flow path extends from the inlet 43, within the stack of heat transfer plates 30 and to the outlet 44. This flow path is illustrated by the broken arrows that extend in directions parallel to the direction D2. Conventional baffles connected to sides of the stack of heat transfer plates 30 direct the flow of the second fluid in a number of passes within the stack 30 (here the same number of passes as for the first fluid).

The arrangement of baffles is per se accomplished by employing conventional techniques. However, the first flow path for the first fluid is between the pairs of heat transfer plates in the stack 30, while the second flow path for the second fluid is within the pairs of heat transfer plates in the stack 30. A pair of heat transfer plates comprises a first heat transfer plate and a second heat transfer plate, as will be described further on. This means that the flow of the first fluid is between heat transfer plates of different pairs of heat transfer

plates, while the flow of the second fluid is between a first and a second heat transfer plate of the same pair, i.e. within a pair. The linings 31-34 seal the corners of the stack of heat transfer plates 30, which ensures that the two different fluids paths are separated.

5 With reference to Figs 2, 3 and 4 a first and a second pair 50, 60 of heat transfer plates are exemplified, where Fig. 3 is a cross-sectional view along section A-A of Fig. 2 and Fig. 4 is a cross-sectional view along section B-B of Fig. 2. The pairs 50, 60 of heat transfer plates are part of the stack of heat transfer plates 30 illustrated in Fig. 1. The stack 30 comprises a number
10 of pairs of heat transfer plates that are similar to the pairs 50, 60, such as 4-200 pairs or even more.

For the pairs 50, 60 of heat transfer plates exemplified by Figs 2, 3 and 4, the first pair 50 of heat transfer plates comprises a first heat transfer plate 51 and a second heat transfer plate 52. The second pair 60 of heat transfer
15 plates is typically similar to the first pair 50 of heat transfer plates, which means that it also comprises a first heat transfer plate 61 and a second heat transfer plate 62. Thus, the first heat transfer plate 61 of the second pair 60 of heat transfer plates is typically similar to the first heat transfer plate 51 of the first pair 50 of heat transfer plates, while the second heat transfer plate 62 of
20 the second pair 60 of heat transfer plates may be similar to the second heat transfer plate 52 of the first pair 50 of heat transfer plates.

Also, the first heat transfer plate 51 and the second heat transfer plate 52 of the first pair 50 of heat transfer plates have similar shapes. From this follows that all heat transfer plates 51, 52, 61, 62 of the pairs 50, 60 of heat
25 transfer plates may be similar or even identical. However, the second heat transfer plate 52 is, in relation to the first heat transfer plate 51, turned 180° around an axis A1 that is parallel to the plane of the second heat transfer plate 52. In detail, the axis A1 extends through the centre of the second heat transfer plate 52 and is parallel to two opposite sides of the second heat
30 transfer plate 52, such that the second heat transfer plate 52 is, in relation to the first heat transfer plate 51, arranged as an inverted mirror-image of the first heat transfer plate 51. The second heat transfer plate 62 of the second

pair 60 of heat transfer plates is in a corresponding manner arranged as an inverted mirror-image of the first heat transfer plate 61 of the second pair 60.

Depending on the configuration of the heat transfer plates, rotation of one heat transfer plate of a pair may be done around one or more different
5 axes for arranging the plates of a pair as inverted mirror-images of each other. For example, the second heat transfer plate 52 may be arranged as an inverted mirror-images of the first heat transfer plate 51 when it is rotated 180° about an axis that is parallel to the illustrated direction D2, followed by a rotation of 180° about an axis that is parallel to the illustrated normal N of the
10 plates 51, 52.

Each heat transfer plate has, as exemplified by the first heat transfer plate 51 of the first pair 50 of heat transfer plates, a rectangular shape with a first 511, a second 512, a third 513 and a fourth elongated side 514. When the stack of heat exchanger plates 30 is arranged within the enclosure of the
15 plate heat exchanger 2, the first elongated side 511 is facing the first side panel 11 while the third side 513 is facing the third side panel 13. The first heat transfer plate 51 is joined with the second heat transfer plate 52 via a joint 78 at the first elongated side 511 and via a joint 79 at the third elongated side 513, as may be seen in Fig. 3.

20 The first heat transfer plate 51 comprises sets of corrugations 101-106 that are arranged on respective sides of elongated joints 72-76 that join the first and second heat transfer plates 51, 52. The elongated joints 72-76 are arranged to extend across the first and second heat transfer plates 51, 52. In the disclosed embodiment, the elongate joints 72-76 extend from the second
25 elongated side 512 to the fourth elongated side 514 in parallel with the first elongated side 511 and the third elongated side 513. It is to be understood that other extensions are applicable, such as from the first 511 to the third elongated sides.

30 The elongated joints 72-76 together with the first and second heat transfer plates 51, 52 delimit flow paths 57 in the form of through flow channels 571-576. The area between two adjacent elongated joints 72-76 is thus

not supported by any contact points. During use, the total pressure load will be transferred to the elongated joints 72-76.

The corrugations 101-106 are separated by the elongated joints 72-76. The sets of corrugations 101-106 extend a direction that is parallel to the joints 72-76, which direction in the exemplified embodiment is parallel to the direction D2. The sets of corrugations 101-106 have two outermost sets of corrugations 101, 106, and further joints 71, 77 may be arranged intermediate the outer sets of corrugations 101, 106 and the corresponding, closest elongated side 513, 511.

As previously indicated, since all heat transfer plates may be similar, all or some of the heat transfer plates of the stack of heat transfer plates 30, such as plates 52, 61 and 62, may have the same properties and structural shape as plate 51.

The corrugations 101- 106 comprise ridges and grooves that extend in a direction D1 that is 45°-90° transverse a direction D2 along which the elongated joints 71-77 extend. The directions D1, D2 are here the same directions as previously discussed in respect of the flow of the first and second fluid. Corrugations 101, 102 on the first heat transfer plate 51 and corresponding corrugations 201, 202 on the second heat transfer plate 52 each comprise ridges and grooves, such as ridge 92 and groove 93 of the first heat transfer plate 51 and ridge 192 and groove 193 of the second heat transfer plate 52.

The corrugations 101-106 form a pattern extending along the elongate joints 72-76, i.e in the direction D2, The pattern can be symmetrical or asymmetrical.

The first pair 50 of heat transfer plates comprises elongated joint grooves, as exemplified by joint grooves 81-87 of the first heat transfer plate 51, along which the elongated joints 71-77 are arranged. Each corrugation of the set of corrugations 101-106 comprising ridges and grooves that extend in a direction D1 that is transverse a direction D2 along which the elongated joint grooves 81-87 extend.

The ridges of the first heat transfer plate 51 may be aligned with the ridges of the second heat transfer plate 52, as seen in a direction parallel to a

normal direction N of the first pair 50 of heat transfer plates. This is advantageous in that efficient heat transfer and flow of fluid may be accomplished.

As shown, the joints 71-77 are arranged in a respective joint groove 81-87. Since the second heat transfer plate 52 is similar to the first heat transfer plate 51 it also comprises elongated joint grooves along which the elongated joints 71-77 are arranged.

With reference to Fig. 3 and to Fig. 5 illustrating the enlarged section C of Fig. 3, it is shown that e.g. joint groove 82 of the first heat transfer plate 51 abut a corresponding joint groove 182 of the second heat transfer plate 52. The heat transfer plates 51, 52 are then joined at the joint grooves 82, 182 by virtue of the joint 72. In this context, a backside surface 515 of the joint groove 82 of the first heat transfer plate 51 is in contact with a backside surface 525 of the joint groove 182 of the second heat transfer plate 52.

The joints are typically formed by welding but may also be formed by brazing or by some other, suitable means of joining. The heat exchanger plates 51, 52, 61, 62 are typically made of metal, such as stainless steel. When welding is used for forming the joints, i.e. when the joint are welds, laser welding may be used as well as other welding techniques, such as resistance welding.

Each of the joints 71-77 may comprise two at least partially overlapping joint sections, as exemplified by a first section 721 and a second section 722 of the joint 72. The joint sections 721, 722 may be overlapping by a predetermined distance, such as 5-30 mm. The two joint sections 721, 722, or welding sections when the joints are formed by welding, may begin at a respective end section of the joint groove, as illustrated by the two end sections 821, 822 of joint groove 82.

As indicated, the joining of the first heat transfer plate 51 with the second heat transfer plate 52 at the first and third elongated sides 511, 513 may be accomplished by a first set of opposite, elongated side joints 78, 79, such that a flow path 57 for the second fluid is formed between the first set of opposite, elongated side joints 78, 79, i.e. within the first pair 50 of heat transfer

plates. The flow path 57 is then parallel to the direction D2 discussed in connection with Fig. 1.

For facilitating joining of the plates in a pair 50, the first and second heat transfer plates 51, 52 have peripheral sections like sections 53, 54 that are folded towards each other. The peripheral sections 53, 54 are folded towards each other since the second heat transfer plate 52 is arranged as an inverted mirror-image of the first heat transfer plate 51, having in mind that the plates 51, 52 are similar. The related weld 79 is applied at a contact surface formed between the folded sections 53, 54.

The joint grooves 81-87 may extend unbroken along the flow path 57 that is formed between the first and second heat transfer plates 51, 52. Also since the first heat transfer plate 51 and the second heat transfer plate 52 are typically joined by multiple elongated joints 71-77, the flow path 57 for the second fluid formed between the first and second heat transfer plates 51, 52 comprises multiple parallel flow channels 571-576.

To form the stack of heat transfer plates 30, pairs of heat transfer plates like the first pair 50 of heat transfer plates and the second pair 60 of heat transfer plates are joined via opposite, elongated side joints. Such joints are exemplified by a set of opposite, elongated side joints 781, 782 arranged between the first pair 50 of heat transfer plates and the second pair 60 of heat transfer plates. Such elongated side joints 781, 782 are transverse the first set of elongated side joints 78, 79 and joins a pair of heat transfer plates (exemplified by pair 50) with an adjacent pair of heat transfer plates (exemplified by pair 60). For facilitating joining, the plates 51, 52, 61, 62 have respective peripheral sections that are folded towards a heat transfer plate that belongs to another pair of heat transfer plates, such as folded sections 56 and 65. The related weld 781 is applied at a contact surface formed between the folded sections 56, 65.

When the pairs 50, 60 of heat transfer plates are joined, a flow path 67 for the first fluid is formed between the pairs 50, 60 of heat transfer plates. Since the pairs 50, 60 are joined only at the second set of side joints 781, 782 a so called free-flow path is formed between the joints 781, 782, i.e. a free-

flow path is formed between the pairs 50, 60 of heat exchanger plates. A free-flow path may in this context be defined as a flow path without any contact points intermediate the side joints 781, 782. Generally, free-flow has been observed to be advantageous since occurrence of e.g. deposits from the fluid or the presence of bacteria may be reduced or, in practice, even eliminated.

Optionally, with reference to Fig. 6 which is a cross-sectional view that corresponds to Fig. 4, the first pair 50 of heat transfer plates and the second pair 60 of heat transfer plates may comprise one or more supports 783, 784. The supports 783, 784 may then be arranged intermediate the second set of opposite, elongated side joints 781, 782 for reducing the risk of bulging of the pairs 50, 60 of heat transfer plates due to e.g. thermal expansion.

As illustrated, the supports 781, 782 may be embodied as point-like indentations in the second heat transfer plate 52, but may also be embodied as indentations in both the first heat transfer plate 51 and in the second heat transfer plate 52, such that the second heat transfer plate 52 may be made similar to the first heat transfer plate 51. In principle, the supports 781, 782 of the second heat transfer plate 52 of the first pair 50 are in contact with the first heat transfer plate 61 of the second pair 60. The contact surfaces formed by the supports 781, 782 between these plates 52, 61 may be made as small as possible for avoiding occurrence of e.g. deposits from the first fluid.

A limited free-flow path is to be accomplished when one or more supports between the side joints that join two pairs are used. However, free-flow properties may in practice still be obtained if the number of supports between the side joints is limited. To what number the supports should be limited depends on the size of the plates, and may be empirically determined.

To form the complete stack of heat transfer plates 30, a number of pairs of heat transfer plates are stacked adjacent each other and joined to each other in a manner like the joining of the first and the second pairs 50, 60 of heat transfer plates. The joining of the pairs may be accomplished by using the same methods (welding, brazing etc.) as when joining the plates of one pair.

For efficiently joining the heat transfer plates to the linings 31-34 each heat exchanger plate has four protrusions at its corners, such as protrusions 515-518 of the first heat transfer plate 51. The protrusions are then joined to the linings 31-34 by e.g. welding, brazing or by some other suitable means of joining. The linings 31-34 partially surround the set of corner girders 21-24 when the plate heat exchanger 2 is assembled, such that the stack of heat transfer plates 30 is firmly fixed within the enclosure that is formed by the heads 15, 16 and the side panels 11-14.

The heat transfer plates 51, 52, 61, 62 may per se be manufactured from steel sheets that are pressed with a press tool that forms the corrugations and the weld grooves. A cutting machine thereafter cuts the pressed plates along their periphery and the edges of the cut plates are folded in a machine that forms the folded, peripheral sections.

From the description above follows that, although various embodiments of the invention have been described and shown, the invention is not restricted thereto, but may also be embodied in other ways within the scope of the subject-matter defined in the following claims.

For example, other patterns of corrugations and weld grooves are achievable, as long as a pair of heat transfer plates comprises corrugations that are arranged on a respective side of an elongated joint that joins a first and second heat transfer plate of a pair of heat transfer plates. Also, the elongated joint comprises an unbroken, elongated joint, as well as comprises a number of spot-welds arranged in an elongated series.

CLAIMS

1. A stack of heat transfer plates configured to be arranged within an enclosure formed by a top head (15), a bottom head (16) and four side panels (11-14) that are bolted together with a set of corner girders (21-24), the stack of heat transfer plates comprising pairs (50, 60) of heat transfer plates that are stacked such that a flow path (67) for a first fluid is formed between the stacked pairs (50, 60) of heat transfer plates, wherein a pair (50) of the stacked pairs (50, 60) of heat transfer plates comprises a first heat transfer plate (51) and a second heat transfer plate (52) that are joined such that a flow path (57) for a second fluid is formed between the first and second heat transfer plates (51, 52), **characterized in** that

the first heat transfer plate (51) and the second heat transfer plate (52) are joined by a plurality of elongated joints (71-77), such that the flow path (57) for the second fluid comprises multiple parallel flow channels (571-576), and wherein

the pair (50) of first and second heat transfer plates (51, 52) comprises corrugations (101, 102) that are arranged on a respective side of said plurality of elongated joints (72-76).

2. A stack of heat transfer plates according to claim 1, wherein the first heat transfer plate (51) comprises elongated joint grooves (82-87) along which the elongated joints (72-76) are arranged.

3. A stack of heat transfer plates according to claim 2, wherein the joint grooves (82-87) extend unbroken along the flow path (57) formed between the first and second heat transfer plates (51, 52).

4. A stack of heat transfer plates according to claim 2 or 3, wherein the second heat transfer plate (52) comprises an elongated joint groove (182) along which the elongated joint (72) is arranged, and wherein the joint grooves (82, 182) of the first and second heat transfer plates (51, 52) abut each other such that the heat transfer plates (51, 52) are joined at the joint grooves (82, 182).

5. A stack of heat transfer plates according to any one of claims 1 - 4, wherein the joints (72-76) comprise two at least partially overlapping joint sections (721, 722).

6. A stack of heat transfer plates according to any one of claims 1 - 5, wherein the corrugations are symmetrical (101-102).

7. A stack of heat transfer plates according to any one of claims 1 - 6, wherein the pair (50) of heat transfer plates comprises a first set of opposite, elongated side joints (78, 79) that join the first and second heat transfer plates (51, 52).

8. A stack of heat transfer plates according to claim 7, wherein the pair (50) of heat transfer plates comprises a second set of opposite, elongated side joints (781, 782) that are transverse the first set of elongated side joints (78, 79) and joins the pair (50) of heat transfer plates with a similar pair (60) of heat transfer plates, such that the flow path (67) for the first fluid comprises a free-flow path between the second set of side joints (781, 782).

9. A stack of heat transfer plates according to claim 8, wherein the free-flow path between the second set of side joints (781, 782) is interrupted by at least one support (783) for reducing bulging of heat transfer plates (51, 52).

10. A stack of heat transfer plates according to any one of claims 1 - 9, wherein each of the first heat transfer plate (51) and the second heat transfer plate (52) comprises corrugations (101-106, 201, 202) that are arranged on a respective side of the elongated joint (72).

11. A stack of heat transfer plates according to claim 6 and 10, wherein the corrugations comprises sets of corrugations (101-106) that are arranged between the plurality of elongated joints (71-77) that join the first and second heat transfer plates (51, 52).

12. A stack of heat transfer plates according to any one of claims 1 - 11, wherein the corrugations (101, 102) comprise ridges (92) and grooves (93) that extend in a direction (D1) that is 45°-90° transverse a direction (D2) along which the elongated joint (72) extends.

13. A stack of heat transfer plates according to any one of claims 1 - 12, wherein the first heat transfer plate (51) and the second heat transfer plate (52) have similar shapes and the second heat transfer plate (52) is, in relation to the first heat transfer plate (51), turned 180° around an axis (A1) that is parallel to the plane of the second heat transfer plate (52).

14. A stack of heat transfer plates according to any one of claims 1 - 13, wherein the pair (50) of heat transfer plates has a rectangular shape and comprises four corners that are welded to linings (31-34) configured to at least partially surround the set of corner girders (21-24).

15. A plate heat exchanger comprising a stack of heat transfer plates (30) according to any one of claims 1 - 14, further comprising a top head (15), a bottom head (16) and four side panels (11-14) that are bolted together with a set of corner girders (21-24) to form an enclosure in which the stack of heat transfer plates (30) is arranged.

1/4

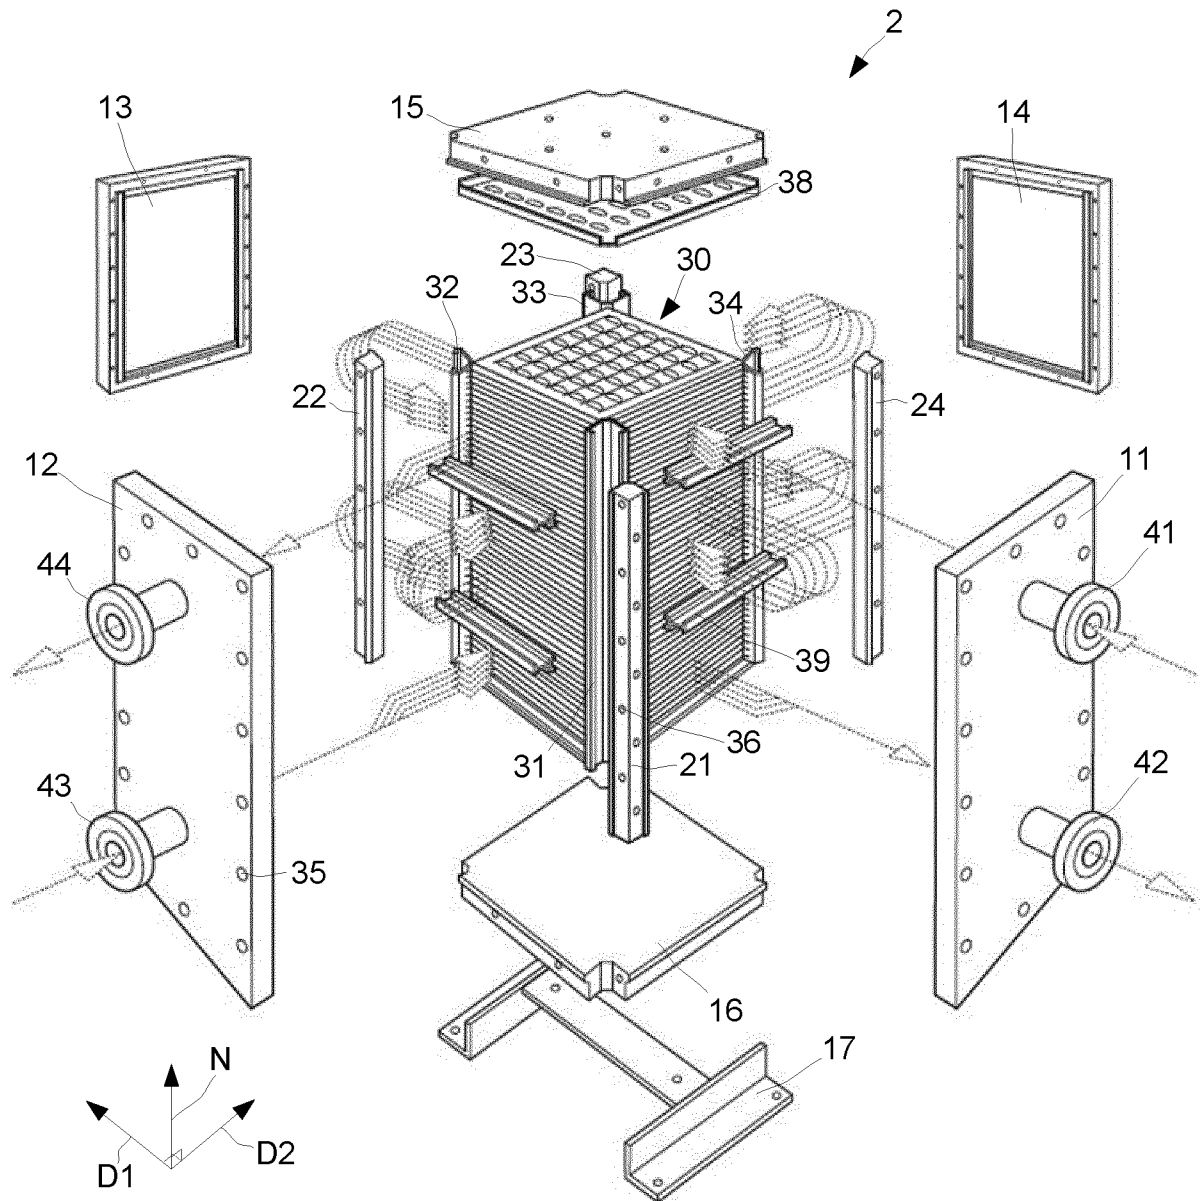


Fig. 1

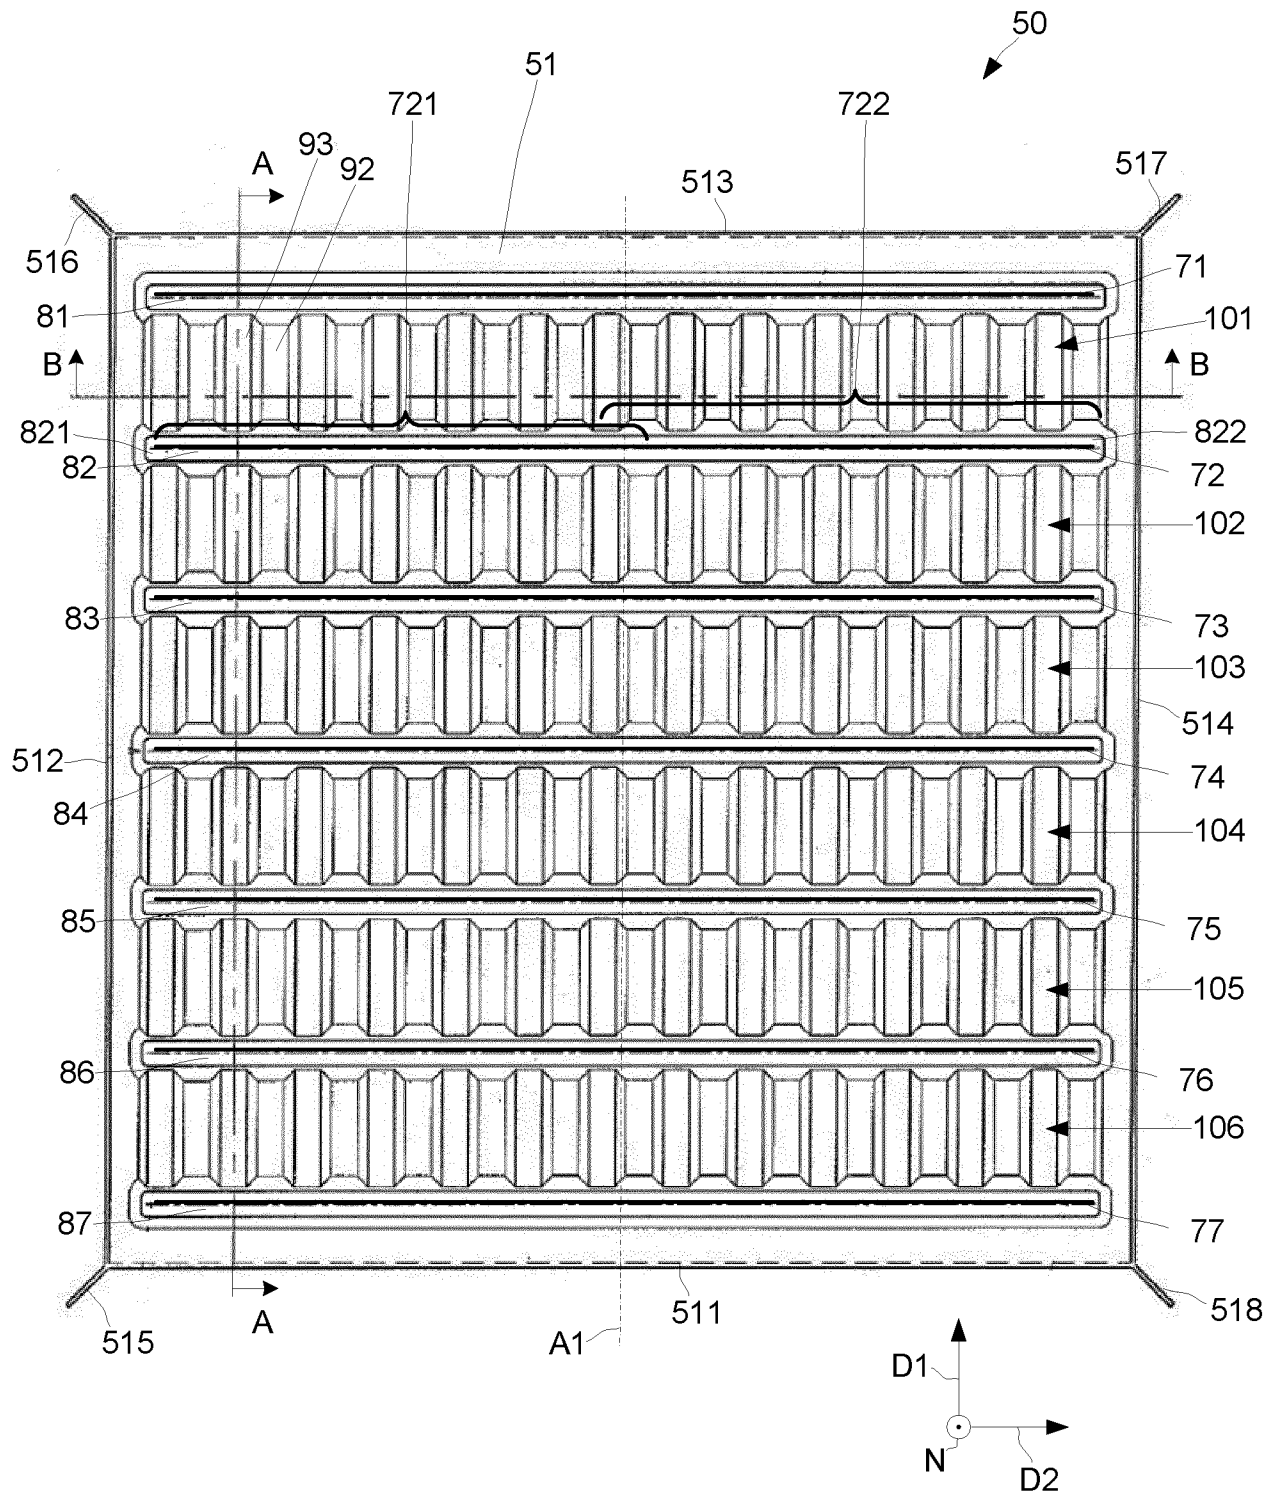


Fig. 2

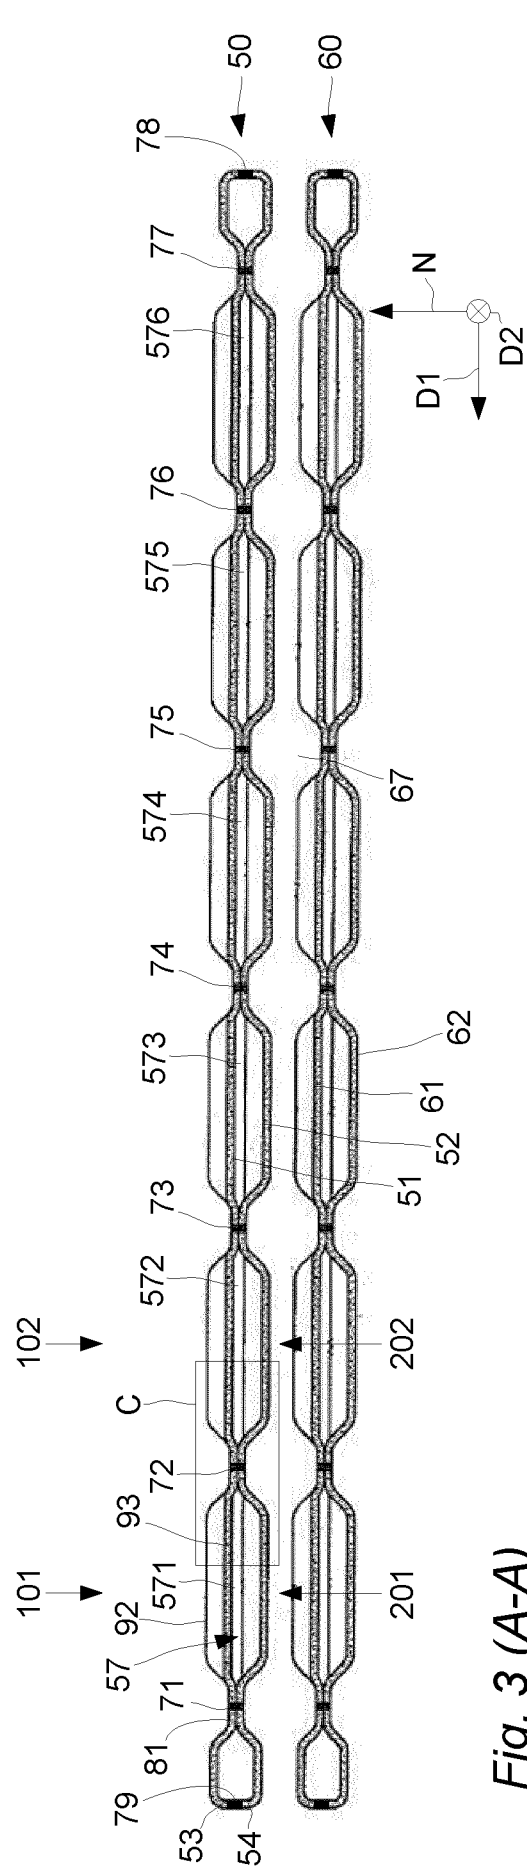


Fig. 3 (A-A)

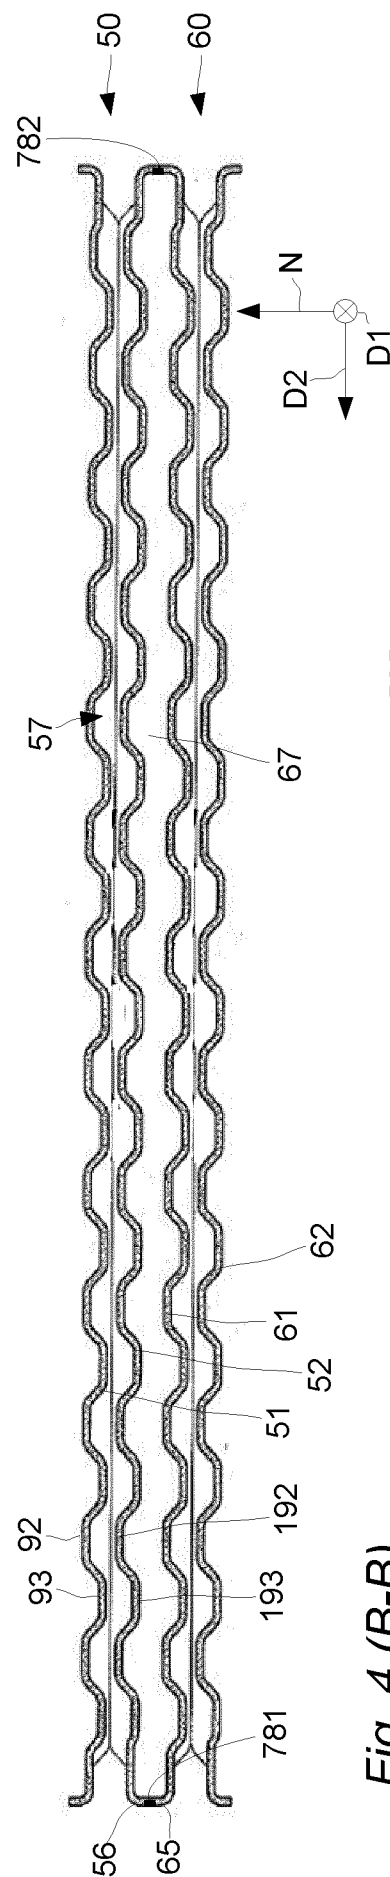


Fig. 4 (B-B)

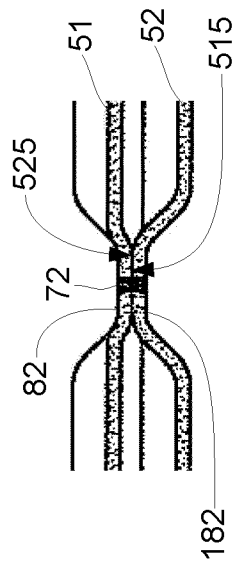


Fig. 5

4/4

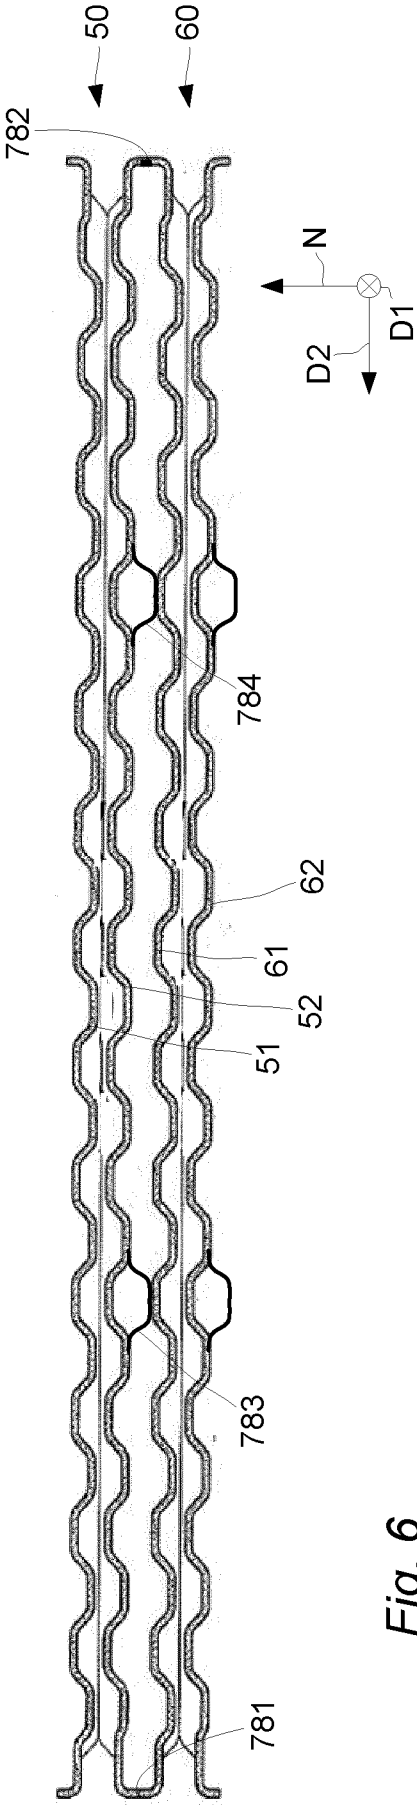


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/053883

A. CLASSIFICATION OF SUBJECT MATTER
INV. F28D9/00 F28F3/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F28D F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 462 421 A (PITT PAUL A) 22 February 1949 (1949-02-22)	1-4,6-8, 10-12
Y	column 2, line 47 - column 3, line 4; figures	9,13-15
Y	----- US 2 526 157 A (TORSTEN RAMEN) 17 October 1950 (1950-10-17) column 3, line 4 - line 8; figures 4,5	9
Y	----- US 3 783 090 A (ANDERSSON J ET AL) 1 January 1974 (1974-01-01) column 4, line 49 - line 51; figure 15	13
Y	----- EP 0 639 258 A1 (FERNANDEZ JEAN NOEL [FR]) 22 February 1995 (1995-02-22) cited in the application page 10, line 23 - page 12, line 35; figures 7,8,13,14	14,15
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 July 2012

Date of mailing of the international search report

20/07/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Mootz, Frank

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/053883

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 106 729 A2 (JOMA POLYTEC KUNSTSTOFFTECHNIK [DE]) 13 June 2001 (2001-06-13) paragraphs [0025], [0027], [0028]; figures -----	1-4,6,7, 10,11
A	US 3 916 644 A (NASSER GAMAL EL DIN) 4 November 1975 (1975-11-04) column 3, line 16 - line 42; figures -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/053883

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2462421	A	22-02-1949	NONE
US 2526157	A	17-10-1950	NONE
US 3783090	A	01-01-1974	DE 2207756 A1 21-09-1972 FR 2125471 A1 29-09-1972 GB 1357282 A 19-06-1974 IT 947614 B 30-05-1973 JP 52000271 B 06-01-1977 SE 353954 B 19-02-1973 US 3783090 A 01-01-1974
EP 0639258	A1	22-02-1995	AT 151863 T 15-05-1997 DE 69309921 D1 22-05-1997 DE 69309921 T2 23-10-1997 EP 0639258 A1 22-02-1995 ES 2102030 T3 16-07-1997 FR 2690986 A1 12-11-1993 WO 9322608 A1 11-11-1993
EP 1106729	A2	13-06-2001	NONE
US 3916644	A	04-11-1975	CA 1007049 A1 22-03-1977 CH 570594 A5 15-12-1975 DE 2340003 A1 20-02-1975 FR 2240413 A1 07-03-1975 GB 1462295 A 19-01-1977 IT 1017855 B 10-08-1977 JP 50072442 A 16-06-1975 US 3916644 A 04-11-1975