



(51) International Patent Classification:

H04W 16/20 (2009.01) H04W 72/04 (2009.01)  
H04W 72/12 (2009.01) H04W 88/08 (2009.01)

(21) International Application Number:

PCT/US2016/016020

(22) International Filing Date:

1 February 2016 (01.02.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/109,681 30 January 2015 (30.01.2015) US

(71) Applicant: SYSTEMS AND SOFTWARE ENTERPRISES, LLC [US/US]; 2929 East Imperial Highway, Suite 170, Brea, California 92821 (US).

(72) Inventor: CARSWELL, Samuel A.; 5384 Via Maria, Yorba Linda, California 92886 (US).

(74) Agents: PRIETO, Tomas et al.; Fish & Tsang LLP, 2603 Main Street, Suite 1000, Irvine, California 92614 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR WIRELESS COMMUNICATION IN FREQUENCY-LIMITED, CLIENT-DENSE ENVIRONMENTS

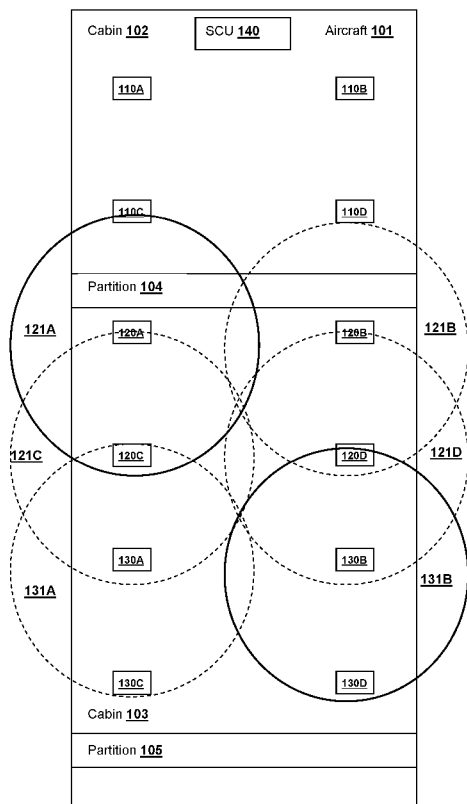


Figure 3B

(57) Abstract: A system for managing the wireless transmission of data using a configured or fixed frequency, such as the 60GHz spectrum, within a client-dense environment such as an aircraft. The system includes access points ("ZAPs") that control a plurality of antennas according to a time-slotted broadcast schedule such that the transmissions from the antennas do not interfere with each other.

WO 2016/123631 A1

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

**SYSTEMS AND METHODS FOR WIRELESS COMMUNICATION IN  
FREQUENCY-LIMITED, CLIENT-DENSE ENVIRONMENTS**

[0001] This application claims priority to U.S. provisional application 62/109,681, filed January 30, 2015. U.S. provisional application 62/109,681 and all other extrinsic references contained herein are incorporated by reference in their entirety.

**Field of the Invention**

[0002] The field of the invention is wireless networking in frequency-limited environments populated with a high density of clients and potentially a high density of access points, such as for in-flight entertainment systems.

**Background**

[0003] The background description includes information that may be useful in understanding the present invention. It is not an admission that any of the information provided herein is prior art or relevant to the presently claimed invention, or that any publication specifically or implicitly referenced is prior art.

[0004] Providing in-flight entertainment is an important component of air travel, and as technology has advanced, available options for in-flight entertainment have expanded. Wireless networking has opened the door to many different modes of entertainment delivery in in-flight entertainment systems.

[0005] However, within the confines of an aircraft or other vehicle there exists a limited amount of unlicensed, unrestricted available bandwidth within the commonly adopted spectrums (e.g., WiFi, cellular, etc.). As the amount of network-capable devices both within an aircraft and carried on by passengers increases, the amount of bandwidth for reliable delivery of content decreases.

[0006] The 60GHz spectrum provides an alternative to the WiFi and cellular bands that allows for very fast data transfers, but it is subject to very severe attenuation by air and as such, has very limited range. Additionally, it is very sensitive to disruption by obstacles and other environment factors, requiring line-of-sight communications. As such, the 60GHz spectrum has traditionally not been suitable for crowded environments such as the inside of an aircraft.

[0007] Additionally, as available bandwidth within an aircraft becomes increasingly reserved or otherwise restricted, the available frequencies for transmission become limited and frequency-hopping to resolve transmission conflicts may not be available as an option. However, in an environment having many access points and many clients, there exists a high potential for interference among devices transmitting on the same frequency band, thus disrupting communications.

[0008] Thus, there still exists a need for improved in-flight wireless networking solutions for the distribution of information to airline Passenger Electronic Devices (PEDs) and aircraft equipment.

### **Summary of The Invention**

[0009] The inventive subject matter provides apparatus, systems and methods in which an in-vehicle entertainment system can transmit data wirelessly and efficiently within the crowded environment of a vehicle cabin using a configurable frequency band. The systems and methods of the inventive subject matter takes advantage of the diffusive qualities of the 60GHz frequency bands to enable the high-speed transfer of data within the crowded environment using a plurality of access point antennas to communicate with a plurality of densely-spaced clients.

[0010] An access point device, referred to herein as a “ZAP”, controls the transmission of a plurality of its antennas such that the antennas transmit according to a fixed time slot broadcast schedule, whereby two antennas within transmission range of one another do not transmit at the same time. The antennas and the client devices all transmit using the performed within the 57-66 GHz frequency range, and more preferably within the 61.56 to 62.9 GHz ISM band. Thus, the ZAP ensures that adjacent antennas transmit at different times such that their transmissions do not interfere with each other.

[0011] The ZAP causes the antennas to transmit content (e.g., movies, television shows, etc.) to client devices connected to or integrated with in-flight entertainment devices (“IFEs”), such as those installed in aircraft seat-backs, that can receive content for playback on the IFEs.

[0012] The client devices can select an antenna for use based on the current conditions within the cabin. Thus, a client device that has a data transmission from a first antenna interrupted

by an environmental factor (such as by a passenger moving about the cabin, a service cart coming down the cabin, or other obstacle that causes a break in the transmission) can request to use a different antenna to resume receiving data. The client devices can request a new antenna from the ZAP upon learning of the disruption.

**[0013]** The ZAPs also manage the time slots such that the client devices have available slots to broadcast back to the ZAP without causing interference with the broadcasts from the antennas. Thus, the client devices can exchange data with the ZAPs as needed, such as to switch antennas, report information to the ZAPs (e.g., usage information, diagnostic information, flight attendant call requests, etc.).

**[0014]** The presented innovation for communicating with installed aircraft equipment clients such as seats, galley, lighting, lavatory and carts. Simultaneous individual client file download and multiple-client streaming of data are delivered with a bit rate and quality of service in excess of that could otherwise be realized within the restricted available spectrum.

**[0015]** Various objects, features, aspects and advantages of the inventive subject matter will become more apparent from the following detailed description of preferred embodiments, along with the accompanying drawing figures in which like numerals represent like components.

### **Brief Description of the Drawing**

**[0016]** **Figure 1** provides an illustrative example of a cabin layout of aspects of the system installed in an aircraft from a top-down perspective.

**[0017]** **Figure 2** provides the illustrative example of Fig. 1, showing a plurality of client devices within the system.

**[0018]** **Figure 3A** provides an overview of the coverage area of a plurality of transmissions from a plurality of antennas, if the antennas were to transmit simultaneously.

**[0019]** **Figure 3B** provides the overview of Fig. 3A, highlighting examples of adjacent antennas and non-adjacent antennas.

**[0020]** **Figure 4A** provides an overview of the assigned time slots for each transmission from each antenna.

[0021] **Figure 4B** shows the transmission of non-adjacent antennas transmitting during their assigned time slot and adjacent antennas silent during the same time slot.

[0022] **Figure 5** provides an illustrative scenario of communications established between various clients according to an example implementation.

### **Detailed Description**

[0023] The following description includes information that may be useful in understanding the present invention. It is not an admission that any of the information provided herein is prior art or relevant to the presently claimed invention, or that any publication specifically or implicitly referenced is prior art.

[0024] Throughout the following discussion, numerous references will be made regarding servers, services, interfaces, engines, modules, clients, peers, portals, platforms, or other systems formed from computing devices. It should be appreciated that the use of such terms is deemed to represent one or more computing devices having at least one processor (e.g., ASIC, FPGA, DSP, x86, ARM, ColdFire, GPU, multi-core processors, etc.) configured to execute software instructions stored on a computer readable tangible, non-transitory medium (e.g., hard drive, solid state drive, RAM, flash, ROM, etc.). For example, a server can include one or more computers operating as a web server, database server, or other type of computer server in a manner to fulfill described roles, responsibilities, or functions. One should further appreciate the disclosed computer-based algorithms, processes, methods, or other types of instruction sets can be embodied as a computer program product comprising a non-transitory, tangible computer readable media storing the instructions that cause a processor to execute the disclosed steps. The various servers, systems, databases, or interfaces can exchange data using standardized protocols or algorithms, possibly based on HTTP, HTTPS, AES, public-private key exchanges, web service APIs, known financial transaction protocols, or other electronic information exchanging methods. Data exchanges can be conducted over a packet-switched network, the Internet, LAN, WAN, VPN, or other type of packet switched network.

[0025] One should appreciate that the systems and methods of the inventive subject matter provide the technical effect of enabling reliable wireless transmissions between many access point antennas and many clients all transmitting within a crowded environment, such as an aircraft or other large passenger vehicle, on a restricted frequency band. The systems and

methods of the inventive subject matter provide the additional technical effect of enabling the use of the 60GHz spectrum for communications in such an environment.

**[0026]** All publications identified herein are incorporated by reference to the same extent as if each individual publication or patent application were specifically and individually indicated to be incorporated by reference. Where a definition or use of a term in an incorporated reference is inconsistent or contrary to the definition of that term provided herein, the definition of that term provided herein applies and the definition of that term in the reference does not apply.

**[0027]** In some embodiments, the numbers expressing quantities of ingredients, properties such as concentration, reaction conditions, and so forth, used to describe and claim certain embodiments of the invention are to be understood as being modified in some instances by the term “about.” Accordingly, in some embodiments, the numerical parameters set forth in the written description and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by a particular embodiment. In some embodiments, the numerical parameters should be construed in light of the number of reported significant digits and by applying ordinary rounding techniques. Notwithstanding that the numerical ranges and parameters setting forth the broad scope of some embodiments of the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as practicable. The numerical values presented in some embodiments of the invention may contain certain errors necessarily resulting from the standard deviation found in their respective testing measurements.

**[0028]** Unless the context dictates the contrary, all ranges set forth herein should be interpreted as being inclusive of their endpoints and open-ended ranges should be interpreted to include only commercially practical values. Similarly, all lists of values should be considered as inclusive of intermediate values unless the context indicates the contrary.

**[0029]** As used in the description herein and throughout the claims that follow, the meaning of “a,” “an,” and “the” includes plural reference unless the context clearly dictates otherwise. Also, as used in the description herein, the meaning of “in” includes “in” and “on” unless the context clearly dictates otherwise.

**[0030]** The recitation of ranges of values herein is merely intended to serve as a shorthand method of referring individually to each separate value falling within the range. Unless

otherwise indicated herein, each individual value is incorporated into the specification as if it were individually recited herein. All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g. "such as") provided with respect to certain embodiments herein is intended merely to better illuminate the invention and does not pose a limitation on the scope of the invention otherwise claimed. No language in the specification should be construed as indicating any non-claimed element essential to the practice of the invention.

**[0031]** Groupings of alternative elements or embodiments of the invention disclosed herein are not to be construed as limitations. Each group member can be referred to and claimed individually or in any combination with other members of the group or other elements found herein. One or more members of a group can be included in, or deleted from, a group for reasons of convenience and/or patentability. When any such inclusion or deletion occurs, the specification is herein deemed to contain the group as modified thus fulfilling the written description of all Markush groups used in the appended claims.

**[0032]** The following discussion provides many example embodiments of the inventive subject matter. Although each embodiment represents a single combination of inventive elements, the inventive subject matter is considered to include all possible combinations of the disclosed elements. Thus if one embodiment comprises elements A, B, and C, and a second embodiment comprises elements B and D, then the inventive subject matter is also considered to include other remaining combinations of A, B, C, or D, even if not explicitly disclosed.

**[0033]** As used herein, and unless the context dictates otherwise, the term "coupled to" is intended to include both direct coupling (in which two elements that are coupled to each other contact each other) and indirect coupling (in which at least one additional element is located between the two elements). Therefore, the terms "coupled to" and "coupled with" are used synonymously.

**[0034]** The systems and methods of the inventive subject matter enable efficient, fast and reliable wireless communication between access points and clients in fixed-frequency band operation within the confines of an obstruction- and/or interference-filled environment such as the interior of a passenger aircraft or other vehicle.



[0035] **Figure 1** provides an illustrative example of a cabin layout of aspects of the system **100** installed in an aircraft **101** from a top-down perspective (i.e., looking down from above the aircraft **101**), according to embodiments of the inventive subject matter.

[0036] As shown in Fig. 1, system **100** includes at least one access point **110**. In the illustrated example of Fig. 1, the system **100** includes access points **120, 130**, and it is contemplated that the system **100** can include additional access points. To avoid confusion with wireless access points of conventional wireless access points (e.g., cellular, WiFi), the access points **110, 210, 310** of the inventive subject matter will be referred to herein as “ZAPs”. Each ZAP **110, 120, 130** is communicatively coupled via a wired data connection with a plurality of antennas **110A-110D, 120A-120D, and 130A-130D**, respectively.

[0037] Each antenna is separated by several meters thus giving the ZAP centralized real-time control over multiple physical communication paths with every client. Real-time digital communication between the ZAP and antennas allows the ZAP to synchronously control each antenna’s transmission and reception time slot, power, and sub-frequency. The ZAP is thus able to command simultaneous separate or overlapping communication on all of its antennas. Communication between multiple ZAPs enables synchronization between adjacent ZAP antennas.

[0038] System **100** also includes a plurality of client devices **210**, as shown in **Figure 2**. Fig. 2 is the same system of Fig. 1, with ZAPs **110, 120, 130**, SCU **140**, and the illustrated wired connections removed from the figure for the purposes of illustrating client devices **210**. Also, it should be noted that certain client devices **210** located under the antennas are shown in dotted lines for ease of illustration and clarity in the figure.

[0039] For clarity and simplicity, the discussion of the various details of the access point(s) of the inventive subject matter references ZAP **110** individually. However, it should be understood that, unless otherwise specifically noted or context dictates otherwise, the discussion of ZAP **110** similarly applies to ZAPs **120, 130**.

[0040] Similarly, for clarity and simplicity, the discussion of the various details of the antenna(s) of the inventive subject matter references antenna **110A** individually. However, it should be understood that, unless otherwise specifically noted or context dictates otherwise, the discussion of antenna **110A** similarly applies to antennas **110B-110D, 120A-120D, and 130A-130D**.

[0041] As will be discussed in further detail herein, ZAPs **110** exchange data wirelessly with clients **210** via the ZAPs' antennas **110A** using a configurable frequency band transmission. In preferred embodiments of the inventive subject matter, the data exchange is performed within the 57-66 GHz frequency range, and more preferably within the 61.56 to 62.9 GHz ISM band.

[0042] The ZAPs **110** and antennas **110A** are installed overhead in aircraft **101**. In preferred embodiments, the antennas **110A** are positioned no more than 20 meters from their corresponding ZAP **110**. The antennas **110A** can be arranged within the aircraft **101** depending on factors such as the transmission range of the antennas, the amount of antennas used, the dimensions and shape of the aircraft interior, the location of the antennas on clients **210**, and other factors. In embodiments, the antennas are spaced along the length of the aircraft in about 10 meter increments. In embodiments, the antennas can be spaced along the width of the aircraft **101** at about the same increments, or at different distances than the spacing used in the length of the aircraft **101**. For example, the antennas may be spaced at the 10 meter increments along the length of the aircraft **101**, but at 3 meter increments along the width of the aircraft. Preferably, the antennas **110A** are placed no closer than 2 meters apart. For the purposes of discussing the illustrative example herein, the antennas **110A** are assumed to have a broadcast range of approximately 10 meters.

[0043] ZAPs **110** are the managed Ethernet switches between their wirelessly connected clients **210** and data (content and otherwise) provided by the SCU **140** via the GigE interface. ZAP **110** comprises at least one processor programmed to perform the functions described herein, and the data exchange interfaces enabling it to exchange data with other system components and other computing devices within aircraft **101** as described here. ZAP **110** also includes at least one non-transitory computer-readable storage medium that stores computer-executable instructions that are carried out by the ZAP's processor to execute its corresponding functions. In embodiments, the storage medium can also be used to store partial and/or complete copies of the content store by SCU **140**, such that it is available for streaming to clients **210** without having to retrieve it from SCU **140**.

[0044] Antenna **110A** is an antenna capable of transmitting and receiving radio frequency ("RF") signals. Preferably, antenna **110A** is configured to radiate and receive RF signals in the extremely high frequency ("EHF") range and, in particular, within the 57-66 GHz

frequency range (also referred to herein as the “60 GHz spectrum”). More preferably, antenna **110A** is configured to operate within the 61.56 to 62.9 GHz ISM band.

[0045] The aircraft **101** of Fig. 1 is divided into cabins **102** and **103** by partitions **104** and **105**. The cabins **102**, **103** are sections of the aircraft as subdivided by the partitions **104** and **105** (as well as the front and rear ends of the aircraft). Partitions **104**, **105** can be galleys, lavatories, curtains, or other physical divisions between the various cabin sections of the aircraft **101**. The partitions **104**, **105** can be the physical divisions that define the boundaries of particular cabin seating classes (thus, beyond partition **105** there may be additional cabins, not shown). For example, in a particular aircraft **101**, cabin **102** may be a first-class cabin and cabin **103** may be a “main cabin” (i.e., economy or “coach”). However, it should be noted that for certain aircraft configurations, a partition may be within a same seating class (i.e., a lavatory in the middle of economy class), thus dividing a seating class into two cabins.

[0046] ZAPs **110**, **120**, **130** are communicatively connected to one or more system control units (“SCU”) **140** of aircraft **101**, such as via a GigE interface. SCU **140** can be one or more computing devices installed in aircraft **101** from which the ZAPs obtain content for transmission, operation instructions, updates, etc. and to which ZAPs can send content requests, reporting information for the purposes of maintenance, troubleshooting, and general usage reporting. The SCUs **140** can include one or more processors and storage media (e.g., hard drives, solid-state drives, etc.). The SCUs **140**, either individually or collectively (in configurations where more than one is present) store content in memory such as audio, video (e.g., movies, television programs, pre-recorded cabin announcements, etc.), interactive games, and other in-flight entertainment content. The SCUs **140** can also include communication interfaces that allow the SCU **140** to send and receive data to other aircraft systems (e.g., positioning data for passenger-accessible map functions, etc.) and other computing devices external to the aircraft (e.g., to update available content, report maintenance needs, usage data to appropriate parties, etc.)

[0047] Client device **210** includes an antenna and a processor programmed to carry out the functions of the client as described herein. The antenna of the client **210** is an antenna capable of transmitting and receiving radio frequency (“RF”) signal, and preferably configured to radiate and receive RF signals in the extremely high frequency (“EHF”) range and, in particular, within the 57-66 GHz frequency range (also referred to herein as the “60 GHz spectrum”). More preferably, antenna is configured to operate within the 61.56 to 62.9

GHz ISM band. It should be noted that the antenna of client **210** is configured to operate in the same frequency band as the antennas **110A**.

**[0048]** The client device **210** can be connected to or integrated within an in-flight entertainment unit (“IFE”) installed within (i.e., the seat-back and/or below) a seat of aircraft **101**. The IFE typically includes a processor, a display unit, and an audio output interface (e.g., headphones jack, speaker, or other output), and can include a control interface (e.g., touch screen, remote control, controls in the arm-rest, etc.) or otherwise be connected to a control interface (e.g., controls in arm-rest or remote) that allows a user to interact with the IFE. In embodiments, the IFE can include one or more wireless network interfaces that enables the IFE to exchange data via cellular, WiFi and/or Bluetooth protocols as is known in the art.

**[0049]** Each client device **210** is assigned a MAC address by its corresponding ZAP **110**. The client device **210** can provide a bridging function to various components of the IFE individually that lack Ethernet connectivity (e.g., the display unit, storage local to the IFE, etc.) and other aircraft systems (e.g., flight attendant call, seat controls, seat actuators, etc.).

**[0050]** In embodiments, the ZAPs **110** can learn the locations of the clients **210** by sensing, via one or more of their respective antennas **110A**, the wireless transmissions from each client **210** installed in the aircraft. Thus the location can be determined via triangulation or other electronic location determination techniques. If a particular client **210** is replaced, or an aircraft’s seating configuration changes, the location of one or more of the client devices **210** may change relative to the ZAP antennas **110A** of the one or more ZAPs **110** on board the aircraft **101**. The ZAPs **110** can then update their information regarding the locations of any clients **210** whose location have changed. The assignments of the clients **210** to each ZAP **110** (and, optionally, to one or more specific ZAP antennas) can be performed by the ZAPs **110** based on the detected quality of signal during the location discovery process.

**[0051]** Client **210** is programmed to configure (upon initial installation) and update its software as well the software of its associated IFE via wireless transmission from its ZAP. Relevant updated can be pushed to the ZAPs **110** via SCU **140**. Thus, any updates to the client **210** or to its associated IFE can be performed without any configuration action needed by any aircraft mechanics or other personnel. Additionally, in embodiments, each client **210** can be programmed to, upon startup, reset, or periodically, provide configuration information

(e.g., software version numbers, hardware information, etc.) to the ZAPs, who in turn can request the necessary updates from the manufacturer or other source via the SCU 140.

[0052] Each client device 210 is assigned to a particular ZAP 110 based on its location relative to one or more of ZAP's antenna(s), and can be associated with a secondary ZAP 110 for redundancy. The secondary ZAP 110 is selected based on the location of its antennas, such that at least one antenna 110A of the secondary ZAP 110 within transmission range of the particular client 210. Thus, in preferred embodiments, the secondary ZAP 110 is adjacent to the primary ZAP 110 for a particular client. In embodiments, a client device 210 can be assigned one or more specific antennas 110A associated with its assigned ZAP 110 as the default antenna(s) to use during operation. For example, a particular client device 210 can be assigned a primary antenna and a secondary antenna of a particular ZAP. In other embodiments, the client device 210 can dynamically select the best antenna on its assigned ZAP 110 based on detected antenna signal strength and/or the measured transmission speeds from the antennas. When a client device 210 selects an antenna (or changes the selected antenna), it transmits its selection to its assigned ZAP 110 informing the ZAP 110 which antenna it wishes to use for transmission. Having established a corresponding antenna (either assigned or selected), the client device 210 discards all messages that are not from that antenna.

[0053] Upon power up or reset, each client 210 is programmed to attempt communication with its primary ZAP 110. If the client 210 is unable to establish communication (e.g. within a certain time period, certain number of attempts, or other threshold), the client 210 is programmed to attempt to connect to the secondary ZAP if the primary ZAP is still not present.

[0054] During operation, the position of each client device 210 is fixed within aircraft 101 during operation of the system 100, and as such each ZAP 110 knows the location of its own antennas 110A and each client device 210 assigned to it.

[0055] In embodiments, aircraft configuration data ("ACD") that includes a pre-defined layout or map of the arrangement of client devices 210 within the aircraft 101 is loaded into each ZAP 110 with the client assignments for each ZAP 110. The ACD also includes data regarding the seat numbers, seat groups, IFE configuration data, and the name of the configuration that matches the aircraft's certified configuration. The layout can be uploaded

into aircraft **101** via the SCU **140**, which then provides it to the ZAPs **110**. Thus, if the location of one or more of the client devices **210** changes (e.g., due to the removal or addition of a client due to maintenance, a change in the cabin configuration of the aircraft, etc.), an updated map must be provided to account for the new client arrangement within the aircraft.

[0056] In embodiments, a combination of ACD and the location discovery embodiments is used to provide ZAPs **110** with the location of the clients **210** within the aircraft. Having the layout provided by the ACD, the ZAPs **110** can electronically verify that the locations of the clients **210** match the configuration provided by the ACD, determine the seat numbers/groups associated with each client **210**, and transmit any necessary IFE configuration information or updates to the appropriate client **210** for execution.

[0057] As discussed above, the ZAPs **110** (via antennas **110A**) and clients **210** exchange data using a fixed frequency in the 60 GHz spectrum (preferably between 61.56-62.9 GHz). In order to successfully transmit data between the various antennas **110A** and clients **210** within the cabins of aircraft **101** without interfering with each other, each of the ZAPs **110**, **120**, **130** are programmed to employ time division multiplexing to cause each of their respective antennas **110A-110D**, **120A-120D**, and **130A-130D** to transmit according to fixed time slot assignments based on a pre-determined schedule and transmission direction for each antenna. In order to be able to have multiple ZAPs transmit according to a uniform schedule, ZAPs **110**, **120**, **130** are synchronized in time.

[0058] **Figure 3A** shows an illustrative example of transmissions **121A**, **121B**, **121C**, **121D**, **131A** and **131B** from antennas **120A**, **120B**, **120C**, **120D**, **130A**, and **130B**, respectively, if all were to be transmitting simultaneously. It should be noted that the circles representing the transmissions **121A**, **121B**, **121C**, **121D**, **131A** and **131B** are for illustrative purposes, and are not intended to be to scale.

[0059] The discussion of the inventive subject matter herein includes references to “adjacent” and “non-adjacent” antennas. As used herein, “adjacent” is intended to generally refer to two or more antennas **110A** that are logically, physically, and/or geometrically proximate such that their transmission range of one of the antennas is within the transmission range of another antenna. Thus, it is possible that two adjacent antennas **110A** are physically located far enough apart that the ranges of each antenna’s transmissions do not reach the adjacent antennas themselves (even if pointed directly at the adjacent antenna), but that the

transmission ranges of the antennas are such that the transmissions would intersect (and thus cause interference) if the adjacent antennas transmitted simultaneously.

[0060] For example, in Figure 3A, antennas **120B**, **120C** and **120D** are adjacent to antenna **120A** because the transmission **121A** of antenna **120A** would intersect (and thus, interfere) with each of the transmissions **121B**, **121C** and **121D** of antennas **120B**, **120C**, and **120D**, respectively, if the transmissions occurred simultaneously. Conversely, antenna **130B** is not considered adjacent to antenna **120A** because the transmission **121A** and the transmission **131B** would not intersect even if the transmissions occurred simultaneously. **Figure 3B** shows the transmissions of Fig. 3A, with the transmissions considered adjacent to transmission **121A** in broken lines and the non-adjacent transmissions (**121A** and **131B**) in solid lines.

[0061] It should be noted that, even though the transmissions of antennas **110C** and **110D** are not shown, antennas **110C** and **110D** would be considered adjacent to **120A** if their respective transmissions could interfere with transmission **121A** during a simultaneous transmission as discussed above. However, depending on the width of partition **104**, the separation between the cabins **102** and **103** could be sufficient to keep the transmission **121A** out of the range of the transmissions of one or both antennas **110C** and **110D**. Similarly, the partition **104** may be of a width and/or material such that partition **104** serves to insulate transmission **121A** from those of antennas **110C** and/or **110D**, and vice-versa. In these cases, antenna **120A** would not be considered adjacent to antenna **110C** and/or **110D**.

[0062] In order to avoid interference between transmissions of adjacent antennas, the ZAPs assign fixed broadcast time slots to each antenna. The ZAPs are synchronized such that if an antenna from a first ZAP (for example, antenna **120C** of ZAP **120**) is adjacent to an antenna from a second ZAP (antenna **130A** of ZAP **130**), the antennas can be assigned to time slots to avoid interfering with antennas of other ZAPs. **Figure 4A** shows the transmissions **121A**, **121B**, **121C**, **121D**, **131A** and **131B** from antennas **120A**, **120B**, **120C**, **120D**, **130A**, and **130B** assigned time slots **T1**, **T2**, **T3**, **T4**, **T1** and **T2**, respectively.

[0063] **Table 1** depicts the fixed time slots **T1-T4** assigned to the antennas (and their corresponding ZAP) as follows:

Antenna (ZAP)	Time Slot <b>T1</b>	<b>T2</b>	<b>T3</b>	<b>T4</b>	<b>T1</b>	...
<b>120A (120)</b>	Transmits	OFF	OFF	OFF	Transmits	
<b>120C (120)</b>	OFF	Transmits	OFF	OFF	OFF	
<b>120D (120)</b>	OFF	OFF	Transmits	OFF	OFF	
<b>120B (120)</b>	OFF	OFF	OFF	Transmits	OFF	
<b>130A (130)</b>	OFF	OFF	OFF	Transmits	OFF	
<b>130C (130)</b>	OFF	OFF	Transmits	OFF	OFF	
<b>130D (130)</b>	OFF	Transmits	OFF	OFF	OFF	
<b>130B (130)</b>	Transmits	OFF	OFF	OFF	Transmits	

**TABLE 1**

[0064] The time slots **T1**, **T2**, **T3**, **T4**, **T1** and **T2** have been assigned to non-adjacent antennas to avoid interference when multiple antennas (from the same ZAP or, as in this example multiple ZAPs - ZAPs **120** and **130**) are transmitting. **Figure 4B** provides an illustration of the transmission activity at time slot **T1**, showing both antennas **120A** and **130B** transmitting, and adjacent antennas **120B**, **120C**, **120D**, **130A**, **130C** and **130D** (each adjacent to one or both of antennas **120A** and **130B**) silent.

[0065] The transmissions from antennas **130C**, **130D** are not shown, but for the purposes of this example are considered to be of approximately identical magnitude as the respective **121A**, **121B**, **121C**, **121D**, **131A** and **131B**. For the purposes of the illustrative example, antennas **130C**, **130D** could be transmitting to client devices **210** near the rear of the aircraft or into another cabin further rearward (not shown).

[0066] Thus, as shown by the time slot assignments in Table 1 applied in Fig. 4A, no adjacent antennas transmit at the same time, minimizing the possibility of interference between any two antennas transmitting simultaneously.

[0067] For the sake of simplicity in the illustrated example, the presented schedule of Table 1 depicts four time slots **T1-T4**. Depending on the number and arrangement of the antennas



**110A**, the number of clients **210**, the configuration of the cabin, the amount of obstructions present in the cabin, etc., the amount of time slots can be greater to account for a greater number of potential instances of interference.

[0068] If the groupings of the antennas **110A** within aircraft **101** are such that there is a “break” in the chain of adjacent antennas, then the scheduling of the broadcast times do not have to be coordinated because there is no danger of interference from one group to another. This can occur due to the spacing of certain groupings of antennas **110A** and/or due to the presence of an obstruction such as a partition. For example, if due to partition **104**, no antenna from cabin **102** is considered adjacent to any antenna of cabin **103**, then time slots for antennas **110A-110D** of ZAP **110** can be scheduled independently of those in cabin **103**. However, if at least one antenna from cabin **102** is adjacent to at least one antenna of cabin **103**, then the ZAPs **110** and **120** (and also **130** in this example) are synchronized to ensure there is no cross-cabin interference due to the adjacent antennas. Thus, if in Figs. 3A-4B, it is assumed that antennas **110A**, **110C** and **110D** are adjacent to antenna **120A** but antenna **110B** is not adjacent, antenna **110B** would also be transmitting at time **T1**.

[0069] In embodiments, the time slot schedule for each antenna **110A** can be provided *a priori* to the ZAPs **110**, based on the known locations and transmission ranges of the antennas **110A** within the system.

[0070] In embodiments, a ZAP **110** can be programmed to determine, for each antenna **110A**, which other antennas **110A** are adjacent and which are non-adjacent. In embodiments, the ZAP **110** can receive information regarding the location of each of the antennas **110A** within aircraft **101** and the broadcast range for the antennas **110A**, and determine which antennas are adjacent based on the distance between the antennas and their broadcast ranges. This information can be provided by a technician or other source of data, and can be data obtained from planned layouts and known specifications of the hardware components (e.g., the antennas). In embodiments, the ZAP **110** can determine the location of the antennas or the broadcast range by causing each antenna to transmit and then polling the clients **210** to see which clients received the broadcast and determining where the overlaps in broadcast range between the broadcasts of the various antennas **110A** exist. In multiple ZAP environments, the ZAPs **110** can coordinate this process to determine, across an entire cabin or even an entire aircraft, the status of all of the antennas as adjacent or non-adjacent. This determination can be done upon initial system installation in aircraft **101**, periodically (such

as after maintenance where certain arrangements of the cabin could result in location changes for the antennas), or upon a change in antenna hardware or operating parameters (e.g., antennas changed to ones that have different transmission ranges).

[0071] In order to group antennas **110A** into non-adjacent groups such that a particular time slot can be used by multiple antennas throughout the aircraft **101**, the ZAP determines, for a first antenna **110A**, which antenna(s) **110A** are non-adjacent as discussed above. Then, the ZAP **110** determines the antennas **110A** that are not adjacent for each of those antennas **110A** not adjacent to the first antenna **110A**, sequentially narrowing down the group to those antennas **110A** that are commonly non-adjacent (i.e., none of the antennas **110A** in the group are adjacent to any other antenna **110A** in the group).

[0072] In these embodiments, the ZAP **110** can further be programmed to divide the transmission cycle based on the number of groups of non-adjacent antennas **110A**.

[0073] For the sake of simplicity of illustration, the example of Table 1 and Fig. 4A depicts the fixed time slots for transmission by antennas to the clients **210**. However, clients **210** can also communicate with their respective assigned ZAPs. Just as the transmissions from antennas **110A** can cause interference with each other, so can the transmissions from clients **210** interfere with the transmissions from one or more antenna **110A**. Thus, the fixed time slot schedule includes a time slot **TC** reserved for a client **210** to transmit data to their respective ZAP (via their selected antenna) as shown in **Table 2**. Because the client-ZAP transmission include far less data and are performed far less frequently than the ZAP-client transmission, the time slot reserved for client **210** transmissions can be scheduled to occur far less frequently. For example, it can occur every other cycle of the schedule (as in the example of **Table 2**), every third cycle, every 10<sup>th</sup> cycle, etc.

Antenna (ZAP)	T1	T2	T3	T4	T1	T2	T3	T4	TC	...
<b>120A (120)</b>	Trans	OFF	OFF	OFF	Trans	OFF	OFF	OFF	OFF	
<b>120C (120)</b>	OFF	Trans	OFF	OFF	OFF	Trans	OFF	OFF	OFF	
<b>120D (120)</b>	OFF	OFF	Trans	OFF	OFF	OFF	Trans	OFF	OFF	
<b>120B (120)</b>	OFF	OFF	OFF	Trans	OFF	OFF	OFF	Trans	OFF	
<b>130A (130)</b>	OFF	OFF	OFF	Trans	OFF	OFF	OFF	Trans	OFF	
<b>130C (130)</b>	OFF	OFF	Trans	OFF	OFF	OFF	Trans	OFF	OFF	
<b>130D (130)</b>	OFF	Trans	OFF	OFF	OFF	Trans	OFF	OFF	OFF	
<b>130B (130)</b>	Trans	OFF	OFF	OFF	Trans	OFF	OFF	OFF	OFF	
<b>Client 210</b>	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	Trans	

**TABLE 2**

[0074] As with the antennas **110A** as discussed above, simultaneous transmissions by adjacent clients **210** can similarly cause interference. The ZAPs **110** synchronize the TDMA slots so that adjacent clients **210** do not transmit at the same time. Because client-ZAP transmission are far less frequent and/or contain much less data than ZAP-client transmissions, the ZAPs **110** can, in embodiments, manage multiple client transmissions by splitting the client-assigned time slot **TC** into sub-slots, each assigned to a client needing to transmit. In other embodiments, the time slots **TC** can be assigned to a single client per cycle, with the clients **210** requiring transmission queued for transmission as time slots **TC** become available.

[0075] As discussed above, a client **210** can dynamically select which antenna on its assigned ZAP **110** it wishes to use. In order to “know” which antenna a client has selected, a ZAP **110** is programmed to listen for any transmission from any of its assigned clients **210** received from any of its antennas **110A**.

[0076] The 60GHz spectrum is particular susceptible to interference by environmental factors and objects. Thus, the transmission between a client **210** and a selected antenna might be

disrupted or outright interrupted due to a blockage created by standing passengers, flight crew activity or carts in the aisles, open overhead compartments, or other obstacles present in the cabin. A client **210** is thus programmed to detect an interruption in a transmission from its selected antenna, and to select a new antenna to resume the transmission. The client **210** then notifies its assigned ZAP **110** of the change in antenna.

[0077] The client **210** is programmed to detect an interruption in a transmission by monitoring the received transmission from its current antenna and, if the data transmission rate from the antenna falls below an acceptable threshold (or, in embodiments, the client **210** stops receiving data altogether) from its current antenna for a predetermined amount of time.

[0078] **Figure 5** provides an illustrative scenario of communications established between various clients in this example implementation. Fig. 5 shows a plurality of clients **210A-210G** having established communications with ZAP **120** via antennas **120A-120D**. For the purposes of clarity, ZAP **120** and other system components are not illustrated in Fig. 5. In Fig. 5, bidirectional communications are illustrated via the broken lines, and unidirectional communications are illustrated via solid lines.

[0079] As shown in Fig. 5, client **210A** has selected antenna **120A** for bidirectional communication, and client **210B** has similarly selected antenna **120B**. Antenna **120C** has been selected for bidirectional communication by clients **210C** and **210D**, and is also downloading a movie in 92 seconds at 300 Mbps to client **210C**. Antenna **120D**, in turn, has been selected by four clients (**210E**, **210G**, **210E**, **210F**) for bidirectional communication and is downloading two movies (one to client **210E** and one to client **210F**) at 300 Mbps.

[0080] Thus, client **210A** would be receiving data at time **T1**, client **210B** would be receiving data at time slot **T4**, clients **210C** and **210D** at time **T2**, and clients **210E-210H** at time **T3**. Additionally, the transmissions of data from the clients to their respective antennas are coordinated according to the time slots **TC** so as not to interfere with each other, as discussed above.

[0081] It should be noted that while the above discussion describes the system as applied within an aircraft, the system is similarly applicable to buses, trains, ships, submarines, or other high-capacity vehicles. Similarly, the system is also applicable in other high-occupancy, bandwidth-limited or bandwidth-regulated environments.

**[0082]** It should be apparent to those skilled in the art that many more modifications besides those already described are possible without departing from the inventive concepts herein. The inventive subject matter, therefore, is not to be restricted except in the spirit of the appended claims. Moreover, in interpreting both the specification and the claims, all terms should be interpreted in the broadest possible manner consistent with the context. In particular, the terms “comprises” and “comprising” should be interpreted as referring to elements, components, or steps in a non-exclusive manner, indicating that the referenced elements, components, or steps may be present, or utilized, or combined with other elements, components, or steps that are not expressly referenced. Where the specification claims refers to at least one of something selected from the group consisting of A, B, C . . . . and N, the text should be interpreted as requiring only one element from the group, not A plus N, or B plus N, etc.

## CLAIMS

What is claimed is:

1. A system for wireless communication within a vehicle interior, comprising:
  - a wireless access point (“ZAP”) connected to a plurality of antennas arranged within a vehicle interior, the ZAP programmed to cause each a first antenna to transmit to a first plurality of client devices according to a first time slot within a transmission cycle based on a location of the first antenna relative to the other antennas;
  - wherein each of the first plurality of client devices includes a client antenna.
2. The system of claim 1, wherein the ZAP is programmed to assign the first time slot to the first antenna based on the location further comprises determining whether a range of transmission for the first antenna overlaps a range of transmission of any of the other antennas and assigning a time slot for the first antenna that is different than any of the antennas for which there is an overlap.
3. The system of claim 2, wherein the ZAP is further programmed to:
  - determine that a transmission range of a second antenna does not overlap with the transmission range of the first antenna; and
  - assign the first time slot to the second antenna such that the second antenna transmits to a second plurality of client devices during the time slot.
4. The system of claim 1, wherein the ZAP is further programmed to:
  - receive a predetermined layout of the anticipated location of each of the client devices relative to each antenna;
  - detect a signal transmitted by each of the client devices; and
  - determine the relative location of each of the client devices relative to each antenna based on the anticipated location and the signal.
5. The system of claim 1, wherein the antennas and the client antennas are configured to communicate using a fixed frequency band.
6. The system of claim 5, wherein the frequency band comprises the 61.56 to 62.9 GHz ISM band.

7. The system of claim 1, further comprising:

a first client device from the first plurality of client devices, the first client device programmed to:

receive a data transmission from the first antenna;

determine that the data transmission has been interrupted;

determine that the first client device is within a second broadcast range from a second antenna from the plurality of antennas; and

transmit an antenna change request to the second antenna, the antenna change request indicating that the first client device wishes to switch to the second antenna; and

the ZAP further programmed to:

receive the antenna change request; and

in response to the antenna change request, resume the data transmission to the first client device via the second antenna.

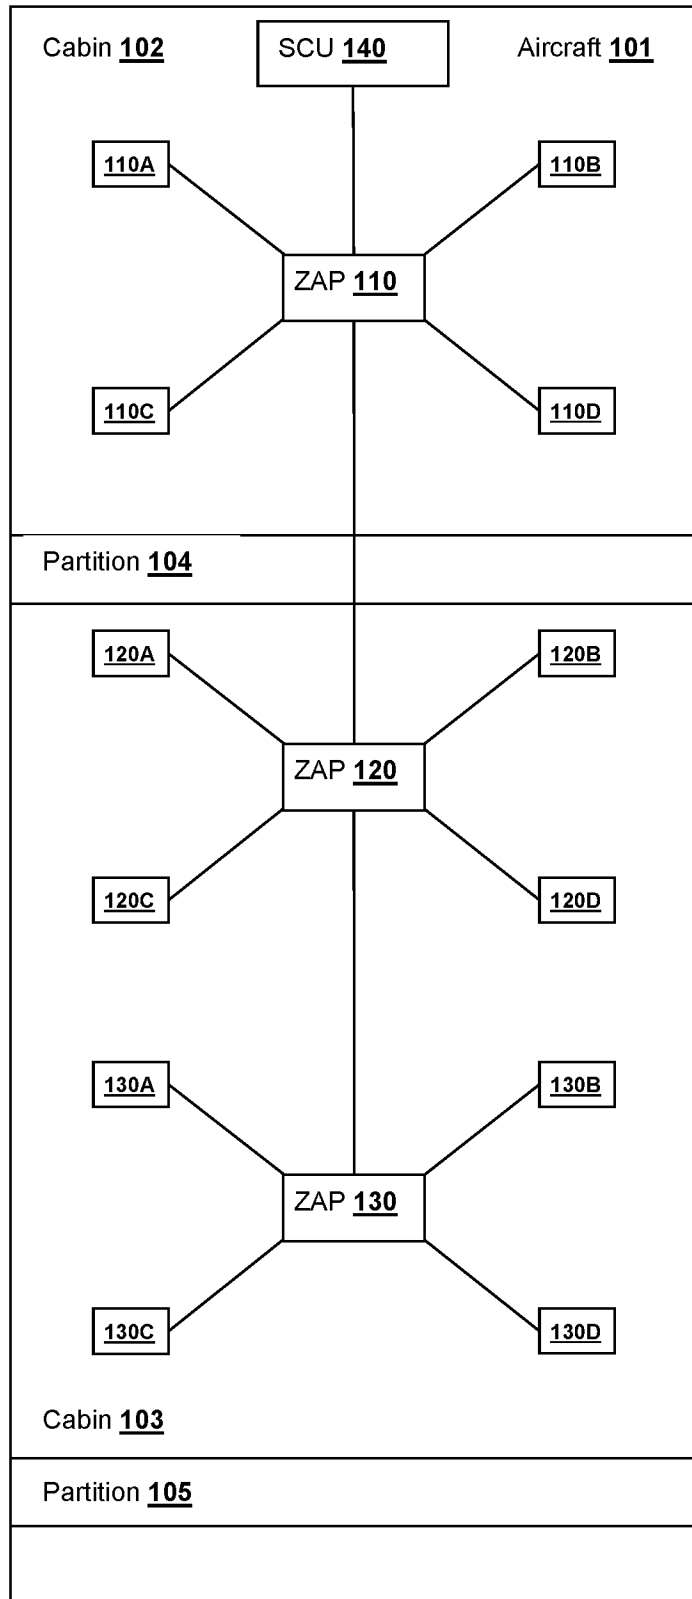


Figure 1



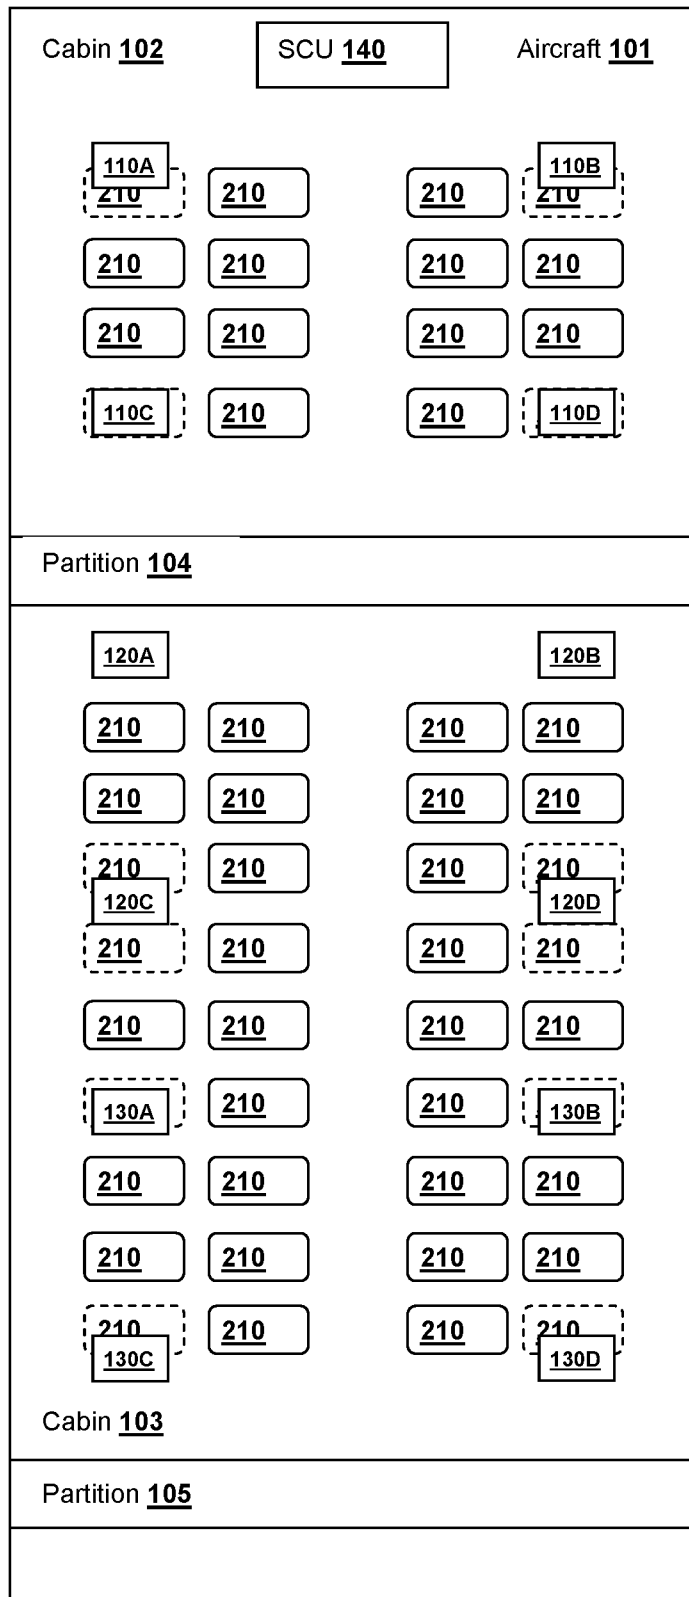


Figure 2

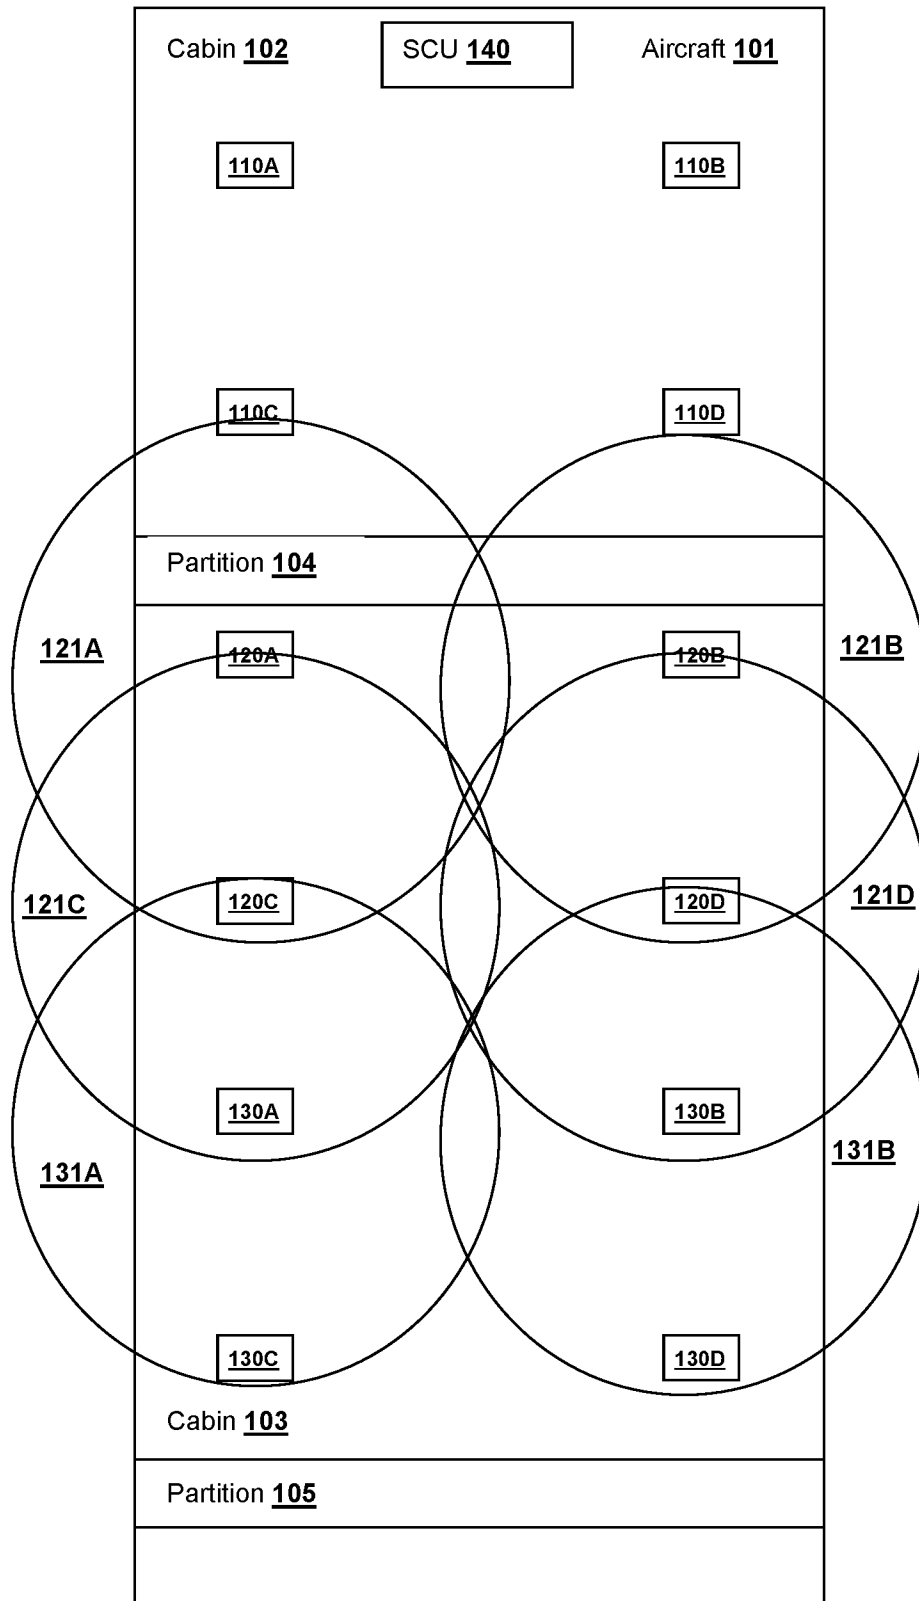


Figure 3A

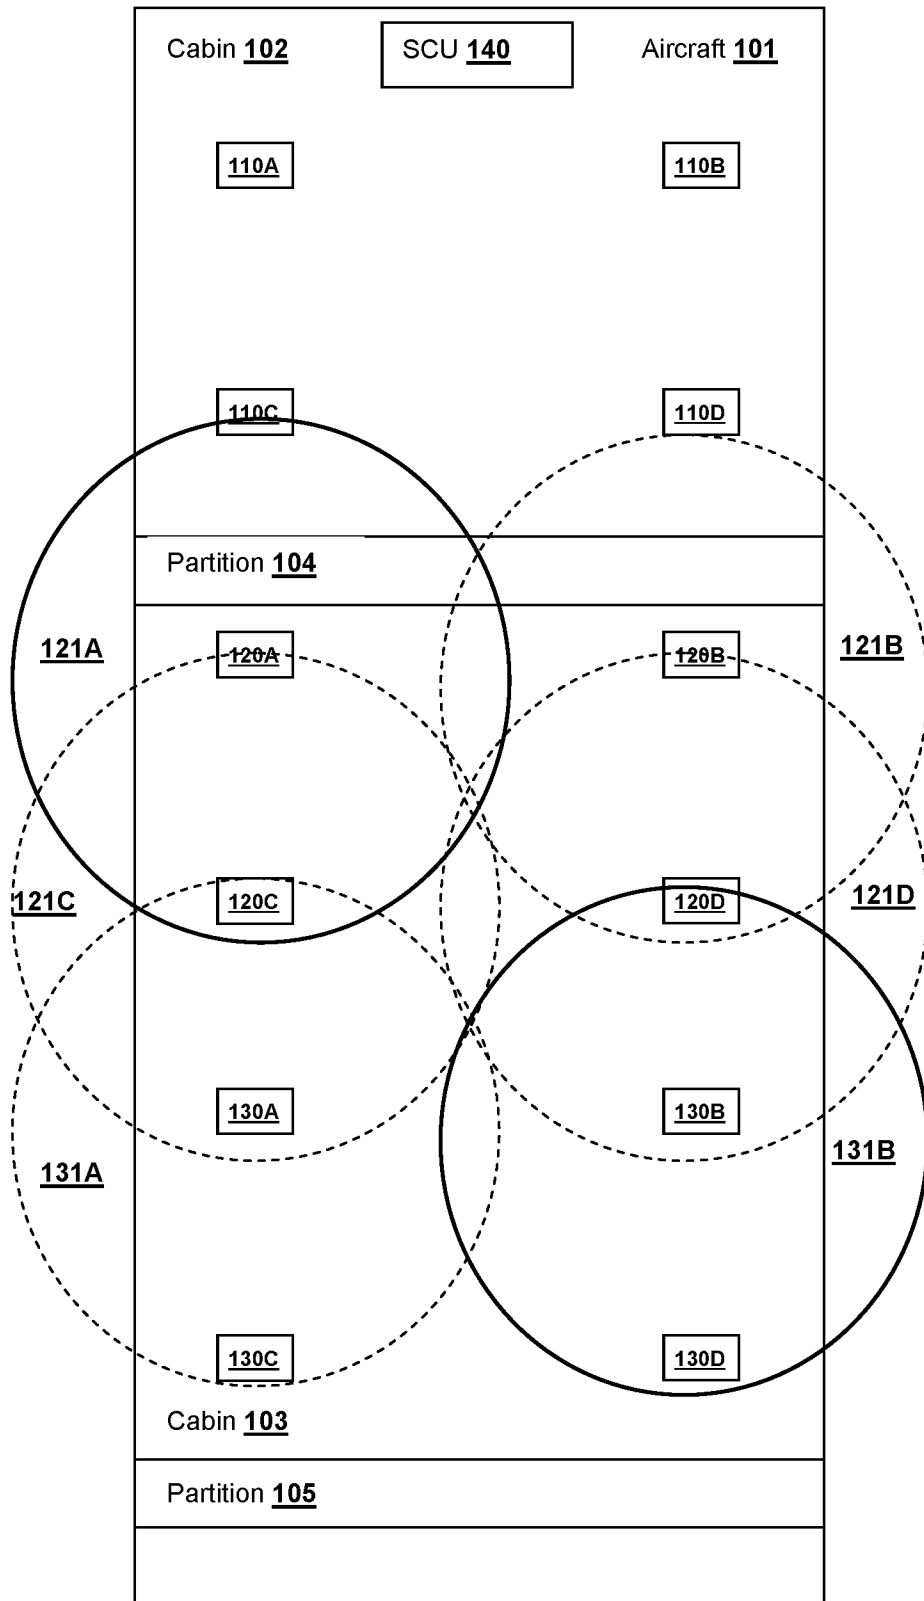


Figure 3B

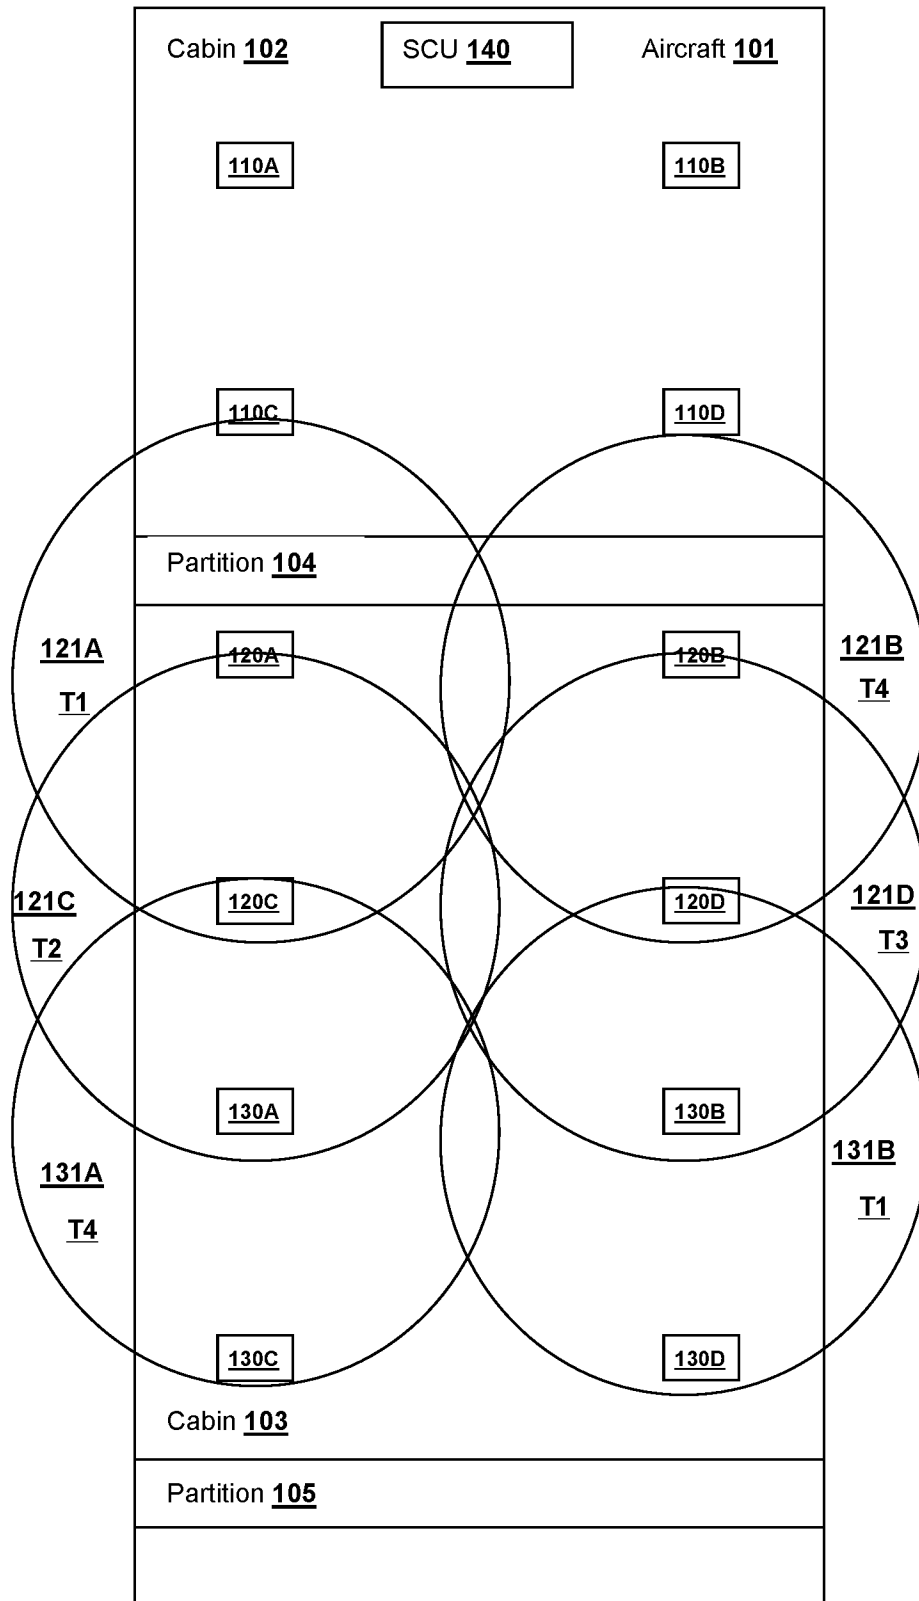


Figure 4A

Time Slot T1

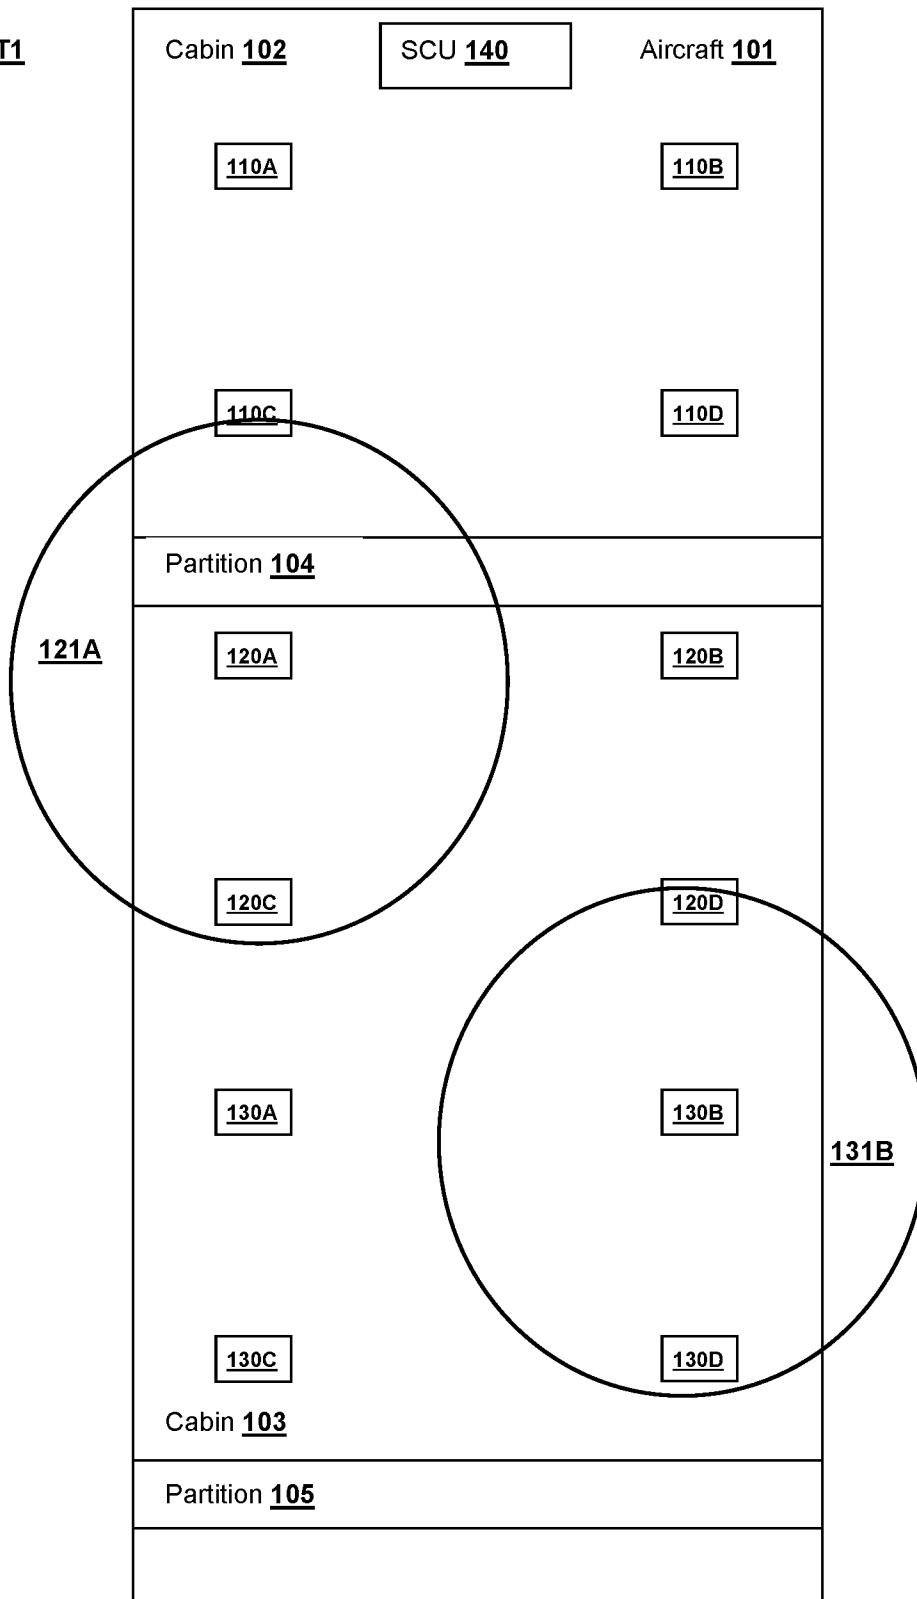


Figure 4B

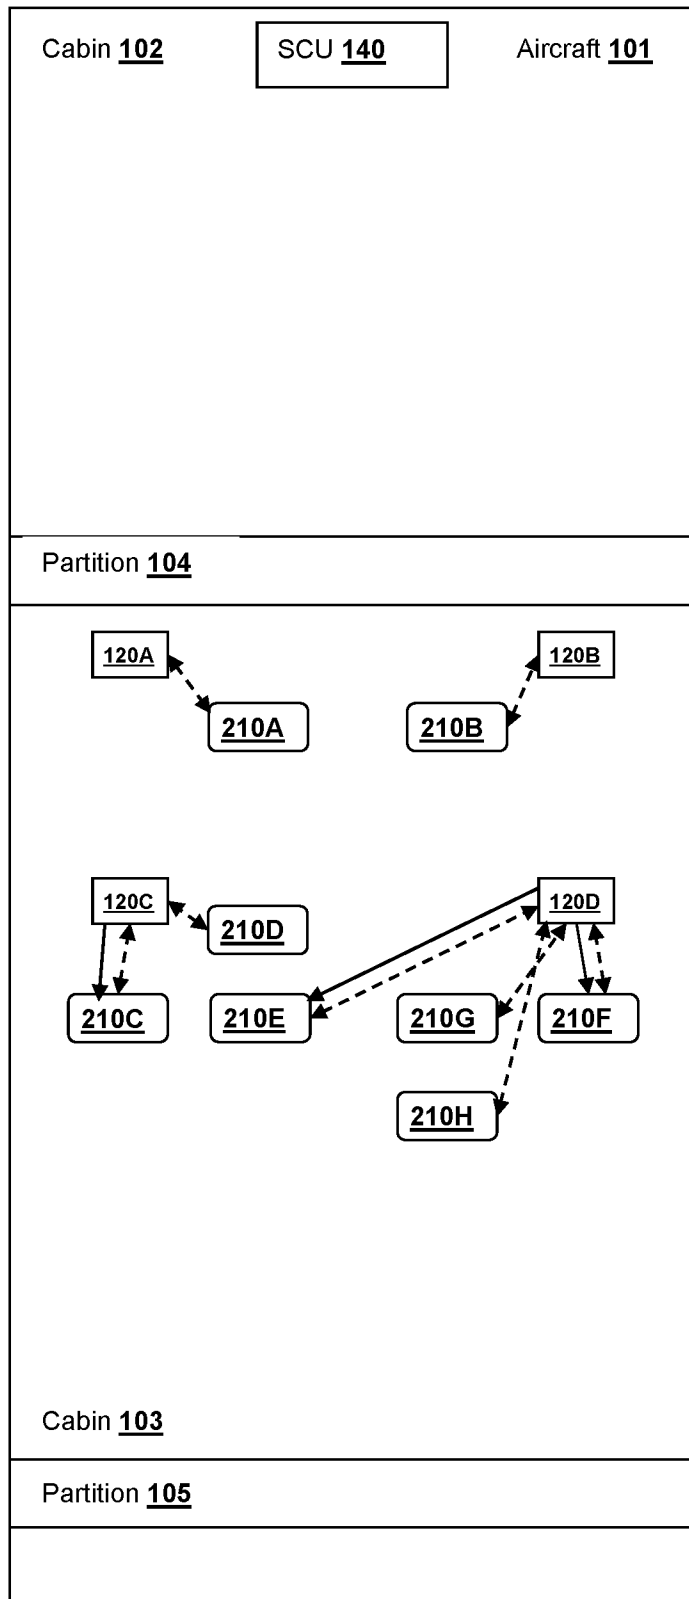


Figure 5

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2016/016020**A. CLASSIFICATION OF SUBJECT MATTER****H04W 16/20(2009.01)i, H04W 72/12(2009.01)i, H04W 72/04(2009.01)i, H04W 88/08(2009.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H04W 16/20; H04Q 7/24; H04Q 7/20; H04J 3/00; H04W 4/00; H04W 84/02; H04W 72/12; H04W 72/04; H04W 88/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: access point, vehicle interior, time slot, transmission cycle, location, antenna, fixed frequency band

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008-0316986 A1 (ROBERT J. SNYDER) 25 December 2008 See paragraphs [0016]-[0023]; claims 1, 3-4, 14; and figure 1.	1-7
Y	US 2011-0110340 A1 (ISMAIL LAKKIS) 12 May 2011 See paragraphs [0053]-[0058]; claims 1, 4; and figure 1.	1-7
Y	US 7483696 B1 (JAMES P. MITCHELL) 27 January 2009 See column 5, lines 3-65; and claim 1.	4
Y	US 8031650 B2 (THOMAS D. PETITE et al.) 04 October 2011 See column 15, line 37 - column 16, line 3; claim 1; and figure 6.	5-6
A	US 2011-0128949 A1 (TOSHIHIRO EZAKI et al.) 02 June 2011 See paragraphs [0042]-[0052]; claim 1; and figures 2A-2B.	1-7



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

30 June 2016 (30.06.2016)

Date of mailing of the international search report

**30 June 2016 (30.06.2016)**

Name and mailing address of the ISA/KR

International Application Division  
Korean Intellectual Property Office  
189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

YANG, Jeong Rok

Telephone No. +82-42-481-5709



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2016/016020**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0316986 A1	25/12/2008	CN 101375560 A EP 1982469 A1 JP 2009-525640 A WO 2007-089961 A1	25/02/2009 22/10/2008 09/07/2009 09/08/2007
US 2011-0110340 A1	12/05/2011	US 2015-0163826 A1 US 8767640 B2	11/06/2015 01/07/2014
US 7483696 B1	27/01/2009	None	
US 8031650 B2	04/10/2011	US 2005-0195775 A1 US 2011-0310929 A1 US 8379564 B2	08/09/2005 22/12/2011 19/02/2013
US 2011-0128949 A1	02/06/2011	JP 2011-205162 A US 8477692 B2 WO 2010-013431 A1	13/10/2011 02/07/2013 04/02/2010