



- (51) International Patent Classification:
H04B 10/2575 (2013.01) *H04Q 11/00* (2006.01)
H04B 10/075 (2013.01)
- (21) International Application Number:
PCT/US2021/054213
- (22) International Filing Date:
08 October 2021 (08.10.2021)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
63/089,098 08 October 2020 (08.10.2020) US
63/093,323 19 October 2020 (19.10.2020) US
17/496,722 07 October 2021 (07.10.2021) US
- (71) Applicant: NEC LABORATORIES AMERICA, INC.
[US/US]; Suite 200, 4 Independence Way, Princeton, New Jersey 08540 (US).
- (72) Inventors: **JI, Philip**; 61 Cranbury Neck Drive, Cranbury, New Jersey 08512 (US). **WANG, Ting**; 10 Glacier Way West, West Windsor, New Jersey 08550 (US). **YE, Zilong**; 2204 Del Marino, La Verne, California 91750 (US).
- (74) Agent: **KOLODKA, Joseph**; NEC Laboratories America, Inc., 4 Independence Way, Suite 200, Princeton, New Jersey 08540 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,

(54) Title: DISTRIBUTED FIBER OPTIC SENSOR PLACEMENT

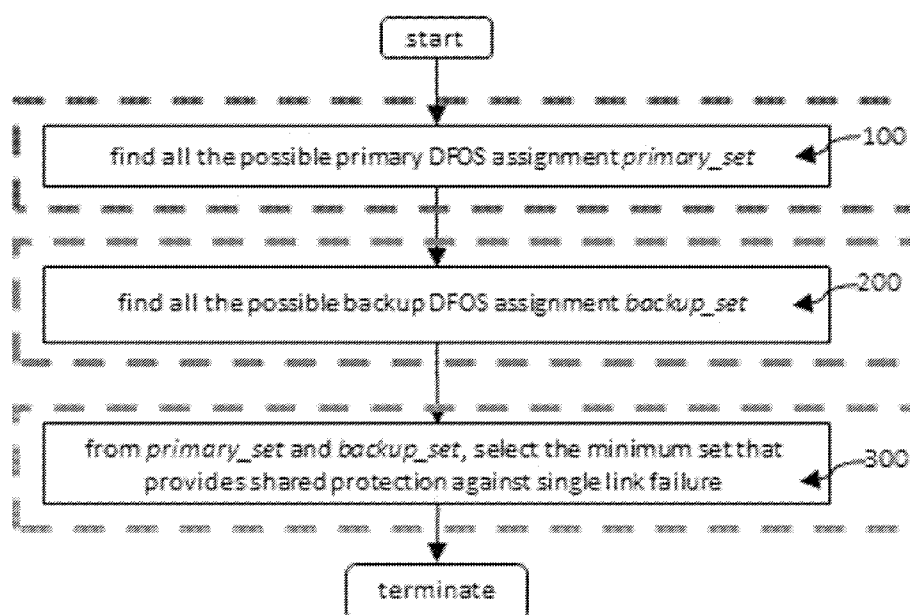


FIG. 3

(57) Abstract: Aspects of the present disclosure describe distributed fiber optic sensor (DFOS) systems, methods, and structures that advantageously enable/provide for the proper placement/assignment of sensors in the DFOS network to provide for high reliability, fault tolerant operation that survives fiber failures. In one embodiment, for the DFOS network having a plurality of nodes optically connected by a plurality of optical links, a method of providing assignment of both primary and back sensor assignment, comprises exhibiting distance-route resource sharing, including determining possible primary DFOS assignments as primary_set, determining all backup DFOS assignments as backup_set, and from the primary_set and the backup_set, selecting a minimum set that provides shared protection against a single link failure.

ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

DISTRIBUTED FIBER OPTIC SENSOR PLACEMENT

TECHNICAL FIELD

[001] This disclosure relates generally to fiber optic telecommunications networks and distributed fiber optic sensing (DFOS) systems, methods, and structures. More specifically, it pertains the efficient deployment of DFOS sensors for reliable service and tolerance / immunity to link failure(s).

BACKGROUND

[002] Empowered by the rapid advancement of fiber optic sensing techniques recently, network carriers can upgrade their network infrastructure with sensing applications and services (e.g., monitoring traffic, road condition, etc.) - in addition to providing communication services - thus achieving a paradigm known in the art as "Infrastructure-as-a-Sensor" (IaaS).

[003] While such sensor upgrades and resulting services have found widespread applicability, the network infrastructure(s) remain vulnerable to a variety of failures including link failures that may result from fiber cuts. A critical challenge then for IaaS service providers is how to efficiently deploy DFOS sensors that are tolerant of and/or immune to failure to achieve and provide a reliable level of IaaS service.

SUMMARY

[004] An advance in the art is made according to aspects of the present disclosure directed to DFOS systems, methods, and structures that advantageously provide for the proper placement/assignment of sensors in a DFOS network to provide for high reliability, fault tolerant operation that survives fiber failures.

[005] Viewed from a first aspect, our inventive procedure provides a reliable yet cost efficient IaaS service or DFOS assignment that is tolerant of a single link failure. Our procedure allows a backup DFOS resources to be shared among multiple primary DFOS

assignments, thus achieving a cost-efficient way of providing highly reliable IaaS service. Furthermore, our procedure treats the assignment of primary and backup DFOS equally and determines these assignments using a one-step global optimization process, thus achieving a close-to-optimal result in terms of the number of DFOS sensors used.

[006] Viewed from another aspect, our inventive procedure includes three sub-procedures. First, all possible fiber sensing routes (constrained by the sensing range limit) on each node are identified and considered as candidates for primary DFOS assignment. Second, all possible fiber sensing route trees (constrained also by the sensing range limit) on each node are identified considered as candidates for backup DFOS assignment. Finally, all primary DFOS candidates and backup DFOS candidates are considered equally, and a greedy algorithm is employed to select a minimum set of DFOS assignments from the primary candidates and backup candidates, such that each link is sensed (or covered) at least once from each direction. Additionally, our inventive procedure ensures that, on a particular link that is shared by multiple primary fiber sensing routes, the number of backup fiber sensing services is greater than or equal to the number of primary fiber sensing services, such that each primary fiber sensing service will have at least one backup fiber sensing service if / when a single link failure occurs.

[007] To summarize, our inventive procedure according to aspects of the present disclosure: achieves a close-to-optimal results in terms of the number of sensors used, through an efficient shared protection method that provides reliable IaaS services against single link failure; is a novel approach that determine the assignment of primary DFOS and backup DFOS in a one-step global optimization manner; determines where to place the primary DFOS sensors to achieve fully IaaS service coverage in an existing telecommunication network infrastructure; determines primary fiber sensing route(s) (including the assignment of the routing and the sensing range) for each deployed primary DFOS sensor(s); determines placement of backup DFOS sensors to achieve protection for the IaaS services against single link failure; determines a backup fiber sensing routing tree (including the assignment of the routing and the sensing range) for each deployed backup DFOS sensors; and determine the backup fiber sensing route (including the assignment of

the routing and the sensing range) for the utilized backup DFOS sensors when a link failure occurs.

BRIEF DESCRIPTION OF THE DRAWING

[0008] A more complete understanding of the present disclosure may be realized by reference to the accompanying drawing in which:

[0009] **FIG. 1(A), FIG. 1(B), and FIG. 1(C)** are schematic diagrams illustrating protection of a fiber and cut point of an illustrative single-ended prior art DOFS system;

[0010] **FIG. 2** is a schematic diagram illustrating reliable DFOS placement in an optical network according to aspects of the present disclosure;

[0011] **FIG. 3** is a flow diagram illustrating an overview of a placement procedure according to aspects of the present disclosure;

[0012] **FIG. 4, FIG. 4(A), FIG. 4(B), and FIG. 4(C)** are series of flow diagrams illustrating overall operation of the first sub-procedure of **FIG 3** according to aspects of the present disclosure;

[0013] **FIG. 5** is a flow diagram illustrating overall operation of the second sub-procedure of **FIG 3** according to aspects of the present disclosure;

[0014]

[0015] **FIG. 6, FIG. 6(A), FIG. 6(B), and FIG. 6(C)** are series of flow diagrams illustrating overall operation of the third sub-procedure of **FIG 3** according to aspects of the present disclosure; and

[0016] FIG. 7 is a schematic diagram illustrating application of reliable DFOS placement with shared protection in a fiber optic sensing network according to aspects of the present disclosure.

DESCRIPTION

[0017] The following merely illustrates the principles of the disclosure. It will thus be appreciated that those skilled in the art will be able to devise various arrangements which, although not explicitly described or shown herein, embody the principles of the disclosure and are included within its spirit and scope.

[0018] Furthermore, all examples and conditional language recited herein are intended to be only for pedagogical purposes to aid the reader in understanding the principles of the disclosure and the concepts contributed by the inventor(s) to furthering the art and are to be construed as being without limitation to such specifically recited examples and conditions.

[0019] Moreover, all statements herein reciting principles, aspects, and embodiments of the disclosure, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

[0020] Thus, for example, it will be appreciated by those skilled in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the disclosure.

[0021] Unless otherwise explicitly specified herein, the FIGs comprising the drawing are not drawn to scale.

[0022] By way of some additional background – we begin by noting that because DFOS sensors (such as distributed acoustic sensors (DAS), distributed vibration sensors (DVS), distributed temperature sensors (DTS), distributed strain sensors (DSS)), detect backscattered signals (such as Rayleigh backscattering, Raman backscattering, and Brillouin backscattering) of optical pulses generated / output by an optical source included as part of overall DFOS sensor hardware (i.e, an interrogator), it is usually what is known in the art as a single-ended system. In other words, a transmitter and receiver are located at a same end of a sensing fiber.

[0023] **FIG. 1(A), FIG. 1(B), and FIG. 1(C)** are schematic diagrams illustrating protection of a fiber and cut point of an illustrative single-ended prior art DOFS system. With simultaneous reference to those figures, **FIG. 1(A)** illustrates a configuration in which a DFOS sensor interrogator located in Node *A* performs a sensing function for a link *AB* between Node *A* and Node *B*. If there exists a cut in the sensing fiber/cable at a cut point (*CP*) located between Node *A* and Node *B*, the section between Node *A* and *CP* can still be detected, but the section between *CP* and Node *B* cannot be detected, as shown illustratively in **FIG. 1(B)**. Accordingly, and as will be understood and appreciated, a protection mechanism is needed to allow detection of the *CP-B* section when such discontinuity (fiber cut) occurs.

[0024] In a contemporary fiber optic network protection configuration, if one link fails (such as experiencing a cable cut) between two nodes, an alternative route that does not involve the damaged link is selected, configured, and made operational to maintain communication between the two nodes. In other words, the exact routing arrangement is not important, so long as there is at least one operational link between a source node and a destination node – regardless of route taken.

[0025] Unfortunately, however, such is not the case with an IaaS fiber sensing network. In such a sensing network, the specific route is critical since the specific fiber serves as sensing media and its specific location (route) determines where such sensing

occurs. Accordingly, any protection solution for IaaS_r cannot simply discard a damaged link and replace it with another fiber route (link).

[0026] Such protection can however instead be provided by adding a sensing function from an opposite end of a failed link (route). As shown in **FIG. 1(C)**, after the link *AB* is cut at the point *CP*, a second sensor interrogator is placed at Node *B* (or alternatively an existing, redundant system is made operational), and provides the sensing functionality for section *B-CP*. Therefore, the entire link *AB* can still be monitored in its entirety, with *A-CP* section information obtained by the interrogator located in Node *A*, and *B-CP* section information obtained by the interrogator located in Node *B*. Advantageously, a network operator can “stitch” or otherwise combine (physically and/or logically) the data from these two sensors together to produce the overall sensing result for the entire link - except the very small section at the fiber cut location.

[0027] From this discussion it may be apparent to those skilled in the art that a relatively straightforward solution to achieve IaaS_r network link protection is to dedicate a backup DFOS interrogator at an opposite end of every sensing route (could be a route over multiple links). Unfortunately, this is not a cost-effective solution as it will potentially double the number of sensor interrogators employed in the system - while half of them serve as backup and are not used during a normal operation time.

[0028] A more economical approach is to share backup DFOS interrogators among all routes. In this way, the hardware cost (capital expenditure) will be lowered as the number of necessary DFOS interrogators (primary working ones and backup ones) is minimized, while any link failure can be circumvented. Such a shared arrangement is known in the art as a “shared protection scheme” and - until now - there is no known method to optimize DFOS placement for such shared a protection scheme.

[0029] Such DFOS placement is now described according to aspect of the present disclosure which advantageously defines a DFOS placement such that it is tolerant of / immune from single link failure.

[0030] The problem of reliable DFOS placement against single link failure can be defined as follows. We are given a network infrastructure $\mathbf{G}(\mathbf{V}, \mathbf{E})$, where $\mathbf{V}$ is the set of end nodes, and $\mathbf{E}$ is the set of optical fiber links that connects those end nodes. $\mathbf{G}$ is subjected to single link failure, e.g., fiber cut. The reliable DFOS placement problem is to find out the assignment of both primary and backup DFOS assignment (including sensor placement and fiber sensing routes for both primary and backup DFOS) to survive against single link failure and continue to provide IaaS services without interruption, with the objective of minimizing the consumption of the number of sensors.

[0031] **FIG. 2** is a schematic diagram illustrating reliable DFOS placement in an optical network according to aspects of the present disclosure. As shown in **FIG. 2**, four DFOS sensors are deployed at Nodes A , B , E (note that there are two sensors at Node E) as the primary sensors. The corresponding primary fiber sensing routes are $\{A: A-G-H\}$, $\{B: B-A-D-G\}$, $\{E1: E-F-H-E\}$, and $\{E2: E-D-B-C-F\}$. From the figure we can observe that all links are sensed (or covered) by this primary DFOS assignment.

[0032] Assume now that the optical network infrastructure arrangement illustratively shown in the figure is subjected to a single link failure, e.g., the cut point (CP) between node G and H . To provide reliable IaaS service, two backup DFOS sensors are deployed at node F and G . Since they are for backup protection purpose, the corresponding backup fiber sensing routes exhibit a tree-like structure (topology), rather than linear routes.

[0033] In this way, a backup sensing route tree can provide backup protection to several primary fiber sensing routes. In other words, it is a shared protection scheme, which may yield to a more efficient resource consumption in terms of the number of sensors used.

[0034] With continued reference to **FIG. 2**, we note that the backup fiber sensing trees are $\{G: GAB-GDA-GDE\}$ and $\{F: FCBD-FEHF-FEHG\}$. In case of a single link failure (e.g., fiber cut), the original primary sensor will continue to sense its assigned link(s)

as much as possible, while a backup sensor and a branch on the corresponding backup fiber sensing tree will be used to recover sensing service for the remaining segment of the broken link from the opposite direction as compared to the primary sensing route.

[0035] For example, in the configurations shown illustratively in **FIG. 2**, if there is a link failure at link *G-H* (e.g., a fiber cut point denoted by *CP*), the primary sensor at node *A* will continue to sense the path *A-G-CP*, while backup sensor *F* will be used to provide backup sensing service to path *F-E-H-CP*, thus any IaaS service can continue to function on all the links (including the broken link *G-H*) on the network infrastructure. In this example, links *E-F* and *E-H* are sensed by both the primary sensor in Node *E* and the backup sensor in Node *F* in opposite directions. Advantageously, this will not cause any data confusion or conflict.

[0036] Our inventive method and resulting DFOS configuration(s) according to aspects of the present disclosure advantageously provide reliable yet cost efficient IaaS service or DFOS assignment against single link failure. In particular, our method allows the backup DFOS resources to be shared among multiple primary DFOS assignments, thus achieving a cost-efficient way of providing reliable IaaS service. Furthermore, our method treats the assignment of primary and backup DFOS equally, and determines these assignments as a one-step global optimization, thus achieving a close-to-optimal result in terms of the number of DFOS sensors used.

[0037] Our inventive method and procedures according to aspects of the present disclosure generally involve three sub-procedures. First, our inventive method according to aspects of the present disclosure identifies all possible fiber sensing routes (constrained by the sensing range limit) on each node and considers them as candidates for primary DFOS assignment. Second, our inventive method according to aspects of the present disclosure identifies all possible fiber sensing route trees (constrained also by the sensing range limit) on each node and considers them as candidates for backup DFOS assignment. Finally, our inventive method according to aspects of the present disclosure considers primary DFOS candidates and backup DFOS candidates equally and applies a greedy

algorithm to select the minimum set of DFOS assignment from the primary candidates and backup candidates, such that each link is sensed (or covered) at least once from each direction.

[0038] In the meantime, our inventive methods according to aspects of the present disclosure ensures that, on a particular link that are shared by multiple primary fiber sensing routes, the number of backup fiber sensing services is greater than or equal to the number of primary fiber sensing services, so that each primary fiber sensing service will have at least one backup fiber sensing service when single link failure occurs.

[0039] **FIG. 3** is a flow diagram illustrating an overview of a placement procedure according to aspects of the present disclosure. With reference to that figure, it may be observed that our inventive method / procedure may be generalized into three sub-procedures, which are illustratively indicated as steps **100**, **200** and **300**, as shown in **FIG. 3**.

[0040] **Step 100**, the first sub-procedure, explores all possible primary DFOS assignments and stores them in a set called *primary_candidates*, which will be used as one input for a third sub-procedure at **Step 300**.

[0041] **Step 200**, the second sub-procedure, explores all possible backup DFOS assignments and stores them in a set called *backup_candidates*, which will be used as another input for the third sub-procedure at **Step 300**.

[0042] **Step 300**, the third sub-procedure takes outputs from **Step 100** and **Step 200**, and applies a greedy algorithm to select a minimum set from *primary_candidates* and *backup_candidates*, which will cover each link at least once from each direction of a link, thus providing protection for reliable IaaS services against single link failure.

[0043] The first sub-procedure (i.e., **Step 100**) includes 16 steps as follows, the flowchart of which is shown in **FIG. 4**, **FIG. 4(A)**, **FIG. 4(B)**, and **FIG. 4(C)**.

[0044] **Step 101** is the initialization step of the sub-procedure of depth-limited route exploration. Three data structures are created and initialized. First, a stack *s* is created to store all identities of all nodes that need to be visited for a given node *n*. The stack is initialized with the given node *n*, and to it is added any additional nodes when the additional nodes meet certain conditions (see **Steps 106** and **108**, and **Steps 112** and **114**).

[0045] Second, a list called *visited* is initialized to keep track of nodes that have been visited during a depth-limited route exploration process. This ensures that there are no duplicated sensing route(s) in a final DFOS assignment.

[0046] The list is initialized to contain the given node *n*. Finally, a set called *route_set* is initialized as empty, which contains all possible fiber sensing routes (linear routes) if a sensor at the given node *n* is deployed.

[0047] **Step 102**: is the entering point of a while loop. It performs a check to determine if stack *s* is empty or not. If the stack is not empty, control enters the while loop and continues to **Step 103**. If the stack is empty, it forces a quit of the while loop and transfers control to **Step 116** and returns the *route_set* for the given node *n*. Here, when the stack is empty, it means that all the neighboring nodes that are within the sensing limit for the given node *n* have been checked, so *route_set* contains all possible sensing routes for the given node *n*.

[0048] **Step 103** pops the last-in node from stack *s* and denotes it as node *current*. This *current* node indicates where the current exploration is located at. Future steps determine whether or not to add *current* and its neighbors as possible sensing routes in *route_set*.

[0049] **Step 104** checks if set *route_set* is empty or not. If it is empty, node *current* is the original node of the sensing route and operation will further explore any other possible sensing routes, as **Step 105**. If *route_set* is not empty, then operation checks the routes from *route_set* whose predecessor is *current*, and further explore any other possible sensing routes, a operation proceeds to **Step 110**.

[0050] **Step 105** is the entry point of a for-loop. We need to check each neighbor node nm of *current* and generate a route r from *current* to nm . This route will be checked in step 106 to determine whether it will be added to *route_set*.

[0051] **Step 106** checks the condition of route r that is extended from *current* to nm . A qualifying condition is that route r must be a linear route that contains no loop, and in the meantime, the distance traveled by r is less than the sensing range limit. If route r satisfies the above conditions, we will add r to *route_set* as shown in **Step 107**. If the condition is not met, the procedure will return to **Step 105** and check the next neighbor node and its corresponding newly generated route.

[0052] **Step 107** adds the route r to the set of *route_set*.

[0053] **Step 108** checks if neighbor node nm has been visited or not. If nm has been visited before, then control returns to **Step 105** and checks the next neighbor node. If nm has not been visited, then control continues at **Step 109**.

[0054] **Step 109** adds neighbor node nm to stack s , which allows further exploration of any other possible sensing routes extended from this node. In this step, nm is added to the list of visited nodes.

[0055] **Step 110** is executed when the condition in step 104 is not met. It is the entering point of the outer loop of a double for-loop. Here, we need to check each existing sensing route r in the set of *route_set*, and proceed with the ones that originate from node *current*.

[0056] **Step 111** is the entry point of an inner loop of a double for-loop. At this point in the procedure we need to check each neighbor node nm of *current* and generate a new route r_{new} that is constructed by adding node nm to existing sensing route, r .

[0057] **Step 112** this step checks whether or not route r_{new} is a linear route without a loop, and in the meantime, the distance traveled by r_{new} is less than the sensing limit. If the above condition holds true, then control proceeds at **Step 113**, where r_{new} is

added to *route_set*. If the condition is not met, the procedure will return to **Step 111** and check the next neighbor node and its corresponding newly generated route.

[0058] **Step 113** adds the route *r_new* to the set of *route_set*.

[0059] **Step 114** checks if neighbor node *nm* has been visited or not. If *nm* has been visited before, then control returns to **Step 111** and checks the next neighbor node. If *nm* has not been visited, then control proceeds at **Step 115**.

[0060] **Step 115** adds neighbor node *nm* to stack *s*, which allows further exploration of any other possible sensing route extended from this node. In this step, *nm* is added to the list of visited.

[0061] **Step 116** is executed when the condition in **Step 102** holds true. It returns *route_set* to where the procedure was called in the first sub-procedure in **Step 100**.

[0062] The second sub-procedure (i.e., **Step 200**) includes a number of steps as follows, the flowchart of which is shown in **FIG. 5**.

[0063] **Step 201** is the initialization step of the second sub-procedure. A set called *backup_tree* is created to store the backup fiber sensing routing tree if a backup sensor is deployed at the given node *n*.

[0064] **Step 202** calls the first sub-procedure to facilitate all the possible fiber sensing routes for the given node *n*. The result is denoted as *route_set*.

[0065] **Step 203** is the entry point of an outer for-loop. It will check each *route* in *route_set* and repeat **Step 204** through **Step 206**. If all route items in *route_set* have been checked, go to **Step 207**.

[0066] **Step 204** is the entry point of an inner for-loop. It checks each link traveled through by the selected *route* and repeats **Step 204** and **Step 205**. If all link items in *route* have been checked, control returns to **Step 203**.

[0067] **Step 205** checks if the selected *link* does not exist in *backup_tree* yet. If the link does not exist in *backup_tree* yet, control is transferred to **Step 206**; otherwise, control is transferred to **Step 204**.

[0068] **Step 206** adds the selected *link* to *backup_tree*.

[0069] **Step 207** returns *backup_tree* to where the second sub-procedure is called.

[0070] The third sub-procedure of our inventive method (i.e., **Step 300**) includes 18 steps as follows, the flowchart of which is shown in **FIG. 6**, **FIG. 6(A)**, **FIG. 6(B)**, and **FIG. 6(C)**.

[0071] **Step 301** is the initialization step of the third sub-procedure. Three data structures are created and initialized. First, a set called *universe* is created and initialized to contain all the links (both directions) in the given network **G**. Second, a set called *primary_candidates* is initialized as empty, which will store all the possible primary DFOS assignment. Thirdly, a set called *backup_candidates* is initialized as empty, which will store all the possible backup DFOS assignment. Finally, a set called *dfos_protection* is initialized as empty, which will store the assignment of reliable DFOS assignment (including both primary and backup DFOS assignments) that provides shared protection against single link failure.

[0072] **Step 302** calls the first sub-procedure for each node in the network $G(V, E)$, and add the returned results to *primary_candidates*.

[0073] **Step 303** calls the second sub-procedure for each node in the network $G(V, E)$, and add the returned result to *backup_candidates*.

[0074] **Step 304** is the entry point of a while-loop. If *universe* is empty, control is transferred to **Step 318**; otherwise, repeat **Step 305** through **Step 317**.

[0075] **Step 305** examines each candidate from *primary_candidates* and *backup_candidates*, and selects the DFOS assignment *dfos_max*, which has the maximum overlapping links with *universe*.

[0076] **Step 306** adds the above selected *dfos_max* to the final reliable DFOS assignment result *dfos_protection*. Note that this *dfos_max* can be either a primary DFOS assignment or a backup DFOS assignment, which means that the proposed procedure treats them equally without prioritizing primary DFOS assignment over backup DFOS assignment. As a result, the allocation of primary and backup DFOS is obtained in a global optimization manner in one-step, which is more efficient than any two-step approach that provisions primary DFOS assignment first followed by the backup DFOS assignment or vice versa.

[0077] **Step 307** checks if the above selected *dfos_max* is from *primary_candidates* or *backup_candidates*. If it is from *primary_candidates*, the procedure proceeds to **Step 308**; otherwise, the procedure goes to **Step 313**.

[0078] **Step 308** is the entry point of a for-loop. It will check each *link* in *dfos_max* and repeat from **Step 309** to **Step 312**.

[0079] **Step 309** checks if *link* does not exist in *backup_set*. If *link* does not exist in *backup_set*, the procedure transfers control to **Step 310**; otherwise, the procedure transfers control to **Step 311**.

[0080] **Step 310** adds the given *link* to *primary_set*.

[0081] **Step 311** checks if *link* (e.g., (i, j) , where i and j are network nodes) exists in *universe*, and in the meantime, the opposite direction link *opposite_link* (e.g., (j, i)) does not exist in *primary_set*. If true, the procedure transfers control to **Step 312**; otherwise, the procedure returns to **Step 308**.

[0082] **Step 312** removes *link* from *universe*.

[0083] **Step 313** is the entry point of a for-loop. It checks each *link* in *dfos_max* and repeat from step **Step 314** to **Step 317**.

[0084] **Step 314** checks if *link* does not exist in *primary_set*. If *link* does not exist in *primary_set*, the procedure transfers control to **Step 315**; otherwise, the procedure transfers control to **Step 316**.

[0085] **Step 315** adds the given *link* to *backup_set*.

[0086] **Step 316** checks if *link* (e.g., (i, j) , where i and j are network nodes) exists in *universe*, and in the meantime, the opposite direction link *opposite_link* (e.g., (j, i)) does not exist in *backup_set*. If true, the procedure continues at **Step 317**; otherwise, the procedure transfers back to **Step 313**.

[0087] **Step 317** removes *link* from *universe*.

[0088] **Step 318** returns results in *dfos_protection* and the procedure terminates.

[0089] **The application of one-step DFOS placement with shared protection**
FIG 7 shows the application of the proposed one-step DFOS placement with shared protection procedure.

[0090] There are multiple nodes in the fiber optic network, and there are multiple fiber optic links between pairs of nodes. The yellow fiber optic links are those links that need to be monitored (sensed) by the DFOS sensors (they could include all of the fiber optic links in the network).

[0091] These optical nodes are controlled by a network controller, which can be placed at one of the nodes, or can be in a remote location or multiple locations. The network information, including the network topology, information of each node, information of each link (such as the two end nodes, the link distance, whether sensing is required on this link), and so on, are collected by the network controller. Based on the information, the network controller uses the one-step DFOS placement with shared protection procedure to decide the network configuration for sensing purpose. The configuration settings are then sent to individual nodes.

[0092] When an optical node receives the respective network configuration instructions, it executes the instructions, which could include placing one or more DFOS sensor hardware at the node and connecting them to the respective fiber, and/or connect two fibers from two links together to form a pass-through path (this can be done via a fiber patch panel or optical switch), and/or terminate a fiber to prevent large reflection at the end surface of the termination point.

[0093] Each deployed DFOS sensor also use the instruction from the network controller to configure the sensing distance and any related parameters, then start the on-going measurement. The collected data are separated into individual links, if the sensor's sensing range spans across multiple hops. The measure data for each fiber link can be stored and processed locally or can be sent to remote or centralized processor to be analyzed or stored.

[0094] When a cable failure occurs (such as buried cable cut by illegal or improper construction, buried cable cut by earthquake, overhead cable cut by falling tree, or overhead cable cut by traffic accident that breaks the utility pole supporting the cable), it is detected immediately by the corresponding DFOS sensor that monitors this route, since there is a loss of the backscattering signal and abnormal sensor data. Due to the operation principle of backscattering-based DFOS, in which the signal location is clearly distinguished through the time-of-flight calculation, the location of the cable failure can be identified easily. This information is then sent to the network controller.

[0095] Based on the pre-determined backup route assignment plan provided by the proposed shared protection procedure, the network controller assigns the backup DFOS sensor(s) and the corresponding backup route(s), and sends the information to the respective nodes. The backup DFOS(s) is then operated, and corresponding routes are configured through optical switches at the intermediate nodes. The sensing network can then provide the sensing service on the backup route(s), which includes the remaining part of the route that was cut.

[0096] The network controller also coordinates the data processing between the primary sensor and the backup sensor that operate on different part of the affected route from opposite direction, and stitch the sensing data from two sensors together, so that the user can still receive a smooth, almost seamless sensing result for this route.

[0097] Besides seamless data in the spatial domain (along the fiber route), the data in time domain is also almost seamless, because the backup route selection time and configuration time are very short due to automated control. Therefore the user will still receive continuous, uninterrupted sensing service, and will not miss any events on the network.

[0098] Concurrently, the network controller will notify the network operator about the cable cut with detailed location information, so that the network operator can take action to do the repair.

[0099] Due to the resource optimization advantage of the protected DFOS placement procedure, the total number of the primary DFOS sensors and the backup DFOS sensors in the network can be kept low, saving the hardware expense. This automatic procedure is very efficient, which can reduce the network planning time significantly, especially when compared to manual planning. Therefore, it advantageously reduces operation cost.

[00100] Since all the required links in the network are performing sensing function continuously, even after a cable failure, the IaaSr (NaaSr) function is achieved and maintained, which will improve the network operation efficiency (such as early warning of potential cable damage, monitoring cable health, monitoring operation environment), and bring new service and revenue to the network owner (such as providing traffic information to municipal government, monitoring road condition for highway operator, monitoring utility pole health for utility company, monitoring city noise for accident detection, etc.)

[00101] Problem Statement and Integer Linear Programming Formulation

[00102] The problem of survivable DFOS placement against single link failure can be defined as follows. We are given a network infrastructure $G(V, E)$, where V is the set of end nodes, and E is the set of optical fiber links that connects those end nodes. G is subjected to single link failure, e.g., fiber cut. The survivable DFOS placement problem is to find out (1) the placement of both primary and backup DFOS sensors and (2) the routing of primary fiber sensing channel and the backup fiber sensing tree channels, with the objective of minimizing the number of sensors used. In this process, we need to consider the sensing range constraint in a sense that each sensor can sense data in a single-direction with a limited sensing range, e.g., $80km$.

[00103] Here, we use integer linear programming (ILP) to formulate the survivable DFOS placement problem to facilitate the optimal shared protection solution. The following parameters are given:

[00104] $G(V, E)$: the network infrastructure, where V is the set of nodes and E is the set of links;

[00105] R : the sensing range limit;

[00106] $d_{i,j}$: the distance of link (i, j) ;

[00107] From these parameters, we can obtain $w_{i,j}$ by calculating $d_{i,j}/R$, which represents the weight of link (i, j) . We also pre-calculate the shortest paths that are within the sensing range limit R for each node, and define $t_{s,i,j}$ as 1 if link (i, j) is in the sensing range of node s ; 0 otherwise.

[00108] The following boolean variables are to be determined:

[00109] $p_{s,d}$: 1 if a primary sensor is deployed at node s , with sensing channel reaches destination d ; 0 otherwise;

[00110] b_s : 1 if a backup sensor is deployed at node s ; 0 otherwise;

[00111] $r_{s,d,i,j}$: 1 if the primary fiber sensing channel route between s and d travels through link (i, j) ; 0 otherwise;

[00112] The ILP formulation is shown as below.

$$\min: \sum_{s,d \in V} p_{s,d} + \sum_{s \in V} b_s \quad (1)$$

$$\text{subject to: } \sum_{i,j \in V} r_{s,d,i,j} - \sum_{i,j \in V} r_{s,d,j,i} = \begin{cases} p_{s,d} & i = s \\ -p_{s,d} & i = d \\ 0 & \text{otherwise} \end{cases} \quad \forall s, d \in V \quad (2)$$

$$\sum_{i,j \in V} r_{s,d,i,j} \cdot w_{i,j} \leq p_{s,d}, \quad \forall s, d \in V \quad (3)$$

$$\sum_{s,d} r_{s,d,i,j} + \sum_{s,d} r_{s,d,j,i} \geq 1, \forall i, j \in V \quad (4)$$

$$\sum_{s \in V} b_s \cdot t_{s,i,j} + \sum_{s \in V} b_s \cdot t_{s,j,i} \geq 1, \forall i, j \in V \quad (5)$$

$$\sum_{s \in V} b_s \cdot t_{s,i,j} - \sum_{s,d} r_{s,d,j,i} \geq 0, \forall i, j \in V \quad (6)$$

[00113] The objective is to minimize the number of sensors used, which is defined in Eq. (1). In addition, Eq. (2) represents the sensing range limit constraint that the distance of any sensing fiber route must be less than the sensing range limit R. Eq. (3) ensures that each link (i, j) can be sensed at least once from either direction. Eq. (4) makes sure that each sensing fiber route is a linear route. Eq. (5) guarantees that each link has at least one backup sensing tree cover it. Eq. (6) ensures that, for each link in E, the number of backup sensing is greater than or equal to the number of primary sensing, so that the link is protected against single link failure.

[00114] Heuristic Algorithms – Dedicated Protection and Shared Protection

[00115] *Dedicated Protection*

[00116] As we previously noted, a straightforward solution to achieve the IaaS network link protection is to dedicate a backup DFOS interrogator at the opposite end of

every sensing route (could be a route over multiple links). For example, a dedicated protection approach can be to use the solution in [2] to provision the fiber sensing route and allocate a primary and a backup DFOS sensors at the two ends of this route to provide a survivable DFOS placement. However, this is not a cost-effective solution because it will double the amount of sensor interrogators in the system, while half of them serve as backup and are not used during normal operation time. A more economical way is to use share the backup DFOS interrogators among all routes. In this way, the hardware cost (capital expenditure) will be lowered by keeping the number of necessary DFOS interrogators (primary working ones and backup ones) to the minimum, while any link failure can be solved.

[00117] *Shared Protection*

[00118] As noted previously, a shared protection scheme is illustrated in FIG. 8. To provide IaaS services, four DFOS sensors are deployed at node *A*, *B*, *E* (note that there are two sensors on *E*) as primary sensors. The corresponding primary fiber sensing channel routes are *A*: *A-G-H*, *B*: *B-A-D-G*, *E*: *E-F-H-E*, and *E*: *E-D-B-C-F*. We can see that all the links are sensed (or covered) by this primary DFOS assignment. In practice, the network infrastructure is subjected to various hardware and/or software failures, such as a single link failure due to a fiber cut (e.g., a cut point (CP) between node *G* and *H*). When such a single link failure occurs to link *G-H*, the existing primary sensors can continue to collect sensing data from *A-G-CP*, while a backup sensor and a corresponding backup fiber sensing channel routes are required to collect sensing data from *H-CP*, such that link *G-H* is still fully sensed (or covered) from two opposite directions. In order to provide such a survivable IaaS service, two backup DFOS sensors are deployed at node *F* and *G*. The corresponding backup fiber sensing channels are in a tree-like structure, rather than a linear route.

[00119] For example, in FIG. 8, the backup fiber sensing trees are *G*: *GAB-GDA-GDE* and *F*: *FCBD-FEHF-FEHG*. In this way, the backup sensing resources can be shared by multiple primary DFOS assignment, which may yield to a more efficient resource consumption in terms of the number of sensors used. In FIG. 8, when single link failure

(e.g., cut point (CP) occurs to link $G-H$, the primary sensor at node A will continue to sense the channel $A-G-CP$, while the backup sensor at node F will be used to provide backup sensing service to channel $F-E-H-CP$, so that the IaaS service can continue on link $G-H$. As we can see from the above example, it is actually a link protection problem to provision survivable DFOS placement, as we need to make sure each network link is sensed at least once from different direction to survive against single link failure. In the following parts, we propose three efficient heuristics in the context of share protection.

[00120] Shared Protection with Random Backup: This is a two-step shared protection scheme. First, we can apply the solution in [2] to provision the primary DFOS assignment, denoted by *primary_candidates*. Secondly, a random node can be selected to place a backup DFOS sensor. Accordingly, we can find out all the links that are within the sensing limit range of the selected node, which forms a backup sensing tree. The second step repeats until all the physical link can be sensed by at least one primary fiber sensing route in one direction and covered by at least a branch of the backup sensing fiber tree in the opposite direction. Hence, when a link encounters a cut point, the link can be sensed by a primary and backup DFOS sensor from two directions.

[00121] Shared Protection with Minimum Set Cover: This is also a two-step shared protection scheme. The first step is the same as in the shared protection with random backup. The second step is optimized using the greedy algorithm for minimum set cover [3]. More specifically, we can find out the backup sensing tree for each node on the network, which forms the set of *backup_candidates*. Then, we use the minimum set cover greedy algorithm to find out the minimum set from *backup_candidates*, which can cover all the links in the network in an opposite direction as provisioned in *primary_candidates*.

[00122] Shared Protection with One-step Optimization: The above two approaches provisions primary DFOS assignment and the backup DFOS assignment in two steps. As a result, the result is not a global optimal result. Hence, we propose another heuristic that can optimize the allocation of primary and backup DFOS assignments in one-step, which can achieve a global optimization result. More specifically, the shared protection one-step solution works on a directed graph, whose links are stores in *universe*.

The protection is from the perspective of link protection in a sense that each link on a primary fiber sensing routes is protected by a backup sensor and one of the branches on its corresponding backup fiber sensing tree. First, we apply the solution in [2] to find out all the primary DFOS assignment. Instead of actually provisioning it, we store these assignments in *primary_candidates* first. Secondly, similar as the above two approaches, we find out all the possible backup DFOS assignment (including backup sensor placement and the backup fiber sensing tree routes) and denote it as *backup_candidates*. Finally, we use the modified minimum set cover greedy algorithm to find out the minimum set from the combination of *primary_candidates* and *backup_candidates*, which can cover all the links in the network in both directions. The modified minimum set cover greedy algorithm has two distinguished steps compared to [3], which are in the process of (1) selecting the maximum overlapping set and (2) updating the target set. First, when finding the maximum overlapping set, if the candidate is from *primary_candidates*, then we will count how many times the candidates overlap with the *universe* but not overlap with the opposite direction of fiber sensing routes from *primary_dfos*. Accordingly, if the candidate is from *backup_candidates*, then we will count how many times the candidates overlap with the *universe* but not overlap with the opposite direction of fiber sensing routes from *backup_dfos*. The above step will make sure that a given link is not covered by two primary (or two backup) sensing fiber tree in both directions, but by a primary and a backup sensing route from different direction. Secondly, when updating the *universe* we need to mark on the direction of each link, whether they are covered by primary DFOS or backup DFOS, so we create two set *primary_dfos* and *backup_dfos* to keep track of these. The detailed steps of the proposed shared protection in one-step heuristic algorithm can be found in the following pseudocode.

[00123] Numerical Results

[00124] We conduct comprehensive simulations to validate the proposed solutions. The fiber optic sensing range limit is set to be *80km*, given an existing fiber optic sensing technique. Due to this constraint, the network infrastructures we selected are regional or metro fiber optical networks using real-world datasets. The key network parameters are shown in Table 1. Note that we performed pre-processing that clips the links that are

greater than the sensing range limit to be $80km$, so that those links can also be covered by DFOS sensors.

[00125] We evaluate the proposed ILP solution and the efficient heuristic solutions in terms of the number of sensors used. The results are shown in Table 2. We can see that the ILP solution provides the lower bound; however, as the network scale becomes large, it is not able to yield a result in a reasonable amount of time. Among all the heuristic algorithms, we can observe that shared protection solutions outperform the dedicated protection solution. In particular, Shared-One can achieve a performance that is close to the lower bound set by the ILP solution. Furthermore, Shared-One outperforms dedicated protection, Shared-Random and Shared-MSR by an average improvement of 27%, 20% and 16%, respectively. The reason is because Shared-One determine the allocation of primary DFOS and backup DFOS in one-step, which achieves the global optimization.

Algorithm 1 Shared Protection in One-step

```

1: initialize universe with all the links in the directed graph G
2: initialize dfix_primary and backup_primary as empty
3: apply Exp algorithm [2] to find primary_candidates
4: pre-calculate shortest paths for each node pair and form backup_candidates
5: while universe not empty do
6:   max_overlap = 0
7:   for candidate from primary_candidates and backup_candidates do
8:     if candidate is from primary_candidates then
9:       count_overlap is overlapping links between candidate and universe exclude dfix_primary
10:      if count_overlap  $\geq$  max_overlap then
11:        max_overlap = count_overlap
12:        max_candidate = candidate
13:      end if
14:    else
15:      count_overlap is overlapping links between candidate and universe exclude backup_primary
16:      if count_overlap  $\geq$  max_overlap then
17:        max_overlap = count_overlap
18:        max_candidate = candidate
19:      end if
20:    end if
21:  end for
22:  if max_candidate is from primary_candidates then
23:    add max_candidate to dfix_primary
24:  else
25:    add max_candidate to dfix_backup
26:  end if
27: end while
28: return dfix_backup and dfix_primary

```

Table 1. Network parameters

	Oxford	INS	ValleyNet	Palmetto	ION	US_carrier
No. of nodes	19	24	31	45	98	150
No. of links	24	28	33	70	97	171
Ave. node degree	2.53	2.33	2.13	3.11	1.98	2.28
Ave. link distance	51.44	59.06	44.78	54.96	38.02	49.80

Table 2. No. of sensors used

	Oxford	INS	ValleyNet	Palmetto	ION	US_carrier
Dedicated Protection	38	52	46	110	120	264
Shared-Random	33.28	45.8	41.9	92.9	118.88	241.42
Shared-MSD	32	45	39	92	108	231
Shared-One	28	36	35	75	93	187
ILP	25	36	33	*	*	*

[00126] At this point, while we have presented this disclosure using some specific examples, those skilled in the art will recognize that our teachings are not so limited. More specifically, we have defined and formulated a survivable DFOS placement problem and have disclosed an ILP solution that advantageously can achieve an optimal performance in terms of the number of sensors used. Additionally, we have disclosed several efficient heuristic algorithms, including both dedicated protection approaches and shared protection approaches. Our shared protection algorithm treats the allocation of primary and backup DFOS placement equally and optimizes these assignment in a one-step global optimization manner, thus achieving a performance that is a near-optimal solution obtained by the ILP. We have conducted comprehensive simulations to demonstrate the effectiveness of our heuristic algorithm. Accordingly, this disclosure should only be limited by the scope of the claims attached hereto.

Claims:

1. For a distributed fiber optic sensing (DFOS) network having a plurality of nodes optically connected by a plurality of optical links, said network defined by $G(V, E)$ where V is a set of end nodes, and E is a set of optical fiber links that connects those end nodes, where G is subject to a single link failure, a method of providing assignment of both primary and back sensor assignment, said method comprising:

exhibiting distance-route resource sharing, said system comprising

determining possible primary DFOS assignments as *primary_set*;

determining all backup DFOS assignments as *backup_set*; and

from the *primary_set* and the *backup_set*, selecting a minimum set that provides shared protection against a single link failure.

2. A distributed fiber optic sensor placement method comprising:

providing a fiber optic network comprising a set of nodes and a set of fiber optic links defined by $G(V, E)$ where G is the fiber optic network, V is the set of nodes, and E is the set of links;

for each node in $G(V, E)$, perform a distance-limited route exploration procedure to generate a set S that includes all possible sensor placement(s) and routing and sensing assignments at each node n in the network G ; and

deploying the sensors at placement locations generated by the distance-limited route exploration.

3. The method of claim 2 further comprising:

determining a set of all possible sensing routes (*all_route_set*) for each node in the fiber optic network.

4. The method of claim 3 further comprising:

determining a minimum set of sensing routes that fully cover all the links in the fiber optic network.

5. The method of claim 3 further comprising:
determining a set of possible sensing routes for a given node in the fiber optic network when there is no existing sensing route defined for the given node.
6. The method of claim 5 further comprising
determining a set of possible sensing routes for a given node in the fiber optic network when there are existing sensing route defined for the given node.
7. The method of claim 5 wherein a route is only added to *all_route_set* when that route simultaneously contains no loop and a distance of the route is less than a sensing range limit of the sensor being placed.
8. The method of claim 4 wherein placement of a sensor is located at either one of two ends of a sensing route that is within a minimum set cover included in *alt_route_set* which covers all links in a given fiber optic network.
9. The method of claim 8 wherein the fiber optic network include a network controller that is configured to execute the method and a user configurable fiber optic connector switch that optically connects a sensor to a node.
10. The method of claim 9 wherein the network controller communicates network configuration instructions to the nodes included in the fiber optic network.
11. The method of claim 10 wherein the nodes receive the network configuration instructions and in response locally configure including placement of sensor(s) and/or fiber optic links through the fiber optic connector switch.
12. The method of claim 11 wherein the sensors receive the network configuration information and configure respective sensing settings and data reporting.
13. The method of claim 2 wherein the number of sensors deployed is defined by:

$$\min : \sum_{s,d \in V} \theta_{s,d}$$

for the network infrastructure $G(V, E)$, where V is the set of nodes; E is the set of links; R : the sensing range limit of a given sensor; d_{ij} : the distance of link (i, j) ; w_{ij} : the distance of the weight of link (i, j) , which is obtained by d_{ij} / R ;

wherein the following Boolean variables are determined:

$\theta_{s,d}$: 1 if a sensor is deployed at node s , with termination point at node d , where $s, d \in V$; 0 otherwise;

$r_{s,d,i,j}$: 1 if the sensing fiber route between s and d passes through link (i,j) , where $r_{s,d,i,j} \in V$; 0 otherwise;

and the following constraints are considered:

$$\begin{aligned} \sum_{i,j \in V} r_{s,d,i,j} \cdot w_{i,j} &\leq \theta_{s,d}, \quad \forall s, d \in V \\ \sum_{s,d \in V} r_{s,d,i,j} + \sum_{s,d \in V} r_{s,d,j,i} &\geq 1, \quad \forall i, j \in V \\ \sum_{i,j \in V} r_{s,d,i,j} - \sum_{i,j \in V} r_{s,d,j,i} &= \begin{cases} \theta_{s,d} & i = s \\ -\theta_{s,d} & i = d \\ 0 & \text{otherwise} \end{cases} \quad \forall s, d \in V \end{aligned}$$



FIG. 1(A)



FIG. 1(B)



FIG. 1(C)

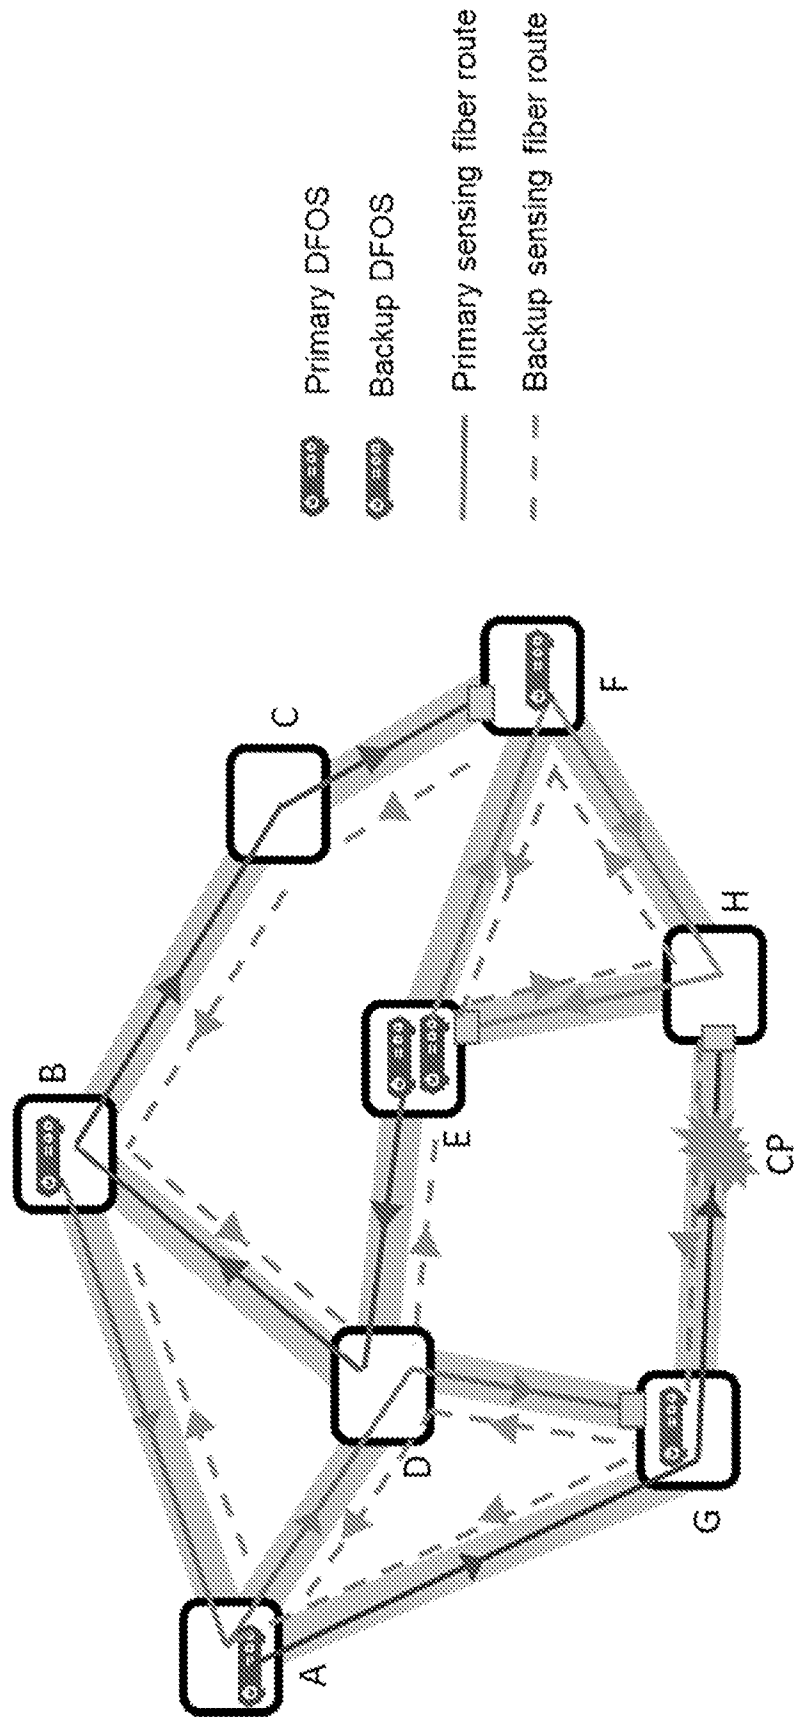


FIG. 2

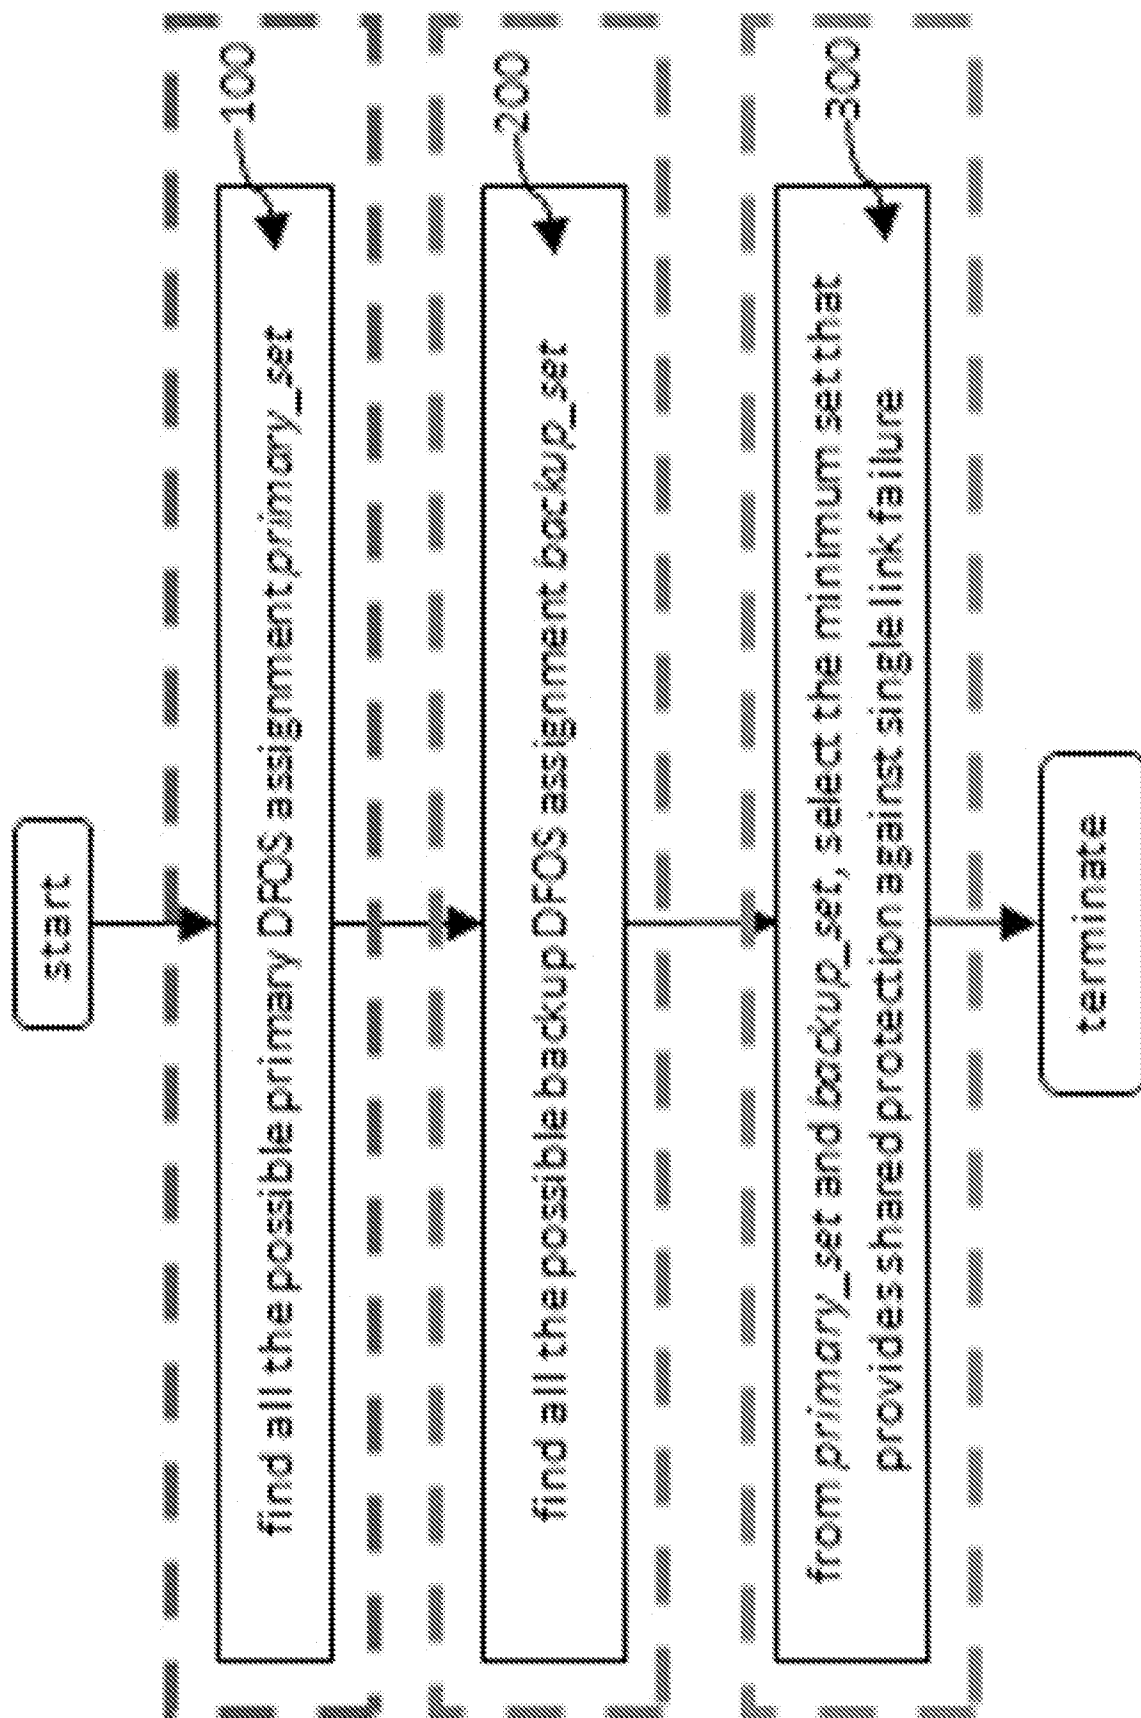


FIG. 3

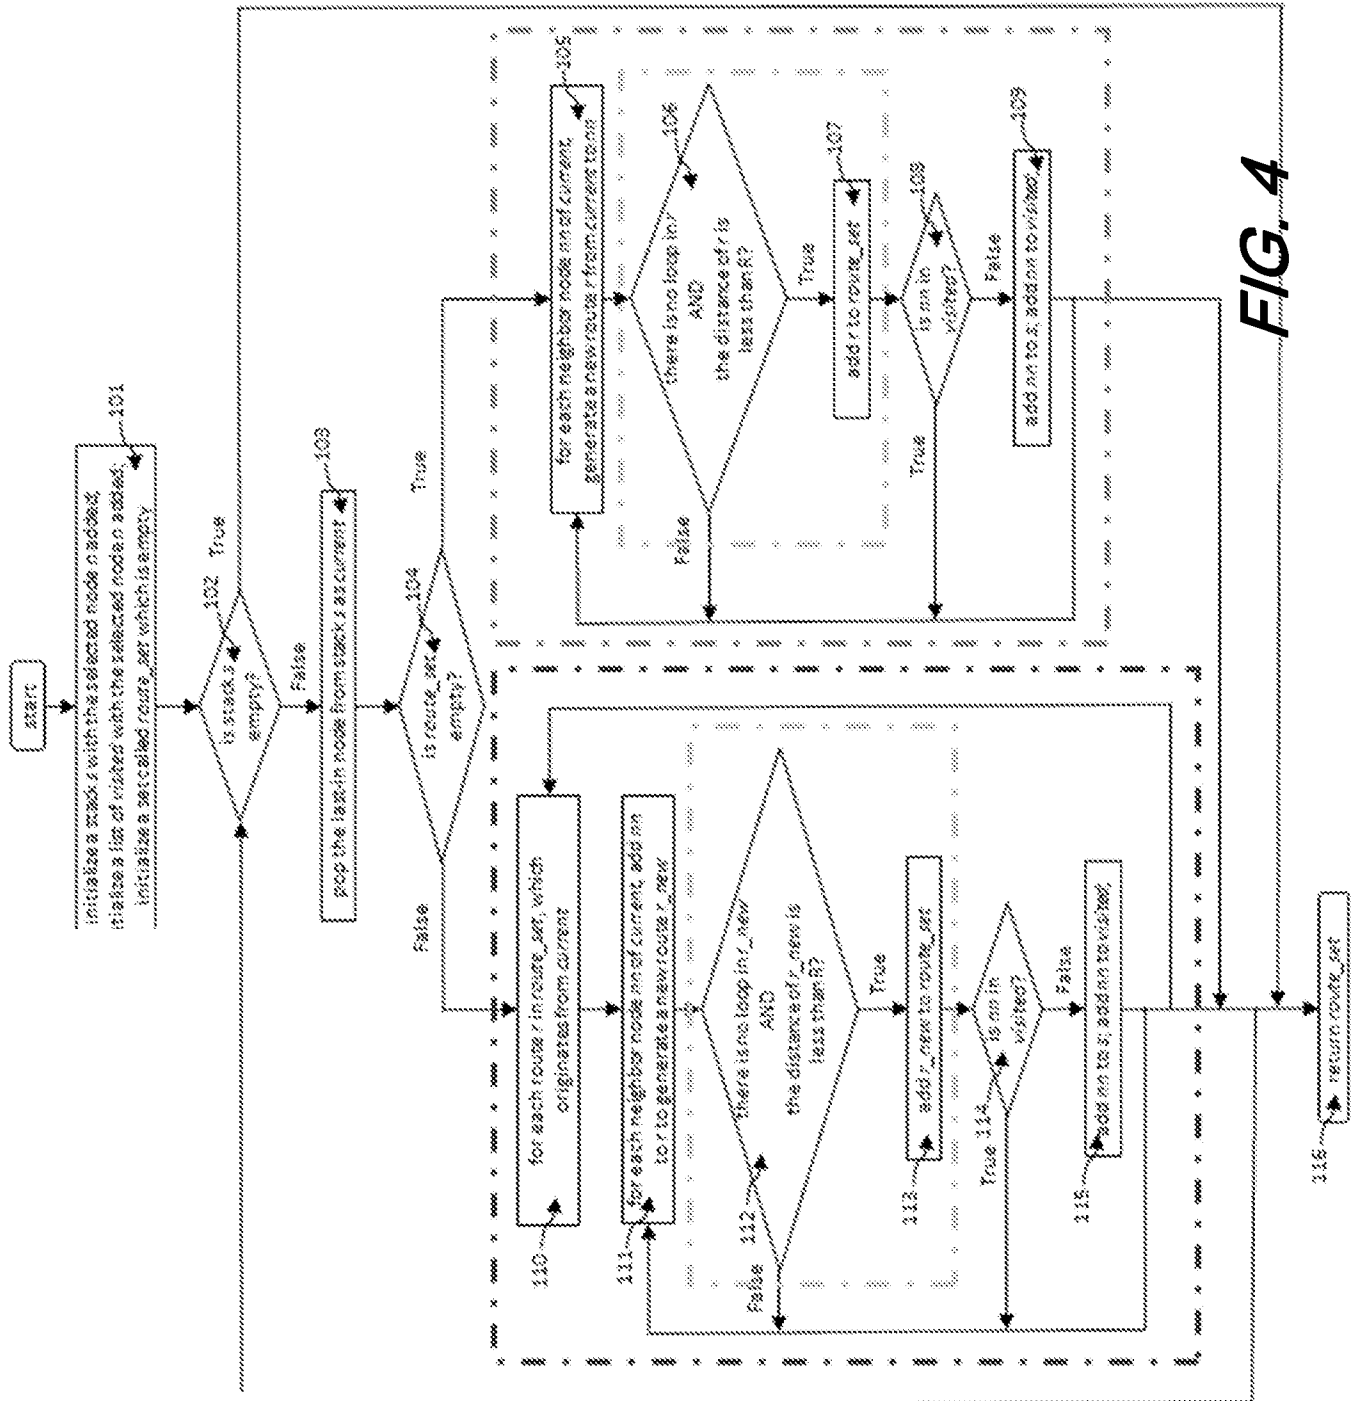
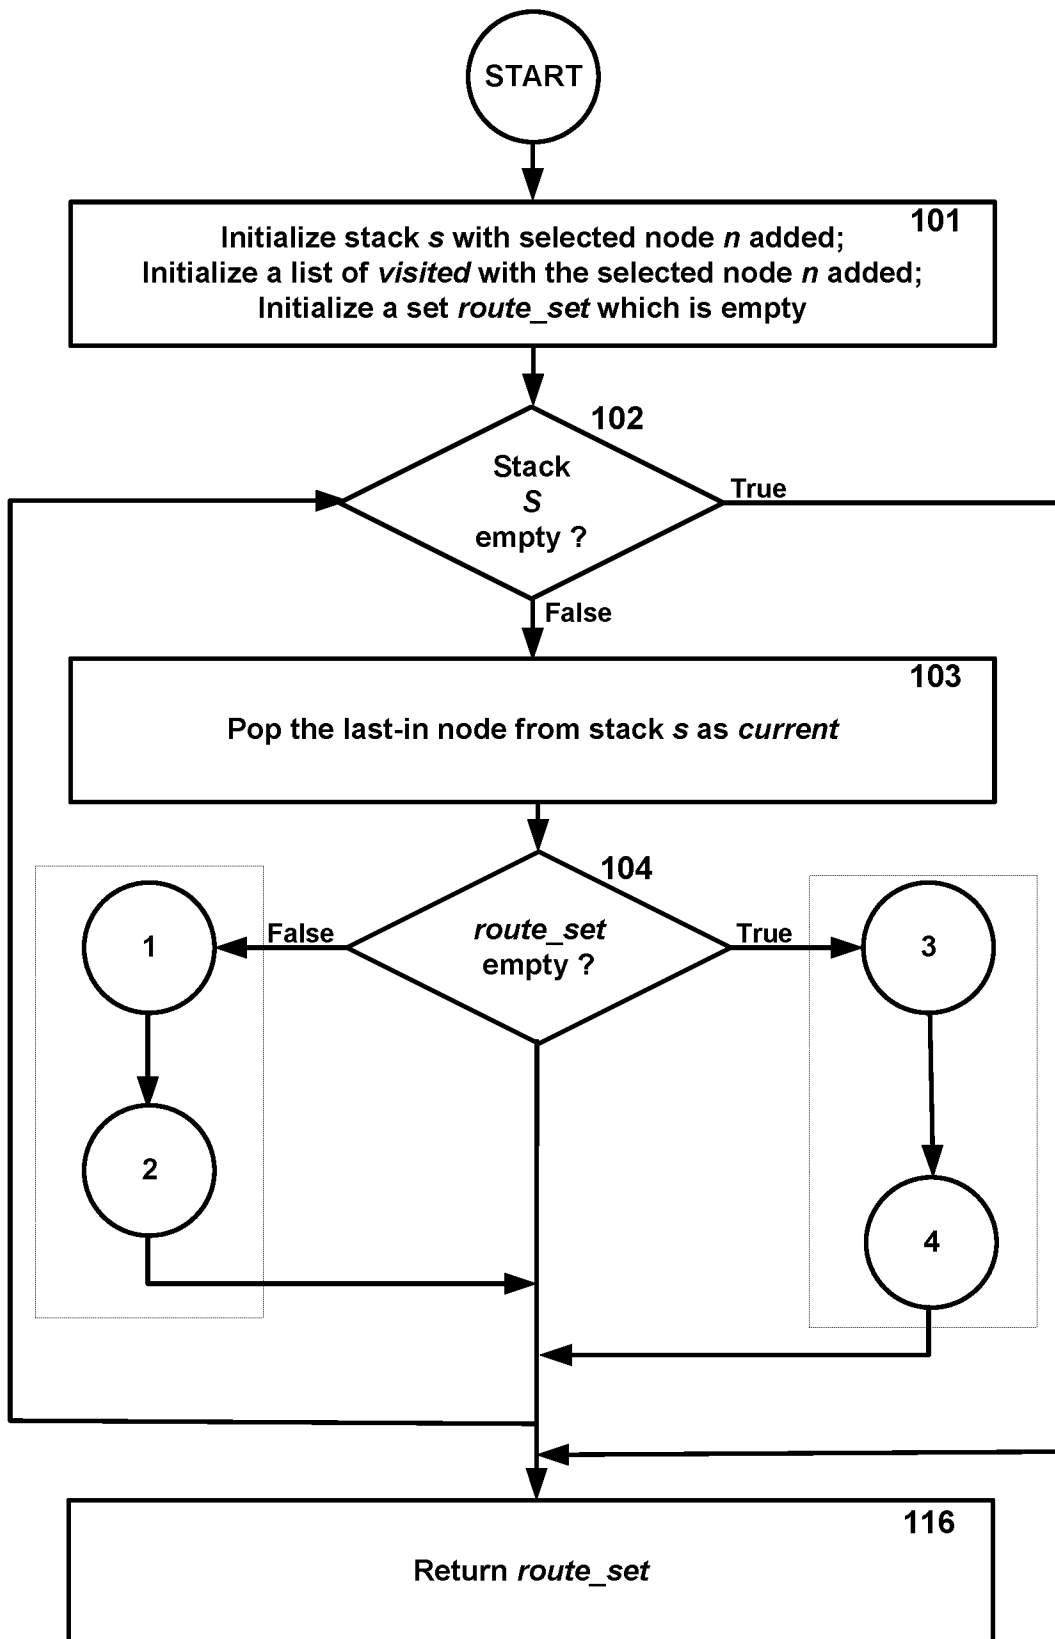
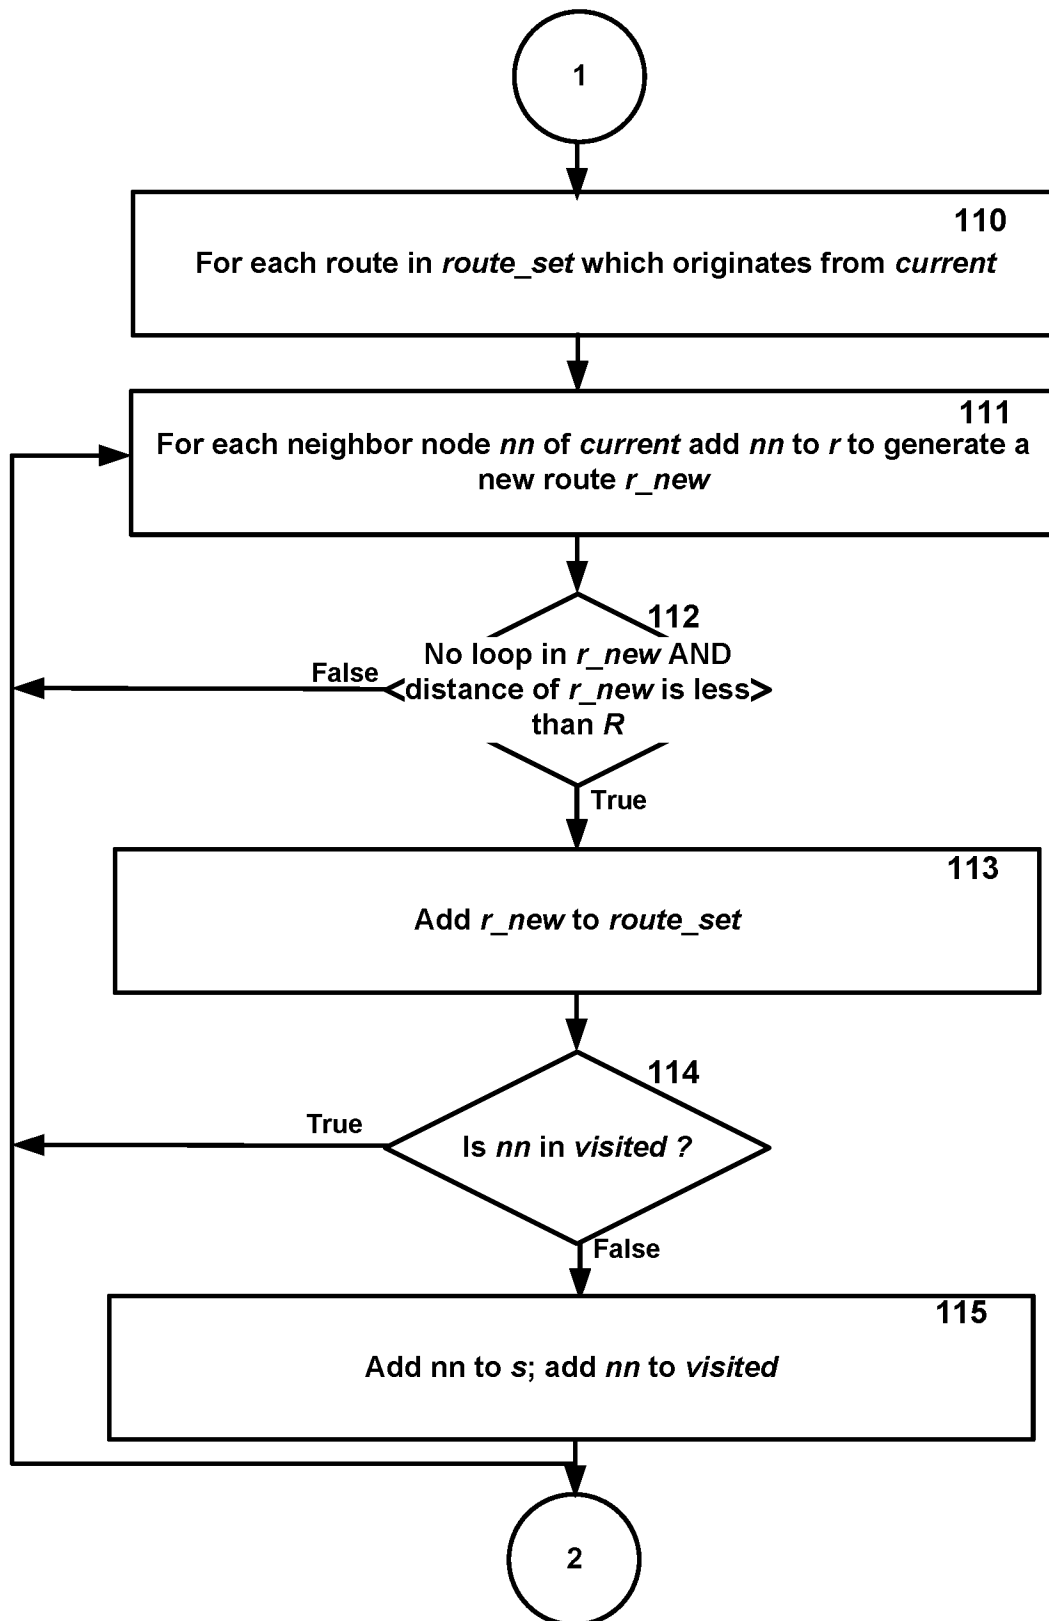


FIG. 4

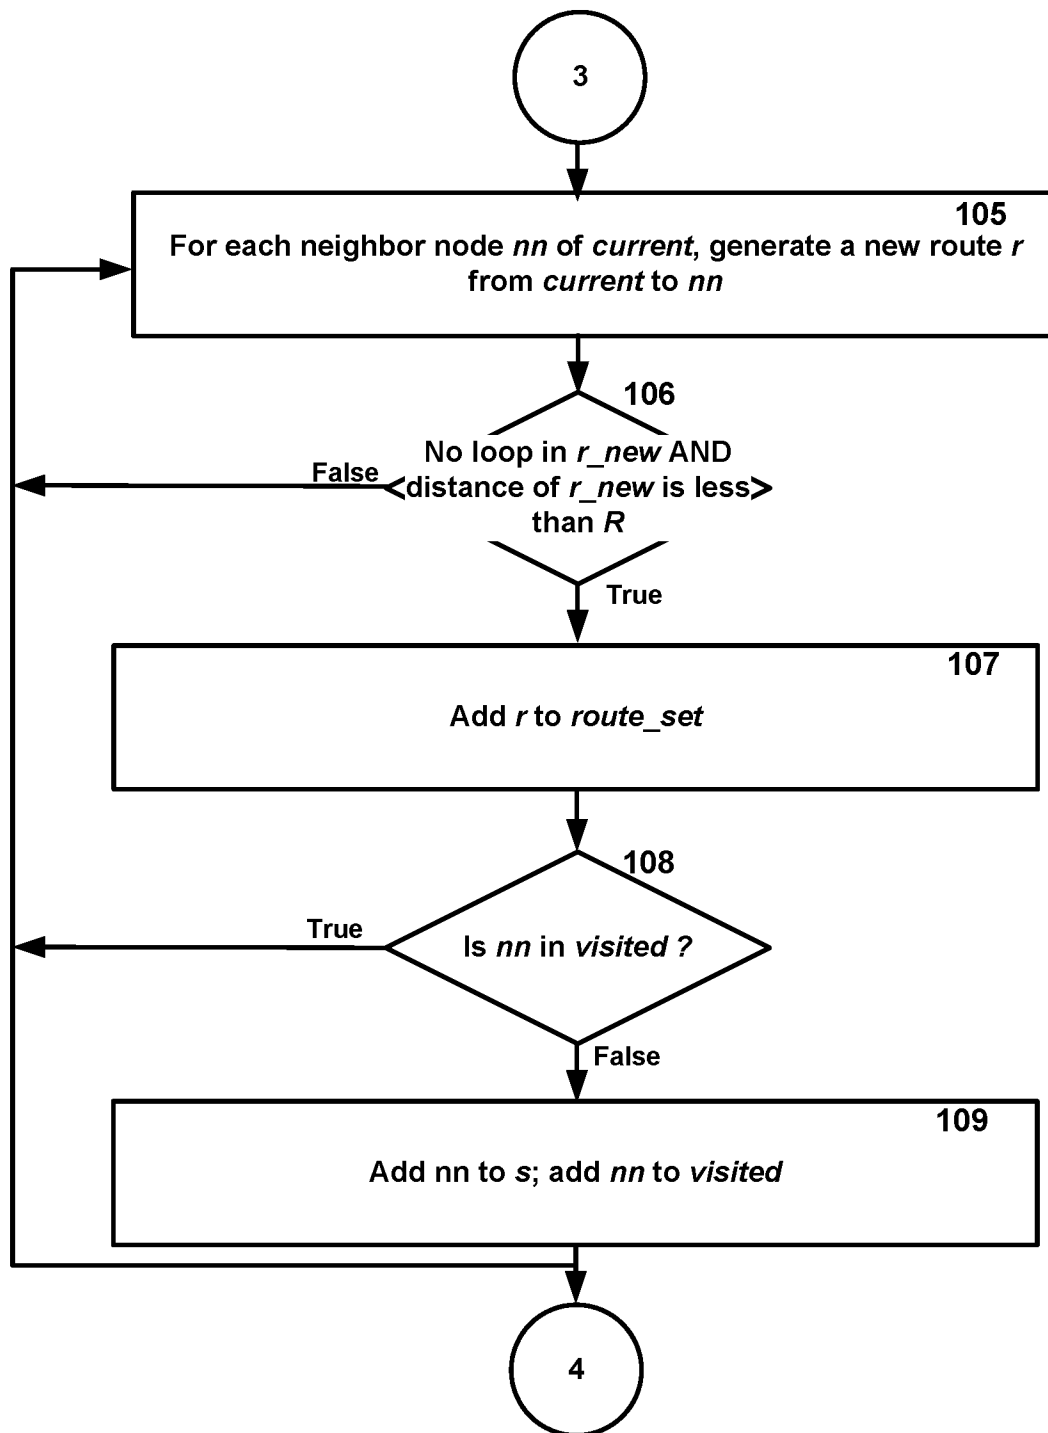
5/13


**FIG. 4(A)**

6/13

**FIG. 4(B)**

7/13

**FIG. 4(C)**

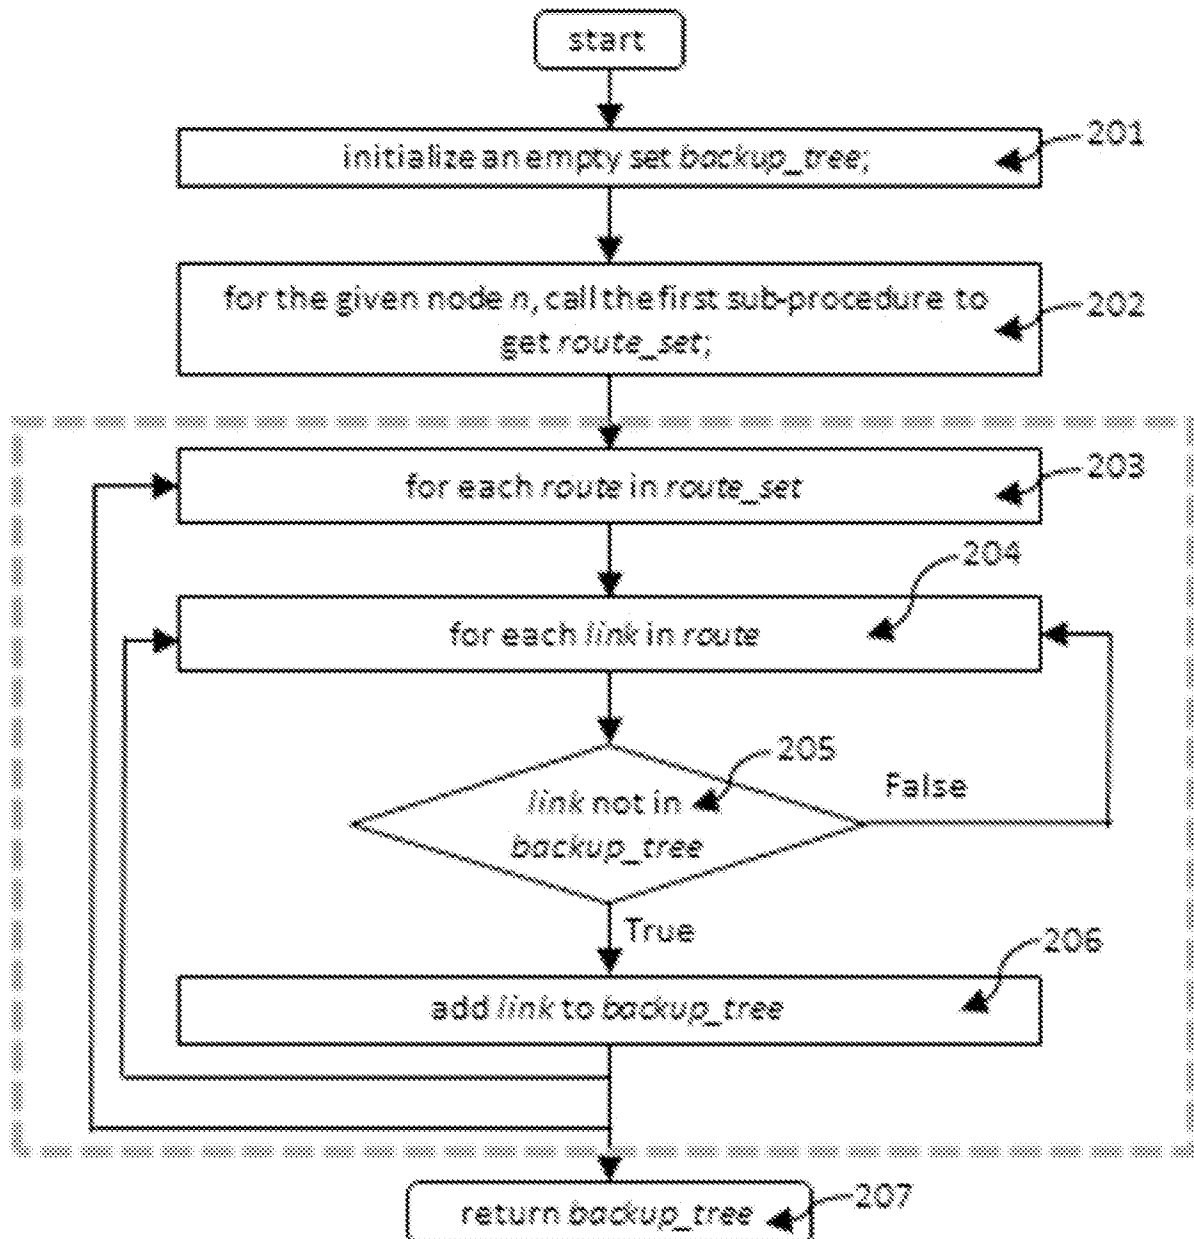**FIG. 5**

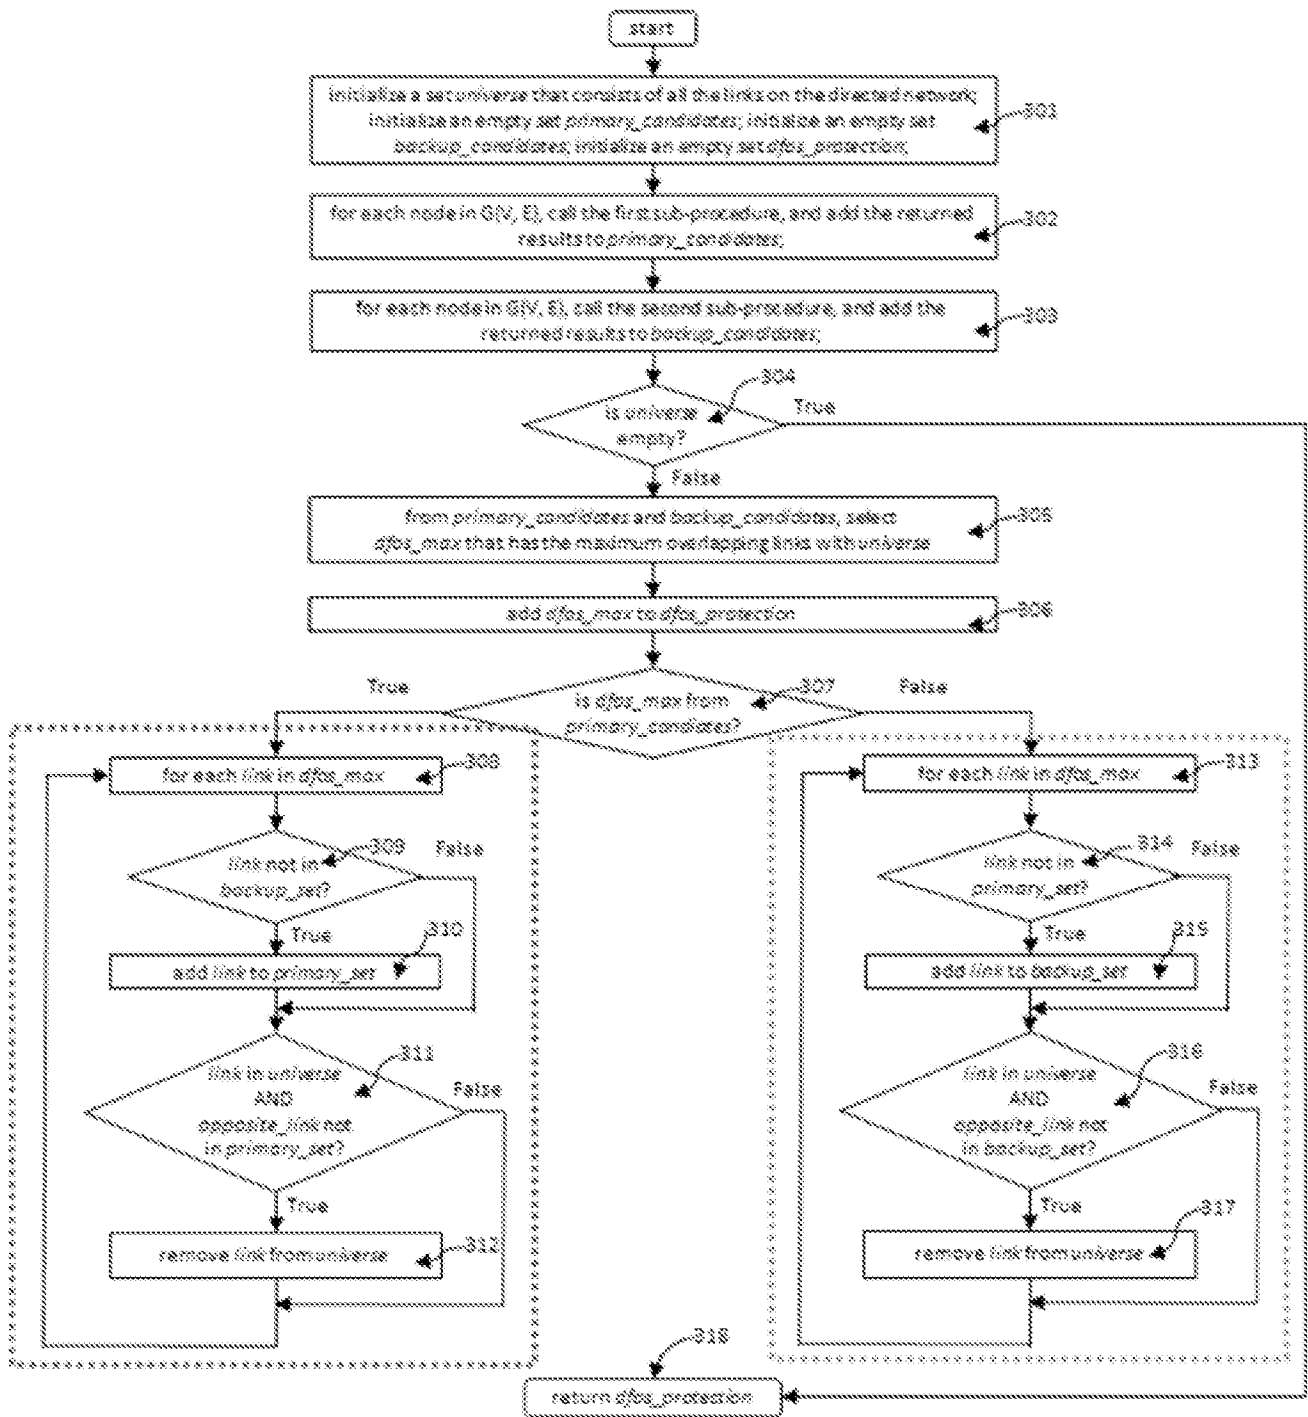
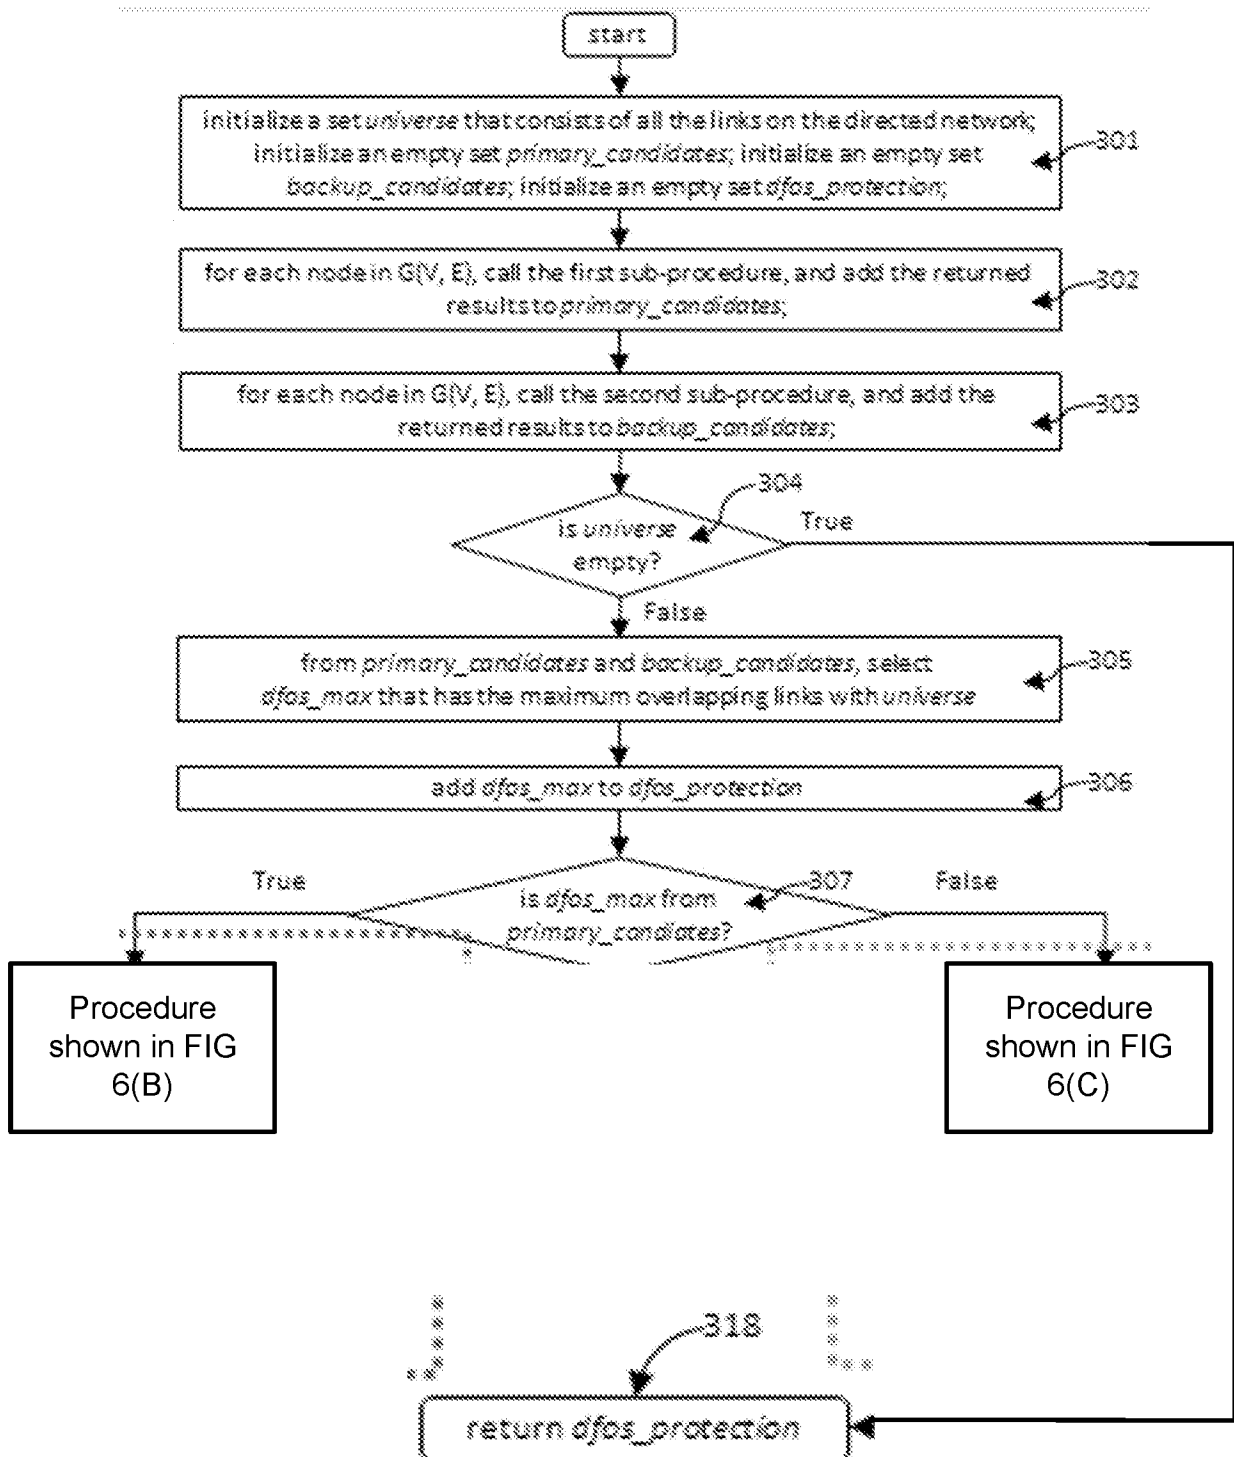
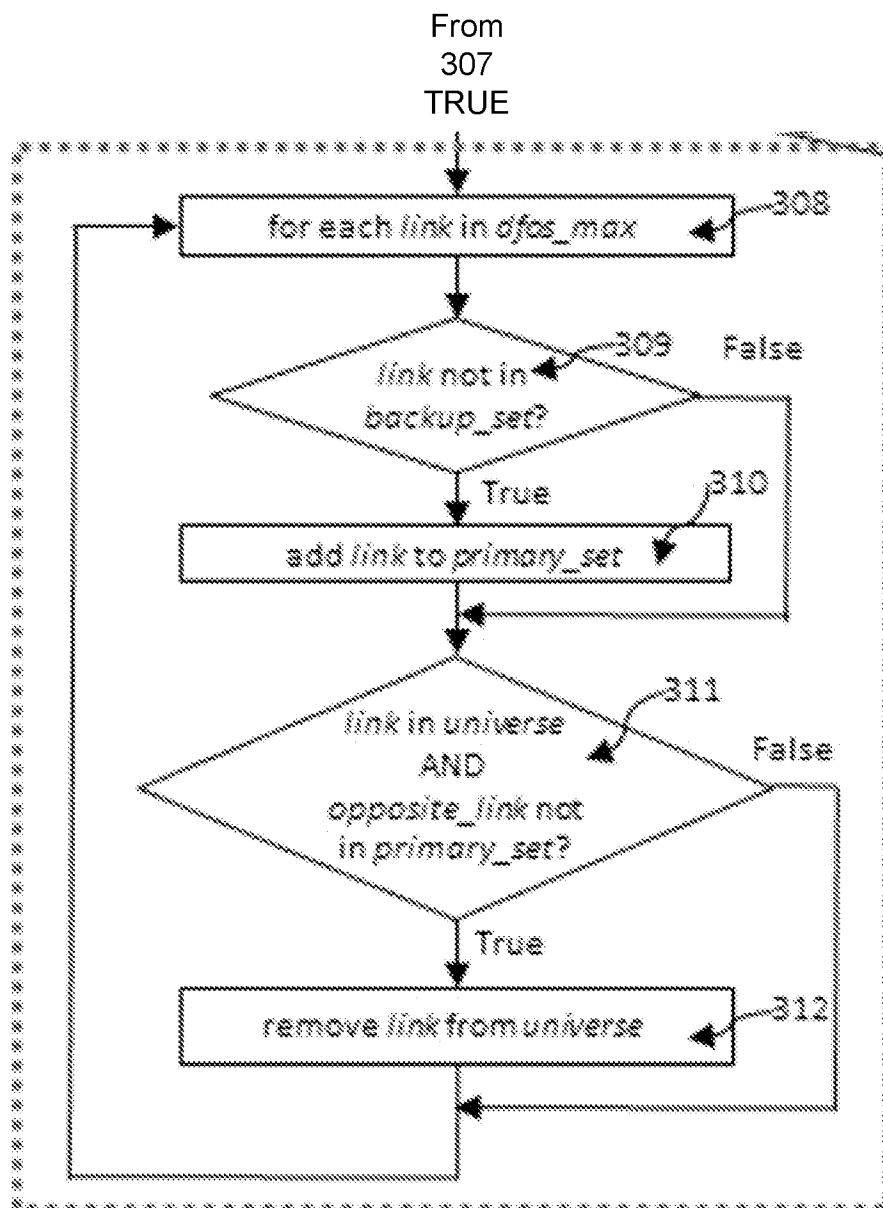



FIG. 6

10/13

**FIG. 6(A)**

11/13

**FIG. 6(B)**

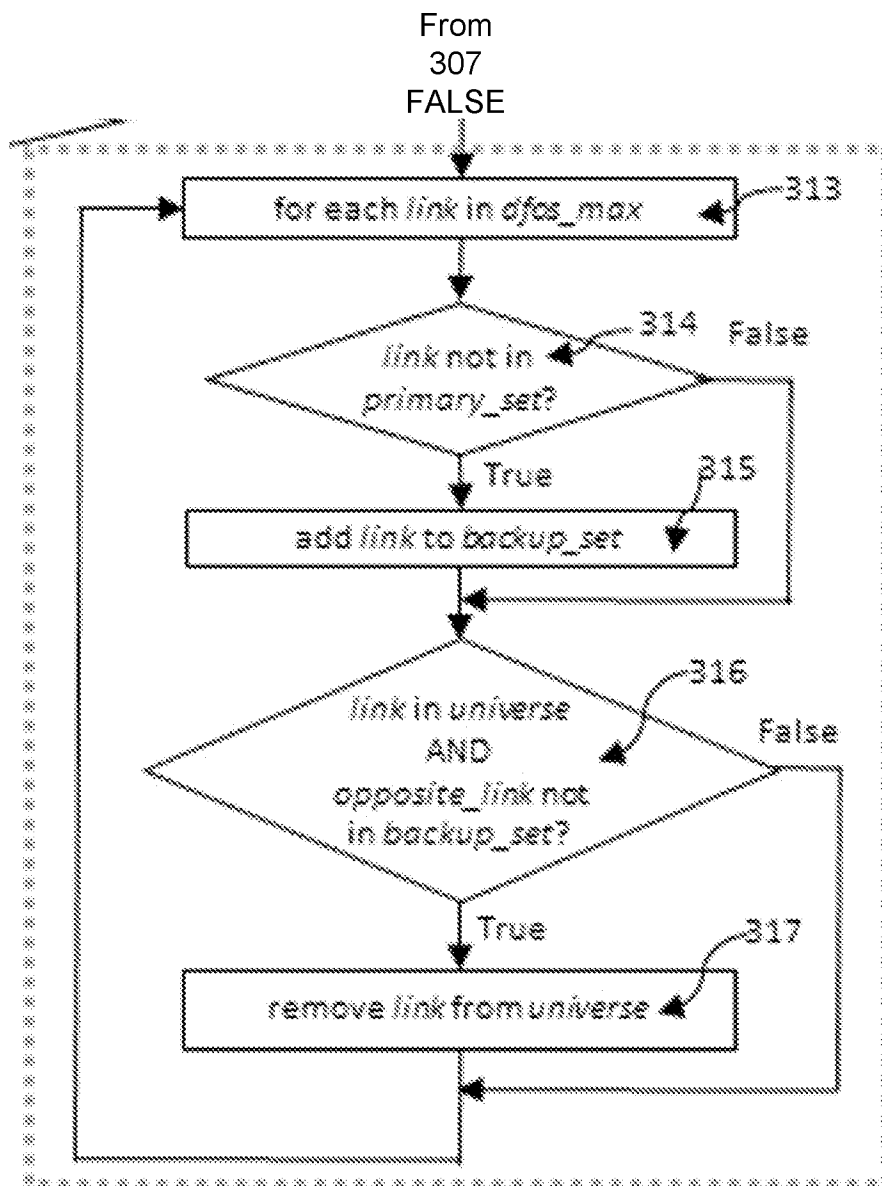**FIG. 6(C)**

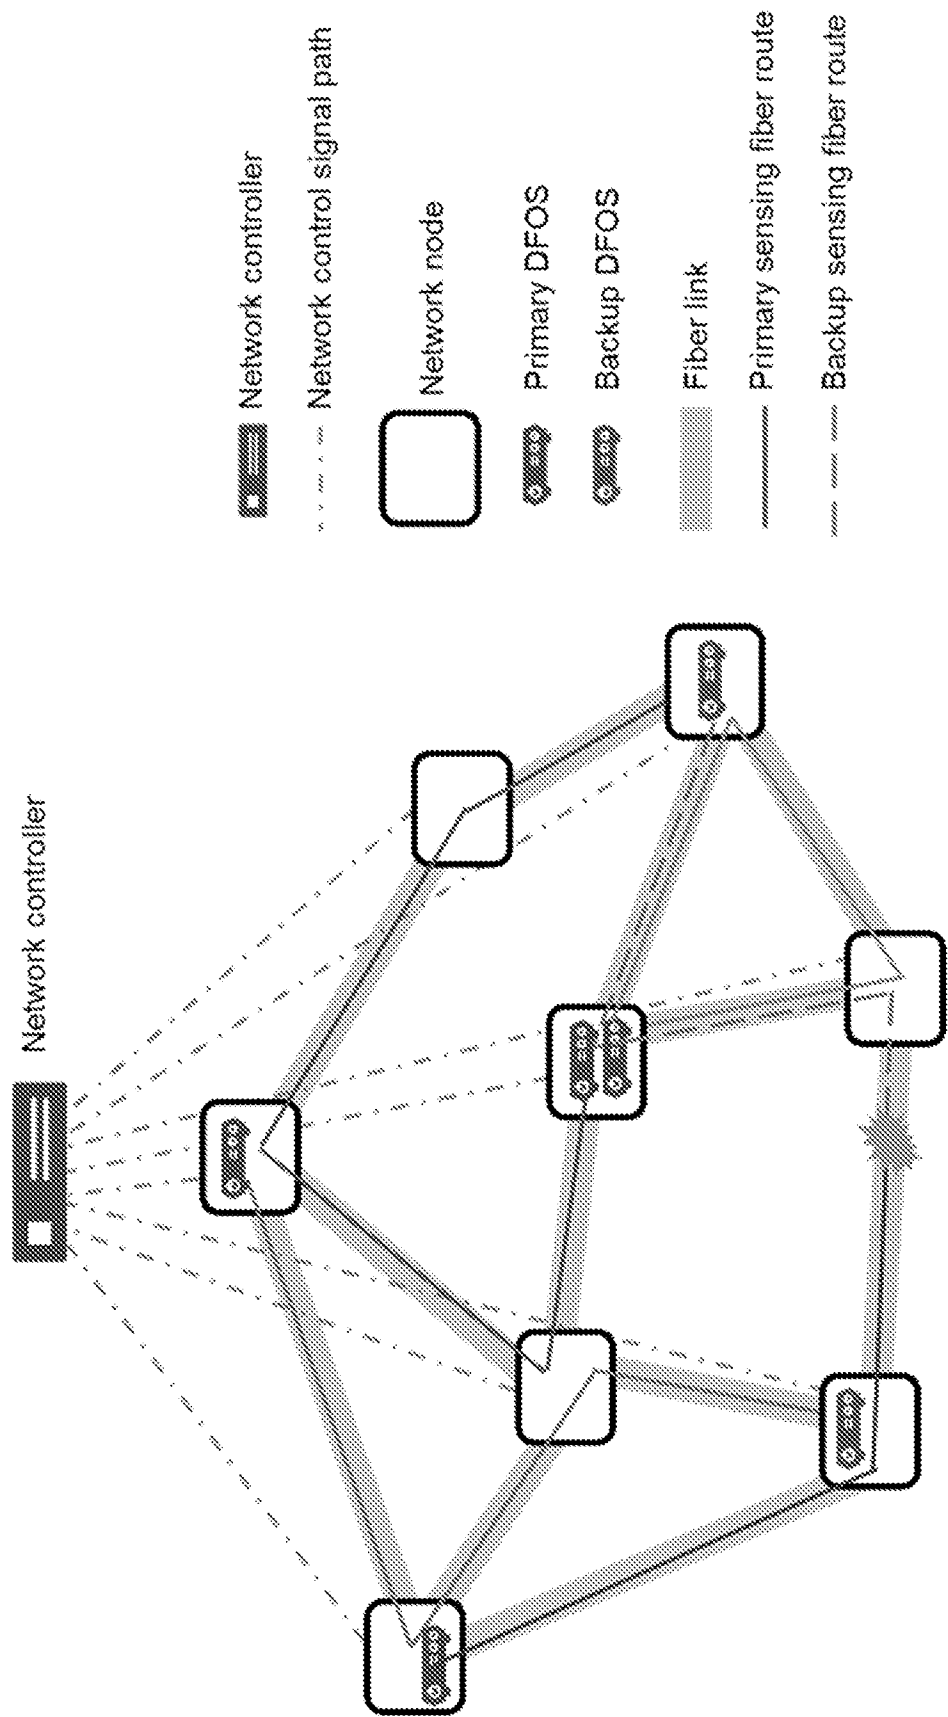


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2021/054213

A. CLASSIFICATION OF SUBJECT MATTER**H04B 10/2575**(2013.01)i; **H04B 10/075**(2013.01)i; **H04Q 11/00**(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04B 10/2575(2013.01); G01D 5/353(2006.01); G01H 9/00(2006.01); G01K 11/32(2006.01); H04B 10/00(2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: distributed fiber optic sensing (DFOS) network, primary, backup, shared protection, distance-route resource sharing, distance-limited route exploration

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	ANLIANG CAI et al., 'Multicast Routing and Distance-Adaptive Spectrum Allocation in Elastic Optical Networks With Shared Protection', Journal of Lightwave Technology, Vol. 34, Issue 17, pp. 4076-4088, 01 September 2016 sections III.A-III.D, V	1 2-13
A	YONGJUN ZHANG et al., 'Survivable Deployments of Optical Sensor Networks against Multiple Failures and Disasters: A Survey', Sensors 2019, volume 19, issue 21, 04 November 2019 sections 3.2-3.3.1	1-13
A	US 2020-0173818 A1 (FOTECH GROUP LIMITED) 04 June 2020 (2020-06-04) paragraphs [0043]-[0095]; and figures 1-6	1-13
A	US 2010-0310258 A1 (CHONGGANG WANG) 09 December 2010 (2010-12-09) paragraphs [0046]-[0065]; and figures 4-6	1-13
A	US 2019-0186958 A1 (OPTASENSE HOLDINGS LIMITED) 20 June 2019 (2019-06-20) paragraphs [0032]-[0082]; and figures 1-3	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 January 2022

Date of mailing of the international search report

25 January 2022

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon
35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

YANG, Jeong Rok

Telephone No. +82-42-481-5709

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2021/054213

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2020-0173818	A1	04 June 2020	CA	3011792	A1	27 July 2017
				EP	3405752	A1	28 November 2018
				EP	3405752	B1	12 August 2020
				EP	3722755	A1	14 October 2020
				US	10584982	B2	10 March 2020
				US	11015961	B2	25 May 2021
				US	2019-0025095	A1	24 January 2019
				WO	2017-125717	A1	27 July 2017
US	2010-0310258	A1	09 December 2010	US	2010-0309844	A1	09 December 2010
				US	2010-0310257	A1	09 December 2010
				US	8315519	B2	20 November 2012
				US	8380072	B2	19 February 2013
				US	8588135	B2	19 November 2013
US	2019-0186958	A1	20 June 2019	AU	2017-281829	A1	24 January 2019
				CA	3029208	A1	28 December 2017
				CN	109564113	A	02 April 2019
				EP	3475663	A1	01 May 2019
				JP	2019-518968	A	04 July 2019
				WO	2017-220985	A1	28 December 2017