



(51) International Patent Classification:
C08F 114/18 (2006.01)

(21) International Application Number:
PCT/US2014/010769

(22) International Filing Date:
9 January 2014 (09.01.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/757,790 29 January 2013 (29.01.2013) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: **LAMANNA, William M.**; 3M Center, Post Office Box 3327, Saint Paul, Minnesota 55133-3427 (US). **SAVU, Patricia M.**; 3M Center, Post Office Box 3327, Saint Paul, Minnesota 55133-3427 (US). **KEHREN, Jason M.**; 3M Center, Post Office Box 3327, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: **BRAMWELL, Adam M.** et al.; 3M Center Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SURFACTANTS AND METHODS OF MAKING AND USING SAME

(57) Abstract: Anionic surfactants have a formula: $R_fSO_2N(H)-CH_2CH(CH_3)OH$; or $R_fSO_2N(H)-CH_2CH_2O)_xH$, where x is an integer from 2-6. R_f is a fluoroalkyl group having 3 to 8 carbon atoms. Neutral surfactants having a formula: (a) $R_fSO_2N[CH_2CH(CH_3)OH]_2$; (b) $R_fSO_2N[CH_2CH(CH_3)OH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6; (c) $R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, and R is an alkyl group having 1 to 4 carbon atoms; or (d) $R_fSO_2N[(CH_2CH_2O)_qH]$, where q is an integer from 1-6 and m is an integer from 3-6. R_f is a fluoroalkyl group having 3 to 8 carbon atoms.



SURFACTANTS AND METHODS OF MAKING AND USING SAME

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 61/757,790,
 5 filed January 29, 2013, the disclosure of which is incorporated by reference herein in its
 entirety.

FIELD


The present disclosure relates to fluorinated surfactants, and methods of making and
 10 using the same.

BACKGROUND

Various fluorinated surfactants are described, for example, in U.S. Patent Nos.
 4,089,804 and 7,741,260, U.S. Patent Application Pub. Nos. 2008/0299487 and 2008/0280230,
 15 and V. Huang et al., *Proc. of SPIE*, Vol. 6519, 65193C-1 (2007).



SUMMARY

In some embodiments, anionic surfactants are provided. The anionic surfactants have a
 formula:



$R_fSO_2N(H)-(CH_2CH_2O)_xH$, where x is an integer from 2-6. R_f is a fluoroalkyl group
 having 3 to 8 carbon atoms.


In some embodiments, neutral surfactants are provided. The neutral surfactants have a
 formula:




(c) $R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, and R is an alkyl group
 having 1 to 4 carbon atoms; or

(d) $R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6 and m is
 30 an integer from 3-6. R_f is a fluoroalkyl group having 3 to 8 carbon atoms.

In some embodiments, fluorinated sulfonamide surfactant compositions are provided.
 The compositions include an anionic surfactant according to the formula:



a neutral surfactant according to the formula:




$R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, and R is an alkyl group having 1 to 4 carbon atoms; or

5 $R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6, m is an integer from 1-6, and $(q+m) \geq 3$; and

a solvent. R_f is a fluoroalkyl group having 3 to 8 carbon atoms.


In some embodiments, fluorinated sulfonamide surfactant compositions are provided. The compositions include an anionic surfactant according to the formula:




a neutral surfactant according to the formula:



15 $R_fSO_2N[CH_2CH(CH_3)OH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6;



group having 1 to 4 carbon atoms;



a solvent. R_f is a fluoroalkyl group having 3 to 8 carbon atoms. If the composition comprises appreciable amounts of only one anionic surfactant and only one neutral surfactant, and the anionic surfactant is $R_fSO_2N(H)-CH_2CH_2OH$, then the neutral surfactant is not $R_fSO_2N[CH_2CH_2OH]_2$.

25 The above summary of the present disclosure is not intended to describe each embodiment of the present disclosure. The details of one or more embodiments of the disclosure are also set forth in the description below. Other features, objects, and advantages of the disclosure will be apparent from the description and from the claims.

30 DETAILED DESCRIPTION

The present disclosure describes fluorinated sulfonamide surfactants and surfactant compositions that may be particularly useful as surface active agents in aqueous solutions. The surfactants and compositions may provide a number of advantages relative to known surfactants, including, for example, improved water solubility, reduced surface tensions in

aqueous media, controlled wetting, and controlled absorption onto or into photoresists.

Applications for the surfactants and surfactant compositions of the present disclosure include, for example, use as wetting agents, cleaning surfactants, coating surfactants for improved leveling and reduced coating defects, and buffered oxide etch (BOE) surfactants. An additional application for the surfactants and surfactant compositions of the present disclosure is their use as photoresist developer rinse surfactants used in semiconductor processing as described in U.S. Patent No. 7,741,260; U.S. Patent Application Pub. No. 2008/0280230; and in V. Huang et al., *Proc. of SPIE*, Vol. 6519, 65193C-1 (2007); S. Spyridon et al., *Advances in Resist Technology and Processing XXI*, J. L. Sturtevant Ed., *Proc. of SPIE*, Vol. 5376 (SPIE, Bellingham, WA, 2004); K. Tanaka et al., *Advances in Resist Technology and Processing XX*, T. Fedynyshyn, Ed., *Proc. of SPIE*, Vol. 5039 (2003); and O. Miyahara et al., *Advances in Resist Technology and Processing XXI*, J. L. Sturtevant Ed., *Proc. of SPIE*, Vol. 5376 (SPIE, Bellingham, WA, 2004).

In semiconductor processing, typically, an integrated circuit consisting of a series of patterned functional layers (insulators, metal wires, etc) is formed. The structure of each layer is transferred from a mask via photolithography followed by etching or ion implantation. In the photolithographic process, the functional layer is covered by a photoresist film. The circuits are typically fabricated with a chemically amplified photoresist consisting of a polymer with an acid-labile pendant protecting group, photoacid generator (PAG), and additional additives. Upon exposure to UV radiation through a patterned mask, the PAG is decomposed, generating a low concentration of acid. In the post-exposure bake step, the acid diffuses and catalyzes a deprotection reaction that cleaves the pendant group of the insoluble polymer resulting in a polymer that is soluble in the developer solution. The exposed positive tone photoresist is then removed, generally using solutions including tetramethyl ammonium hydroxide, leaving a pattern of unexposed photoresist lines, or features.

The semiconductor industry is rapidly migrating towards minimal feature size (e.g., less than 100 nm, less than 50 nm, less than 30 nm, or even less than 20 nm). To fulfill the demands for feature size reduction, critical dimensions of the photoresist structures must shrink adequately. Their heights cannot be reduced in the same way since etch resistance must be retained, forcing an increase in aspect ratio. With increasing aspect ratio, the mechanical strength of the photoresist lines decreases, leading to collapse of the structures during the development or post development processing. This pattern collapse is caused, at least in part, by unbalanced capillary forces acting between the lines after development and during the rinse

and drying steps. It has been demonstrated that the surface tension of the rinse fluid and the contact angle of the rinse fluid on the photoresist are key parameters of the rinse fluid affecting pattern collapse. A promising approach to reduce pattern collapse is to incorporate surfactant solutions in the development and/or post-development rinse steps of the photolithographic process. To date, surfactant solutions have exhibited performance limitations when employed on very small feature sizes (e.g., less than about 28 nm). These deficiencies generally relate to the cleaning performance of the surfactant and its impact on the melting of resist features and defectivity (water mark and particle defects). Consequently, improved surfactant formulations that provide better performance for next generation high resolution wafer processing (e.g., feature sizes of less than 28 nm, less than 22 nm, less than 20 nm, less than 16 nm and beyond) in photoresist developer rinse applications may be desirable.

Definitions

As used herein, the singular forms “a”, “an”, and “the” include plural referents unless the content clearly dictates otherwise. As used in this specification and the appended embodiments, the term “or” is generally employed in its sense including “and/or” unless the content clearly dictates otherwise.

As used herein, the recitation of numerical ranges by endpoints includes all numbers subsumed within that range (e.g. 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.8, 4, and 5).



As used herein, the phrase “anionic surfactants” refers to fluorinated sulfonamide surfactants having acidic hydrogens that are readily deprotonated in the presence of a weak or strong base to form an anion salt of the conjugate acid. In their deprotonated form, anionic surfactants can be paired with any cation including, for example, NH_4^+ and Me_4N^+ , Bu_4N^+ . The anionic surfactants of the present disclosure can exist in their neutral protic forms or as their anion salts or a mixture of neutral and anion salt forms in solution, depending on the pH of the solution.

As used herein, the phrase “neutral surfactants” refers to fluorinated sulfonamide surfactants having no strongly acidic hydrogens (i.e., $\text{pK}_a > 10$, preferably $\text{pK}_a > 15$) and, therefore, that do not readily react with weak or strong base in aqueous solution to form anionic species. The composition and state of charge of the neutral surfactants of the present disclosure may be essentially independent of pH.


As used herein, the phrase “mixed surfactant” or surfactant blends refer to compositions that include at least one anionic surfactant and at least one neutral surfactant.

Unless otherwise indicated, all numbers expressing quantities or ingredients, measurement of properties and so forth used in the specification and embodiments are to be understood as being modified in all instances by the term “about.” Accordingly, unless indicated to the contrary, the numerical parameters set forth in the foregoing specification and attached listing of embodiments can vary depending upon the desired properties sought to be obtained by those skilled in the art utilizing the teachings of the present disclosure. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claimed embodiments, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques.

In some embodiments, the present disclosure describes fluorinated sulfonamide surfactants. The fluorinated sulfonamide surfactants may include an anionic surfactant having a structure as follows:



Alternatively, the fluorinated sulfonamide surfactants may include a neutral surfactant having a structure as follows:




$R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, 2-5, 2-4, or 2-3, and R is an alkyl group having 1 to 4 carbon atoms; or

$R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6, or 1-5, 1-4, or 1-3 and m is 3-6, 3-5, 3-4, or 3.

In some embodiments, to facilitate maximum solubility in water, at least one of the non-fluorinated groups bound to the sulfonamide nitrogen atom of either the anionic or neutral surfactant may be an oligomeric ethylene oxide group, wherein the oligomeric ethylene oxide group has 2-6, 2-5, 2-4, or 2-3 ethylene oxide repeat units.

In an alternative embodiment, the fluorinated sulfonamide surfactants may include anionic and neutral surfactants having a structure as follows:





$R_fSO_2N[(CH_2CH(CH_3)O)_yH][(CH_2CH(CH_3)O)_jH]$; where y is an integer from 1-6, 1-5, 1-4, 1-3; or 1-2; and j is an integer from 2-6, 2-5, 2-4, or 2-3; or

$R_fSO_2N[(CH_2CH(CH_3)O)_kH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6, 1-5, 1-4, or 1-3; and k is an integer from 2-6, 2-5, 2-4, or 2-3.


Similar anionic and neutral fluorinated sulfonamide surfactant structures wherein the ethylene oxide and propylene oxide groups are co-oligomerized in the same chain, as exemplified in $-CH_2CH_2O-CH_2CHCH_3OH$ or $-CH_2CHCH_3O-CH_2CH_2OH$, are also possible. The fluorinated sulfonamide surfactants of the present disclosure may include such surfactants, including higher oligomers.

For the above-described fluorinated sulfonamide surfactants, each R_f may independently be a fluoroalkyl group having 3 to 8 carbon atoms. The fluoroalkyl group may be straight chain, branched chain, or cyclic, and may be saturated or unsaturated. The fluoroalkyl group chain may be interrupted by catenary heteroatoms (e.g., O and N). The fluororoalkyl group may have any degree of fluorination. In various embodiments, R_f may be a fluoroalkyl group having 4 to 6 carbon atoms. In further embodiments, R_f may be a saturated perfluoroalkyl group having 4 to 6 carbon atoms. Still further, R_f may be a saturated perfluoroalkyl group having 4 carbon atoms.

In some embodiments, the present disclosure describes fluorinated sulfonamide surfactant compositions including one or more anionic surfactants or one or more neutral surfactants, and a solvent. Suitable anionic surfactants for the surfactant compositions include those having the following structure:



Suitable neutral surfactants for the compositions include those having the following structure:



$R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, 2-5, 2-4, or 2-3, and R is an alkyl group having 1 to 4 carbon atoms; and

$R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6, 1-5, 1-4, or 1-3, m is an integer from 1-6, 1-5, 1-4, or 1-3, and $(q+m) \geq 3$.

To facilitate maximum solubility in water, in various embodiments, at least one of the non-fluorinated groups bound to the sulfonamide nitrogen atom of either the anionic or neutral surfactant may be an oligomeric ethylene oxide group, wherein the oligomeric ethylene oxide group has 2-6, 2-5, 2-4, or 2-3 ethylene oxide repeat units.

In some embodiments, the present disclosure describes fluorinated sulfonamide mixed surfactant compositions including at least one anionic surfactant, at least one neutral surfactant, and a solvent. Suitable anionic surfactants for the mixed surfactant compositions include those having the following structure:

- 5 $R_fSO_2N(H)-CH_2CH(CH_3)OH$;
 $R_fSO_2N(H)-(CH_2CH_2O)_xH$, where x is an integer from 2-6, 2-5, 2-4, or 2-3; and
 $R_fSO_2N(H)-CH_2CH_2OH$.

Suitable neutral surfactants for the mixed surfactant compositions include those having the following structure:

- 10 $R_fSO_2N[CH_2CH(CH_3)OH]_2$;
 $R_fSO_2N[CH_2CH(CH_3)OH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6, 1-5, 1-4, or 1-3;
 $R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, 2-5, 2-4, or 2-3 and R is an alkyl group having 1 to 4 carbon atoms;
15 $R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6, 1-5, 1-4, or 1-3, m is an integer from 1-6, 1-5, 1-4, or 1-3, and $(q+m) \geq 3$; and
 $R_fSO_2N[CH_2CH_2OH]_2$.

In one embodiment, a fluorinated sulfonamide mixed surfactant composition may include appreciable amounts of (i.e. > 5% by weight of the total fluorinated surfactant present on a 100% solids basis) only one anionic surfactant and only one neutral surfactant. In such an embodiment, if the anionic surfactant is $R_fSO_2N(H)-CH_2CH_2OH$, then the neutral surfactant is not $R_fSO_2N[CH_2CH_2OH]_2$.

For the above-described fluorinated sulfonamide surfactant compositions (including the mixed surfactant compositions), each R_f may independently be a fluoroalkyl group having 3 to 8 carbon atoms. The fluoroalkyl group may be straight chain, branched chain, or cyclic, and may be saturated or unsaturated. The fluoroalkyl group chain may be interrupted by catenary heteroatoms (e.g., O and N). The fluoroalkyl group may have any degree of fluorination. In various embodiments, R_f may be a fluoroalkyl group having 4 to 6 carbon atoms. In further embodiments, R_f may be a saturated perfluoroalkyl group having 4 to 6 carbon atoms. Still further, R_f may be a saturated perfluoroalkyl group having 4 carbon atoms.











To facilitate maximum solubility in water, in various embodiments, at least one of the non-fluorinated groups bound to the sulfonamide nitrogen atom of either the anionic or neutral

surfactant may be an oligomeric ethylene oxide group, wherein the oligomeric ethylene oxide group has 2-6 , 2-5, 2-4, or 2-3 ethylene oxide repeat units.

In some embodiments, the fluorinated sulfonamide surfactants of the present disclosure may include one or more of the compounds listed in Table 1. In various embodiments, the

5 fluorinated sulfonamide surfactant compositions of the present disclosure may include one or more of the fluorinated sulfonamide surfactants listed in Table 1.

Table 1

Structure #, Acronym		Structure #, Acronym	
I, H-FBSP		VI, Me-FBS(Ee)	
II, FBSPP		VII, Pr-FBS(Ee)	
III, H-FBS(Ee)		VIII, H-FBS(Eee)	
IV, FBS(Ee)2		IX, FBS(Eee)2	
V, FBSE(Ee)		X, FBSPE	

In various embodiments, suitable solvents for the fluorinated sulfonamide surfactant compositions of the present disclosure may include water and/or any organic solvents that provide adequate surfactant solubility at the surfactant loading level required for acceptable performance. Single solvents or solvent mixtures may be employed. In some embodiments, the solvent may include water and one or more alcohol base chemicals, such as those described in U.S. Patent Application Pub. No. 2008/0280230.

In illustrative embodiments, the fluorinated sulfonamide surfactants may be present in solution (i.e., in water or in a mixed solvent of water and an organic solvent) at a total concentration (i.e., all fluorinated sulfonamide surfactant species included) of between 0.001% to 5.0% by mass, 0.01% to 1.0% by mass, or even 0.1% to 0.5% by mass.

In some embodiments, the fluorinated sulfonamide surfactant compositions of the present disclosure may further include one or more additives to facilitate performance in a particular application. For example, in buffered oxide etch (BOE) applications, additives may include NH_4F and HF . As another example, in photoresist developer or developer rinse applications, additives may include Me_4NOH , Bu_4NOH , and/or NH_4OH . Still further, when used as wetting or leveling agents in coating applications, coating polymers and other additives may be added to improve coating performance.

The fluorinated sulfonamide surfactants and surfactant compositions of the present disclosure provide a number of surprising advantages compared to known surfactants. For example, the surfactants and surfactant compositions of the present disclosure exhibit improved water solubility, which can be important to reducing the possibility of surfactant precipitation during semiconductor processing and associated defect formation. As a specific example, it was discovered that anionic and neutral fluorinated sulfonamide surfactants of the present disclosure that have oligomeric ethylene oxide groups $[-(\text{CH}_2\text{CH}_2\text{O})_n]$, where $n > 1$ bound to the sulfonamide nitrogen atom provide significantly higher solubility in water compared to known sulfonamide surfactants.

In various embodiments, the neutral surfactants and mixed surfactants of the present disclosure may exhibit surprisingly higher water solubility than known neutral or mixed surfactants. The neutral surfactants of the present disclosure may exhibit solubility in water (e.g., 18 megaohm water, at 25°C) of at least 0.02%, at least 0.06%, or even at least 0.1%. The mixed surfactants of the present disclosure may exhibit a water solubility of at least 0.1%, at least 0.4%, or even at least 0.8%.

Additionally surprising is that the fluorinated sulfonamide surfactants of the present disclosure provide lower surface tensions in aqueous solution than similar surfactants and surfactant mixtures known in the art. This parameter can be important in advanced photolithographic processes to reducing the incidence of pattern collapse during the development or post development rinse steps. As a specific example, it was discovered that very low surface tensions can be achieved in water by controlling the pH of surfactant compositions comprising the anionic surfactants of the present disclosure. pH is generally controlled within about ± 3 pH units of the pKa of the fluorinated anionic sulfonamide surfactant in order to achieve optimum performance. Furthermore, a synergy was discovered wherein lower surface tensions or improved solubilities can be achieved in water by combining the anionic and neutral surfactants of the present disclosure, relative to the individual surfactant components alone.


In some embodiments, the neutral surfactants of the present disclosure may exhibit a surface tension of no more than 30 dyn/cm, no more than 24 dyn/cm, or even no more than 20 dyn/cm as measured using the Surface Tension Test Method, described below; and the mixed surfactants may exhibit a surface tension of no more than 30 dyn/cm, no more than 24 dyn/cm, or even no more than 20 dyn/cm, as measured using the Surface Tension Test Method, described below.

Further surprising is that the fluorinated sulfonamide surfactants of the present disclosure, when used in aqueous photoresist rinse solutions, can provide additional flexibility in fine tuning the level of absorption of surfactant onto or into the photoresist material. As a specific example, it was discovered that by adjusting the pH of surfactant compositions that include one or more anionic surfactants of the present disclosure and/or altering the choice and relative ratios of the anionic and neutral surfactants of the present disclosure, a significant impact on the mass of surfactant absorbed from solution onto or into the photoresist material can be achieved. It is generally known in the art that such surfactant absorption can affect contact angles of aqueous rinse solutions on the resist surface, and influence key lithography performance attributes, such as defectivity (e.g., watermarks and particle defects), line width roughness, line edge roughness, line melting, and process window.

The present disclosure further relates to methods of making the above described fluorinated sulfonamide surfactants. In some embodiments, such methods may include deprotonating a fluorochemical sulfonamide containing at least one acidic N-H group with a base to form a fluorochemical sulfonamide anion, which can then nucleophilically attack an

electrophilic reagent containing a leaving group (E), as in Scheme I below. Since the protons of a fluorochemical sulfonamide are acidic due to electron withdrawal by the fluoroalkylsulfonyl group, a variety of different bases can be used to facilitate deprotonation, such as alkali metal carbonates, organic amines, or alkali metal alkoxides. The electrophilic reagent can, for example, be an alkyl or polyoxyalkyl halide (where the halide is chloride or bromide or iodide), or a cyclic epoxide (like ethylene oxide or propylene oxide) or a cyclic organic carbonate reagent (like ethylene carbonate or propylene carbonate) that ring opens, with or without oligomerization. In the case of the cyclic organic carbonate reagents, CO₂ byproduct may be released in the course of the ring opening reaction. Scheme I below illustrates a non-limiting example of a process that may be used to append a polyethylene oxide chain to a fluorinated sulfonamide N atom. However, it is to be appreciated that other routes, including those described in the Examples section of the present disclosure, may be employed.

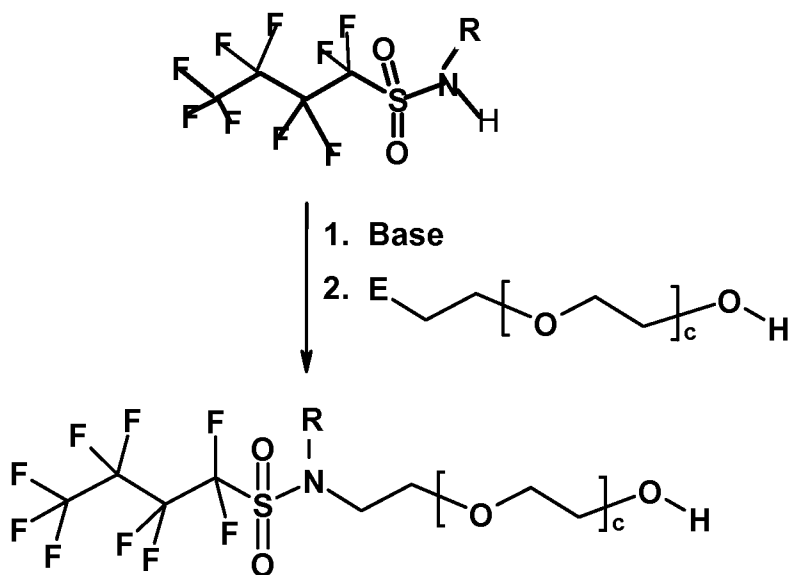Scheme 1



The present disclosure further relates to methods of making the above described fluorinated sulfonamide surfactant compositions. Such methods may include first adding aqueous ammonia to water to form a solution. One example of a commercially suitable ammonia includes, but is not limited to, product number 3265-45, 28-30% ammonia in water, available from Mallinkrodt Chemicals. In one embodiment, the water is 18.2 MΩ water. Fluoroalkyl sulfonamide may then be charged to the solution to make an aqueous fluoroalkyl

sulfonamide solution. The solutions may be mixed for about one hour and allowed to settle overnight. The solution may then be filtered to remove insoluble material and particles. In one embodiment, the filter membrane may be polytetrafluoroethylene (PTFE), polyethylene (PE), polyether sulfone (PES), or glass fiber. In one embodiment, the filter is at least a 1 μm rating and particularly at least a 0.2 μm rating.

Generally, a process of forming a photoresist pattern on a substrate (e.g., semiconductor wafer) may include forming a resist layer over or on the substrate or wafer. Next, the resist layer may be exposed using a lithography tool, optionally followed by a post-exposure bake step. Accordingly, the desired pattern can be initially transferred to the resist layer. The method may then include developing the exposed resist layer by immersing the substrate in or otherwise subjecting the substrate to a developer fluid. Optionally, the method may then include rinsing the developed photoresist material with deionized (DI) water.

In some embodiments, the present disclosure further relates to methods of treating the surface of a photoresist material. In this regard, the methods of the present disclosure may include carrying out the above-described developing step by incorporating the fluorinated sulfonamide surfactants or surfactant compositions into the developer fluid. Additionally, or alternatively, the methods of the present disclosure may include carrying out a fluorinated sulfonamide surfactant rinse step in lieu of, prior to, or subsequent to the above-described DI water rinsing step. The fluorinated sulfonamide surfactant rinse may include one or more fluorinated sulfonamide surfactants or surfactant compositions of the present disclosure.
















The operation of the present disclosure will be further described with regard to the following detailed examples. These examples are offered to further illustrate the various specific and preferred embodiments and techniques. It should be understood, however, that many variations and modifications may be made while remaining within the scope of the present disclosure.

EXAMPLES

Surface Tension Test Method

Surface tension was measured using a K12 process tensiometer (available from Krüss GmbH of Hamburg, Germany) using a Wilhemly plate method with a platinum PL01 plate (available from Krüss GmbH). Forty milliliters of the solution to be tested were placed in a 60 mL glass snap cap jar with an inner diameter of approximately 1.5 inches. Measurements were taken until the average of five measurements had a standard deviation less than 0.07 dyn/cm.

Table 2: Structures of Examples and Comparatives*

Structure #, Acronym	Syn Ex #		Structure #, Acronym	Syn Ex #	
I H-FBSP	1		IX FBS(EEE)2	7	
II FBSPP	1		X FBSPE	8	
III H-FBS(EF)	2				
IV FBS(EF)2	3		A H-FBSE		
V FBSE(EF)	4		B FBSEE		
VI Me-FBS(EF)	5		C Me-FBSE		
VII Pr-FBS(EF)	6		D FBSA		
VIII H-FBS(EEE)	7		E FES(EF)2	9	

* Structures of the invention have Roman numeral designations. Comparative structure examples have alphabetic letter designations.

Surfactant Synthesis Examples:**Synthesis 1: $C_4F_9SO_2N(H)CH_2CH(CH_3)OH$ (I) and $C_4F_9SO_2N[CH_2CH(CH_3)OH]_2$ (II)**

$C_4F_9SO_2NH_2$ (100.00g, 0.3343mol) (prepared as described in US 7,169,323), K_2CO_3 powder (5.54g, 0.0401mol), and anhydrous propylene carbonate (68.26g, 0.6687mol) were batch charged to a 200mL round bottom flask equipped with a Claisen adapter, water cooled condenser with nitrogen inlet line, immersion thermocouple probe, magnetic stirrer and heating mantle. The reaction mixture was gradually heated to 160°C under nitrogen with stirring and then held at 160°C for about 15 hours. After cooling to room temperature, an aliquot of the reaction mixture was removed and analyzed by GC in acetone. GC-FID analysis revealed the presence of about 38% $C_4F_9SO_2N(H)CH_2CH(CH_3)OH$ and 24% $C_4F_9SO_2N[CH_2CH(CH_3)OH]_2$ (mix of two diastereomers). Peak assignments were confirmed by GC-MS. To the reaction mixture was added 69.4g of deionized water and 19.4g of 20 wt% $H_2SO_4(aq)$. After heating to 60°C to reduce viscosity the reaction mixture was stirred vigorously to neutralize all residual base and then transferred to a separatory funnel and allowed to phase separate. The lower product phase was separated, washed with about 60mL of additional hot water and then phase separated again. The lower product phase was isolated and then dissolved in 240g of MTBE (methyl t-butyl ether available from Sigma-Aldrich, St Louis, MO) to cut viscosity and facilitate additional extractions. After filtration by gravity through fluted filter paper, the product solution in MTBE was transferred to a 1.0L separatory funnel and extracted with three 300mL portions of deionized (DI) water. The upper MTBE/product phase was isolated and then concentrated on a rotary evaporator at 20Torr, 20-50°C to remove bulk of MTBE solvent to isolate crude product.

The crude product was then fractionally distilled under vacuum (3Torr) through a short Vigreux column to separate and isolate the two desired product fractions. Fraction #2 comprising 36.4g of 92.1% pure $C_4F_9SO_2N(H)CH_2CH(CH_3)OH$ was collected at a head temperature of 128-133°C. Fraction #5 comprising 12.49g of 91.7% pure $C_4F_9SO_2N[CH_2CH(CH_3)OH]_2$ (mix of two diastereomers) was collected at a head temperature of 148.0-148.5°C. The two isolated product fractions (#2 and #5) were separately dissolved in hot toluene to 20% solids, filtered hot to remove insolubles, and then allowed to cool to room temperature and recrystallize. Once recrystallization was complete, the white crystalline solids that formed were isolated by vacuum filtration, washed with toluene at room temperature (RT) and then recrystallized a second time from hot toluene at about 30% solids using a similar procedure. The isolated crystalline solids were vacuum dried at 60-65°C for about 3 hours in a vacuum oven at about 80mTorr to remove residual toluene and other volatiles. The final

isolated yield of $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}$ from Fraction #2 was 27.082g with a GC-FID purity of 98.54%. $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}$ was a solid with a melting point of 80.33°C as determined by DSC. The final isolated yield of $\text{C}_4\text{F}_9\text{SO}_2\text{N}[\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}]_2$ from Fraction #5 was 8.537g with a GC-FID purity of 99.77% (approximately 50:50 mixture of two possible diastereomers). In both cases the only observable impurity was residual toluene solvent. Both purified product samples were analyzed by ^1H , ^{19}F and ^{13}C NMR spectroscopy to determine the identities and relative quantities of the primary isomeric components. The product isolated from distillate Fraction #2 was found to contain 98.3% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}$ (major isomer) and 1.7% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}(\text{CH}_3)\text{CH}_2\text{OH}$ (minor isomer). Fraction #5 was found to contain 99.2% $\text{C}_4\text{F}_9\text{SO}_2\text{N}[\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}]_2$ (major isomer) and 0.8% $\text{C}_4\text{F}_9\text{SO}_2\text{N}[\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}][\text{CH}(\text{CH}_3)\text{CH}_2\text{OH}]$ (minor isomer). The NMR results confirm that propylene carbonate is preferably attacked by the nucleophilic sulfonamide nitrogen at the unsubstituted, secondary $-\text{CH}_2-$ carbon to form the major mono-ol and diol product isomers.

Synthesis 2: $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$ (III)

$\text{C}_4\text{F}_9\text{SO}_2\text{NH}_2$ (100.00g, 0.3343mol) and triethylamine (101.48g, 1.0029mol) were batch charged to a 500mL, 3-necked round bottom flask equipped with a Claisen adapter, addition funnel, water cooled condenser with nitrogen inlet line, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating mixture to a set point of 60°C, $\text{ClCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$ (53.726g, 0.4313 mol; available from Alfa Aesar, Ward Hill, MA) was gradually added with stirring from addition funnel over a period of 40 minutes without significant exotherm or precipitate. Reaction temperature was increased to 95°C and held for 17 hours resulting in formation of significant white precipitate ($\text{Et}_3\text{NH}^+ \text{Cl}^-$). GC analysis of an aliquot of the reaction mixture indicated that the reaction had proceeded to only 36.5% conversion, so an additional 10.00g of $\text{ClCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$ was charged to the reaction mixture via syringe and the mixture was allowed to react at 95°C for an additional 66 hours with stirring. After cooling to room temperature, an aliquot of the reaction mixture was removed for GC-FID analysis, which revealed 23.1% unreacted $\text{C}_4\text{F}_9\text{SO}_2\text{NH}_2$, 52.2% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$ (desired product) and 24.8% of the corresponding diol, $\text{C}_4\text{F}_9\text{SO}_2\text{N}[\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}]_2$. To the cooled reaction mixture was added 69g deionized water and 99.4g of 20% $\text{H}_2\text{SO}_4(\text{aq})$ with stirring. The resulting mixture was transferred to a 1.0L separatory funnel and extracted with 239g MTBE. The lower aqueous phase was separated and drained and the remaining MTBE/product phase was washed with 300mL of

deionized water. A stable emulsion formed, which was broken by adding a small amount of concentrated aqueous NaCl and 150mL of 42.5% phosphoric acid. After this first wash, the lower aqueous phase was drained and the remaining MTBE phase was washed two more times with a mixture of 300mL of water and 150ml of 42.5% phosphoric acid. A stable emulsion was formed again during the third wash, so entire contents of separatory funnel were drained into a beaker and the MTBE was allowed to evaporate. This resulted in clean phase separation of the product (lower phase) from the aqueous acid (upper phase). The lower product phase was isolated using a separatory funnel and then purified by fractional vacuum distillation at 2.0Torr through a short Vigreux column. A total of 33.9g of desired product, $C_4F_9SO_2N(H)CH_2CH_2OCH_2CH_2OH$, was collected in Fraction #3 at a head temperature of 136.5-143.5°C. The isolated product collected in Fraction #3 was a clear colorless viscous liquid initially, with a purity determined by GC-FID of 99.25%. GC peak assignments were confirmed by GC-MS. This material ultimately crystallized to a low melting solid with a melting point (mp) of 35.7°C.

Synthesis 3: $C_4F_9SO_2N(CH_2CH_2OCH_2CH_2OH)_2$, (IV)

$C_4F_9SO_2NH_2$ (295g, 0.9867mol) and $ClCH_2CH_2OCH_2CH_2OH$ (491g, 3.94mol) were batch charged to a 1000mL, 3-necked round bottom flask equipped with a Claisen adapter, water cooled condenser, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating mixture to a set point of 90°C, potassium carbonate (300g, 2.17mol) was gradually added with stirring over a period of 15 minutes without significant exotherm or precipitate. Reaction temperature was increased to 120°C and held for 17 hours. The batch temperature was lowered to 90°C and 1000g of hot water was added. The contents were split in a separatory funnel to give 622g of lower fluorochemical phase. The lower phase was returned to the flask and 300ml of water, 107g of 86% phosphoric acid, and 53g of sodium chloride was added and stirred with the batch, and then poured into a separatory funnel. The bottom layer was then split off to give 669g. The lower phase was stripped at atmospheric pressure until the pot temperature reached 150°C. The batch was then cooled to 90°C, and with good stirring the stripping was continued under vacuum to remove unreacted $ClCH_2CH_2OCH_2CH_2OH$ and $C_4F_9SO_2NH_2$. Stripping was begun at 90°C and 103mm Hg to a receiver that was cooled in dry ice/acetone and continued until the vacuum was 0.4mm Hg and the batch had reached 100°C. The batch was cooled, vacuum was broken and the receiver was emptied. The distillation was then continued at 0.4mm Hg. Cut 1 distilled at a head temp of 173-181°C and a pot temp of 189-200°C, and weighed 34g. Cut 2 distilled at 0.2mm Hg at a

head temperature of 181-182°C and a pot temperature of 200-203°C and weighed 118g. Cut 3 distilled at 0.2mm at a head temperature of 181-210°C and a pot temperature of 207-215°C and weighed 47g.

NMR and GC/MS showed cut 2 to be 89.5% the desired

5 $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})_2$ (including minor branched FC isomers), 9.8% $\text{C}_4\text{F}_9\text{SO}_2\text{NHCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$, 0.6% $\text{C}_4\text{F}_9\text{SO}_2\text{NH}_2$. GC/MS showed cut 3 to be 83.1% the desired $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})_2$ (including minor branched FC isomers).

Synthesis 4: $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})(\text{CH}_2\text{CH}_2\text{OH})$, (V)

10 $\text{C}_4\text{F}_9\text{SO}_2\text{NHCH}_2\text{CH}_2\text{OH}$ (249g, 0.725mol; prepared according to US 7,169,323) and $\text{ClCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$ (211g, 1.70mol) were batch charged to a 1000mL, 3-necked round bottom flask equipped with a Claisen adapter, water cooled condenser, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating mixture to a set point of 90°C, potassium carbonate (120g, 0.86mol) was gradually added with stirring over a period of 15 minutes without significant exotherm or precipitate. Reaction temperature was increased to 120°C and held for 17 hours. GC-FID analysis (in acetone) revealed the presence of about 37% unreacted $\text{ClCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$, no detectible $\text{C}_4\text{F}_9\text{SO}_2\text{NHCH}_2\text{CH}_2\text{OH}$, and 58.3% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})(\text{CH}_2\text{CH}_2\text{OH})$. The batch temperature was lowered to 90°C and 230g of hot water was added. After addition of water 18g of 85% phosphoric acid was added to the batch. The contents were phase split in a separatory funnel to give 385g of lower fluorochemical phase. The lower phase was returned to the flask and 100ml of water, and 40g of 86% phosphoric acid, were added and stirred with the batch. After sitting for an hour, no phase split could be seen. 377g of methyl t-butyl ether was added to the batch, which was allowed to stir for 15 min. After the phase split, 759g of methyl t-butyl ether product solution was separated from 166g of lower aqueous phase. The ether solution was stripped at atmospheric pressure until the batch temperature reached 77°C. The batch was further stripped at 8.6mm Hg until the pot temperature reached 132°C, and then the receiver was emptied. Then stripping was continued until the pressure reached 2.2mm Hg at a head temperature of 171°C. The receiver was then emptied and collection of the product cut was begun at 0.2mm Hg vacuum and a head temperature of 172°C and a pot temperature of 184°C. Distillation was continued until the pot reached 195°C to give 183g of distillate. GC-FID analysis of the distillate showed the material to be 95.4% desired product (V). At room temperature the material crystallized to a low melting solid with a melting point of 45.1°C as determined by DSC.

Synthesis 5: $C_4F_9SO_2N(CH_3)(CH_2CH_2OCH_2CH_2OH)$, (VI)

$C_4F_9SO_2NHCH_3$ (339g, 1.087mol) (prepared as described in US 6,852,781) and $ClCH_2CH_2OCH_2CH_2OH$ (314g, 2.52mol) were batch charged to a 2000mL, 3-necked round bottom flask equipped with a Claisen adapter, water cooled condenser, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating the mixture to a set point of 90°C, potassium carbonate (179g, 1.29mol) was gradually added with stirring over a period of 15 minutes without significant exotherm or precipitate. Reaction temperature was increased to 120°C and held for 17 hours. GC-FID analysis in acetone after overnight heating at 120°C revealed the presence of about 30% unreacted $ClCH_2CH_2OCH_2CH_2OH$, no detectible $C_4F_9SO_2NHCH_3$, and 58.9% $C_4F_9SO_2N(CH_3)(CH_2CH_2OCH_2CH_2OH)$. The batch temperature was lowered to 90°C and 300g of hot water was added. After addition of water, 100g of 85% phosphoric acid was added to the batch. The contents were phase split in a separatory funnel to give 523g of lower fluorochemical phase. The bottom fluorochemical phase was stripped at atmospheric pressure until the batch temperature reached 140°C. The batch was further stripped at 63mm Hg until the pot temperature reached 101°C, and then the receiver was emptied. Then stripping was continued until the pressure reached 2.2mm Hg and 152°C. The receiver was emptied and collection of the product cut was begun at 0.2mm Hg vacuum, at a head temperature of 125°C and a pot temperature of 149°C. Distillation was continued until the head temperature was 132°C, and the pot temperature reached 152°C to give 363g of material. GC-FID analysis showed the material to be 97.8 area % the desired product. $C_4F_9SO_2N(CH_3)(CH_2CH_2OCH_2CH_2OH)$ was found to be a solid at room temperature with a melting point of 80.5°C as determined by DSC. The chemical structure of this material was confirmed to be (VI) by 1H and ^{19}F NMR analysis.

Synthesis 6: $C_4F_9SO_2N(n-C_3H_7)(CH_2CH_2OCH_2CH_2OH)$, (VII)

$C_4F_9SO_2NH(n-C_3H_7)$ (382g, 1.137mol) (prepared as described in US 7,572,848) and $ClCH_2CH_2OCH_2CH_2OH$ (328g, 2.63mol) were batch charged to a 2000mL, 3-necked round bottom flask equipped with a Claisen adapter, water cooled condenser, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating mixture to a set point of 90°C, potassium carbonate (184g, 1.33mol) was gradually added with stirring over a period of 15 minutes without significant exotherm or precipitate. Reaction temperature was increased to 120°C and held for 17 hours. GC analysis in acetone after overnight heating at 120°C revealed the presence of about 31% unreacted $ClCH_2CH_2OCH_2CH_2OH$, no detectible $C_4F_9SO_2NH(n-C_3H_7)$, and 67.2 area% $C_4F_9SO_2N(n-C_3H_7)(CH_2CH_2OCH_2CH_2OH)$. The batch

temperature was lowered to 90°C and 380g of hot water was added. After addition of water, 100g of 85% phosphoric acid was added to the batch. The contents were phase split in a separatory funnel and the lower fluorochemical phase was isolated. The fluorochemical phase was stripped at atmospheric pressure until the batch temperature reached 110°C. The batch was further stripped at 28mm Hg until the pot temperature reached 140°C, and then the receiver was emptied. Distillation was continued at an initial pressure of 2.6mm Hg until the head temperature reached 142°C, and the pot temperature reached 164°C and the pressure dropped to 0.6mm Hg to give 430g of distillate. GC-FID analysis showed the collected distillate to be 100 area % desired product. The chemical structure of this material was confirmed to be (VII) by ¹H and ¹⁹F NMR analysis.

Synthesis 7: C₄F₉SO₂NH(CH₂CH₂OCH₂CH₂OCH₂CH₂OH) (VIII) and C₄F₉SO₂N(CH₂CH₂OCH₂CH₂OCH₂CH₂OH)₂ (IX)

C₄F₉SO₂NH₂ (640g, 2.14mol) and ClCH₂CH₂OCH₂CH₂OCH₂CH₂OH (288g, 1.71mol, available from Aldrich, St. Louis, MO) were batch charged to a 2000mL, 3-necked round bottom flask equipped with a Claisen adapter, water cooled condenser, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating mixture to a set point of 90°C, sodium carbonate (189g, 1.81mol) was gradually added with stirring over a period of 15 minutes without significant exotherm or precipitate. Reaction temperature was increased to 120°C and held for 17 hours. The batch temperature was lowered to 90°C and 750g of hot water was added followed by 103g of 85% phosphoric acid. The contents were phase split in a separatory funnel. The lower fluorochemical phase was returned to the flask and 508ml of water, 53g of 86% phosphoric acid, and 53g of sodium chloride were added and stirred with the batch, and then poured back into a separatory funnel. The bottom layer was then phase split off to give 888g of crude product. An aliquot of the washed crude was removed and analyzed by GC-FID in acetone revealing the presence of about 22% unreacted C₄F₉SO₂NH₂, 60% C₄F₉SO₂NH(CH₂CH₂OCH₂CH₂OCH₂CH₂OH) and 21% C₄F₉SO₂N(CH₂CH₂OCH₂CH₂OCH₂CH₂OH)₂. The crude product mixture was stripped at atmospheric pressure until the pot temperature reached 150°C. The batch was then cooled to 90°C, and with good stirring the stripping was continued under vacuum to remove unreacted ClCH₂CH₂OCH₂CH₂OCH₂CH₂OH and C₄F₉SO₂NH₂. Stripping was begun at 90°C and 103mm Hg to a receiver that was cooled in dry ice/acetone and continued until the pressure dropped to 0.4mm Hg and the batch had reached 100°C. The batch was cooled, vacuum was broken and the receiver was emptied. The distillation was then continued at 0.4mm Hg

pressure. Cut 1 distilled at a head temp of 136-158°C and a pot temp of 163-174°C. Cut 2 distilled at 0.2mm Hg at a head temperature of 140-180°C and a pot temperature of 174-195°C and weighed 282g. Cut 3 distilled at 0.2mm Hg at a head temperature of 181-193°C and a pot temperature of 193-215°C and weighed 69g. GC-FID analysis of Cut 2 revealed the presence of 97.2% $\text{C}_4\text{F}_9\text{SO}_2\text{NH}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})$ (VIII) and 2.8% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})_2$ (IX), and was a white solid at room temperature with a melting point of 58.5°C. GC-FID analysis of Cut 3 revealed the presence of 66% $\text{C}_4\text{F}_9\text{SO}_2\text{NH}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})$ (VIII) and 33.3% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH})_2$ (IX). Cut 3 was a thick yellow liquid at room temperature. The chemical structure of the major product collected in cut 2 was confirmed to be (VIII) by ^1H and ^{19}F NMR analysis.

Synthesis 8: $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{OH})\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}$ (X)

$\text{C}_4\text{F}_9\text{SO}_2\text{NHCH}_2\text{CH}_2\text{OH}$ (500.00g, 1.43mol), K_2CO_3 powder (53g, 0.39mol), and anhydrous propylene carbonate (500g, 4.9mol) were batch charged to a 1.0L round bottom 3-necked flask equipped with a Claisen adapter, water cooled condenser with nitrogen inlet line, immersion thermocouple probe, overhead stirrer and heating mantle. The reaction mixture was gradually heated to 130°C. It was heated and stirred overnight. After cooling to 84°C, an aliquot of the reaction mixture was removed and analyzed by GC in acetone. GC-FID analysis revealed the presence of about 56 area % unreacted propylene carbonate, 2.65% $\text{C}_4\text{F}_9\text{SO}_2\text{N}(\text{H})\text{CH}_2\text{CH}_2\text{OH}$ and 32.6% $\text{C}_4\text{F}_9\text{SO}_2\text{NCH}_2\text{CH}_2\text{OH} [\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}]$. At 84°C, 800ml of water was added to the batch followed by slow addition of 100g of 85% phosphoric acid. The batch was phase split in a separatory funnel to give 884g of lower crude fluorochemical product. The lower phase was washed with 500g of water with 10g of NaCl dissolved in it to give 773g of lower fluorochemical layer. The fluorochemical phase was stripped at atmospheric pressure until the pot temperature reached 100°C, giving 160g of distillate. A precut was collected by distilling under vacuum (57 to 2mm Hg) when the pot temperature was 35-143°C. A second precut was distilled at 2 to 1.4mm Hg with a pot temperature of 143-183°C and a head temperature of 105-152°C, resulting in the collection of 62g of distillate. GC analysis of this second precut by GC-FID showed it to be 11.3 area % H-FBSE and 72% the desired product (X). The main product cut was distilled at 1.4 to 0.2mm Hg at a pot temp of 183-215°C and a head temperature of 150-160°C, yielding 308g of distillate. GC analysis showed this material to be 70.6% desired product. Recrystallization of

the distilled main cut from toluene led to material that was 98.4% desired product (X) by GC-FID.

Synthesis 9: $C_2F_5SO_2N(CH_2CH_2OCH_2CH_2OH)_2$, (E)

5 $C_2F_5SO_2NH_2$ (55.7g, 0.279mol; prepared according to the procedure for $C_4F_9SO_2NH_2$ as described in US7169323 with the exception that $C_4F_9SO_2F$ was replaced with $C_2F_5SO_2F$) and $ClCH_2CH_2OCH_2CH_2OH$ (175g, 1.4mol) were batch charged to a 1000mL, 3-necked round bottom flask equipped with a Claisen adapter, water cooled condenser, immersion thermocouple probe, mechanical stirrer and heating mantle. After heating mixture to a set point of 90°C, potassium carbonate (113g, 0.81mol) was gradually added with stirring over a period of 15 minutes without significant exotherm or precipitate. Reaction temperature was increased to 120°C and held for 17 hours. The batch temperature was lowered to 90°C and 250g of hot water and 33g of 86% phosphoric acid were added. The contents were split in a separatory funnel to give 206g of lower fluorochemical phase. GC-FID analysis of the lower fluorochemical phase (in acetone) revealed the presence of 54.8% $ClCH_2CH_2OCH_2CH_2OH$ plus $C_2F_5SO_2NH_2$ and 38.8% of the desired product (area %). The lower fluorochemical phase was stripped at atmospheric pressure until the pot temperature reached 150°C. The batch was then cooled to 90°C, and with good stirring the stripping was continued under vacuum to remove unreacted $ClCH_2CH_2OCH_2CH_2OH$ and $C_2F_5SO_2NH_2$. Stripping was begun at 90°C and 103mm Hg to a receiver that was cooled in dry ice/acetone and continued until the vacuum was 2.5mm Hg and the batch temperature had reached 100°C. The batch was then cooled, vacuum was broken and the receiver was emptied. The distillation was then continued at 2.5mm Hg. Cut 1 distilled at a head temp of 146-148°C and a pot temp of 189-206°C, and weighed 57g. Cut 2 distilled at 0.2-2.0mm Hg at a head temperature of 159-180°C and a pot temperature of 185-203°C and weighed 13.3g. GC-FID analysis of Cut 1 (in acetone) revealed it was 93.6 area% desired product (E). Cut 2 was similarly analyzed and found to be 89.8 area% desired product (E).

Surfactant Performance Testing Examples:

Examples 1-4: Solubility and Surface Tension of H-FBSP (I) with Ammonium Hydroxide

25% solutions of H-FBSP were prepared by dissolving molten H-FBSP in aqueous ammonium hydroxide (29% NH_3 in water available from KMG Chemicals, Houston, TX) which had been diluted with 18.2 megaohm DI water. The mole ratio – defined as the moles of

base to the moles of fluorochemical surfactant – was varied. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 3.

Table 3: Sample Preparation of H-FBSP in Aqueous NH_4OH

<i>Example</i>	<i>Mole Ratio</i>	<i>Mass Water (g)</i>	<i>Mass 29% NH_3 (g)</i>	<i>Mass H-FBSP (g)</i>	<i>Soluble</i>
1	2.0	3.357	0.396	1.256	Yes
2	1.5	3.443	0.299	1.250	Yes
3	1.0	3.552	0.208	1.249	No
4	0.5	3.649	0.109	1.249	No

The homogeneous solutions were diluted in water for surface tension and solubility measurements. Surface tension and solubility results are summarized in Table 4.

Table 4: H-FBSP in Aqueous NH_4OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 1 Mole Ratio 2.0	2000	51.6	Yes
	4000	46.2	Yes
	6000	42.8	Yes
	8000	40.5	Yes
Example 2 Mole Ratio 1.5	2000	47.9	Yes
	4000	41.6	Yes
	6000	37.9	Yes
	8000	35.6	Yes

Examples 5-8: Solubility and Surface Tension of H-FBS(EE) (III) with Ammonium Hydroxide

25% solutions of H-FBS(EE) were prepared by dissolving the H-FBS(EE) liquid in aqueous ammonium hydroxide which had been diluted with 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 5.

Table 5: Sample Preparation of H-FBS(EE) in Aqueous NH_4OH

<i>Example</i>	<i>Mole Ratio</i>	<i>Mass Water (g)</i>	<i>Mass 29% NH_3 (g)</i>	<i>Mass H-FBS(EE) (g)</i>	<i>Soluble</i>
5	2.0	2.692	0.305	0.998	Yes
6	1.5	2.773	0.231	0.999	Yes
7	1.0	2.854	0.153	0.992	Yes
8	0.5	2.915	0.077	0.993	Yes

The solutions were diluted in water for surface tension and solubility measurements. The results are summarized in Table 6.

Table 6: H-FBS(EE) in Aqueous NH₄OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 5 Mole Ratio 2.0	1000	47.9	Yes
	2000	42.1	Yes
	4000	35.5	Yes
	6000	32.9	Yes
	8000	30.4	Yes
Example 6 Mole Ratio 1.5	1000	46.6	Yes
	2000	41.1	Yes
	4000	34.5	Yes
	6000	31.4	Yes
	8000	28.8	Yes
Example 7 Mole Ratio 1.0	1000	36.8	Yes
	2000	30.3	Yes
	4000	24.1	Yes
	6000	21.1	Yes
	8000	20.1	Yes
Example 8 Mole Ratio 0.5	1000	29.4	Yes
	2000	24.7	2 nd Liquid Phase
	4000	21.0	2 nd Liquid Phase

Examples 9-12: Solubility and Surface Tension of H-FBS(EE) (III) with Tetramethyl
Ammonium Hydroxide

25% solutions of H-FBS(EE) were prepared by dissolving the H-FBS(EE) liquid in aqueous tetramethylammonium hydroxide (TMAH, 25% TMAH in water available from Alfa Aesar, Ward Hill, MA) which had been diluted with 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 7.

Table 7: Sample Preparation of H-FBS(EE) in Aqueous TMAH

<i>Example</i>	<i>Mole Ratio</i>	<i>Mass Water (g)</i>	<i>Mass 25% TMAH (g)</i>	<i>Mass H-FBS(EE) (g)</i>	<i>Soluble</i>
9	2.0	1.401	2.351	1.258	Yes
10	1.5	1.989	1.761	1.248	Yes
11	1.0	2.573	1.183	1.248	Yes
12	0.5	3.153	0.597	1.260	Yes

The solutions were diluted in water for surface tension and solubility measurements. The results are summarized in Table 8.

Table 8: H-FBS(EE) in Aqueous TMAH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 9 Mole Ratio 2.0	1000	46.4	Yes
	2000	41.4	Yes
	4000	35.8	Yes
	6000	32.4	Yes
	8000	30.3	Yes
Example 10 Mole Ratio 1.5	1000	46.5	Yes
	2000	41.0	Yes
	4000	35.7	Yes
	6000	32.5	Yes
	8000	30.0	Yes
Example 11 Mole Ratio 1.0	1000	45.4	Yes
	2000	40.6	Yes
	4000	34.7	Yes
	6000	32.4	Yes
	8000	29.5	Yes
Example 12 Mole Ratio 0.5	1000	28.2	Yes
	1500	24.1	No
	2000	23.4	No
	4000	20.3	No

Examples 13-16: Solubility and Surface Tension of H-FBS(EEE) (VIII) with Ammonium Hydroxide

25% solutions of H-FBS(EEE) were prepared by dissolving molten H-FBS(EEE) in aqueous ammonium hydroxide which had been diluted with 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 9.

Table 9: Sample Preparation of H-FBS(EEE) in Aqueous NH₄OH

<i>Example</i>	<i>Mole Ratio</i>	<i>Mass Water (g)</i>	<i>Mass 29% NH₃ (g)</i>	<i>Mass H-FBS(EEE) (g)</i>	<i>Soluble</i>
13	2.0	6.795	0.696	2.503	Yes
14	1.5	6.972	0.533	2.513	Yes
15	1.0	7.151	0.347	2.502	Yes
16	0.5	7.325	0.178	2.498	Yes

The solutions were diluted in water for surface tension and solubility measurements. The results are summarized in Table 10.

Table 10: H-FBS(EEE) in Aqueous NH₄OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 13 Mole Ratio 2.0	1000	39.9	Yes
	2000	35.2	Yes
	4000	31.4	Yes
	6000	29.2	Yes
	8000	27.6	Yes
Example 14 Mole Ratio 1.5	1000	38.7	Yes
	2000	33.3	Yes
	4000	29.4	Yes
	6000	26.6	Yes
	8000	25.4	Yes
Example 15 Mole Ratio 1.0	1000	34.0	Yes
	2000	28.4	Yes
	4000	24.5	Yes
	6000	22.5	Yes
	8000	20.8	Yes
Example 16 Mole Ratio 0.5	1000	26.5	Yes
	1500	23.8	Yes
	2000	23.2	Yes
	3000	21.2	No
	4000	21.6	No

Examples 17 & 18: Solubility and Surface Tension of H-FBSP (I) Blends in Ammonium Hydroxide

Blends of 22% H-FBSP and 3% of a neutral surfactant were made by dissolving molten H-FBSP with the following neutral surfactants – FBSEE (B; prepared as described in U.S. Patent Application Pub. No.2010/0160458) or FBSP (II), in aqueous ammonium hydroxide which had been diluted in 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 11.

Table 11: Sample Preparation of H-FBSP + Neutral Surfactants in Aqueous NH₄OH

Example	17	18
Neutral	FBSEE	FBSP
Mass Water (g)	3.348	3.351
Mass 29% NH ₃ (g)	0.397	0.399
Mass H-FBSP (g)	1.103	1.102
Mass Neutral (g)	0.154	0.151
Soluble	Yes	Yes

The solutions were diluted in water for surface tension and solubility measurements. The results are summarized in the Table 12.

Table 12: H-FBSP + Neutral Surfactants in Aqueous NH₄OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 17 FBSEE	2000	30.5	Yes
Example 18 FBSP	500	35.4	Yes
	1000	31.2	Light Precipitate
	2000	26.6	Precipitate

Examples 19-23: Solubility and Surface Tension of H-FBS(Ee) (III) Blends in Ammonium Hydroxide

Blends of 22% H-FBS(Ee) and 3% of a neutral surfactant were made by dissolving H-FBS(Ee) with each of the following neutral surfactants – FBSEE (B; prepared as described in U.S. Patent Application Pub. No. 2010/0160458), FBS(Ee)₂ (IV), FBSPE (X), FBSE(Ee) (V) or Pr-FBS(Ee) (VII). Solutions were prepared in aqueous ammonium hydroxide which had been diluted in 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 13.

Table 13: Sample Preparation of H-FBS(Ee) + Neutral Surfactants in Aqueous NH₄OH

Example	19	20	21	22	23
Neutral	FBSEE	FBS(Ee) ₂	FBSPE	Me-FBS(Ee)	Pr-FBS(Ee)
Mass Water (g)	2.699	2.699	6.734	6.748	2.696
Mass 29% NH ₃ (g)	0.296	0.296	0.764	0.752	0.306
Mass H-FBS(Ee) (g)	0.886	0.880	2.204	2.212	0.883
Mass Neutral (g)	0.116	0.119	0.301	0.303	0.117
Soluble	Yes	Yes	Yes	Yes	Yes

The solutions were diluted in water for surface tension and solubility measurements.

The results are summarized in Table 14.

Table 14: H-FBS(EE) + Neutral Surfactants in Aqueous NH₄OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 19 FBSEE	1000	36.5	Yes
	2000	29.3	Yes
	4000	22.4	Yes
Example 20 FBS(EE)2	1000	34.1	Yes
	2000	22.4	Yes
	4000	22.8	Yes
Example 21 FBSPE	1000	20.8	Yes
	2000	19.4	Yes
	4000	18.9	Yes
	6000	18.3	No
Example 22 FBSE(EE)	1000	27.1	Yes
	2000	23.7	Yes
	4000	19.9	Yes
	6000	18.9	Yes
	8000	18.9	Yes
Example 23 Pr-FBS(EE)	1000	23.2	Yes
	2000	22.7	No
	4000	21.8	No

Examples 24-26: Solubility and Surface Tension of H-FBS(EEE) (VIII) Blends in Ammonium Hydroxide

5 Blends of 22% H-FBS(EEE) and 3% of a neutral surfactant were made by dissolving H-FBS(EEE) with each of the following neutral surfactants – FBSEE (B), FBS(EE)2 (IV) or FBS(EEE)2 (IX). The FBS(EEE)2 used consisted of 33% FBS(EEE)2 and 66% H-FBS(EEE). Blend ratios were adjusted to account for this. Solutions were prepared in aqueous ammonium hydroxide which had been diluted in 18.2 megaohm water. The solutions were mixed for one
10 hour and allowed to settle over night. Examples were prepared as described in Table 15.

Table 15: Sample Preparation of H-FBS(EEE) + Neutral Surfactants in Aqueous NH₄OH

Example	24	25	26
Neutral	FBSEE	FBS(EE)2	FBS(EEE)2
Mass Water (g)	6.798	3.407	3.403
Mass 29% NH ₃ (g)	0.701	0.355	0.357
Mass H-FBS(EEE) (g)	2.198	1.101	0.782
Mass Neutral (g)	0.300	0.150	0.450
Soluble	Yes	Yes	Yes

The solutions were diluted in water for surface tension and solubility measurements.

15 The results are summarized in Table 16.

Table 16: H-FBS(EEE) + Neutral Surfactants in Aqueous NH₄OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 24 FBSEE	1000	35.1	Yes
	2000	28.6	Yes
	4000	20.8	Yes
	6000	19.2	No
	8000	19.6	No
Example 25 FBS(EE)2	1000	31.6	Yes
	2000	24.5	Yes
	4000	21.0	Yes
	6000	20.5	Yes
	8000	21.2	Yes
Example 26 FBS(EEE)2	1000	31.2	Yes
	2000	26.0	Yes
	4000	22.2	Yes
	6000	22.1	Yes
	8000	23.1	Yes

Examples 27-31: Solubility and Surface Tension of H-FBSE (A) Blends in Ammonium Hydroxide

Blends of 22% H-FBSE and 3% of a neutral surfactant were made by dissolving H-FBSE with each of the following neutral surfactants – FBS(EE)2 (IV), FBSE(EE) (V), FBSPE (X), Me-FBS(EE) (VI) or Pr-FBS(EE) (VII). Solutions were prepared in aqueous ammonium hydroxide which had been diluted in 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Examples were prepared as described in Table 17.

Table 17: Sample Preparation of H-FBSE + Neutral Surfactants in Aqueous NH₄OH

Example	27	28	29	30	31
Neutral	FBS(EE)2	FBSE(EE)	FBSPE	Me-FBS(EE)	Pr-FBS(EE)
Mass Water (g)	6.65	6.647	6.649	6.662	6.661
Mass 29% NH ₃ (g)	0.85	0.864	0.846	0.848	0.856
Mass H-FBSE (g)	2.20	2.201	2.203	2.19	2.21
Mass Neutral (g)	0.30	0.300	0.296	0.30	0.300
Soluble	Yes	Yes	Yes	Yes	Yes

The solutions were diluted in water for surface tension and solubility measurements.

The results are summarized in Table 18.

Table 18: H-FBSE + Neutral Surfactants in Aqueous NH_4OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 27 FBS(EE)2	2000	21.6	Yes
	4000	19.6	Yes
	6000	20.0	Yes
	8000	20.6	Yes
Example 28 FBSE(EE)	500	24.2	Yes
	1000	23.7	Yes
	2000	23.5	Yes
	4000	20.6	Yes
	6000	18.6	Yes
	8000	18.3	Yes
Example 29 FBSPE	1000	24.5	Yes
	2000	20.4	Yes
	4000	19.2	Yes
	5000	18.5	Yes
	6000	18.3	Very light haze
Example 30 Me-FBS(EE)	1000	26.1	Yes
	2000	17.6	Yes
	2200	18.1	Yes
	2500	17.6	No
Example 31 Pr-FBS(EE)	1000	23.7	Yes
	2000	23.6	No
	4000	23.5	No

Example 32: Solubility and Surface Tension of FBSE(EE) (V)

A 1% solution of FBSE(EE) was prepared by dissolving molten FBSE(EE) in 18.2 megaohm water. The solution was mixed for one hour and allowed to settle over night.

Example 32 was prepared as described in Table 19.

Table 19: Sample Preparation of FBSE(EE) in Water

<i>Example</i>	<i>Mass Water (g)</i>	<i>Mass FBSE(EE) (g)</i>	<i>Soluble</i>
32	9.903	0.102	Yes

The solution was diluted in water for surface tension and solubility measurements. The results are summarized in Table 20.

Table 20: FBSE(EE) Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 32	25	48.2	Yes
	50	41.1	Yes
	100	32.2	Yes
	250	27.4	Yes
	500	21.6	Yes
	1000	18.4	Yes

Example 33: Solubility and Surface Tension of Pr-FBS(EE) (VII)

A 1% solution of Pr-FBS(EE) was prepared by dissolving molten Pr-FBS(EE) in iso-propyl alcohol (IPA, available from Honeywell, Morristown, NJ). The solution was mixed and allowed to settle. Example 33 was prepared as described in Table 21.

Table 21: Sample Preparation of Pr-FBS(EE) in IPA

<i>Example</i>	<i>Mass IPA (g)</i>	<i>Mass Pr-FBS(EE) (g)</i>	<i>Soluble</i>
33	10.890	0.110	Yes

The solution was diluted in water for surface tension and solubility measurements. The results are summarized in Table 22.

Table 22: Pr-FBS(EE) Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 33	25	32.7	Yes
	50	27.1	Yes
	100	23.7	Yes
	125	23.6	Yes
	150	23.2	Yes

Example 34: Solubility and Surface Tension of FBS(EE)2 (IV)

FBS(EE)2 was diluted in water for surface tension and solubility measurements (Example 34). The results for example 34 are summarized in Table 23.

Table 23: FBS(EE)2 Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
Example 34	50	41.8	Yes
	100	35.9	Yes
	250	27.6	Yes
	500	22.6	Yes

Comparative Examples 1-4 – Solubility and Surface Tension of H-FBSE (A) with Ammonium Hydroxide

25% solutions of H-FBSE were prepared by dissolving molten H-FBSE in aqueous ammonium hydroxide which had been diluted with 18.2 megaohm water. The solutions were mixed for one hour and allowed to settle over night. Comparative examples 1 to 4 were prepared as described in Table 24.

Table 24: Sample Preparation of H-FBSE in Aqueous NH_4OH

<i>Comparative Example (CE)</i>	<i>Mole Ratio</i>	<i>Mass Water (g)</i>	<i>Mass 29% NH_3 (g)</i>	<i>Mass H-FBSE (g)</i>	<i>Soluble</i>
CE 1	2.0	6.65	0.85	2.49	Yes
CE 2	1.5	6.85	0.63	2.51	Yes
CE 3	1.0	7.07	0.45	2.50	Yes
CE 4	0.5	7.29	0.22	2.51	Yes

The solutions were diluted in water for surface tension and solubility measurements.

The results are summarized in Table 25.

5

Table 25: H-FBSE in Aqueous NH_4OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
CE 1 Mole Ratio 2.0	1000	60.7	Yes
	2000	50.2	Yes
	4000	49.2	Yes
	6000	42.8	Yes
	8000	41.2	Yes
CE 2 Mole Ratio 1.5	1000	49.5	Yes
	2000	45.9	Yes
	4000	40.1	Yes
	6000	37.4	Yes
	8000	35.5	Yes
CE 3 Mole Ratio 1.0	1000	41.7	Yes
	2000	34.5	Yes
	4000	27.9	Yes
	6000	23.6	Yes
	8000	20.8	Yes
CE 4 Mole Ratio 0.5	1000	29.9	Yes
	2000	22.7	Yes
	3000	18.4	No
	4000	17.8	No

Comparative Example 5: Solubility and Surface Tension of Blend of H-FBSE (A) and FBSEE (B) with Ammonium Hydroxide

10

A 25% solution of a blend of H-FBSE and FBSEE were prepared by dissolving the molten H-FBSE and FBSEE in aqueous ammonium hydroxide which had been diluted with 18.2 megaohm water. The solution was mixed for one hour and allowed to settle over night. Comparative example 5 was prepared as described in Table 26.

Table 26: Sample Preparation of H-FBSE + FBSEE in Aqueous NH₄OH

<i>Comparative Example</i>	<i>Mass Water (g)</i>	<i>Mass 29% NH₃ (g)</i>	<i>Mass H-FBSE (g)</i>	<i>Mass FBSEE (g)</i>	<i>Soluble</i>
CE 5	6.65	0.85	2.20	0.30	Yes

The solution was diluted in water for surface tension and solubility measurements. The results are summarized in Table 27.

Table 27: H-FBSE + FBSEE in Aqueous NH₄OH Diluted in Water

<i>Sample</i>	<i>Concentration (ppm)</i>	<i>Surface Tension (dyn/cm)</i>	<i>Soluble</i>
CE 5	2000	31.3	Yes
	4000	24.3	Yes
	6000	24.5	No

Comparative Examples 6-7: Solubility and Surface Tension of Blend of FES(EE)2 (E) with H-FBS(EE) (III) and H-FBS(EEE) (VIII) in Aqueous Ammonium Hydroxide

A 25% blend of FES(EE)2 with H-FBS(EE) was prepared by dissolving H-FBS(EE) and FES(EE)2 in aqueous ammonium hydroxide which had been diluted in 18.2 megaohm water. A similar solution was prepared using FES(EE)2 and H-FBS(EEE). The solutions were mixed for one hour and allowed to settle overnight. Comparative examples 6 and 7 were prepared as described in Table 28.

Table 28: Sample Preparation of FES(EE)2 with Anionic Surfactants in Aqueous NH₄OH

<i>Comparative Example</i>	<i>CE 6</i>	<i>CE 7</i>
<i>Anionic</i>	<i>H-FBS(EE)</i>	<i>H-FBS(EEE)</i>
<i>Mass Water (g)</i>	3.371	3.396
<i>Mass 29% NH₃ (g)</i>	0.386	0.349
<i>Mass Anionic (g)</i>	1.096	1.101
<i>Mass FES(EE)2</i>	0.150	0.154
<i>Soluble</i>	Yes	Yes

The solutions were diluted in water for surface tension and solubility measurements. The results are summarized in Table 29.

Table 29: FES(EE)2 + Anionic Surfactants in Aqueous NH₄OH Diluted in Water

Comparative Example	Concentration	Surface Tension	Soluble
CE 6 H-FBS(EE) + FES(EE)2	1000	45.2	Yes
	2000	39.5	Yes
	4000	33.9	Yes
	6000	30.7	Yes
	8000	28.2	Yes
CE 7 H-FBS(EEE) + FES(EE)2	1000	42.5	Yes
	2000	35.6	Yes
	4000	29.8	Yes
	6000	27.8	Yes
	8000	26.4	Yes

Comparison of Water Contact Angles After Rinsing

The shift in the contact angle of water on a photoresist after exposure to a surfactant solution was measured using a DSA 100 (available from Krüss of Hamburg, Germany).

A photoresist material (EPIC 2135 193nm photoresist available from Dow Chemical Co., Midland, MI) was spin coated on one side of a piece of silicon wafer – approximately 1 inch by 1 inch using a spin rate of 1500 rpm for 27 seconds. The photoresist was baked to drive off solvent by placing the wafer on a hot plate at 120°C for 60 seconds.

The wafer coated with resist was placed in a spin coater (WS-650 MZ-23NPP/LITE from Laurell Technologies of North Wales, Pennsylvania) with a modified chuck. While the wafer was spinning at 300 rpm, 1 mL of 2.38% TMAH (available from Alfa Aesar of Ward Hill, Massachusetts) was applied to the wafer over 20 seconds. This was followed by 10 mL of 18.2 megaohm water applied over 60 seconds and then 1.5 mL of surfactant solution applied over 40 seconds. The spin rate was then increased to 1500 rpm and held for 15 seconds. While still spinning at 1500 rpm, a nitrogen stream was then placed over the wafer for 15 seconds. The water contact angle was then immediately measured.

The measured static water contact angles are reported in Table 30. All the surfactant solutions in the table were diluted to 2000 ppm total surfactant in water. In all cases, there were no visible changes to the photoresist after exposure to the surfactant solution.

Table 30: Static Water Contact Angle on Photoresist

<i>Example</i>	<i>Sample</i>	<i>Water Contact Angle</i>
N/A	Wafer – No Resist	34.1 (± 0.8)
N/A	Resist – No Rinse	64.7 (± 1.3)
N/A	Resist – TMAH + Water Only	56.6 (± 1.0)
Comparative Example 5	H-FBSE / FBSEE	41.0 (± 0.6)
Example 27	H-FBSE / FBS(E _E) ₂	44.3 (± 1.0)
Example 28	H-FBSE / FBSE(E _E)	45.7 (± 0.9)
Example 24	H-FBS(E _{EE}) / FBSEE	43.2 (± 0.6)
Example 25	H-FBS(E _{EE}) / FBS(E _E) ₂	42.4 (± 1.3)
Example 26	H-FBS(E _{EE}) / FBS(E _{EE}) ₂	39.6 (± 0.8)
Comparative Example 1	H-FBSE, Mole Ratio 2.0	54.7 (± 1.7)
Comparative Example 3	H-FBSE, Mole Ratio 1.0	49.1 (± 1.9)
Example 5	H-FBS(E _E), Mole Ratio 2.0	46.4 (± 0.6)
Example 7	H-FBS(E _E), Mole Ratio 1.0	45.8 (± 0.6)
Example 13	H-FBS(E _{EE}), Mole Ratio 2.0	43.9 (± 1.1)
Example 15	H-FBS(E _{EE}), Mole Ratio 1.0	44.5 (± 0.8)

The results of these experiments demonstrate that the choice of surfactants, blending of selected anionic and neutral surfactants, and adjusting pH can affect water contact angles on developed and rinsed photoresist surface, thus providing a means to control contact angles.

Comparison of Surfactant Absorption on Photoresist

The absorption of several surfactant solutions diluted in water to a photoresist material (EPIC 2135 193nm photoresist) was measured using a Q-Sense E4 QCM-D microbalance (available from Biolin Scientific, Västra Frölunda, SWEDEN). This instrument analyzes both the dissipation and frequency shift of a quartz crystal sensor to characterize thin films coated on the sensor. This allows the mass of material absorbed and the viscoelastic properties of the thin film to be measured. In these particular experiments, it allows measurement of the mass of surfactant absorbed onto or into the photoresist material during exposure of the resist to the surfactant solution.

A gold plated quartz crystal sensor (QX 301, Biolin Scientific, Sweden) was single side coated with photoresist (EPIC 2135 193 nm) by spin coating. One to three droplets of the resist material were applied to a clean sensor. The sensor was then spun at 1500 rpm for 27 seconds. The resist was baked to drive off solvent by placing the sensor on a hot plate at 120°C for 60 seconds.

The coated sensors were then tested in three stages. During all stages, dissipation and frequency shift were monitored on multiple bands. In the first phase, 18 megaohm water was run over the sensor (at 150 μ L/min) for five minutes to establish a baseline. No frequency shift or dissipation was observed during this stage. Once the baseline was established, the second stage was started by switching the flow to the surfactant solution (at 150 μ L/min). This flow

was continued until the frequency shift and dissipation stabilized (generally 15 minutes). Reported values for frequency shift were measured at this time. In the third stage, the flow was switched back to pure 18 megaohm water (at 150 $\mu\text{L}/\text{min}$). The shift in frequency and dissipation were again monitored for 10 minutes to determine if surfactant absorption was reversible.

The steady state frequency shifts due to absorption of several surfactants from solution at 2000 ppm in water during surfactant solution flow are recorded in Table 31 below.

Table 31: Absorption Values by QCM-D on Photoresist

<i>Set / Example</i>	<i>Sample</i>	<i>Absorption (ΔV)</i>
Comparative Example 5	H-FBSE / FBSEE	4.0
Example 27	H-FBSE / FBS(EE)2	8.2
Example 28	H-FBSE / FBSE(EE)	9.9
Example 24	H-FBS(EEE) / FBSEE	6.7
Example 25	H-FBS(EEE) / FBS(EE)2	7.9
Example 26	H-FBS(EEE) / FBS(EEE)2	7.5
Comparative Example 1	H-FBSE, Mole Ratio 2.0	2.0
Comparative Example 3	H-FBSE, Mole Ratio 1.0	3.8
Example 5	H-FBS(EE), Mole Ratio 2.0	3.1
Example 7	H-FBS(EE), Mole Ratio 1.0	5.7
Example 13	H-FBS(EEE), Mole Ratio 2.0	4.0
Example 15	H-FBS(EEE), Mole Ratio 1.0	6.7

The results of these experiments demonstrate that the choice of surfactants, blending of selected anionic and neutral surfactants, and adjusting pH can affect the level (or mass) of surfactant absorbed onto or into the photoresist from aqueous rinse solutions, thus providing a means to control surfactant absorption by the photoresist. This in turn can provide control of contact angles on the resist surface as well as various lithography performance attributes such as defectivity (numbers of watermarks and particle defects), line melting, line width roughness, line edge roughness and process windows.

Comparisons of Surface Tension Performance and Solubility:

Comparison of H-FBSE, H-FBSP, H-FBS(EE) and H-FBS(EEE) in Aqueous Ammonium Hydroxide

Surface tension and solubility results in water from examples 1, 5, 13 and comparative example 1 are summarized in Table 32 below for mole ratio of 2.0.

Table 32: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous Ammonia, MR2.0

<i>Concentration (ppm)</i>	<i>H-FBSP (Ex 1)</i>	<i>H-FBS(EE) (Ex 5)</i>	<i>H-FBS(EEE) (Ex 13)</i>	<i>H-FBSE (CE 1)</i>
1000		47.9 / Yes	39.9 / Yes	60.7 / Yes
2000	51.6 / Yes	42.1 / Yes	35.2 / Yes	50.2 / Yes
4000	46.2 / Yes	35.5 / Yes	31.4 / Yes	49.2 / Yes
6000	42.8 / Yes	32.9 / Yes	29.2 / Yes	42.8 / Yes
8000	40.5 / Yes	30.4 / Yes	27.6 / Yes	41.2 / Yes

All solutions tested were soluble. The H-FBS(EE) and H-FBS(EEE) provide lower surface tension in water than the H-FBSE at the same concentrations with the H-FBS(EEE) providing the lowest surface tension in water of all the materials tested. H-FBSE and H-FBSP provide roughly equivalent surface tensions.

Surface tension and solubility results in water from examples 2, 6, 14 and comparative example 2 are summarized in Table 33 below for mole ratio of 1.5.

Table 33: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous Ammonia, MR1.5

<i>Concentration (ppm)</i>	<i>H-FBSP (Ex 2)</i>	<i>H-FBS(EE) (Ex 6)</i>	<i>H-FBS(EEE) (Ex 14)</i>	<i>H-FBSE (CE 2)</i>
1000		46.6 / Yes	38.7 / Yes	49.5 / Yes
2000	47.9 / Yes	41.1 / Yes	33.3 / Yes	45.9 / Yes
4000	41.6 / Yes	34.5 / Yes	29.4 / Yes	40.1 / Yes
6000	37.9 / Yes	31.4 / Yes	26.6 / Yes	37.4 / Yes
8000	35.6 / Yes	28.8 / Yes	25.4 / Yes	35.5 / Yes

The relative performance of these surfactants for the mole ratio of 1.5 follows the same trend as the mole ratio of 2.0, above.

Surface tension and solubility results in water from examples 3, 7, 15 and comparative example 3 are summarized in Table 34 below for mole ratio of 1.0.

Table 34: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous Ammonia, MR1.0

<i>Concentration (ppm)</i>	<i>H-FBSP (Ex 3)</i>	<i>H-FBS(EE) (Ex 7)</i>	<i>H-FBS(EEE) (Ex 15)</i>	<i>H-FBSE (CE 3)</i>
1000	Concentrate is not soluble	36.8 / Yes	34.0 / Yes	41.7 / Yes
2000		30.3 / Yes	28.4 / Yes	34.5 / Yes
4000		24.1 / Yes	24.5 / Yes	27.9 / Yes
6000		21.1 / Yes	22.5 / Yes	23.6 / Yes
8000		20.1 / Yes	20.8 / Yes	20.8 / Yes

All the tested dilutions in water are soluble. H-FBS(EЕ) and H-FBS(ЕЕЕ) provide lower surface tensions than H-FBSE at low surfactant concentrations in water. At higher surfactant concentrations, the surface tension results are equivalent for all three.

Surface tension and solubility results in water from examples 4, 8, 16 and comparative example 4 are summarized in Table 35 below for mole ratio of 0.5.

Table 35: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous Ammonia, MR0.5

<i>Concentration (ppm)</i>	<i>H-FBSP (Ex 4)</i>	<i>H-FBS(EE) (Ex 8)</i>	<i>H-FBS(EEE) (Ex 16)</i>	<i>H-FBSE (CE 4)</i>
1000	Concentrate is not soluble	29.4 / Yes	26.5 / Yes	29.9 / Yes
2000		24.7 / No	23.2 / Yes	22.7 / Yes
4000		21.0 / No	21.6 / No	17.8 / No

All of the anionic surfactants tested have limited solubility under these conditions. In the soluble range, the surface tensions are similar for all three materials.

Comparison of H-FBSE, H-FBS(EE) and H-FBS(EEE) in Aqueous TMAH

Surface tension and solubility results in water from Example 9 (H-FBS(EE)) and similar data collected for H-FBS(EEE) and H-FBSE under identical conditions are summarized in Table 36 below for a mole ratio of 2.0.

Table 36: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous TMAH, MR2.0

<i>Concentration (ppm)</i>	<i>H-FBS(EE) (Ex 9)</i>	<i>H-FBS(EEE) (Ex 35)</i>	<i>H-FBSE (CE 8)</i>
1000	46.4 / Yes	47.3 / Yes	62.3 / Yes
2000	41.4 / Yes	42.6 / Yes	59.0 / Yes
4000	35.8 / Yes	38.6 / Yes	55.3 / Yes
6000	32.4 / Yes	35.0 / Yes	51.3 / Yes
8000	30.3 / Yes	32.8 / Yes	49.3 / Yes

All solutions tested were completely soluble. The H-FBS(EE) and H-FBS(EEE) surfactants provide significantly lower surface tension in water than H-FBSE at the same concentrations.

Surface tension and solubility results in water from Example 10 (H-FBS(EE)) and similar data collected for H-FBS(EEE) and H-FBSE under identical conditions are summarized in Table 37, below, for a mole ratio of 1.5.

Table 37: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous TMAH, MR1.5

<i>Concentration (ppm)</i>	<i>H-FBS(EF) (Ex 10)</i>	<i>H-FBS(EEF) (Ex 36)</i>	<i>H-FBSE (CE 9)</i>
1000	46.5 / Yes	47.4 / Yes	60.8 / Yes
2000	41.0 / Yes	42.9 / Yes	61.3 / Yes
4000	35.7 / Yes	37.9 / Yes	55.0 / Yes
6000	32.5 / Yes	35.7 / Yes	52.7 / Yes
8000	30.0 / Yes	33.5 / Yes	49.9 / Yes

Relative surface tension and solubility results are similar to the MR 2.0 results,
described above.

Surface tension and solubility results in water from Example 11 (H-FBS(EF)) and similar data collected for H-FBS(EEF) and H-FBSE under identical conditions are summarized in Table 38 below for a mole ratio of 1.0.

Table 38: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous TMAH, MR1.0

<i>Concentration (ppm)</i>	<i>H-FBS(EF) (Ex 11)</i>	<i>H-FBS(EEF) (Ex 37)</i>	<i>H-FBSE (CE 10)</i>
1000	45.4 / Yes	44.2 / Yes	53.3 / Yes
2000	40.6 / Yes	42.2 / Yes	47.1 / Yes
4000	34.7 / Yes	36.6 / Yes	46.6 / Yes
6000	32.4 / Yes	33.2 / Yes	42.9 / Yes
8000	29.5 / Yes	30.3 / Yes	42.5 / Yes

Both H-FBS(EF) and H-FBS(EEF) provide significantly lower surface tensions than H-FBSE at equivalent concentrations when tested at this mole ratio (MR1.0), similar to results at higher MR.

Surface tension and solubility results in water from Example 12 (H-FBS(EF)) and similar data collected for H-FBS(EEF) and H-FBSE under identical conditions are summarized in Table 39, below, for a mole ratio of 0.5.

Table 39: Surface Tension (dyn/cm) / Solubility of Anionic Surfactants in Aqueous TMAH, MR0.5

<i>Concentration (ppm)</i>	<i>H-FBS(EF) (Ex 12)</i>	<i>H-FBS(EEF) (Ex 38)</i>	<i>H-FBSE (CE 11)</i>
1000	28.2 / Yes	26.7 / Yes	31.1 / Yes
2000	23.4 / No	22.8 / Yes	24.1 / Yes
4000	20.3 / No	20.8 / No	16.7 / No

All of the anionic surfactants tested have limited solubility under these conditions. In the soluble range, the surface tensions of H-FBS(EE) and H-FBS(EEE) are slightly lower than those provided by H-FBSE.

5 Comparison of FBSEE, FBS(EE)2 and FBSE(EE) blended with H-FBSE in Aqueous Ammonium Hydroxide

Surface tension and solubility results in water from examples 27, 28 and comparative example 5 are summarized in Table 40. For the data presented below, the concentrates were prepared at 22 wt% H-FBSE and 3 wt% of either FBSEE, FBS(EE)2, or FBSE(EE) in aqueous ammonium hydroxide, and then diluted with water to the stated concentration.

Table 40: Surface Tension (dyn/cm) / Solubility of Neutral Surfactant Blends with H-FBSE

<i>Concentration (ppm)</i>	<i>FBSE(EE) (Ex 28)</i>	<i>FBS(EE)2 (Ex 27)</i>	<i>FBSEE (CE 5)</i>
2000	23.5 / Yes	21.6 / Yes	31.3 / Yes
4000	20.6 / Yes	19.6 / Yes	24.3 / Yes
6000	18.6 / Yes	20.0 / Yes	24.5 / No
8000	18.3 / Yes	20.6 / Yes	

Blends of FBSE(EE) and FBS(EE)2 with H-FBSE provide lower surface tension and better solubility than the comparative H-FBSE / FBSEE blend.

15 Comparison of Blends of FBSEE, FBS(EE)2 and FBS(EEE)2 with H-FBS(EEE) in Aqueous Ammonium Hydroxide vs. FBSEE/H-FBSE Blend

Surface tension and solubility results in water for surfactants described Examples 24-26 are summarized in Table 41 below. The concentrates for these examples were prepared at 22 wt% H-FBS(EEE) blended with 3 wt% of either FBSEE, FBS(EE)2, or FBS(EEE)2 in aqueous ammonium hydroxide, and then diluted with water to the stated concentration. Comparative results for the blend of H-FBSE/FBSEE prepared and tested under identical conditions (Comparative Example 5) are included for comparison.

Table 41: Surface Tension (dyn/cm) / Solubility of Neutral Surfactant Blends with H-FBS(EEE)

<i>Concentration (ppm)</i>	<i>FBS(EE)2 (Ex 25)</i>	<i>FBS(EEE)2 (Ex 26)</i>	<i>FBSEE (Ex 24)</i>	<i>H-FBSE/FBSEE (CE 5)</i>
1000	31.6 / Yes	31.2 / Yes	35.1 / Yes	-
2000	24.5 / Yes	26.0 / Yes	28.6 / Yes	31.3 / Yes
4000	21.0 / Yes	22.2 / Yes	20.8 / Yes	24.3 / Yes
6000	20.5 / Yes	22.1 / Yes	19.2 / No	24.5 / No
8000	21.2 / Yes	23.1 / Yes	19.6 / No	-

Measured surface tensions are slightly lower for blends of FBS(EE)2 and FBS(EEE)2 with H-FBS(EEE) than the H-FBS(EEE)/FBSEE blend at low concentrations (1000-2000 ppm). In addition, the H-FBS(EEE) blends with FBS(EE)2 and FBS(EEE)2 provide higher solubility in water than the H-FBS(EEE)/FBSEE blend or the comparative H-FBSE/FBSEE blend. All of the surfactant blends of the present invention tested here, comprising at least one surfactant component having at least one oligomeric ethylene oxide group, provide lower surface tensions than the comparative blend of H-FBSE/FBSEE when prepared and tested under identical conditions in aqueous ammonium hydroxide.

Comparison of Blends of FES(EE)2 and FBS(EE)2 with H-FBS(EEE) in Aqueous Ammonium Hydroxide

Surface tension and solubility results in water for the surfactants described in example 25), Comparative 6 and Example 13 are summarized in Table 42 below. The concentrates for the first two were prepared at 22% H-FBS(EE) and 3% of either FES(EE)2 or FBS(EE)2 in aqueous ammonium hydroxide, and then diluted in water to the state concentration. The concentrate for the latter example was prepared by dissolving 25% H-FBS(EEE) in aqueous ammonium hydroxide, and then diluted in water to the stated concentrations.

Table 42: Surface Tension (dyn/cm) / Solubility of Neutral Surfactant Blends with H-FBS(EEE)






Concentration (ppm)	H-FBS(EEE) / FBS(EE)2 (Ex 25)	H-FBS(EEE) / FES(EE)2 (CE 6)	H-FBS(EEE) (Ex 13)
1000	31.6 / Yes	42.5 / Yes	39.9 / Yes
2000	24.5 / Yes	35.6 / Yes	35.2 / Yes
4000	21.0 / Yes	29.8 / Yes	31.4 / Yes
6000	20.5 / Yes	27.8 / Yes	29.2 / Yes
8000	21.2 / Yes	26.4 / Yes	27.6 / Yes

Surface tension results are significantly lower for H-FBS(EEE) / FBS(EE)2 compared to H-FBS(EEE) / FES(EE)2 at equivalent concentrations. The surface tension results for H-FBS(EEE) / FES(EE)2 are essentially the same as H-FBS(EEE) alone at equivalent total surfactant concentrations. The addition of the FBS(EE)2 significantly improves the surface tension performance, but the addition of FES(EE)2 has essentially no effect on the surface tension of the solution. This indicates that the specific choice of neutral surfactant additive is critical to the surface tension performance of such surfactant blends.

Solubility Test Results for Individual Neutral Surfactants in Water

Various neutral fluorinated surfactants were tested to determine their solubility in pure deionized water. Solubility test results are summarized in Table 43. The solubility data indicate that neutral surfactants of the present invention comprising oligomeric ethylene oxide groups (identified by Roman numerals) generally provide superior solubility in water compared to similar art known neutral fluorinated surfactants (identified by letters of alphabet) lacking oligomeric ethylene oxide groups.

Table 43: Solubility for Neutral Fluorinated Surfactants in Water at 22°C

Structure #	Compound	Acronym	% Soluble in water at 22 Deg C*
B (Comparative)		FBSEE	0.0592
V		FBSE(Ee)	100 (miscible)^
IV		FBS(Ee)2	0.101
C (Comparative)		Me-FBSE**	0.118
VI		Me-FBSEE	0.232

* Neutral fluorinated surfactant samples saturated in water were either filtered or phase split and the homogeneous aqueous solutions were submitted for analysis via capillary gas chromatography to determine their solubility in Water at 22°C. The analyses were performed using an Agilent 6890N gas chromatograph with a Flame Ionization Detector (FID), an Agilent 7683A automatic sampler, and an HP-1, 30 m, 0.25 mm ID, 1 um df capillary column. Standards were prepared between 0.1 % (W/V) and 0.0001 % (W/V) in Tetrahydrofuran (THF) stabilized with 0.025 % (W/V) BHT [used as an internal standard] or acetonitrile. The samples were dissolved and diluted to 10 % (W/V) in stabilized THF or acetonitrile.

^ Surfactant Sample was found to dissolve at both 10% and 90% solids in water – completely miscible with water.

** Me-FBSE was prepared as described in US 3,734,962

Other embodiments of the invention are within the scope of the appended claims.

CLAIMS

1. An anionic surfactant according to formula:

$R_fSO_2N(H)-CH_2CH(CH_3)OH$; or

$R_fSO_2N(H)-(CH_2CH_2O)_xH$, where x is an integer from 2-6;

wherein R_f is a fluoroalkyl group having 3 to 8 carbon atoms.

2. A neutral surfactant according to formula:

(a) $R_fSO_2N[CH_2CH(CH_3)OH]_2$;

(b) $R_fSO_2N[CH_2CH(CH_3)OH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6;

(c) $R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, and R is an alkyl group having 1 to 4 carbon atoms; or

(d) $R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6 and m is an integer from 3-6;

wherein R_f is a fluoroalkyl group having 3 to 8 carbon atoms.

3. A fluorinated sulfonamide surfactant composition comprising:

an anionic surfactant according to the formula:

$R_fSO_2N(H)-CH_2CH(CH_3)OH$; or

$R_fSO_2N(H)-(CH_2CH_2O)_xH$, where x is an integer from 2-6; or

a neutral surfactant according to the formula:

$R_fSO_2N[CH_2CH(CH_3)OH]_2$;

$R_fSO_2N[CH_2CH(CH_3)OH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6;

$R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6, and R is an alkyl

group having 1 to 4 carbon atoms; or

$R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6, m is an

integer from 1-6, and $(q+m) \geq 3$; and

a solvent;

wherein R_f is a fluoroalkyl group having 3 to 8 carbon atoms.

4. A fluorinated sulfonamide surfactant composition comprising:

an anionic surfactant according to the formula:

$R_fSO_2N(H)-CH_2CH(CH_3)OH$;

$R_fSO_2N(H)-(CH_2CH_2O)_xH$, where x is an integer from 2-6; or

$R_fSO_2N(H)-CH_2CH_2OH$; and

a neutral surfactant according to the formula:

$R_fSO_2N[CH_2CH(CH_3)OH]_2$;

$R_fSO_2N[CH_2CH(CH_3)OH][(CH_2CH_2O)_nH]$, where n is an integer from 1-6;

5 $R_fSO_2N(R)[(CH_2CH_2O)_pH]$, where p is an integer from 2-6 and R is an alkyl group having 1 to 4 carbon atoms;

$R_fSO_2N[(CH_2CH_2O)_qH][(CH_2CH_2O)_mH]$, where q is an integer from 1-6, m is an integer from 1-6, and $q+m \geq 3$; or

$R_fSO_2N[CH_2CH_2OH]_2$; and

10 a solvent;

wherein R_f is a fluoroalkyl group having 3 to 8 carbon atoms;

with the proviso that if the composition comprises appreciable amounts of only one anionic surfactant and only one neutral surfactant, and the anionic surfactant is $R_fSO_2N(H)-CH_2CH_2OH$, then the neutral surfactant is not $R_fSO_2N[CH_2CH_2OH]_2$.

15

5. A composition according to any one of claims 1 and 3-4, wherein x is an integer from 2-3.

6. A composition according to any one of claims 2-5, wherein n is an integer from 1-3, p is an integer from 2-3, and q is an integer from 1-3.

20

7. A composition according to any one of claims 3-6, wherein m is an integer ≤ 3 .

8. A composition according to claim 2, wherein m is 3.

25

9. A composition according to any one of the preceding claims, wherein the fluoroalkyl group is saturated.

10. A composition according to any one of the preceding claims, wherein the fluoroalkyl group is straight chain.

30

11. A composition according to any one of the preceding claims, wherein the fluoroalkyl group is a perfluoroalkyl group.

12. A composition according to any one of the preceding claims, wherein the fluoroalkyl group has 4 to 6 carbon atoms.
13. A composition according to any one of the preceding claims, wherein the fluoroalkyl group is a saturated perfluoroalkyl group having 4 to 6 carbon atoms.
14. A composition according to any one of the preceding claims, wherein the fluoroalkyl group is a saturated perfluoroalkyl group having 4 carbon atoms.
15. A composition according to any one of claims 1-14, wherein either the anionic or neutral surfactant includes at least one oligomeric ethylene oxide group bonded to the sulfonamide nitrogen atom, wherein the oligomeric ethylene oxide group has 2-6 ethylene oxide repeat units.
16. A composition according to any one of the preceding claims, wherein if the composition comprises a solvent, the solvent comprises water, an organic liquid, or combinations thereof.
17. A method of treating a surface of a photoresist material, the method comprising:
exposing the photoresist material to a composition according to any one of the preceding claims.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2014/010769

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C08F 114/18 (2014.01)

USPC - 526/243

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - C08F 114/00, 114/18 (2014.01)

USPC - 526/72, 242, 243, 248, 250, 252, 253

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - C08F 114/00, 114/18, 114/185 (2014.02)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Orbit.com, Google Patents, Google Scholar, Public AppFT and PatFT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/0299485 A1 (SAVU et al) 04 December 2008 (04.12.2008) entire document	1-17
X	US 5,043,195 A (SKRIVSETH) 27 August 1991 (27.08.1991) entire document	2

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2014

Date of mailing of the international search report

29 APR 2014

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774