



AU9065120

(12) PATENT ABRIDGMENT (11) Document No. AU-B-65120/90
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 650239

- (54) Title
LIQUID SPRAYER
- (51)⁵ International Patent Classification(s)
B05B 011/00
- (21) Application No. : 65120/90 (22) Application Date : 05.10.90
- (87) PCT Publication Number : WO92/05879
- (43) Publication Date : 28.04.92
- (44) Publication Date of Accepted Application : 16.06.94
- (71) Applicant(s)
YOSHINO KOGYOSHO CO., LTD.
- (72) Inventor(s)
HIROSHI MIZUSHIMA; TADAO SAITO
- (74) Attorney or Agent
GRIFFITH HACK & CO , GPO Box 1285K, MELBOURNE VIC 3001
- (56) Prior Art Documents
AU 546406 14996/83
AU 537799 55081/80
- (57) Claim

(1) A liquid sprayer comprising a container body having a neck portion;

a cylinder ^{depending} ~~hanging~~ from said neck portion into the container body,

a suction valve provided at the lower end portion of this cylinder,

a suction pipe ^{depending} ~~hanging~~ from the lower portion of the cylinder,

an operating member up- and downwards movably located on the container body,

a stem ^{depending} ~~hanging~~ from this operating member and being inserted into said cylinder,

a trunk piston provided at the lower end of the stem and sliding together with the up- or downwards moving operating member in the cylinder,

a spring provided in the cylinder and energizing said trunk piston and stem downwards,

(11) AU-B-65120/90
(10) 650239

-2-

a depressing spraying head provided on the operating member, and

a discharge valve provided in the operating member, and communicating said stem with the depressing spraying head with said depressing spraying head being depressed.

PCT

OPI DATE 28/04/92

APPLN. ID

65120 / 90

AQJP DATE 11/06/92

PCT NUMBER PCT/JP90/01297

付託協力条約に基づいて公開された国際出願


(51) 国際特許分類⁵ B05B 11/00	A1	(11) 国際公開番号 WO 92/05879 (43) 国際公開日 1992年4月16日 (16.04.1992)
(21) 国際出願番号 PCT/JP90/01297 (22) 国際出願日 1990年10月5日 (05. 10. 90) (71) 出願人 (米国を除くすべての指定国について) 株式会社 吉野工業所 (YOSHINO KOGYOSHO CO., LTD.) [JP/JP] 〒136 東京都江東区大島3丁目2番6号 Tokyo, (JP) (72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 水島 博 (MIZUSHIMA, Hiroshi) [JP/JP] 斉藤忠雄 (SAITO, Tadao) [JP/JP] 〒136 東京都江東区大島3丁目2番6号 株式会社吉野工業所内 Tokyo, (JP) (74) 代理人 弁理士 佐藤宗徳, 外 (SATO, Munenori et al.) 〒103 東京都中央区東日本橋3丁目6番18号 ハニー堀留ビル5階 Tokyo, (JP)	(81) 指定国 AT (欧州特許), AL, BB, BE (欧州特許), BF (OAPI特許), BG, BJ (OAPI特許), BR, CA, CF (OAPI特許), CG (OAPI特許), CH (欧州特許), CM (OAPI特許), DE (欧州特許), DK (欧州特許), ES (欧州特許), FI, FR (欧州特許), GA (OAPI特許), GB (欧州特許), HU, IT (欧州特許), KR, LK, LU (欧州特許), MC, MG, ML (OAPI特許), MR (OAPI特許), MW, NL (欧州特許), NO, RO, SD, SE (欧州特許), SN (OAPI特許), SU*, TD (OAPI特許), TG (OAPI特許), US. 添付公開書類 国際調査報告書 650239	

(54) Title: LIQUID SPRAYER

(54) 発明の名称 液体噴出器

(57) Abstract

The present invention relates to a liquid sprayer having a cylinder and a piston, wherein, in order to increase a spraying time period and to simplify the construction, such an arrangement is adopted that the piston stroke is designed to be longer and the liquid sprayer comprises: a working member vertically movably mounted on a main body of a container housing the cylinder; a stem suspended from this working member and inserted into the cylinder; a tubular piston provided at the bottom end of this stem and slidable in the cylinder in accordance with the vertical movement of the working member; a spring provided in the cylinder and urging the tubular piston and the stem downwardly; a push-down spray head provided on the working member; and a discharge valve provided in the working member and allowing the stem to communicate with the push-down spray head in accordance with the push-down operation of the push-down spray head.

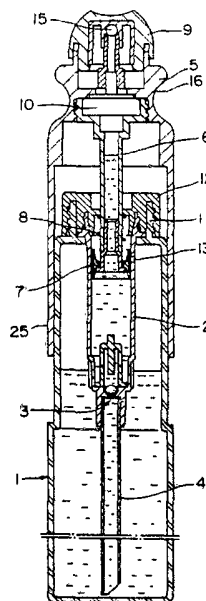

(57) 要約

本発明は、シリンダとピストンを有する液体噴出器において、噴霧時間が長く、構造が簡易な液体噴出器とすることを目的とし、そのため、ピストンストロークを長く設計できる構造とし、シリンダを有する容器本体の上に上下動可能に装着された作動部材と、この作動部材から垂設されるとともに前記シリンダ内に挿入されるステムと、このステムの下端に設けられて作動部材の上下動に伴いシリンダ内を摺動する筒状ピストンと、シリンダ内に設けられて前記筒状ピストン及びステムを下方へ付勢するスプリングと、作動部材の上に設けられた押下げ噴出ヘッドと、作動部材内に設けられ前記押下げ噴出ヘッドの押下げに伴い前記ステムを押下げ噴出ヘッドへ開通させる吐出弁とを備えた液体噴出器である。

情報としての用途のみ

PCTに基づいて公開される国際出願のパンフレット第1頁にPCT加盟国を同定するために使用されるコード

AT	オーストリア	ES	スペイン	ML	マリ
AU	オーストラリア	FI	フィンランド	MN	モンゴル
BB	バルバードス	FR	フランス	MR	モーリタニア
BE	ベルギー	GA	ガボン	MW	マラウイ
BF	ブルキナ・ファソ	GI	ギニア	NL	オランダ
BG	ブルガリア	GB	イギリス	NO	ノルウェー
BJ	ベナン	GR	ギリシャ	PL	ポーランド
BR	ブラジル	HU	ハンガリー	RO	ルーマニア
CA	カナダ	IT	イタリア	SD	スーダン
CF	中央アフリカ共和国	JP	日本	SE	スウェーデン
CG	コンゴ	KP	朝鮮民主主義人民共和国	SN	セネガル
CH	スイス	KR	大韓民国	SU ⁺	ソビエト連邦
CI	コート・ジボアール	LI	リヒテンシュタイン	TD	チャード
CM	カメルーン	LK	スリランカ	TG	トゴ
CS	チェコスロバキア	LU	ルクセンブルグ	US	米国
DE	ドイツ	MC	モナコ		
DK	デンマーク	MG	マダガスカル		

⁺ SUの指定はロシア連邦の指定としての効力を有する。しかし、その指定が旧ソビエト連邦のロシア連邦以外の他の国で効力を有するかは不明である。

SPECIFICATION

LIQUID SPRAYER

Field of the Art

The present invention relates to a liquid sprayer wherein liquid cosmetic or liquid is discharged therefrom in a straight line or in a sprayed pattern

Background of the Invention

As an atomizer for spraying liquid continuously, an aerosol-type liquid sprayer using fleon gas is often used. In such an aerosol-type liquid sprayer, fleon gas is pressurized in a container body, and by depressing the head of an upper end of a valve tube which is erected in an energized condition from an aerosol-type valve locked in the head portion of the container, the aerosol-type valve is opened, thereby spraying the liquid in the container body out of a spraying aperture through the valve and the valve tube.

The aerosol-type liquid sprayer is very convenient because pressurized liquid is sprayed out of the opened valve only by depressing the valve tube of the aerosol-type valve. When fleon gas used for pressurization, however, is discharged in the atmosphere, it rises up to an ultra-high altitude and destroys the ozone layer, so that the development of a manual liquid sprayer capable of spraying continuously without using

fleon gas is expected.

Speaking of liquid sprayers in general, an accumulator atomizer as disclosed in Utility Model Laid Open No. 185475/88 is often used. In this accumulator atomizer, by energizing upwards and erecting a tubular member with its lower end provided with a small diameter trunk piston from a small diameter cylinder provided with a suction valve hanging into the container body, by fitting a large diameter trunk piston provided at the upper end of this member into a large diameter cylinder hanging from the lower surface of a depressing head, by forming a discharge valve of a valve body erecting from the upper end of the member and a valve hole drilled in the top wall of the large diameter cylinder, and by depressing said depressing head with respect to the container body, said tubular member is lowered against energization because of pressurization in the large diameter cylinder, thereby opening the discharge valve, and the liquid is sprayed out of the atomizer having an opening in the side face of the depressing head, and because of cancellation of the pressurization the tubular member and the depressing head are raised by said energization with the suction valve being closed when the depressing head is released, thereby opening the suction valve, and the liquid in the container body is sucked into the both cylinders and the tubular member.

Such a conventional accumulator atomizer is capable of spraying liquid for a short period of time so that it is necessary to depress the head many times to obtain required

amount of liquid out of the atomizer, which takes a great deal of trouble. However, there are no alternative products to replace a conventional accumulator atomizer. Moreover, the construction thereof is also complicated.

5 The present invention made under these circumstances has as its object the provision of an atomizer which is capable of spraying liquid for a long period of time and is constructed simple.

Disclosure of the Invention

10 According to the present invention there is provided a liquid sprayer comprising a container body having a neck portion:

 a cylinder depending from said neck portion into the container body,

15 a suction valve provided at the lower end portion of this cylinder,

 a suction pipe depending from the lower portion of the cylinder,

20 an operating member up and downwards movably located on the container body,

 a stem depending from this operating member and being inserted into said cylinder,

25 a trunk piston provided at the lower end of the stem and sliding together with the up or downwards moving operating member in the cylinder,

 a spring provided in the cylinder and energizing said trunk piston and stem downwards,

 a depressing spraying head provided on the operating member, and

30 a discharge valve provided in the operating member, and communicating said stem with the depressing spraying head with said depressing spraying head being depressed.

35 In this liquid sprayer spraying liquid stored in the

container body, the operating member is lifted up at first against the spring. Thus, the trunk piston is raised, thereby generating a negative pressure in the interior of the cylinder, and sucking the liquid in the container body via the suction pipe and the suction valve into the cylinder. When the lifted up operating member is released in this condition, the trunk piston will be lowered due to the elasticity of the spring, thereby pressurizing the liquid in the cylinder. When the depressing spraying head is depressed by depressing the operating member, the discharge valve is opened, thereby allowing the pressurized liquid to flow from the stem into the depressing spraying head and spraying it out of the spraying nozzle of this spraying head. And according to the sprayed amount, the container body is raised by the energizing force of the spring, and is finally returned to the original position thereof.

As said discharge valve, an aerosol-type valve is preferably used, having a valve tube connected to said head and being opened when the stem and the piston are depressed by depressing the head.

Said aerosol-type valve comprises preferably a valve body having upper and lower ends being opened; and elastic member having a first through-hole sealing the upper surface of the valve body; a casing having a second through-hole and connecting the elastic member and the valve body to each other in one-piece construction by enveloping them therein; a valve tube having a closed lower end and an opened upper end to which said head is

connected, and also having at the middle portion thereof an annular concave part with a valve hole drilled, the lower end thereof being inserted through the second through-hole of the casing and the first through-hole of the elastic member into the valve body and the elastic member being fitted into said annular concave part; and a spring energizing this valve tube upwards.

Said casing may be formed of a metallic sheet such as aluminum, a plastic casing, however, is preferably fitted onto the upper portion of said valve body.

In addition, by providing the operating member with a grip trunk up- and downwards slidably fitted onto the container body, an easier operation is possible, and since the operating member is guided up- and downwards by the grip trunk, the operating member, and thus, the piston are more stably moved up- and downwards, and the longer up- and downward strokes of the piston are realized.

Brief Description of the Drawings

Figs. 1 to 3 illustrate Example 1 of the present invention; Fig. 1 is a half sectional front view, Fig. 2 is a half sectional view wherein the liquid sprayer is in an operated condition, Fig. 3 is an enlarged sectional view of the discharge valve portion, and Fig. 4 is an enlarged sectional view wherein the discharge valve is in an operated condition. Figs. 5 to 7 illustrate Example 2 of the present invention; Fig. 5 is a longitudinal sectional view of liquid sprayer, Fig. 6 is a

longitudinal sectional view wherein liquid has been sucked into the cylinder, and Fig. 7 is a sectional view of the aerosol-type valve member used in the liquid sprayer. Figs. 8 to 10 illustrate Example 3; Fig. 8 is a half sectional front view of the operating member, Fig. 9 is a half sectional view of the discharge valve portion, and Fig. 10 is a view illustrating one variation of the piston portion. And Fig. 11 illustrates Example 4 and is a half sectional view of operating member.

Preferred Embodiments of the Invention

Referring now to the drawings, the preferred embodiments of the present invention will be described in the following:

[Example 1]

As illustrated in Figs. 1 to 4, an attaching trunk 12 is threaded on the neck portion 11 of the container body 1 forming a wide-mouthed and long bottle, the upper end of a cylinder 2 is secured to this attaching trunk by fitting the former into the latter, and this cylinder 2 is hung from the neck portion into the container body 1.

The cylinder 2 is provided with a suction valve 3 comprising a ball valve in the interior of the lower portion thereof, a suction pipe 4 hanging from the lower end thereof, and an air suction hole 13 on the exterior of the upper portion thereof introducing outside air into the container body 1 in order to prevent a negative pressure. This air suction hole 13 is

covered with an elastic trunk like portion 24 for preventing the leakage of liquid.

A trunk-like operating member 5 is up- and downwards slidably provided on the upper portion of the container body 1 or the exterior of the attaching trunk 12, the upper end of a stem 6 is fitted into and engaged with the upper middle portion of this operating member located on the attaching trunk 12, and a spring 8 is provided in the interior of the cylinder 2, thereby energizing the trunk-like piston 7 and the stem 6 downwards. And in addition, a grip trunk 25 is hung, being fitted onto the container body 1 so as to envelop the upper half of the container body 1 from the periphery of the operating member 5 therein.

In Figs. 1 and 2, 16 is a finger-hold concave part provided around the upper outer periphery of the operating member 5.

A depressing spraying head 9 is depression-slidably attached to the upper end of the operating member 5, and in the interior of the upper portion of the operating member 5 is provided a discharge valve 10 being connected mechanically to the depressing spraying head 9 and communicating said head 9 with said stem together with the depression of said head 9, and further, in the interior of the upper portion of stem 6 is provided a spring 14 energizing the depressing spraying head 9 upwards simultaneously with the discharge valve 10 pushed up in a closed condition. In the figures, 15 is a spraying nozzle provided on the front side of the depressing spraying head 9.

The spraying nozzle 15 is one of the type spraying liquid like mist.

The discharge valve 10 has a bottomed valve tube 17 fitted into the lower end of the depressing spraying head 9. An annular concave part is provided on the side of the middle portion of this valve tube 17, and a valve hole 18 is drilled in this annular concave part. And a collar-like elastic body 19 having a first through-hole is located at the upper end of the stem 6, a casing 20 having a second through-hole is fitted onto the upper portion of the stem, and the elastic member 19 is secured thereto. The valve tube 17 is inserted through the second through-hole of the casing 20 and the first hole of the elastic member 19 into the stem 6, the elastic member 19 is fitted into the annular concave part the valve tube, and said valve hole 18 is sealed by means of the inner peripheral surface of the elastic body 19. In addition, the bottomed valve tube 17 is energized upwards by means of said spring, thereby maintaining the valve-sealing condition of the elastic member 19, and together with the lowered depressing spraying head 9, as

illustrated in Fig. 4, the bottomed valve tube 17 is lowered, thereby opening the valve hole 18. In the illustrated example, the elastic member is deformed when the valve is opened, but an elastic member opening the valve by sliding may be also used.

In this example, only by lifting up the operating member with respect to the container body 1 or by depressing the container body 1 with respect to the operating member 5, liquid

can be pressurized by means of the spring 8, and thereafter this pressurized liquid can be sprayed in an atomized pattern only by depressing the depressing spraying head 9.

A grip trunk 25 is hung from the operating member 5, and since grip trunk 25 is up- and downwards slidably fitted into the container body 1, the stem 6 having a trunk-like piston 7 and the operating member will not be loose with respect to the cylinder 2 when spraying liquid, even if the stroke of the trunk-like piston 7 with respect to the cylinder 2 becomes large, thereby realizing a smooth spraying.

In addition, since the liquid sprayer in this example is constructed so as to raise the container body 1 with respect to the operating member 5, there are no problems of complicated spraying operations due to too large a stroke.

And opposed to the sprayers using freon gas, this sprayer is friendly to the environment, is easy to operate, has a simple mechanism against the mechanical complication of the conventional accumulator sprayers, and is practically very useful and convenient.

[Example 2]

As illustrated in Figs. 5 to 7, Example 2 has essentially a similar arrangement as Example 1 except for partial design changes. The discharge valve 10 is different from Example 1 in that an independent aerosol-type valve is incorporated. And the elastic trunk-like portion 24 is also omitted.

That is, the cylinder 2 is hung into the neck portion 11 and the upper portion of the cylinder 2 is secured to the neck portion 11 by means of the attaching trunk 12.

At the upper portion of the stem whose lower end is inserted into the cylinder 2, an aerosol-type cylinder 10 is provided on, passing through the attaching trunk 12.

In one example illustrated in Fig. 6, a valve body 23 having an outward flange 22 and an elastic member 19 having a first through-hole and sealing the upper surface of the valve body 23 are enveloped in a metallic casing 20 having a second through-hole, and are connected to each other in one-piece construction, and at the same time a valve tube 17 with a closed lower end surface having an annular concave part with a valve hole 18 at the middle portion thereof is inserted into the second through-hole of said casing 20 and the first through-hole of said elastic member 19, the elastic member 19 is fitted into the annular concave part, said valve hole 18 is sealed by means of the inner wall surface of the through-hole of this elastic member 19, the valve tube 17 is energized upwards by means of a spring 14, and a valve is formed of the valve hole 18 and the elastic body 19. When a head 9 with a spraying aperture 15 is fitted into the upper end of the valve tube 17, and the head 9 is depressed against energization, the peripheral portion of the first through-hole of the elastic member 19 is bent downwards due to the lowered valve tube 17, thereby opening the valve hole 18, and when the valve tube 17 is raised due to the interruption of

depression, the elastic member 19 is also elastically returned to the illustrated position, thereby sealing said valve hole 18.

In case of an aerosol-type liquid sprayer, the upper end of an outflow pipe is fitted into the trunk portion 29 hanging from the inner periphery of the inward flange-like bottom wall of the valve body 23, and the outflow pipe is hung into the container body, while the outflow pipe is not required in this example.

Since this example is similar as Example 1 in other points, the description of the similar points are omitted with the same symbols being affixed.

[Example 3]

As illustrated in Figs. 8 and 9, Example 3 uses a different aerosol-type valve from that in Example 2. And in this example the stem 6 and the grip trunk 25 are constructed in one-piece by means of a connecting piece 30, thereby decreasing the number of the component parts. The aerosol-type valve is a engaging trunk the tip of which is inserted in an engaging hole provided in said connecting piece 30 and engaged therein. And this engaging trunk 31 is secured on the connecting piece 30.

As for the aerosol-type valve used in this Example 3, a trunk-like valve body 23, the upper half of which being of larger diameter than the lower half, and an elastic member 19 with a first through-hole sealing the upper surface of the valve body 23 are enveloped in a plastic casing 20 having a second through-

hole, and are connected to each other in one-piece construction. That is, the plastic casing 20 is constructed so as to erect a side wall portion 20b around a top plate portion 20a having the second through-hole in the middle and to provide a concave groove in the interior of the side wall portion 20b, and it is fitted into the trunk-like valve body 23 by fitting a convex groove provided on the upper outer periphery of the trunk-like valve body 23 into this concave groove. And a valve tube 17 with a closed lower end surface having an annular concave part valve hole 18 drilled at the middle portion thereof is inserted through the second through-hole of said plastic casing 20 and the first through-hole of said elastic member 19, the elastic member 19 is fitted into the annular concave part, said valve hole 18 is sealed by means of the inner wall surface of the through-hole of the elastic member 19, and the valve tube 17 is energized upwards by means of a spring 72 provided in the trunk-like valve body 23.

Thus, a discharge valve is formed of the valve hole 18 and the elastic member 19. When a head 9 with a spraying aperture 15 is fitted into the upper end of the valve tube 17, and the head 9 is depressed against energization, the peripheral portion of the first through-hole of the elastic member 19 is bent downwards due to the lowered valve tube 17, thereby opening the valve hole 18, and when the valve tube 17 is raised due to the interruption of depression, the elastic member 19 is also elastically returned to the illustrated position, thereby sealing said valve hole 18.

Unlike the valve in Example using a metallic casing, the valve in

this Example uses a plastic casing, thus allowing the casing 20 to be fitted onto the valve body 23 much more easily than in Example 2 wherein the metallic casing is fixed by caulking.

As illustrated in Fig. 10, by separating the main portion 7a of the piston from the trunk portion 7a, the main portion 7a of the piston may only be replaced with the trunk portion 7a remaining unreplaced, even if the cylinder 2 has a different diameter, which is very economical.

[Example 4]

In this example, as illustrated in Fig. 11, the aerosol-type valve of Example 3 is incorporated in the stem 6, wherein the trunk-like valve body 23 is constructed as a member forming a portion of the stem 6 in one-piece, the plastic casing 20 constructed together with an engaging trunk 31 in one-piece is fitted onto the stem 6, the plastic casing 20 is fitted onto the stem 6, the elastic member 9 with a first through-hole is provided at the upper portion of the stem 6, the valve tube 17 with a closed lower end surface having an annular concave portion with a valve hole 18 drilled is inserted through the second through-hole of said plastic casing 20 and the first through-hole of said elastic member 19, the elastic member 19 is fitted into the annular concave part, said valve hole is sealed by means of the inner wall surface of the through-hole of the elastic member 19, and the valve tube 17 is energized upwards by means of the spring 14 engaging a stepped part provided in the stem 6. Since

said plastic casing 20 is constructed in one-piece with said engaging trunk 31 the tip of which is inserted into the engaging hole provided in said connecting piece 30 and is engaged therein, the number of component parts is decreased so much.

In this arrangement, the number of component parts can be decreased, thus realizing an easier mass production and a decreased production cost.

[Other Examples]

Every component part of the above-described apparatus can be molded of plastic. According to the designs of spraying apertures, atomizers spraying liquid in an atomized pattern or sprayers spraying liquid in a straight-line can be provided.

Industrial Applications

The present invention is applicable for atomizing or spraying various liquids, for example, as atomizers for cosmetic liquids, sprayers for shampoo liquids, atomizers for insecticides, atomizers for liquid detergents, etc.

Claims

(1) A liquid sprayer comprising a container body having a neck portion:

a cylinder ^{depending} ~~hanging~~ from said neck portion into the container body,

a suction valve provided at the lower end portion of this cylinder,

a suction pipe ^{depending} ~~hanging~~ from the lower portion of the cylinder,

an operating member up and downwards movably located on the container body,

a stem ^{depending} ~~hanging~~ from this operating member and being inserted into said cylinder,

a trunk piston provided at the lower end of the stem and sliding together with the up- or downwards moving operating member in the cylinder,

a spring provided in the cylinder and energizing said trunk piston and stem downwards,

a depressing spraying head provided on the operating member, and

a discharge valve provided in the operating member, and communicating said stem with the depressing spraying head with said depressing spraying head being depressed.

(2) The liquid sprayer of Claim 1 wherein said discharge valve is an aerosol-type valve having a valve tube connected to

the head, and the valve is opened when the stem and the piston depressed by depressing the head.

(3) The liquid sprayer of Claim 2 wherein said aerosol-type valve comprises:

a valve body having upper and lower ends being opened,

an elastic member having a first through-hole sealing the upper surface of the valve body,

a casing having a second through-hole and connecting the elastic member and the valve body to each other in one-piece construction by surrounding them,

a valve tube having a closed lower end and an opened upper end to which said head is connected, and also having at the middle portion thereof an annular concave part with a valve hole drilled, the lower end thereof being inserted through the second through-hole of the casing and the first through-hole of the elastic member into the valve body and the elastic member being fitted into said annular concave part, and

a spring energizing this valve upwards.

(4) The liquid sprayer of Claim 3 wherein said casing is made of plastic and is fitted onto the upper portion of said valve body.

3

(5) The liquid sprayer of Claim 2, wherein said valve body is constructed so as to form a portion of said stem in one-piece, the casing is fitted onto the stem, the elastic member with the through-hole is attached to the upper portion of the stem, the valve tube having the closed lower end surface with said valve

hole drilled is inserted through the second through-hole of
said casing and the first through-hole of said elastic
member, the elastic member being fitted into the annular
concave part, said valve hole is sealed by means of the
5 inner wall surface of the through-hole of the elastic
member, and in addition, the valve tube is energized
upwards by means of a spring provided in the stem.
(6) A liquid sprayer substantially as described
herein with reference to and as illustrated in the
10 accompanying drawings.

DATED this 29th day of March, 1994.

YOSHINO KOGYOSHO CO., LTD.
By Its Patent Attorneys



15 GRIFFITH HACK & CO.
Fellows Institute of Patent Attorneys
of Australia

Abstract


The present invention has its object, the provision of a liquid sprayer capable of spraying a long time and a simple construction with respect to liquid sprayers having a cylinder and a piston. In order to accomplish this object, the liquid sprayer according to the present invention is constructed so as to have a long piston stroke, and has an operating member up- and downwards slidably located on the container body having a cylinder, a stem hung from this operating member and fitted into said cylinder, a trunk-like piston being provided at the lower end of the stem sliding in the cylinder together with the up- and downward movements of the operating member, a spring provided in the interior of the cylinder and energizing said piston and said stem downwards, a depressing spraying head provided on the operating member, and a discharge valve provided in the interior of the operating member and communicating said stem with said depressing spraying head together with the depression of the depressing spraying head.

第 2 図


第 1 図

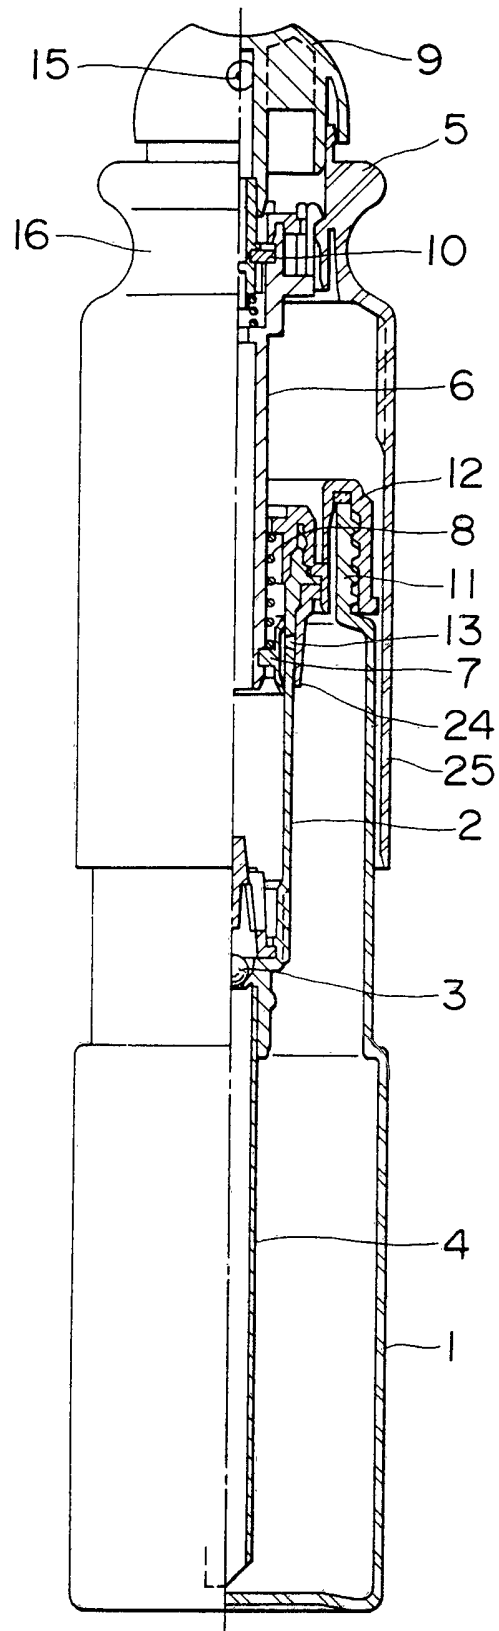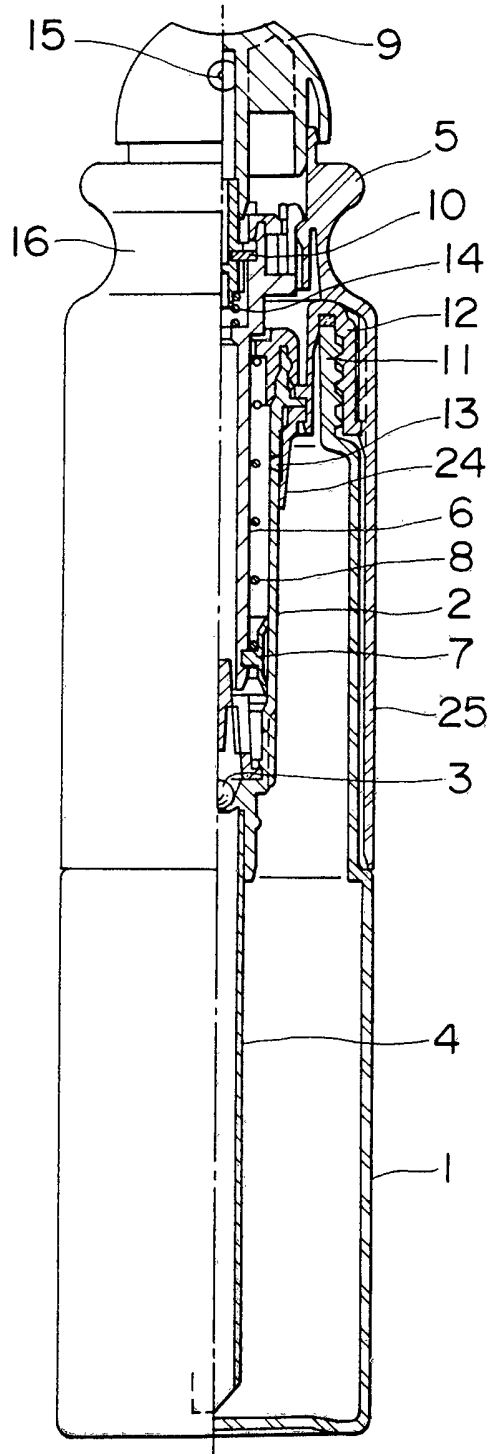

第 3 図

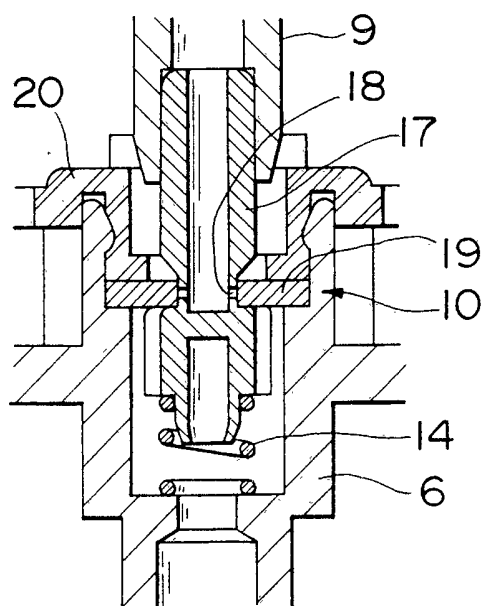


第 4 図

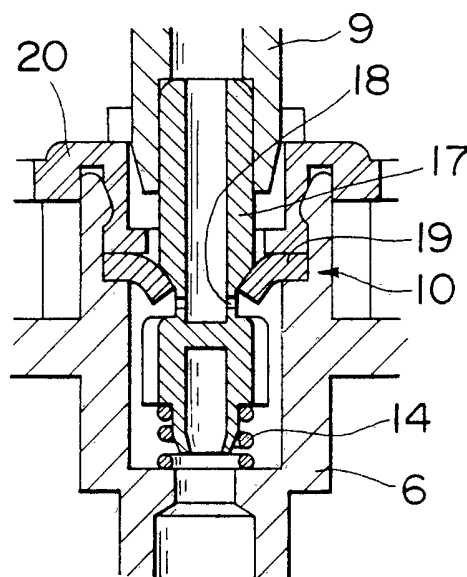


3/7


第 5 図

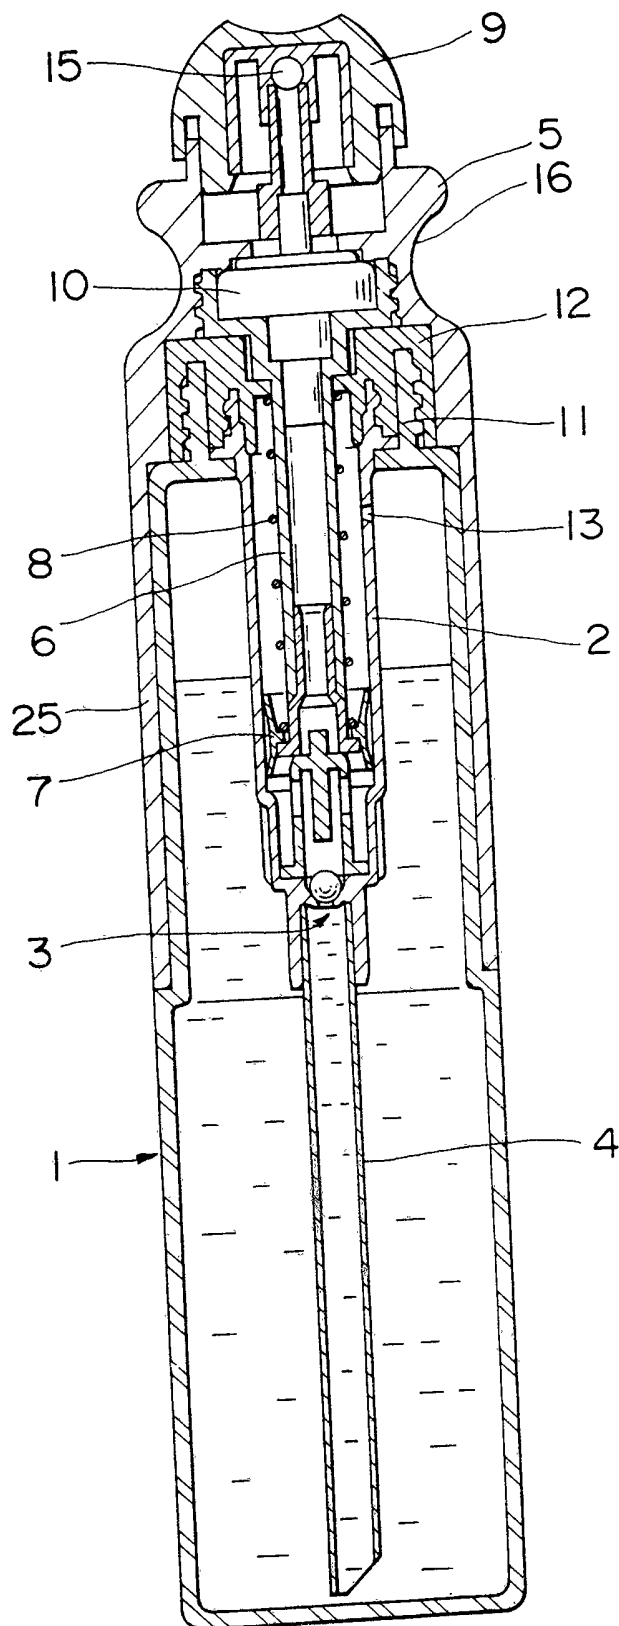

第 6 図

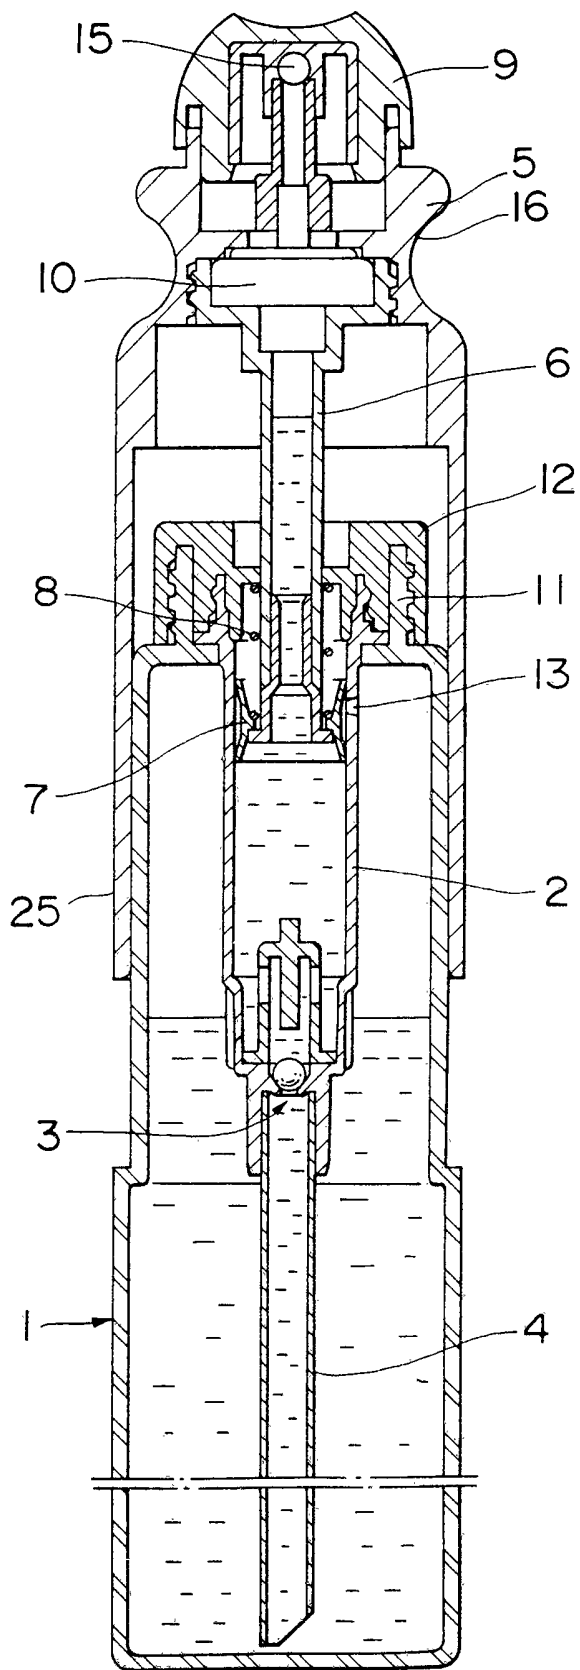


第 7 図

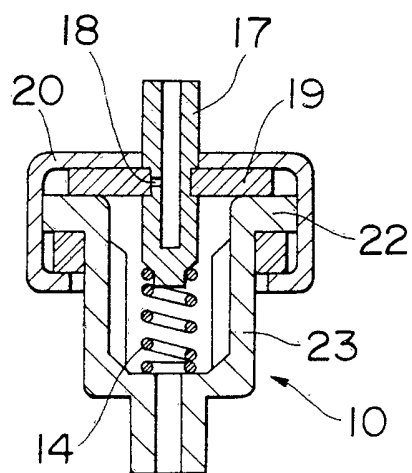


5/7

第 8 図

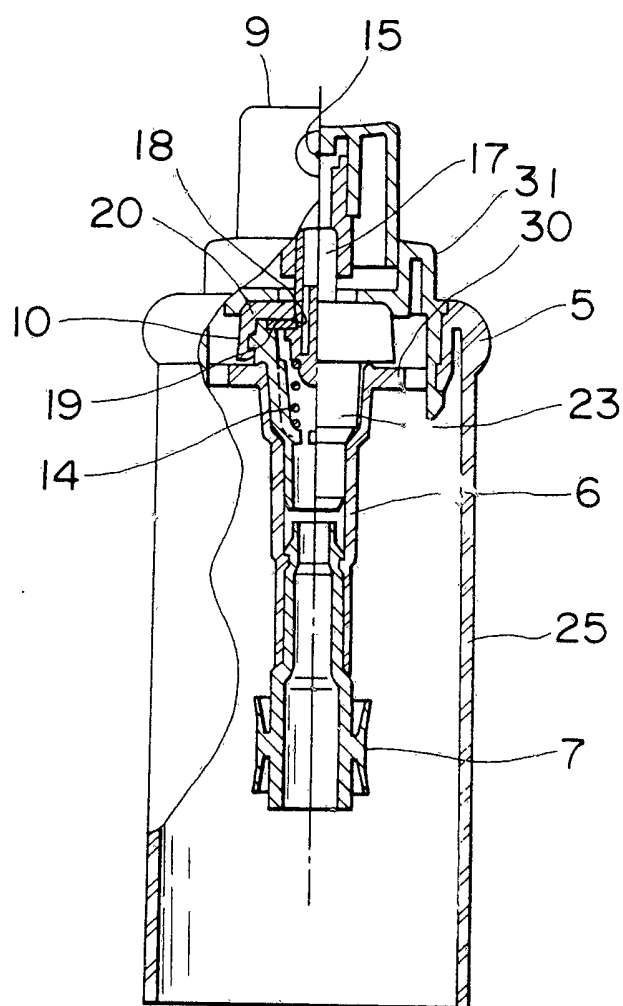


6/7


第 9 図

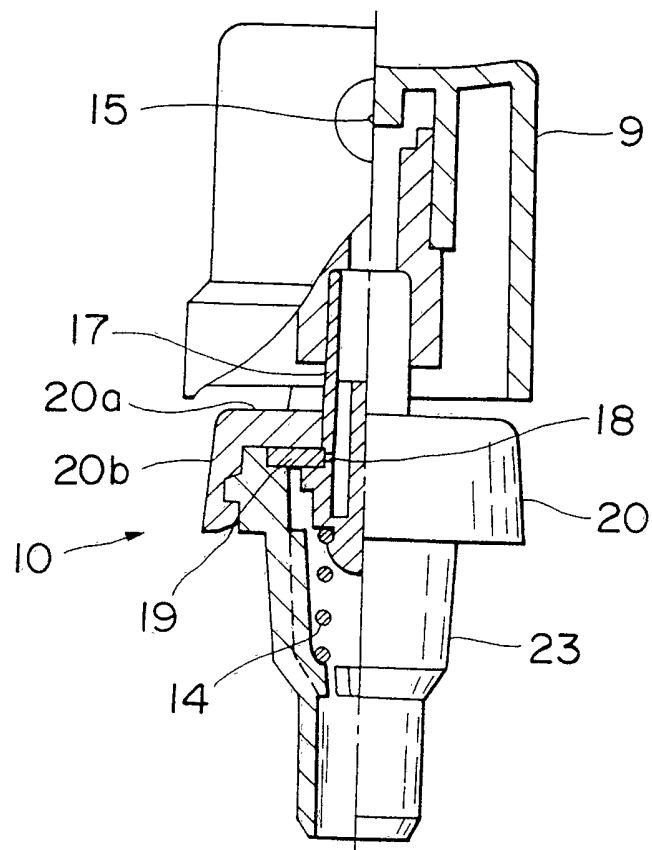

第 10 図

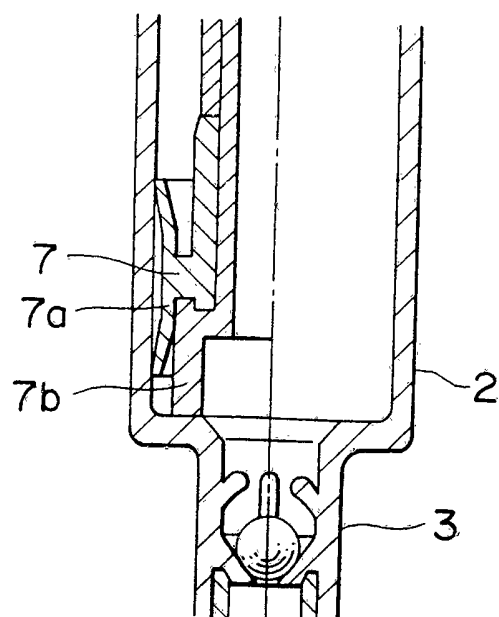

第11図

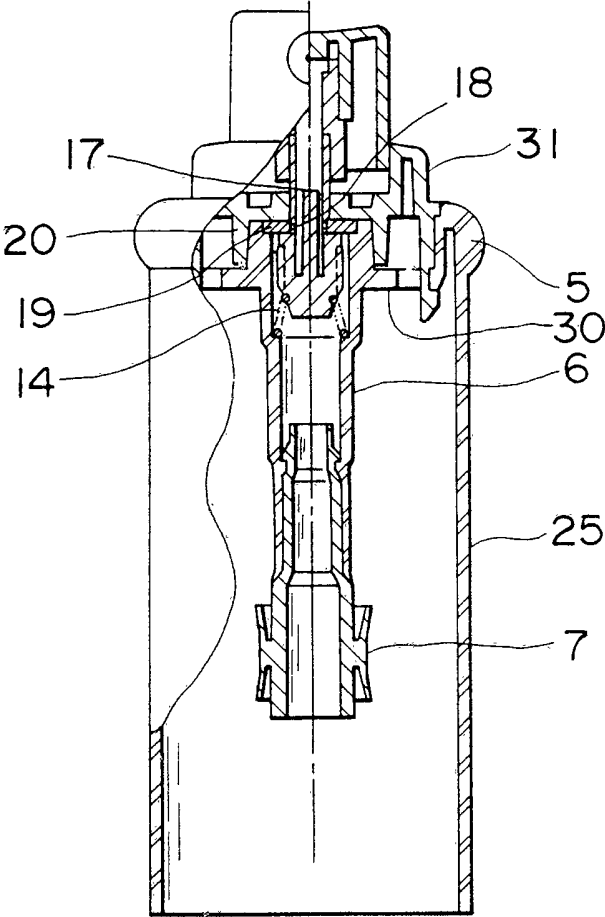

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP90/01297

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl ⁵ B05B11/00		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System ¹	Classification Symbols	
IPC B05B9/047, B05B11/00		
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
Jitsuyo Shinan Koho 1926 - 1990 Kokai Jitsuyo Shinan Koho 1971 - 1990		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category [*]	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	JP, A, 51-131910 (Eizo Mori), 16 November 1976 (16. 11. 76), (Family: none)	1 - 5
A	JP, A, 51-131909 (Marutada Seikan K.K.), 16 November 1976 (16. 11. 76), (Family: none)	1 - 5
[*] Special categories of cited documents: ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search December 5, 1990 (05. 12. 90)		Date of Mailing of this International Search Report December 17, 1990 (17. 12. 90)
International Searching Authority Japanese Patent Office		Signature of Authorized Officer