

(No Model.)

W. M. RUSH, Jr.
WATCHCASE.

No. 543,317.

Patented July 23, 1895.









Fig. 5.




Fig. 2.









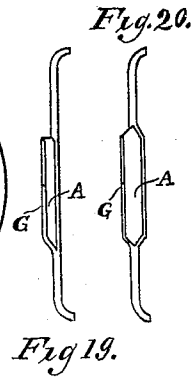


Fig. 19.



witnesses
Moner Osborn
Harry H. Price

Inventor
W. M. Rush, Jr.

UNITED STATES PATENT OFFICE.

WILLIAM M. RUSH, JR., OF ST. JOSEPH, MISSOURI.

WATCHCASE.

SPECIFICATION forming part of Letters Patent No. 543,317, dated July 23, 1895.

Application filed October 22, 1894. Serial No. 526,624. (No model.)

To all whom it may concern:

Be it known that I, WILLIAM M. RUSH, JR., a citizen of the United States, residing at St. Joseph, in the State of Missouri, have invented
5 a new and useful Watchcase, of which the following is a specification.

My invention relates to improvements in watchcases, in which, by means of springs, ribs, lips, recesses, and the expansion of the
10 sheets composing the lids of watchcases, provision is made for a receptacle or case in which to keep and carry postage-stamps.

The object of my invention is to provide
15 age-stamps within a watchcase and in the smallest space. I attain these objects by the mechanism illustrated in the accompanying drawings, in which—

Figure 1 is a view of the inside of the outer
20 or the outside of an inner lid of a watchcase to which a spring B is attached to hold the stamp A in place against the case. Fig. 2 is a sectional view of Fig. 1, drawn on dotted line *a a*, showing the spring B and stamp-space A. Fig. 3 is a sectional view of Fig. 1,
25 at dotted line *a a*, showing the case recessed in order to afford the greater stamp-space A and spring B. Fig. 4 is a view of a lid of a watchcase, to which ribs C C are attached to
30 prevent the stamps shifting, and spring B to hold them against the case. Fig. 5 is a sectional view of Fig. 4, at dotted line *b b*, showing the stamp-space A, the spring B, and the rib C. Fig. 6 is a sectional view of Fig. 4, at
35 dotted line *b b*, showing the case recessed in order to afford greater stamp-space A with the spring B and the rib C. Fig. 7 is a view of a lid of a watchcase in which the lip E has been added to the ribs so as to afford a space
40 within which to secure the stamps. Fig. 8 is a sectional view of Fig. 7, at dotted line *c c*, showing stamp-space A, the ribs C C, and lips E E. Fig. 9 is a sectional view of Fig. 7, at dotted line *c c*, showing the case recessed
45 in order to afford a greater stamp-space A with ribs C C and lips E E. Fig. 10 is a sectional view of a lid of a watchcase, showing a stamp-space A and clip or spring B with a reinforcing spring D. Figs. 11, 12, 13, and 14
50 are sectional views showing the forms of recesses to be made in the opposite lid to receive the stamp apparatus attached to the

other lid. Fig. 15 is a view of a watchcase with the ribs C C covered by a shield F. Fig. 16 is a sectional view of Fig. 15 at dotted line
55 *d d*, showing the case recessed in order to afford a greater stamp-space A with ribs C C and shield F. Fig. 17 is a sectional view of Fig. 15 at dotted line *d d*, showing ribs C C, stamp-space A, and shield F. Fig. 18 is a view of a
60 lid of a watchcase whose sheets have been expanded at G, so as to provide a stamp-space A. Fig. 19 is a sectional view of Fig. 18, at dotted lines *e e*, showing one sheet of the lid G expanded away from its fellow, so as to
65 create a stamp-space A. Fig. 20 is a sectional view of Fig. 18, at dotted lines *e e*, showing the two sheets of the lid expanded away from each other so as to create a greater stamp-space A.

From the foregoing it will be perceived that
70 my invention may be carried out in various ways in practice, and while I make no broad claim to the clasps, springs, &c., for holding tickets, labels, &c., still I am not aware that
75 a watchcase has ever heretofore been provided with such a holder as is here described; and its advantages are that it enables any one to carry postage-stamps in the pocket without
80 having a separate special receptacle for the same, and without risk of having them stuck together and destroyed by moisture in a pocket-book, the cases of the watch affording a
convenient and safe receptacle for them without encumbering the pockets with a separate
85 receptacle, and the impervious nature of the metal lids of the case preventing access of moisture from perspiration and keeping them always dry and free from soil, without in any way affecting the usefulness and slightly ap-
90 pearance of the watch.

Having thus described my invention, what I claim, and desire to secure by Letters Patent, is—

1. As a new article of manufacture, a watch
95 case having, inside of the same and attached to one of its lids or disks, a holder for stamps, consisting of a thin piece of material overlapping and retaining the stamps against lateral displacement substantially as and for
100 the purpose described.

2. A watch case provided with a stamp holder in one of its lids or disks, and a corresponding recess or depression in the adjacent

lid or disk to accommodate the stamp holder, substantially as shown and described.

3. As a new article of manufacture, a watch case having, inside of the same and attached
5 to one of its lids or disks, a holder for stamps, consisting of a thin piece of material fixed to the lid or disk in central position and overlapping and retaining the stamps against lateral displacement substantially as shown and
10 described.

4. As a new article of manufacture, a watch case having, inside of the same and attached to one of its lids or disks, a holder for stamps, consisting of a thin piece of elastic or spring-
15 ing material fixed to the lid or disk in central position and overlapping and retaining the stamps against lateral displacement substantially as shown and described.

5. As a new article of manufacture, a watch

case having, inside of the same and attached 20 to one of its lids or disks, a holder for stamps, consisting of a thin piece of elastic or springing material fixed to the lid or disk in central position and overlapping and retaining the stamps, and side flanges on each side of said
25 holder, substantially as and for the purpose described.

6. As a new article of manufacture, a watch case having, inside of the same and attached to one of its lids or disks in central position, 30 an overlapping stamp holder, and having this same lid or disk recessed or depressed at a point opposite such holder substantially as and for the purpose described.

WILLIAM M. RUSH, JR.

Witnesses:

HOMER OSBORN,

HARRY H. TRICE.