



(22) Date de dépôt/Filing Date: 2002/07/29

(41) Mise à la disp. pub./Open to Public Insp.: 2003/02/27

(45) Date de délivrance/Issue Date: 2013/09/24

(62) Demande originale/Original Application: 2 456 539

(30) Priorité/Priority: 2001/08/14 (US09/929,667)

(51) Cl.Int./Int.Cl. *G02C 7/06* (2006.01),  
*G02C 7/04* (2006.01)

(72) Inventeurs/Inventors:

ROFFMAN, JEFFREY H., US;

JUBIN, PHILIPPE F., US;

POLING, TIMOTHY R., US;

SKINNER, MICHAEL, US;

HICKSON-CURRAN, SHEILA B., US

(73) Propriétaire/Owner:

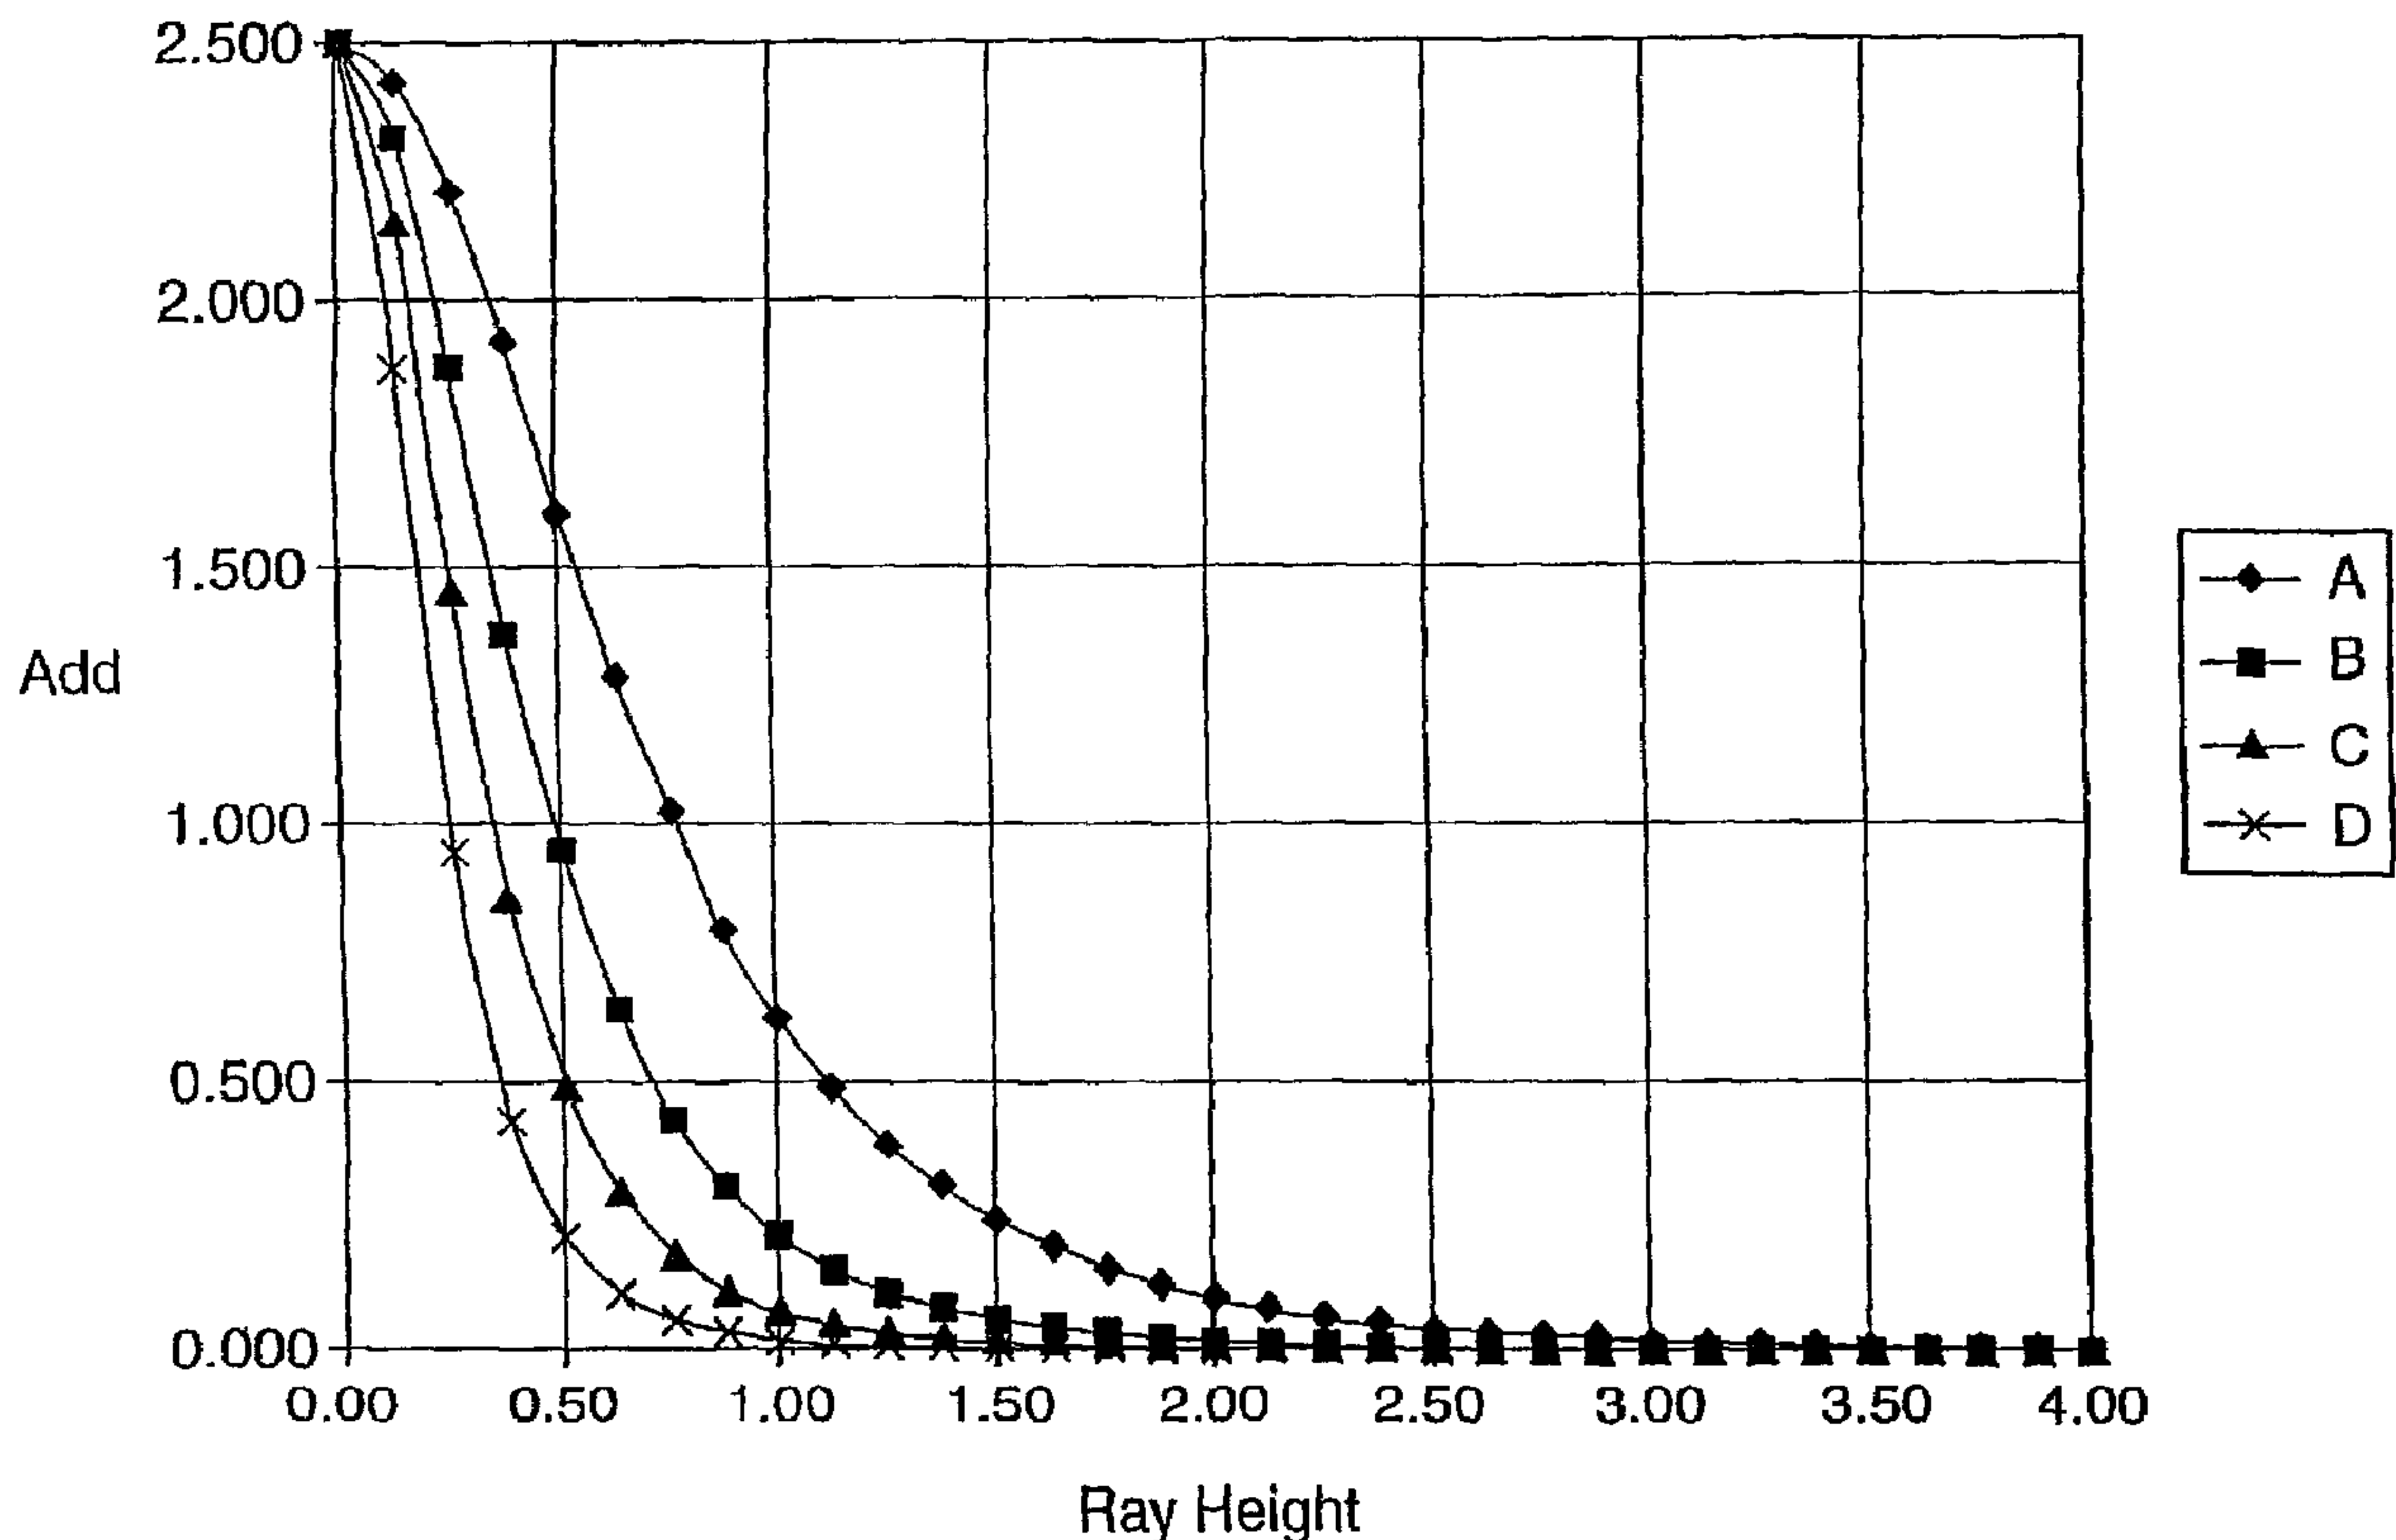
JOHNSON & JOHNSON VISION CARE, INC., US

(74) Agent: NORTON ROSE FULBRIGHT CANADA

LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : METHODES DE CONCEPTION DE LENTILLES OPHTALMIQUES A FOYERS MULTIPLES

(54) Title: METHODS FOR DESIGNING MULTIFOCAL OPHTHALMIC LENSES



(57) Abrégé/Abstract:

The invention provides multifocal ophthalmic lenses useful for correcting presbyopia. The lenses of the invention exhibit a better distribution of the distance and near vision powers within the multifocal zone and, thus, improved visual acuity and wearer satisfaction.

## ABSTRACT

The invention provides multifocal ophthalmic lenses useful for correcting presbyopia. The lenses of the invention exhibit a better distribution of the distance and near vision powers within the multifocal zone and, thus, improved visual acuity and wearer satisfaction.

## METHODS FOR DESIGNING MULTIFOCAL OPHTHALMIC LENSES

This patent application is a divisional application of Canadian patent application 2, 456, 539 METHODS FOR DESIGNING MULTIFOCAL OPHTHALMIC LENSES filed July 29, 2002.

5

## Field of the Invention

The invention relates to ophthalmic lenses. In particular, the invention provides lenses that use more than one optical power, or focal length, and are useful in the correction of presbyopia.

10

## Background of the Invention

As an individual ages, the eye is less able to accommodate, or bend the natural lens, to focus on objects that are relatively near to the observer. This condition is known as presbyopia. Additionally, for persons who have had their natural lens removed and an intraocular lens inserted as a replacement, the ability to  
15 accommodate is totally absent.

Among the methods used to correct for the eye's failure to accommodate is the mono-vision system in which a person is fitted with one contact lens for distance vision and one lens for near vision. The mono-vision system permits the lens wearer  
20 to distinguish both distance and near objects, but is disadvantageous in that a substantial loss in depth perception results.

In another type of multifocal contact lenses, the optic zone of each lens is provided with more than one power. For example, the optic zone may have both  
25 distance and near power, which the eye uses simultaneously.

Neither of these methods provides good results in terms of visual acuity and lens wearer satisfaction. Thus, a need exists for lenses that both provide correction for the wearer's inability to accommodate and that overcome some or all of the  
30 disadvantages of known lenses.

## SUMMARY OF THE INVENTION

In one embodiment, there is provided a multifocal ophthalmic lens, comprising an  
5 optic zone comprising at least one near vision power and at least one distance vision  
power wherein a rate of change and a contour of a power change between the distance  
near vision powers is determined according to an equation selected from the group  
consisting of:

$$Power = A - |\sin(t)^x| * A \quad (IV)$$

10 and

$$Power = |\sin(t)^x| * A \quad (V)$$

wherein:

A is an Add power;

t is a pupil fraction from 90 to 180 degrees; and

15 X is greater than 0 and up to and including  $2\pi$ .

### Brief Description of the Drawings

FIG. 1 is a graphic depiction of the power progression in multifocal vision power zones of differing widths designed according to the invention.

5        FIG. 2 is a graphic depiction of a five power region design designed according to the invention.

FIG. 3 is a graphic depiction of an alternative embodiment of a five power region design according to the invention.

10       Fig. 4 is a graphic depiction of the power progression in four multifocal power zones designed according to the invention.

### Detailed Description of the Invention and Preferred Embodiments

The invention provides methods for designing lenses useful for correcting  
15       presbyopia, lenses incorporating such designs, and methods for producing these lenses. In one embodiment, the method of the invention permits multifocal zones of near vision power and distance vision power to be varied as to amplitude, position, and width. The result of this variation is that there is a better distribution of the distance and near vision powers within the multifocal zone and, thus, improved  
20       visual acuity and wearer satisfaction.

In one embodiment, the invention provides a multifocal ophthalmic lens comprising, consisting essentially of, and consisting of an optic zone comprising, consisting essentially of, and consisting of one or more multifocal power zones  
25       wherein a position, an amplitude, and a width for the zone is determined by the following equation:

$$Y = \left[ \left[ \frac{8a^3}{4a^2 + P(x+k)^2} \right]^S \right] * \text{Add}$$

5

(I)

wherein:

Y is the Add power at any point x on a surface;

x is a point on the lens surface;

a is 0.5;

10 k is the point within the power zone at which the power peaks;

P is the coefficient that controls the width of the power zone and is greater than about 0 and less than about 1.5;

S is the coefficient that controls the amplitude and its decrease in the periphery of the zone and is greater than about 0 and less than about 30; and

15 Add is a value that is equal to or less than the difference in power between the near vision power and distance vision power of the lens.

For purposes of the invention, by "ophthalmic lens" is meant a contact lens, intraocular lens, or the like. Preferably, the lenses of the invention are contact  
 20 lenses. By "position" is meant the power zone position in reference to the pupil. By "amplitude" is meant the extent or range of the power progression within the power zone. By "distance vision power" is meant the amount of refractive power required to correct the wearer's distance vision acuity to the desired degree. By "near vision power" is meant the amount of refractive power required to correct the wearer's near  
 25 vision acuity to the desired degree.

In the lenses of the invention, the multifocal power zones may be on the object-side, or front, surface, the eye-side, or rear, surface, or both surfaces. The multifocal power zones have at least two regions of differing power alternating  
 30 between distance and near vision power, and preferably three regions alternating

between distance, near, and intermediate vision power. Each of the distance and  
 5 near power regions may be of the same or of a different power from the other  
 distance and near regions. Intermediate power may be supplied as a consequence of  
 the power progression between the peak of the power of the near and distance vision  
 regions. Alternatively, a region of intermediate power may also be designed using  
 Equation I.

10

The multifocal power zone may occur at any point within the optic zone of  
 the lens. The multifocal power zone is coaxial, the common axis being the Z axis  
 and preferably rotationally symmetric. In the lenses of the invention, the distance,  
 near, and intermediate optical powers are spherical or toric powers. Additionally,  
 15 the distance, near, and intermediate optical power zones may be of any desired and  
 practical dimensions.

In Fig. 1 is graphically depicted the power progression in four different  
 multifocal power zone designs. In each design, the near vision power is at the center  
 20 of the zone and the distance vision power is at or towards the periphery of the zone.  
 By periphery is meant the region or area farthest from the center of the zone. The  
 values used in Equation I for each of the designs is set forth in the following Table  
 1.

Table 1

	Design A	Design B	Design C	Design D
Add	2.50 D	2.50 D	2.50 D	2.50 D
a	0.50	0.50	0.50	0.50
k	0.0	0.0	0.0	0.0
P	1.0	2.5	5.0	10.0
S	2.000	2.000	2.000	2.000

25

In FIG. 2 is graphically depicted the power progression in a multifocal power zone having five power regions. The composite design of Fig. 2 is achieved by taking the sum of the values generated by using Equation I in the two cases as follows:

Table 2

	Case A	Case B
Add	2.50 D	2.50 D
A	0.50	0.50
K	-1.5	-2.5
P	3.5	5.0
S	4.000	6.283

Use of the composite design provides a simple method for creating multifocal power zones in which the characteristics of the inner power regions, meaning the regions nearest to the geometric center of the lens, differ from those of the outer, or peripheral, regions.

In FIG. 3 is graphically depicted the power progression of a multi-region composite design in which the Add differs from one near vision power region to the other. The composite design was achieved by taking the sum of the values generated by using Equation I in the two cases as follows:

Table 3

	Case C	Case D
Add	2.50 D	1.75 D
A	0.50	0.50
K	-1.5	-2.5
P	3.5	5.0
S	4.000	6.283

The advantage of this design is that it may result in an improvement of night vision in the lens wearer because the near vision power decreases in the peripheral portions  
 5 of the optic zone.

In another embodiment of the invention a method for designing lenses, and lenses made by this method, are provided in which the rate of change and contour of the power change from distance to near and near to distance vision power is varied.  
 10 In this embodiment, the invention provides a multifocal ophthalmic lens comprising, consisting essentially of, and consisting of an optic zone comprising, consisting essentially of, and consisting of near vision power and distance vision power, wherein a rate of change and a contour of a power change between the distance near vision powers is determined according to an equation selected from the group  
 15 consisting of:

$$Power = A - ((1 - P)^x) * A \quad (II)$$

20 and

$$Power = ((1 - P)^x) * A \quad (III)$$

wherein :

A is the Add power;

25 P is the pupil fraction from 0 to 1; and

X is greater than 0, preferably greater than 1, and more preferably 2,  $\pi$ , or  $2\pi$ .

For purposes of Equation II and III, P is determined as follows. The maximum and minimum pupil diameters are selected along with interval steps from  
 30 the minimum to the maximum. The interval steps selected are at the designers discretion, but preferably are suitable to facilitate production of the lens as, for

example, by computer numerical controlled lathe. From the maximum diameter, the percentage of total diameter P is defined.

Equation II is used for center distance lens designs meaning that the distance vision power is in the center of the optic zone and the near vision power is at the optic zone's periphery. Equation III is used for center near lens designs, or lenses in which the near vision power is in the center and the distance vision is at the periphery.

Alternatively, and as yet another embodiment of the invention, the rate of change and contour of the power change from distance to near and near to distance vision power is varied using one of the following equations:

$$Power = A - |\sin(t)^x| * A \quad (IV)$$

and

$$Power = |\sin(t)^x| * A \quad (V)$$

wherein:

A is the Add power;

t is the pupil fraction from 90 to 180 degrees; and

X is greater than 0 and up to and including  $2\pi$ , preferably greater than 1, and more preferably 2,  $\pi$ , or  $2\pi$ .

For purposes of Equation IV and V, t is determined by selection of the maximum and minimum pupil diameters. The minimum diameter is assigned a value of 90 degrees and the maximum diameter of 180 degrees, in linear intervals.

Equation IV is used for center distance designs and Equation V is used for center near lenses. Thus, in yet another embodiment, the invention provides a multifocal ophthalmic lens comprising, consisting essentially of, and consisting of an optic zone comprising, consisting essentially of, and consisting of near vision power and distance vision power wherein a rate of change and a contour of a power change between the distance near vision powers is determined according to an equation selected from the group consisting of:

$$Power = A - |\sin(t)^x| * A$$

(IV)

10 and

$$Power = |\sin(t)^x| * A$$

(V)

wherein:

A is the Add power;

15 t is the pupil fraction from 90 to 180 degrees; and

X is greater than 0 and up to and including  $2\pi$ , preferably greater than 1, and more preferably 2,  $\pi$ , or  $2\pi$ .

In Fig. 4 is graphically depicted the power progression for a variety of designs. Designs A through D are calculated using Equation III and E through G using equation V. Both equations map the same interval (0,1) and start and end at the same values (A and 0). However, because  $\sin(t)$  is not a linear function, the progression rate generated differs. Thus, using one equation instead of the other enables the amount of Add power for a given pupil size to be changed, similar to Equations II and IV.

The designs of the invention are useful in producing contact lenses that are hard or soft lenses. Soft contact lenses, made of any material suitable for producing  
5 such lenses, preferably are used. The lenses of the invention may have any of a variety of corrective optical characteristics incorporated onto the surfaces in addition to distance and near optical powers, such as, for example, cylinder power.

The lenses of the invention may be formed by any conventional method. For  
10 example, the multifocal zones formed therein may produced by diamond-turning using alternating radii. The zones may be diamond-turned into the molds that are used to form the lens of the invention. Subsequently, a suitable liquid resin is placed between the molds followed by compression and curing of the resin to form the lenses of the invention. Alternatively, the zones may be diamond-turned into lens  
15 buttons.

What is claimed is:

1. A multifocal ophthalmic lens, comprising an optic zone comprising at least one near vision power and at least one distance vision power wherein a rate of change and a contour of a power change between the distance near vision powers is determined according to an equation selected from the group consisting of:

$$Power = A - \left| \sin(t)^x \right| * A \quad (IV)$$

and

$$Power = \left| \sin(t)^x \right| * A \quad (V)$$

wherein:

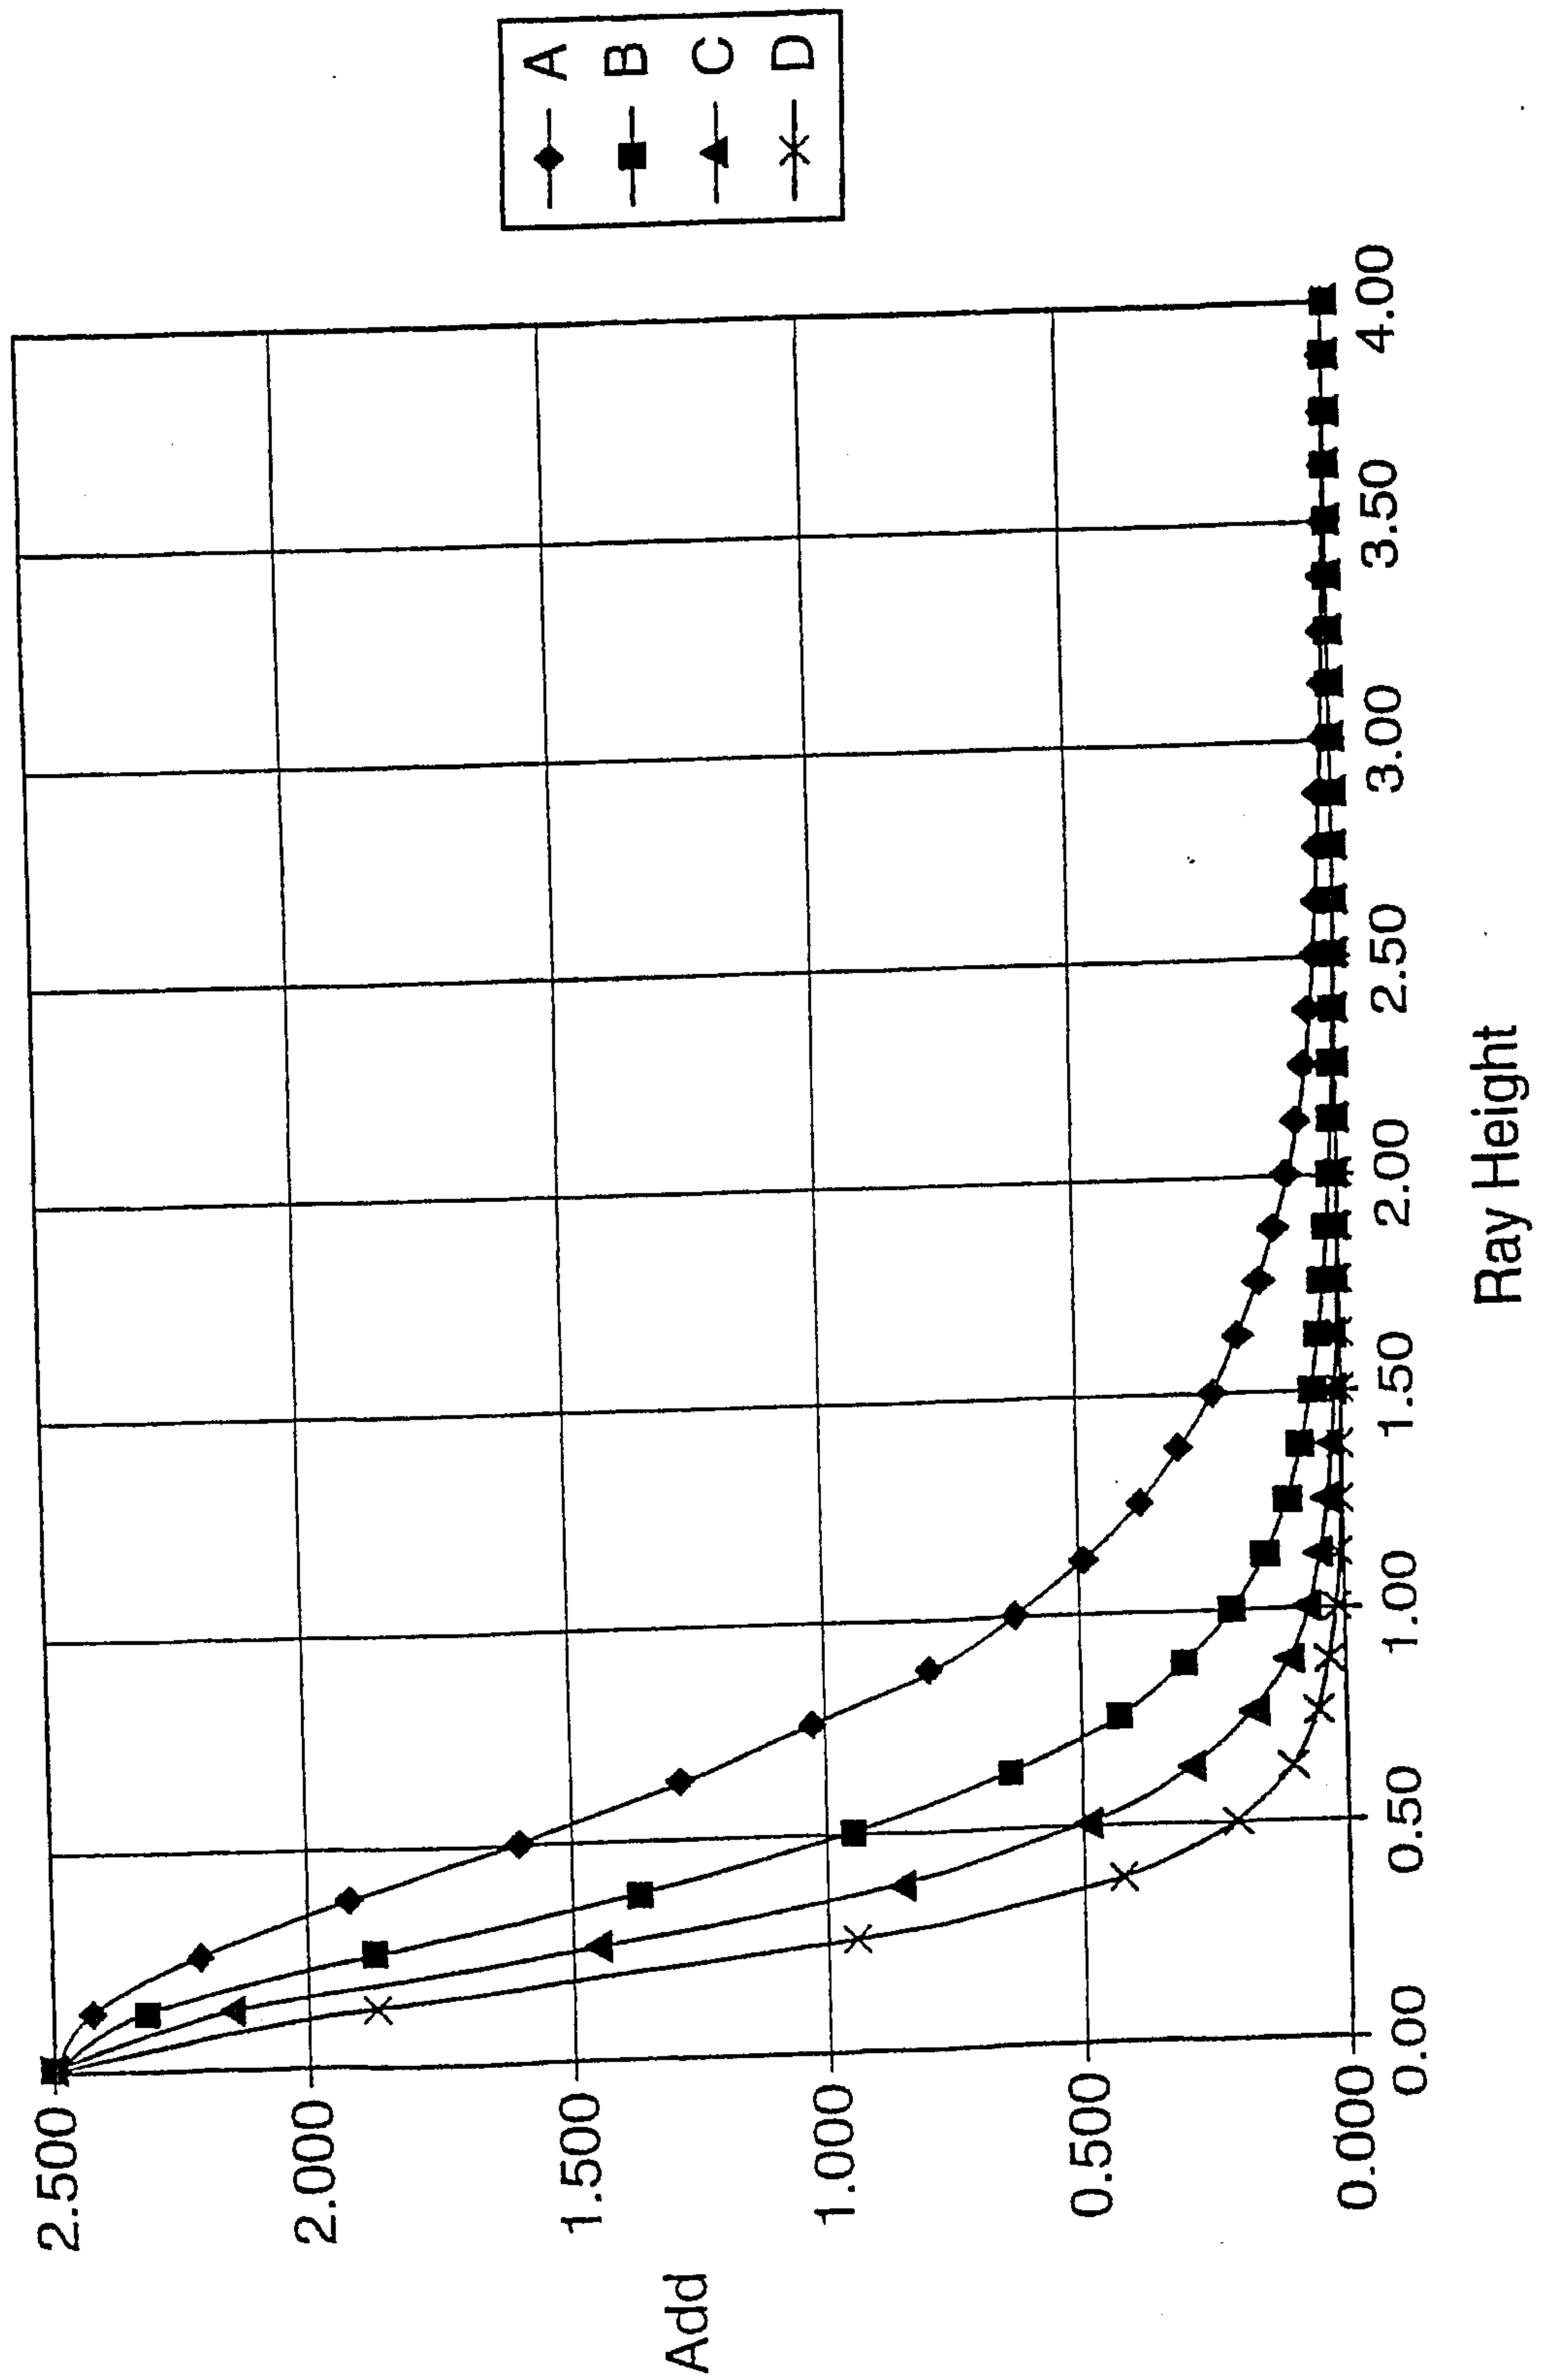
A is an Add power;

t is a pupil fraction from 90 to 180 degrees; and

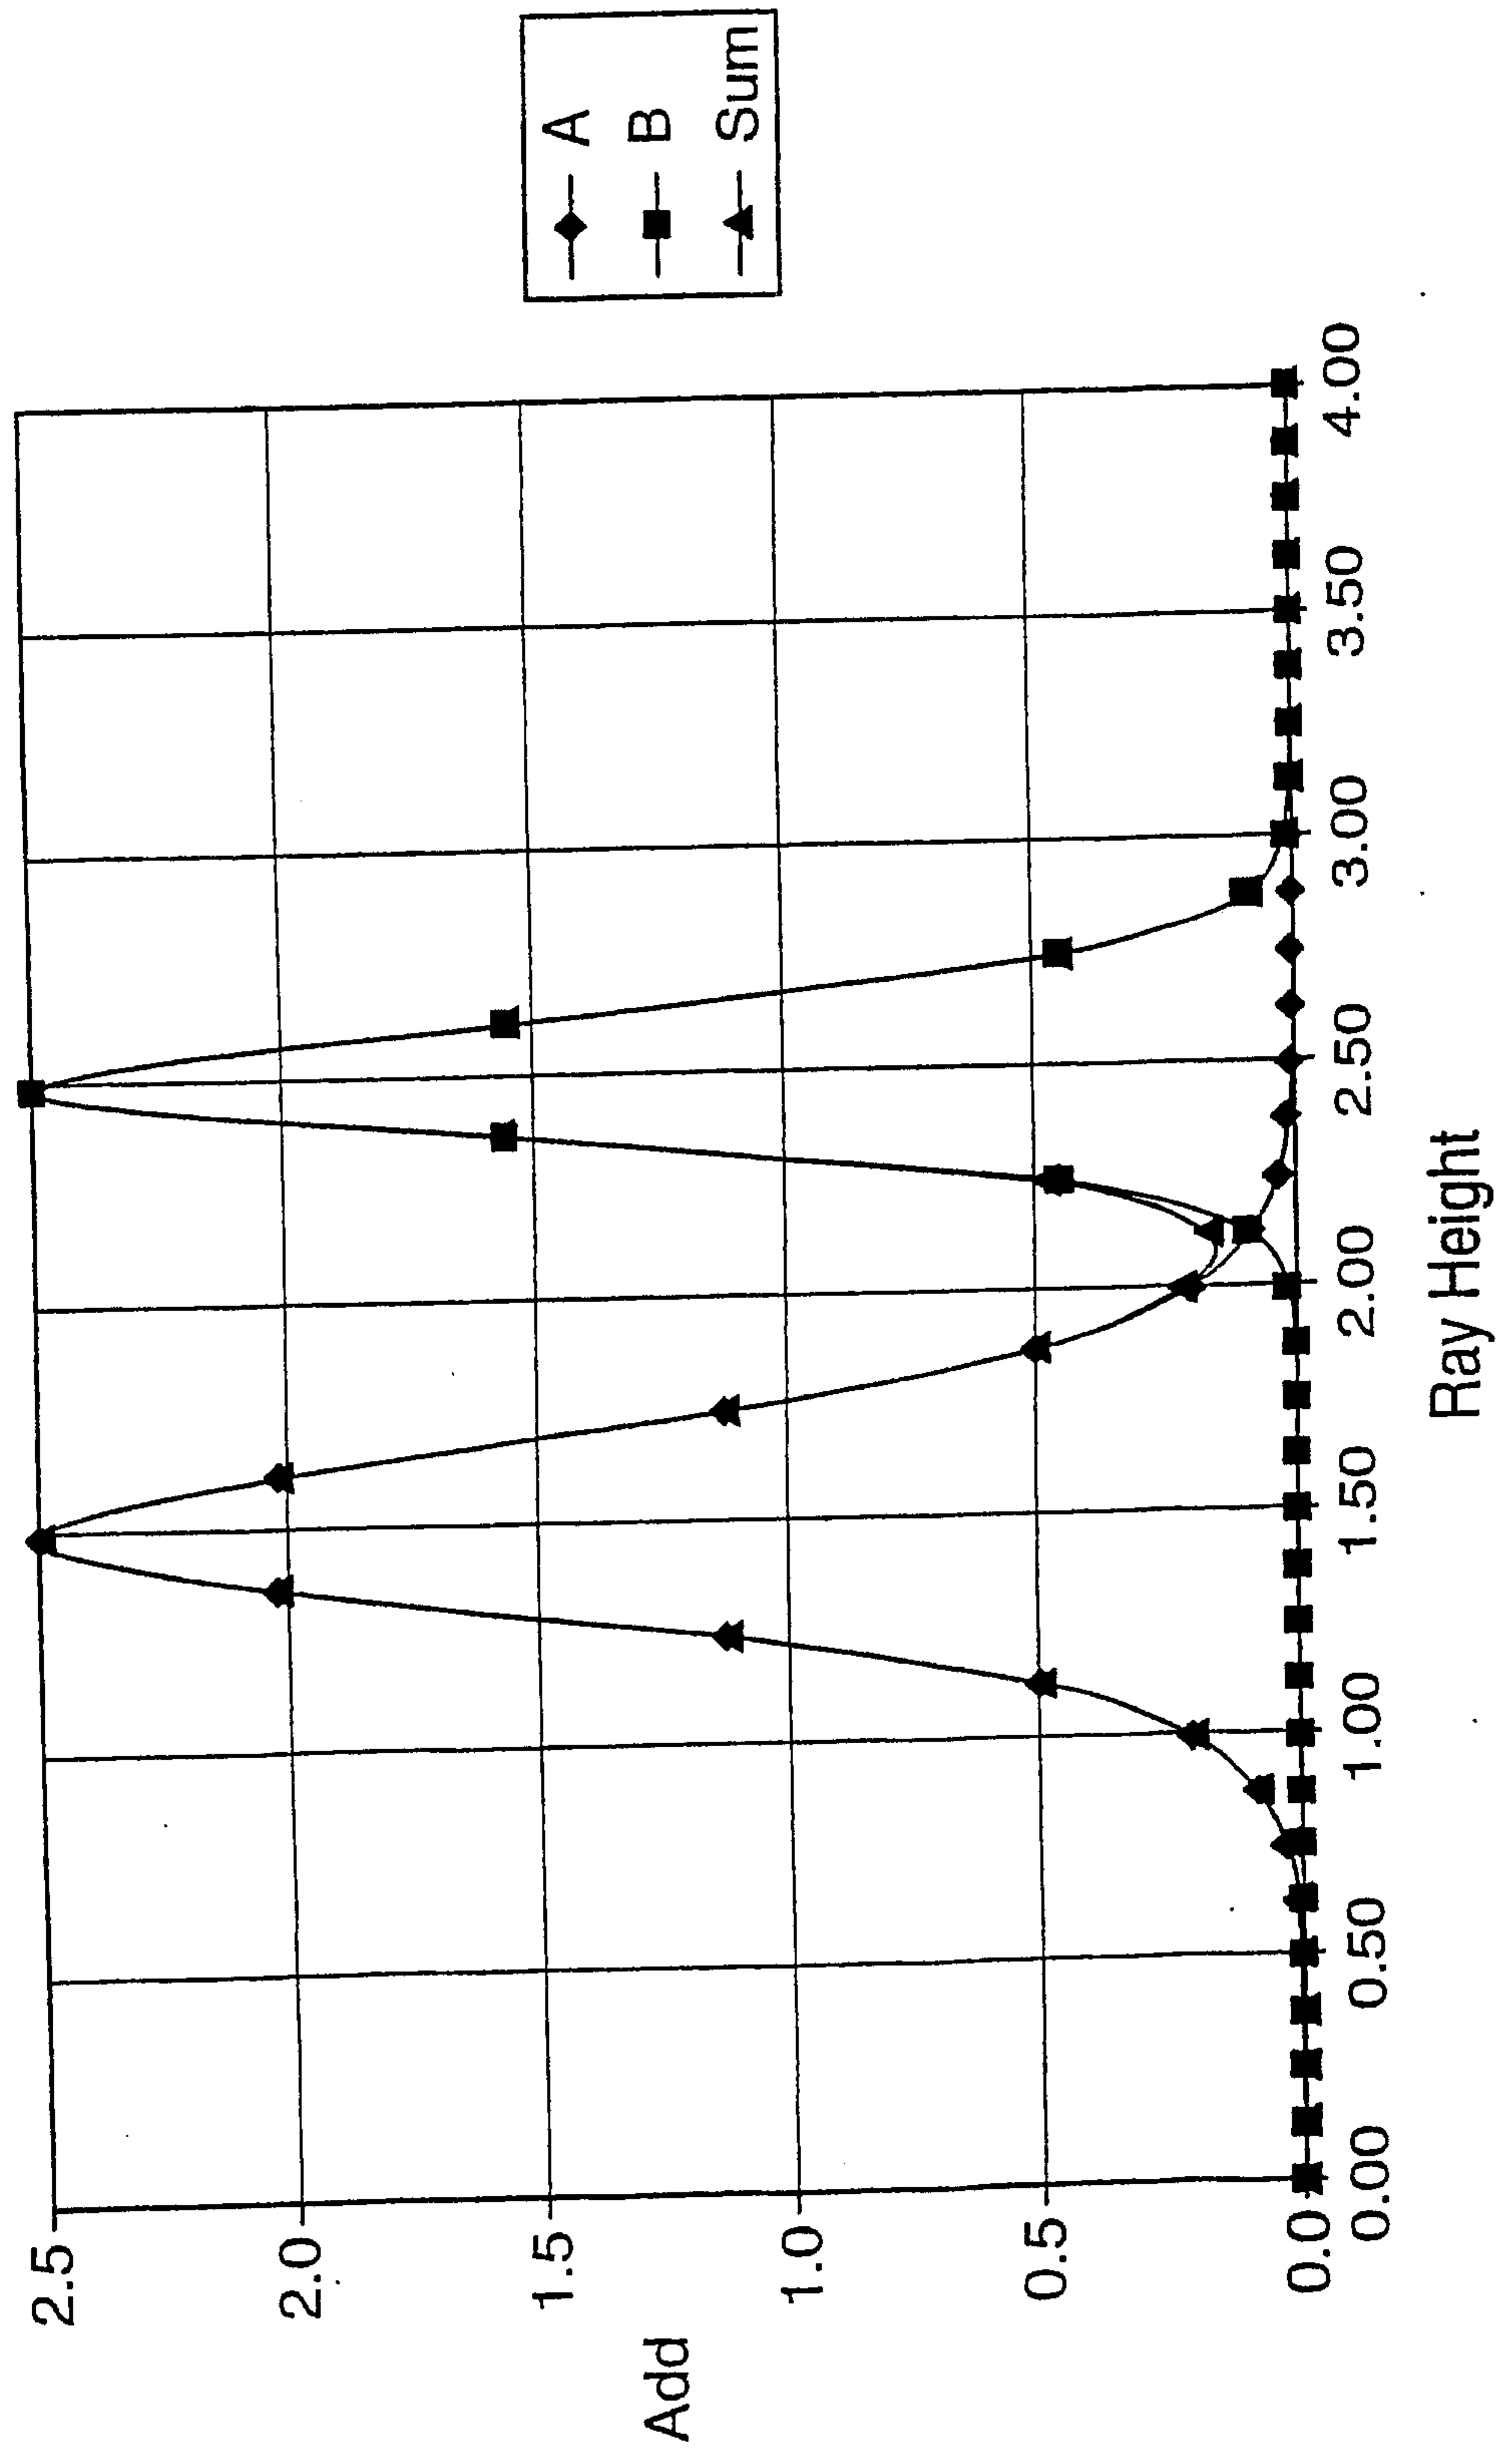
X is greater than 0 and up to and including  $2\pi$ .

2. The lens of claim 1, wherein the lens is a soft contact lens.
3. The lens of claim 1, wherein the distance and near power zone is on a front surface of the lens and a back surface of the lens comprises cylinder power.
4. The lens of any one of claims 1 to 3, wherein the equation is  $Power = A - \left| \sin(P)^x \right| * A$ .
5. The lens of any one of claims 1 to 3, wherein the equation is  $Power = \left| \sin(P)^x \right| * A$ .
6. The lens of claim 4, wherein X is greater than 1.
7. The lens of claim 6, wherein X is 2,  $\pi$ , or  $2\pi$ .
8. The lens of claim 5, wherein X is greater than 1.
9. The lens of claim 8, wherein X is 2,  $\pi$ , or  $2\pi$ .

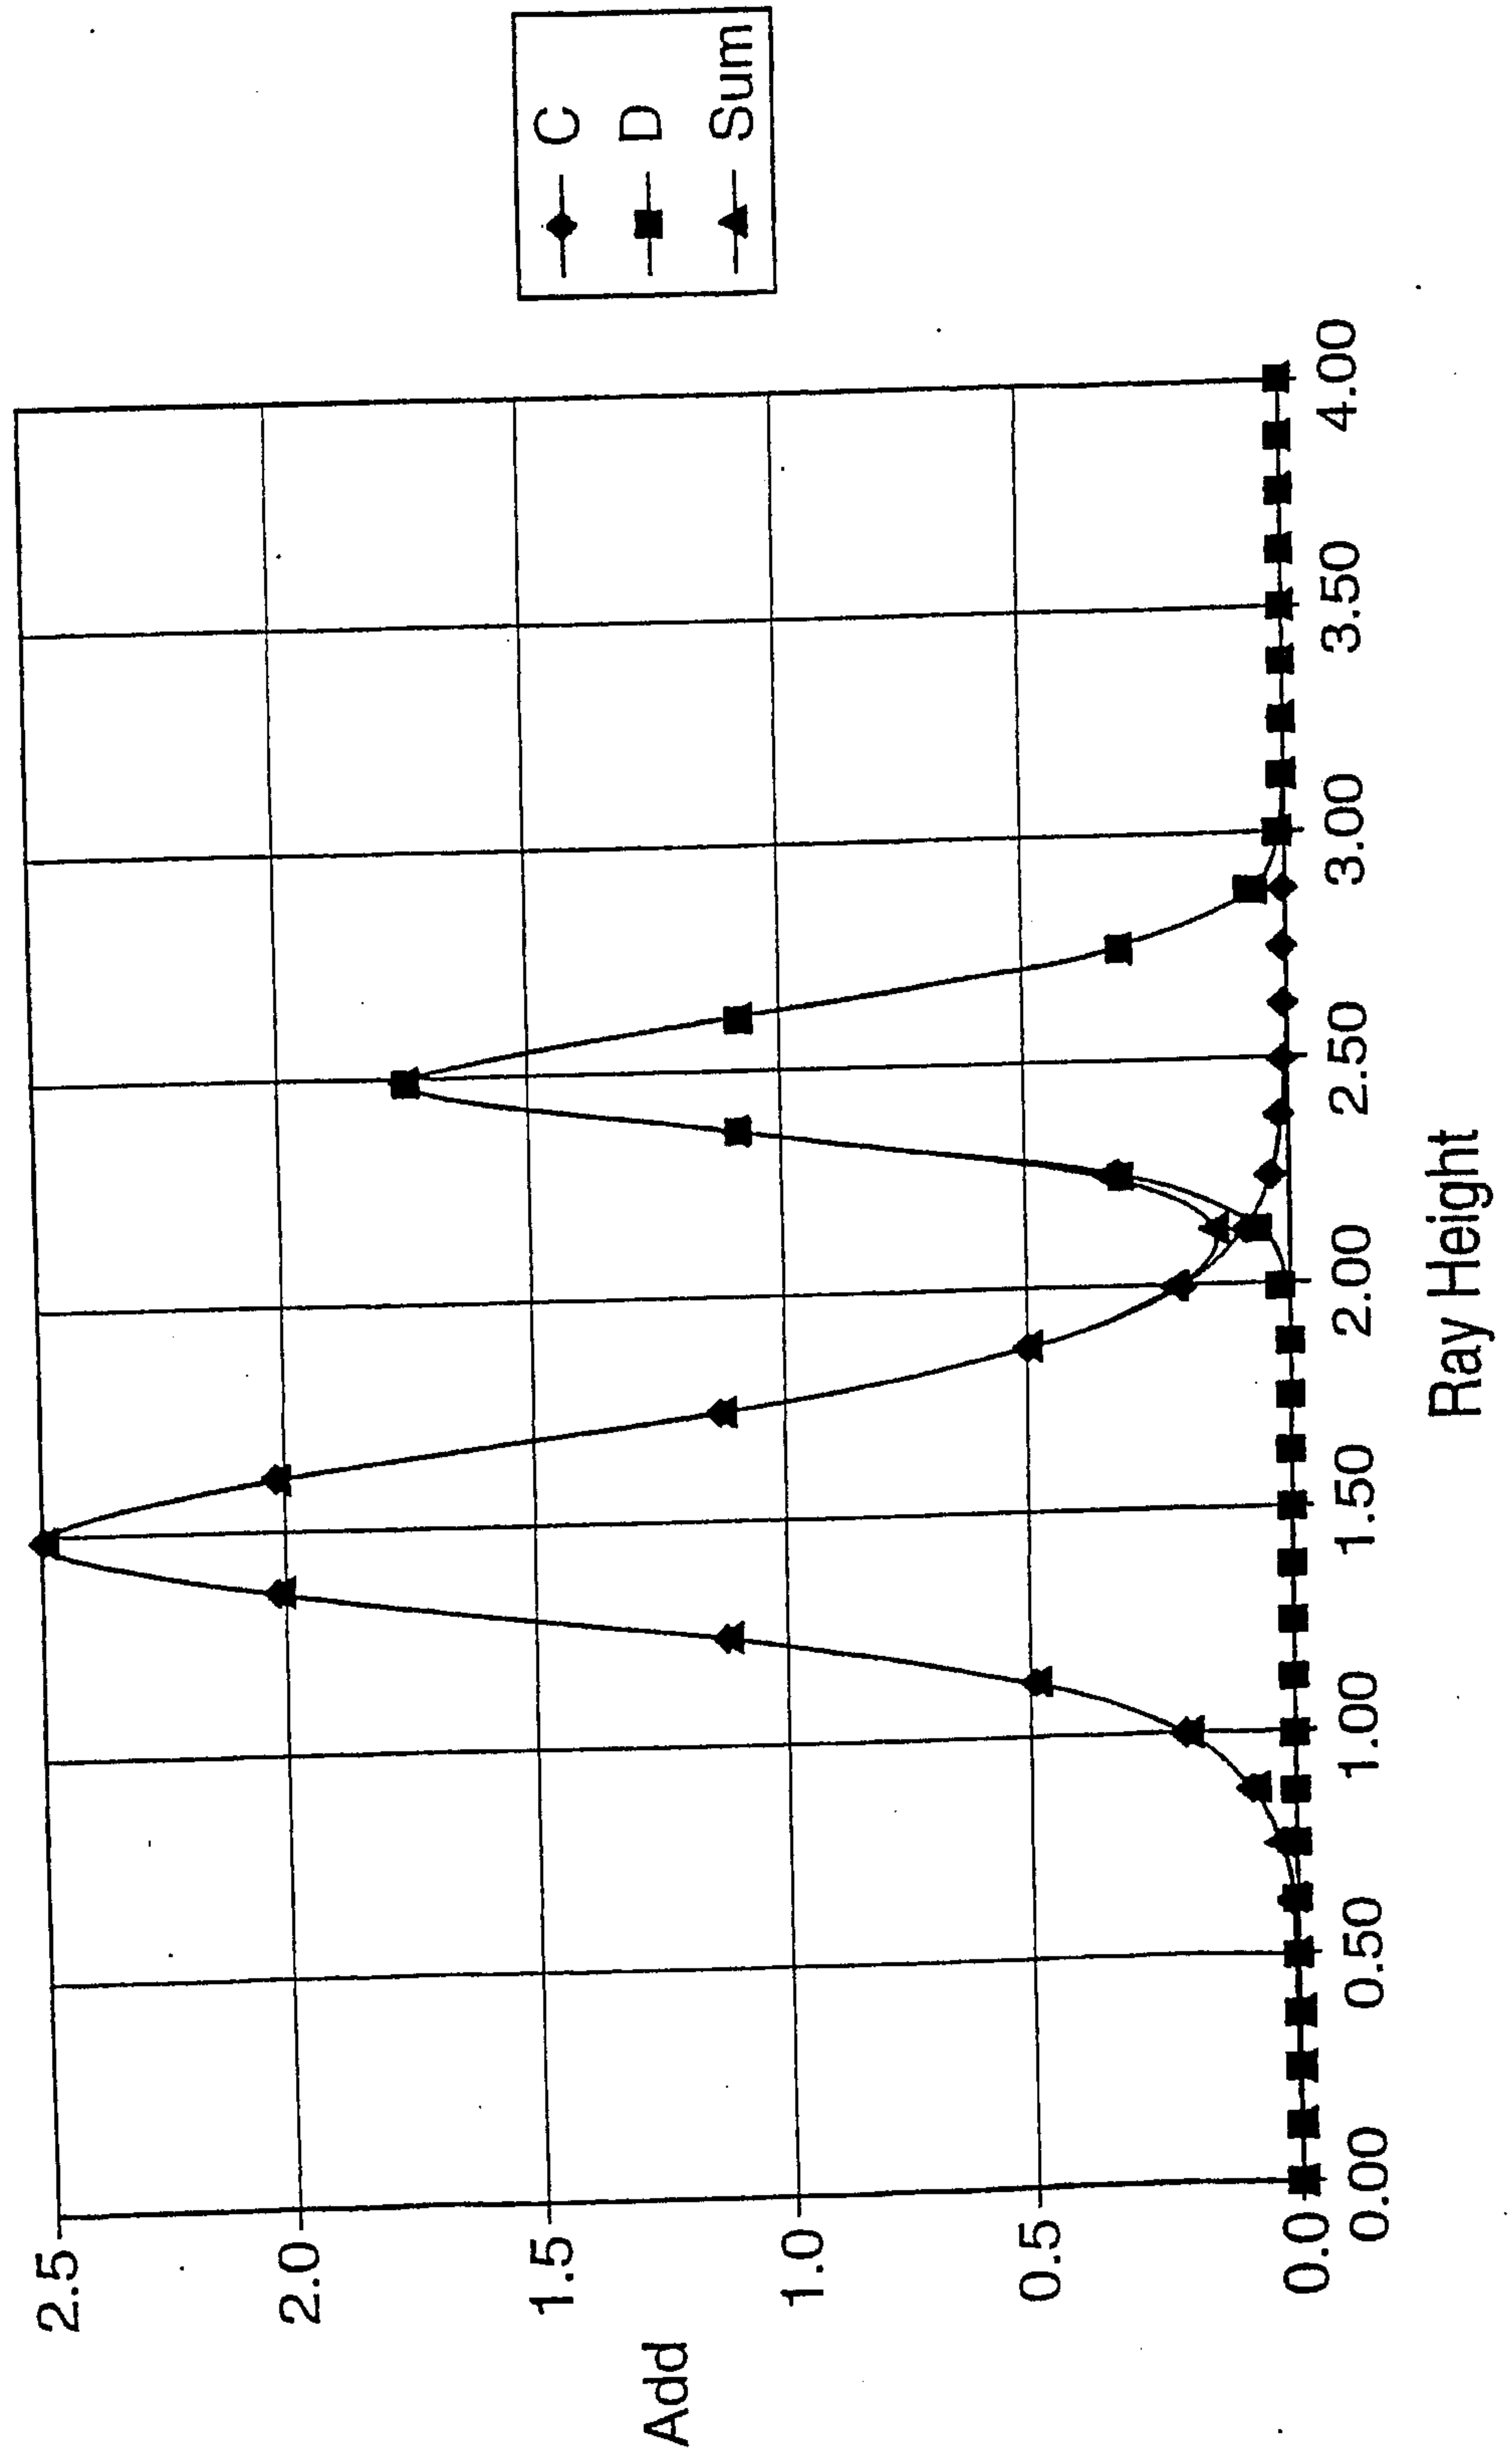
1/4

**FIG. 1**

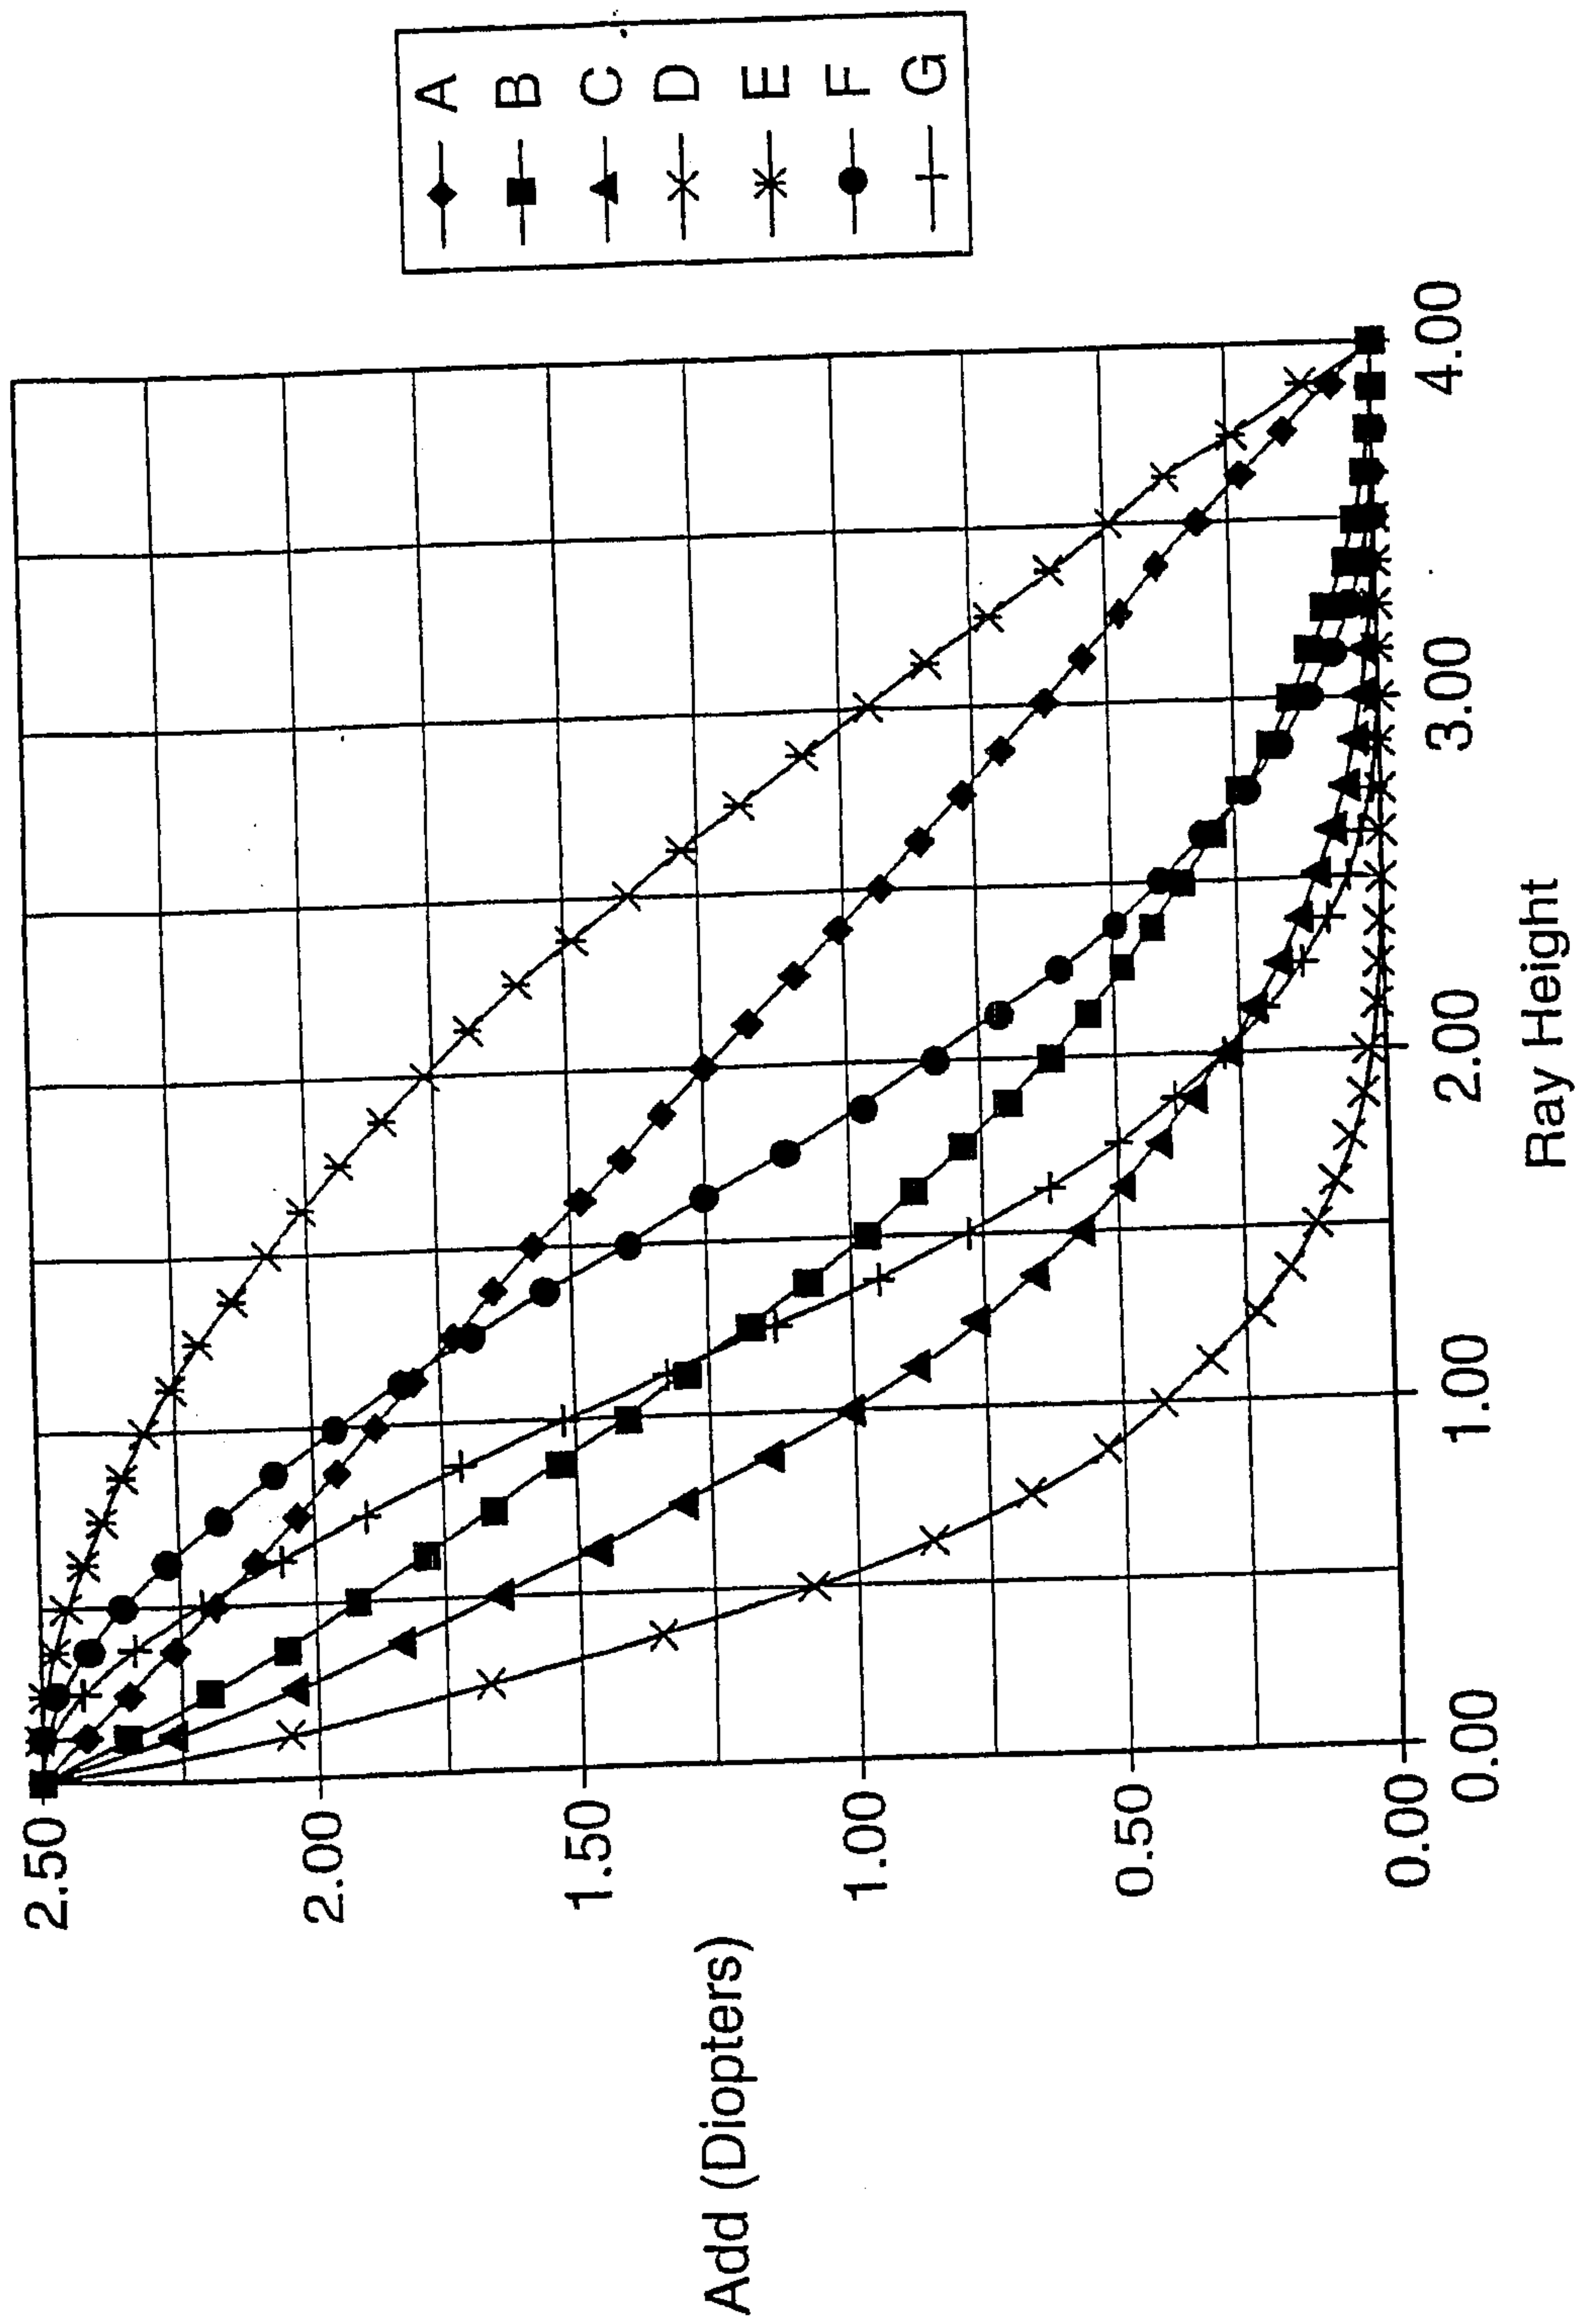
2/4

**FIG. 2**

3/4

**FIG. 3**

4/4

**FIG. 4**

Add

