

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 January 2006 (05.01.2006)

PCT

(10) International Publication Number
WO 2006/001684 A1(51) International Patent Classification⁷: **H04B 1/40**(21) International Application Number:
PCT/KR2005/002047

(22) International Filing Date: 29 June 2005 (29.06.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2004-0049625 29 June 2004 (29.06.2004) KR
10-2004-0054919 14 July 2004 (14.07.2004) KR(71) Applicant (for all designated States except US): **SK TELECOM. CO., LTD.** [KR/KR]; SK T-Tower, 11, Euljiro 2-ga, Jung-gu, Seoul 100-999 (KR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **HA, Do-Hoon** [KR/KR]; 125-1401 Hanjin-Hanhwa-Granville, 18, Wolgye 3-dong, Nowon-gu, Seoul 139-956 (KR). **KWON, Sang-Woon** [KR/KR]; 115-101 Hanshin-Apartment, Seohyeon-dong, Bundang-gu, Seongnam-si, Gyeonggi-do463-772 (KR). **JU, Jae-Young** [KR/KR]; 343-1904 Yulgok-Apartment, 876, Geumjeong-dong, Gunpo-si, Gyeonggi-do 435-050 (KR).(74) Agent: **KIM, Je-Hyun**; 7Fl., Deokchon Bldg., 1554-10 Seocho-dong, Seocho-gu, Seoul 137-070 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: DISGUISED POWER-OFF METHOD FOR A MOBILE COMMUNICATION TERMINAL

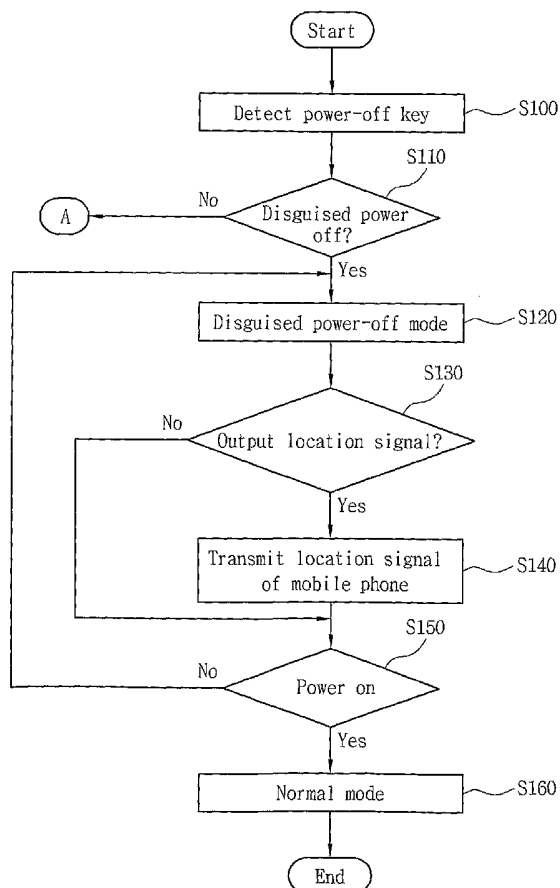

(57) Abstract: The present invention relates to a method of determining the location of a mobile terminal using disguised power-off, wherein if a mobile terminal is powered off in a state where a mobile communication service subscriber does not intend to do so, only the location indication function of the mobile terminal operates, but the remaining functions are terminated as if power of the mobile terminal is turned off. In accordance with the present invention, it is determined whether the subscriber terminal is actually powered off or powered off in a disguised manner. All the power of the subscriber terminal is shut off, or all the power except for power for a function of sending a location signal is shut off, depending on the type of power-off. Furthermore, when a location request signal is received from the server of a mobile communication service provider after the subscriber terminal has been powered off in a disguised manner, the subscriber terminal sends a location signal to a call originator that corresponds to call originator information stored therein. The present invention is advantageous in that, when a mobile terminal is powered off by a disguised power-off key when a user, such as a child or teenager, is in danger, the location of the mobile terminal can be determined through locating thereof.



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DISGUISED POWER-OFF METHOD FOR A MOBILE COMMUNICATION TERMINAL

【Technical Field】

The present invention relates to a disguised power-off method for a mobile terminal and, more particularly, to a disguised power-off method for a mobile terminal wherein, if a mobile terminal is powered off in the case where a mobile communication service subscriber does not intend to do so, only the location indication function of the mobile terminal operates and the remaining functions are terminated as if the mobile terminal is powered off.

【Background Art】

Generally, subscribers to mobile communication service turn on or off mobile terminals when needed.

When the power of a mobile terminal is turned on, power is applied to the mobile terminal, and the powered mobile terminal requests the communication service registration of the mobile terminal from the server of a mobile communication service provider while communicating with an adjacent base station. The mobile terminal whose communication service has been

registered can be provided with communication service, such as an outgoing call connection or incoming call connection service, and multimedia data service, such as Short Message Service (SMS) and Internet service, as necessity requires.

Furthermore, the mobile terminal can register its current location with the server of the mobile communication service provider through communication with a base station. Alternately, the location of the mobile terminal can be tracked using a Global Positioning System (GPS).

FIG. 1 is a conceptual view illustrating the power-on/off process of a common mobile terminal. In FIG. 1, a subscriber terminal 100 that has subscribed to communication service is connected to a server 200 of the mobile communication service provider and a patron terminal 300 via a wireless communication network. The subscriber terminal 100 detects a call connection through the subscriber terminal 100 or the patron terminal 300, and is provided with communication service.

The subscriber terminal 100 and the patron terminal 300 are mobile phones. Although not shown in the drawing, they each include a transmission/reception means for performing wireless communication, a control means for performing the overall control of the mobile phone, a display means

for displaying the operation and status of the mobile phone, a voice Input/Output (I/O) means, and a key input means for inputting character data.

Meanwhile, if power-off manipulation is detected through the key input means, the subscriber terminal 100 is powered off. However, before being powered off, the subscriber terminal 100 requests the release of the communication service connection by sending a power-off signal to the server 200 of the mobile communication service provider. After the communication service connection of the subscriber terminal 100 has been released, all the functions of the mobile terminal 100, including an incoming connection function, an outgoing connection and the other functions, are terminated. The server 200 of the mobile communication service provider stores information about the subscriber terminal 100 whose communication service connection has been released in a database. Thereafter, when a call connection to the subscriber terminal 100 whose communication service connection has been released is
5 detected, the server 200 of the mobile communication service provider sends a message indicating that communication is impossible due to power-off to the terminal 300 on a calling side.

If the battery is forcibly removed, or the terminal is forcibly powered off using a power key regardless of a user's intention, a problem arises in that all

the functions of the subscriber terminal 100 are stopped and, accordingly, information about the location of the terminal cannot be ascertained.

In other words, in the case where a subscriber loses his or her terminal, if the person who picks up the lost subscriber terminal 100 forcibly removes the battery from the terminal or forcibly turns off the terminal using the power key, a problem arises in that the lost mobile terminal cannot be found.

Furthermore, in the case where the mobile terminal is powered off through the power key when a child or a teenager is in danger, a problem arises in that the location of the mobile terminal cannot be tracked using the mobile terminal.

Therefore, the present invention proposes a disguised power-off method for a mobile terminal, in which, when the mobile terminal is powered off against a user's desire, the mobile terminal outputs a signal through which the location of the mobile terminal can be determined and operates as if it is powered off.

【Disclosure】

【Technical Problem】

In order to solve the above-described problem, an object of the

present invention is to provide a disguised power-off method for a mobile terminal, wherein, when the mobile terminal is powered off against a user's desire, the mobile terminal operates as if it is powered off and sends information about the location thereof to the sever of a mobile communication service provider.

【Technical Solution】

In order to accomplish the above object, the present invention provides a disguised power-off method for a mobile terminal, including the steps of detecting input for actually powering off a subscriber terminal or powering off a subscriber terminal in a disguised manner through key input means; if the subscriber terminal has been powered off in a disguised manner, switching the subscriber terminal to a disguised power-off mode; allowing the subscriber terminal to determine whether a location signal has been requested by a server of a mobile communication service provider in a disguised power-off mode; if it is determined that the location signal has been requested by the server of the mobile communication service provider, transmitting a location signal of the subscriber terminal to the server of the mobile communication service provider; determining whether a power-on key has been pressed

through the key input means of the subscriber terminal; and maintaining the disguised power-off mode, or switching the subscriber terminal to a normal mode depending on the input of the power-on key and registering communication service with the server of the mobile communication service provider.

Furthermore, the disguised power-off method further includes the steps of determining whether an incoming call signal has been received after the subscriber terminal has been switched to the disguised power-off mode; and if, as a result of the determination, the incoming call signal has been received, generating a control signal to resume supply of power to the key input means.

Furthermore, the disguised power-off mode prevents reception of calls, sending of calls, shuts off display power and prevents the input and output of sound to and from the subscriber terminal.

Furthermore, the location signal of the subscriber terminal to the server of the mobile communication service provider.

Furthermore, the location signal is sent using a GPS.

Furthermore, the location signal is sent when information about an originator terminal that requests a call connection to the subscriber terminal,

and specific terminal information, which is stored in the subscriber terminal, is identical to the originator terminal information.

Furthermore, the location signal is sent to the server of the mobile communication service provider at predetermined intervals.

Furthermore, the disguised power-off mode is switched when the power-off key of the subscriber terminal is pressed.

Furthermore, if the subscriber terminal is actually powered off, power of the subscriber terminal is completely cut off.

Furthermore, the real power-off of the subscriber terminal is achieved by simultaneously pressing the power-off key and a specific key, or sequentially pressing the power-off key and the specific key.

【Advantageous Effects】

As described above, in accordance with the present invention, the real power-off and disguised power-off of a mobile terminal are employed, so that, although the mobile terminal is powered off through the disguised power key of the terminal when a communication service subscriber, such as a child or teenager, is in danger, a signal indicating information about the location of the mobile terminal is sent to the server of a mobile communication service

provider. Accordingly, there is an advantage in that the location of the mobile terminal of the subscriber can be determined.

Furthermore, there is an advantage in that a subscriber's personal security can be ensured using information about the location of a mobile terminal.

Furthermore, in the case where a subscriber loses his or her mobile terminal, if the person who picks up the lost mobile terminal powers off the terminal using the disguised power key of the mobile terminal, information about the location of the lost mobile terminal can be determined. Accordingly, there is an advantage in that the lost mobile terminal can be easily recovered.

【Description of Drawings】

FIG. 1 is a conceptual view illustrating the on/off process of a common mobile terminal;

FIG. 2 is a flowchart illustrating the operational process of a mobile terminal for providing disguised power-off, in accordance with the present invention; and

FIG. 3 is a flowchart illustrating the operational process of the mobile terminal for providing disguised power-off, which is shown in FIG. 2.

【Best Mode】

The present invention is described in detail in connection with preferred embodiments with reference to the accompanying drawings.

The same reference numerals are used to designate the same parts as in the conventional construction. Descriptions of redundant constructions are omitted. The subscriber terminal 100 detects power-on or power-off through the key input means. In the case of power-off, the subscriber terminal 100 determines whether power-off is real power-off or disguised power-off. If it is determined that power-off is real power-off, the subscriber terminal 100 sends a power-off signal to the server 200 of a mobile communication service provider.

Furthermore, if the key input is disguised power-off, the subscriber terminal 100 displays the power-off of the subscriber terminal 100 through the display means of the subscriber terminal 100 so as to look as if it is actually powered off.

FIG. 2 is a flowchart illustrating the operational process of a mobile terminal for providing disguised power-off according to the present invention. FIG. 3 is a flowchart illustrating the operational process of a server system for providing disguised power-off according to the present invention. The

processes are described in more detail with reference to FIGS. 2 and 3 below.

In FIGS. 2 and 3, the subscriber terminal 100 detects the manipulation of a power-off key through the key input means at step S100, and then determines whether the subscriber terminal 100 is actually powered off or powered off in a disguised manner at step S110. The real power-off and disguised power-off can be determined through the following key input. Real power-off is achieved by simultaneously pressing the generally used power-off key and a specific key through the key input means. For example, the power key and a volume key, the power key and a specific number key, or the power key and a # key may be pressed at the same time. The combination of the real power-off key and the specific key may be arbitrarily changed by a user. Furthermore, the disguised power-off is achieved by pressing only the generally used power-off key through the key input means.

If the disguised power-off key is detected at step S110, the subscriber terminal 100 switches the subscriber terminal 100 to a disguised power-off mode at step S120. At step S120, the disguised power-off mode allows the subscriber terminal 100 to operate as if it is powered off by cutting off power supply to the transmission/reception means for driving functions necessary for sending and receiving calls and blocking input and output to and from the

display means and the sound I/O means for providing an interface between the subscriber and the subscriber terminal 100. At this time, the subscriber terminal 100 sends a signal indicating the location of the terminal to the server 200 of the mobile communication service provider in order to allow the server 200 to know a current location. The confirmation signal can be a confirmation signal for maintaining communication with a base station (not shown) or a location signal using the GPS, but is preferably the confirmation signal using the GPS.

Furthermore, the subscriber terminal 100 determines whether an incoming call signal is received after it has been switched to a disguised power-off mode. If it is determined that the incoming call signal is received, the subscriber terminal 100 can generate a control signal to resume the supply of power to the key input means.

After step S120 has been performed, the subscriber terminal 100 determines whether a location request signal has been sent by the server 200 of the mobile communication service provider in a disguised power-off mode at step S130. That is, if the location of the subscriber terminal 100 that has been powered off in a disguised manner has been requested by the patron terminal 300, the server 200 of the mobile communication service provider

requests a location signal from the subscriber terminal 100 by sending a location request signal to the subscriber terminal 100. The patron terminal 300 is a terminal that has been previously set in the server 200 of the mobile communication service provider so that the location of the subscriber terminal 100 can be determined.

If sending of the location signal of the subscriber terminal 100 has been requested by the server 200 of the mobile communication service provider at step S130, the subscriber terminal 100 sends the location signal to the server 200 of the mobile communication service provider at step S140. Furthermore, step S130 can include the step of allowing the subscriber terminal 100 to periodically send the location signal to the server 200 of the mobile communication service provider at predetermined intervals although the location request signal is not received from the server 200 of the mobile communication service provider.

Meanwhile, if the location signal of the subscriber terminal 100 has been requested by the server 200 of the mobile communication service provider at step S130, the subscriber terminal 100 can transmit the location signal of the subscriber terminal 100 to the server 200 of the mobile communication service provider and can be connected to the terminal of a

particular call originator through an automatic connection, depending on whether call originator information based on originator information display and particular information stored in the subscriber terminal 100 are identical to each other.

After step S140 has been performed, the subscriber terminal 100 determines whether a key has been pressed through the key input means (not shown) and thus determines whether a pressed key is the power-on key of the terminal at step S150. If it is determined that the power-on key has not been pressed, the process returns to step S120.

Otherwise, if the power-on key has been pressed at step S150, the subscriber terminal 100 is supplied with power and thus operates normally at step S160. Furthermore, if the power-on key of the subscriber terminal 100 has been pressed at step S160, the server 200 of the mobile communication service provider registers communication service of the subscriber terminal 100 as normal and achieves a connection to the subscriber terminal 100.

Furthermore, if the location signal of the subscriber terminal 100 has not been requested by the server 200 of the mobile communication service provider at step S130, the subscriber terminal 100 proceeds to step S150 where it determines whether the power-on key has been pressed through the

key input means of the subscriber terminal 100.

Meanwhile, at step S110, if it is determined that the real power-off key has been pressed through the key input means at step S200, the control means (not shown) of the subscriber terminal 100 sends information indicating the current location of the terminal 100 through the transmission/reception means of the terminal to the server 200 of the mobile communication service provider at step S210.

After step S210 has been performed, the subscriber terminal 100 performs a process of terminating real power. The server 200 of the mobile communication service provider stores information on the real power-off of the subscriber terminal 100 at step S220.

After step S220 has been performed, the control means of the subscriber terminal 100 determines whether a key has been pressed through the key input means and determines whether the pressed key is the power-on key of the terminal at step S230. If it is determined that the power-on key has not been pressed, the control means returns to step S210.

Meanwhile, if the power-on key has been pressed at step S230, the subscriber terminal 100 is supplied with power and thus operates normally at step S240. Furthermore, if the power-on key of the subscriber terminal 100

has been pressed at step S240, the server 200 of the mobile communication service provider registers communication service of the subscriber terminal 100 as normal and achieves a connection to the subscriber terminal 100.

【Industrial Applicability】

As described above, the subscriber terminal 100 operates as if it is actually powered off if the disguised power-off key, not the real power-off key, is pressed, and can be normally provided with communication service from the server 200 of the mobile communication service provider if the power-on key is pressed.

Furthermore, in the case where the patron terminal 300 requests information about the location of the subscriber terminal 100 that has been powered off in a disguised manner through the server 200 of the mobile communication service provider, the subscriber terminal 100 can transmit a signal indicating its current location to the server 200 of the mobile communication service provider, while maintaining a state of being actually powered off. Accordingly, the patron terminal 300 can determine the current location of the subscriber terminal 100.

The present invention has been described with reference to the

particular preferred embodiments above. However, the present invention is not limited to the embodiments. Those skilled in the art can change or modify the embodiments without departing from the scope and spirit of the present invention.

【CLAIMS】**【Claim 1】**

A disguised power-off method for a mobile terminal, comprising the steps of:

detecting input for actually powering off a subscriber terminal or powering off a subscriber terminal in a disguised manner through key input means;

if the subscriber terminal has been powered off in a disguised manner, switching the subscriber terminal to a disguised power-off mode;

allowing the subscriber terminal to determine whether a location signal has been requested by a server of a mobile communication service provider in a disguised power-off mode;

if it is determined that the location signal has been requested by the server of the mobile communication service provider, transmitting a location signal of the subscriber terminal to the server of the mobile communication service provider;

determining whether a power-on key has been pressed through the key input means of the subscriber terminal; and

maintaining the disguised power-off mode, or switching the subscriber

terminal to a normal mode depending on the input of the power-on key and registering communication service with the server of the mobile communication service provider.

【Claim 2】

The disguised power-off method according to claim 1, further comprising the steps of:

determining whether an incoming call signal has been received after the subscriber terminal has been switched to the disguised power-off mode; and

if, as a result of the determination, the incoming call signal has been received, generating a control signal to resume supply of power to the key input means.

【Claim 3】

The disguised power-off method according to claim 1, wherein the disguised power-off mode prevents reception of calls, sending of calls, shuts off display power and prevents input and output of sound to and from the subscriber terminal.

【Claim 4】

The disguised power-off method according to claim 1, wherein a disguised power-off mode sends the location signal of the subscriber terminal to the server of the mobile communication service provider.

【Claim 5】

The disguised power-off method according to claim 4, wherein the location signal is sent using a Global Positioning System (GPS).

【Claim 6】

The disguised power-off method according to claim 4, wherein the location signal is sent when information about an originator terminal that requests a call connection to the subscriber terminal, and specific terminal information, which is stored in the subscriber terminal, is identical to the originator terminal information.

【Claim 7】

The disguised power-off method according to claim 4, wherein the location signal is sent to the server of the mobile communication service

provider at predetermined intervals.

【Claim 8】

The disguised power-off method according to claim 1, wherein the disguised power-off mode is switched when the power-off key of the subscriber terminal is pressed.

【Claim 9】


The disguised power-off method according to claim 1, wherein, if the subscriber terminal is actually powered off, power of the subscriber terminal is completely cut off.

【Claim 10】

The disguised power-off method according to claim 1, wherein the real power-off of the subscriber terminal is achieved by simultaneously pressing the power-off key and a specific key, or sequentially pressing the power-off key and the specific key.


1/3

FIG.1

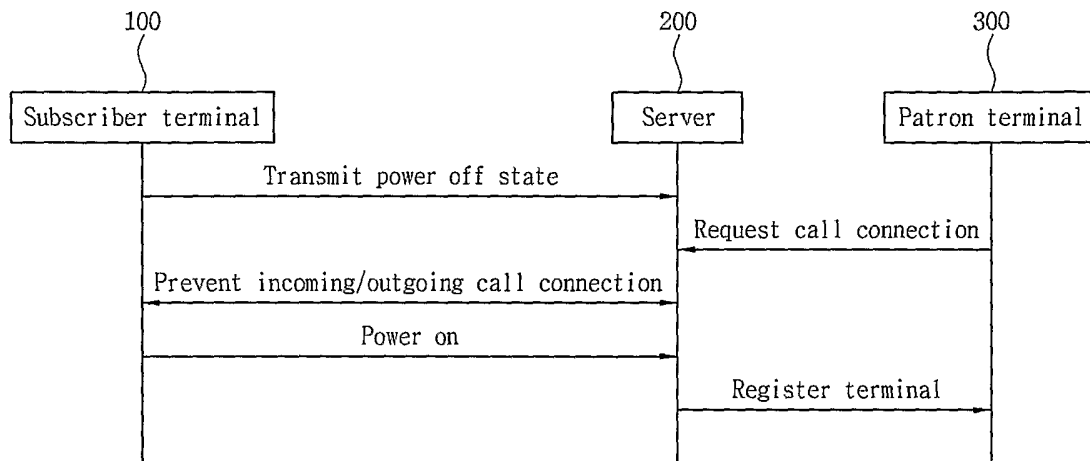


2/3

FIG.2

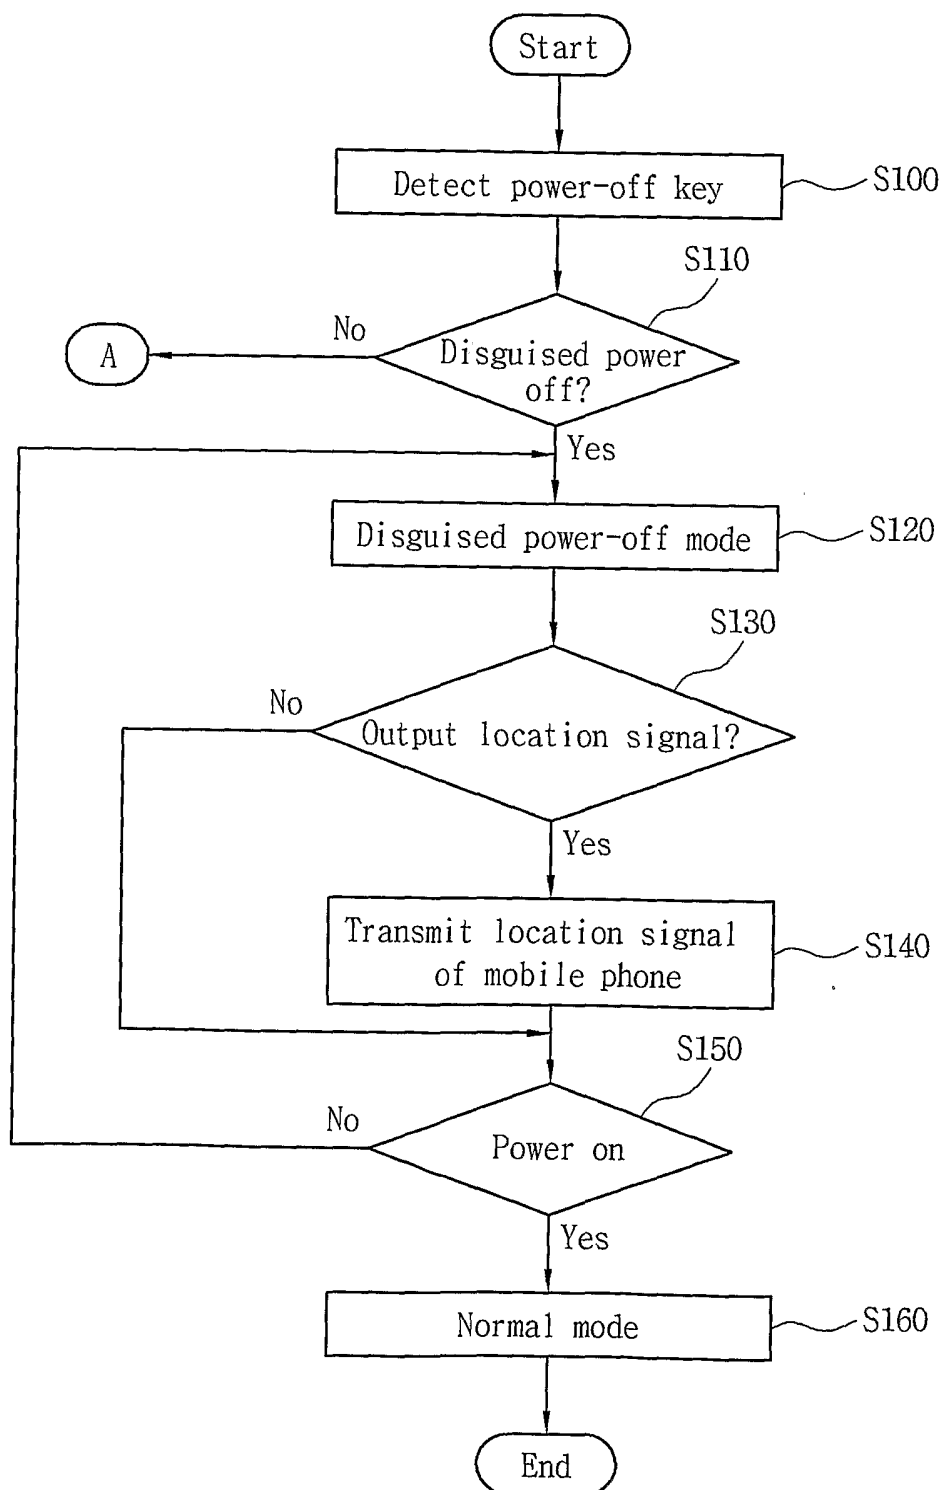

3/3

FIG.3

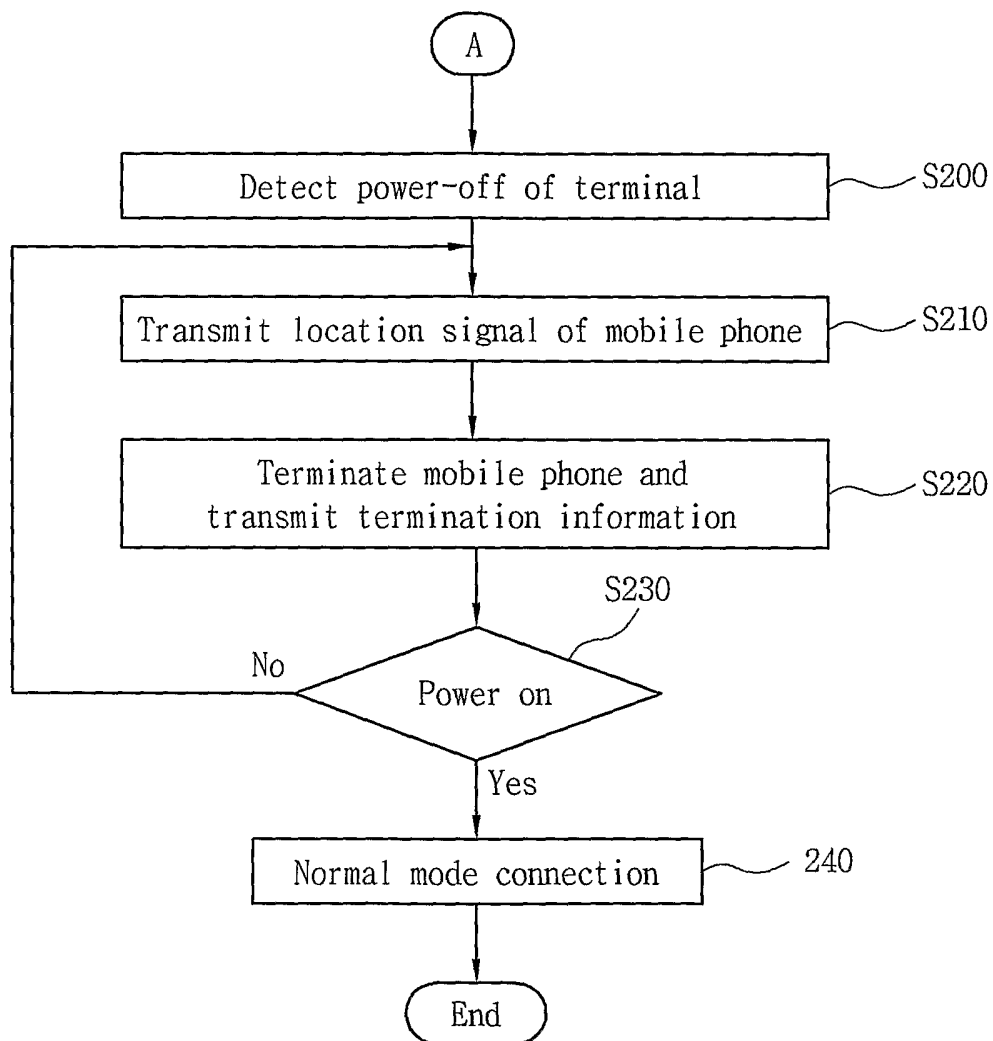

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2005/002047

A. CLASSIFICATION OF SUBJECT MATTER**IPC7 H04B 1/40**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04B 1/40, H04M 1/00, H04B 7/26, H04Q 7/34, H04Q 7/38

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975

Korean Utility models and applications for Utility models since 1975

Japanese Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 14-335566, A(KYOCERA CORP) 22. NOVEMBER 2002 abstract, [0007]-[0025], fig2, fig3, fig5	1
A	JP 15-218767, A(NEC SAITAMA LTD) 31. JULY 2003 abstract, [0014]-[0027], fig1, fig2	1
A	KR 2002-018255A(LG ELECTRONICS INC) 08. MARCH 2002 abstract, claim 1, fig1	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 OCTOBER 2005 (10.10.2005)

Date of mailing of the international search report

10 OCTOBER 2005 (10.10.2005)

Name and mailing address of the ISA/KR




Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Dong Sung

Telephone No. 82-42-481-5949



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2005/002047

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 14-335566 A	22.11.2002	None	
JP 15-218767 A	31.07.2003	None	
KR 2002-018255 A	08.03.2002	None	