United States Patent [19]

Plasko

[11] **3,839,692**

[45] ***Oct. 1, 1974**

[54] **THERMAL LIMITER CONSTRUCTION FOR ONE OR MORE ELECTRICAL CIRCUITS AND METHOD OF MAKING THE SAME**

[75] Inventor: **Emil Robert Plasko,** Washington Township, Ohio

[73] Assignee: **Micro Devices Corp.,** Dayton, Ohio

[*] Notice: The portion of the term of this patent subsequent to Mar. 14, 1989, has been disclaimed.

[22] Filed: **Jan. 8, 1973**

[21] Appl. No.: **321,753**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 217,927, Jan. 14, 1972, which is a continuation-in-part of Ser. No. 101,848, Dec. 28, 1970, Pat. No. 3,649,942, which is a continuation-in-part of Ser. No. 62,369, Aug. 10, 1970, abandoned.

[52] **U.S. Cl.** **337/182,** 219/517, 317/15, 337/166

[51] **Int. Cl.** **H01h 85/02**

[58] **Field of Search** 337/163–165, 337/182, 415; 219/501, 183, 184, 104, 517; 317/15

[56] **References Cited**

UNITED STATES PATENTS

1,966,466	7/1934	Smalley	219/517 X
2,421,953	6/1947	MacKendrick	337/104 X
2,956,210	10/1960	Yatsushiro	317/15
3,173,059	3/1965	Stake	317/15
3,588,776	6/1971	Horwinski	337/415
3,649,942	3/1972	Plasko	337/163

FOREIGN PATENTS OR APPLICATIONS


515,747	12/1939	Great Britain	337/164

Primary Examiner—J. D. Miller
Assistant Examiner—Fred E. Bell
Attorney, Agent, or Firm—Candor, Candor & Tassone

[57] **ABSTRACT**

This invention relates to a thermal limiter construction which can be used to limit one or more electrical circuits and comprises a thermally responsive device having leads for being interconnected into such electrical circuit or circuits and a plurality of electrically operated heaters disposed adjacent the device and each being adapted to cause the device to open the circuit or circuits when heated by the respective heater a certain amount.

5 Claims, 34 Drawing Figures

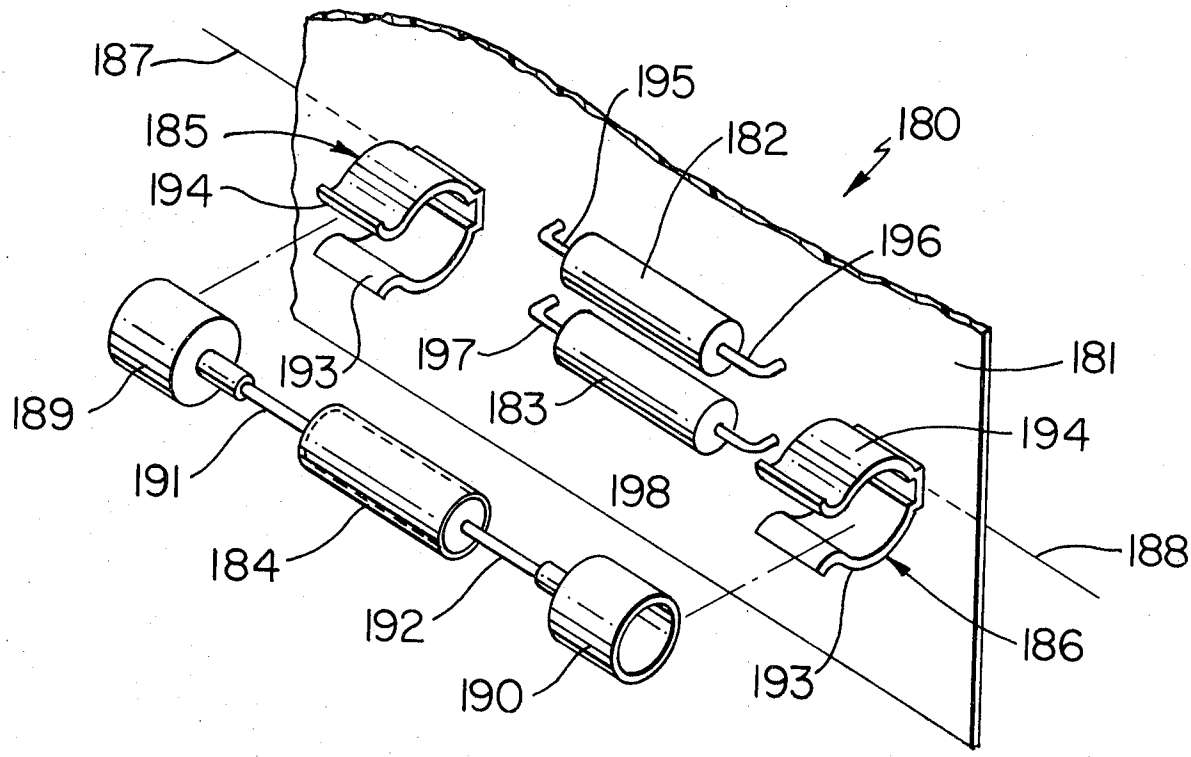

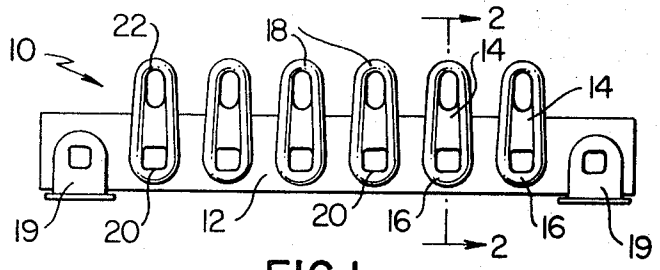


FIG. 1




FIG. 2

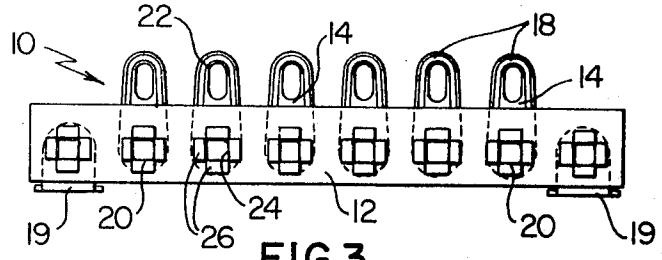


FIG. 3

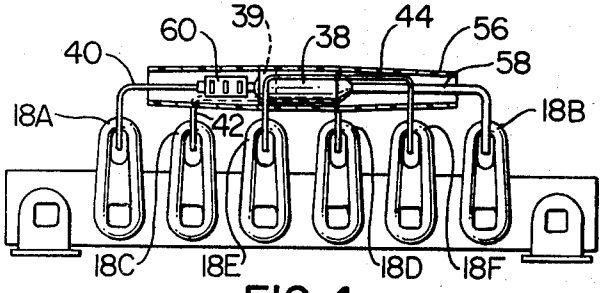


FIG. 4

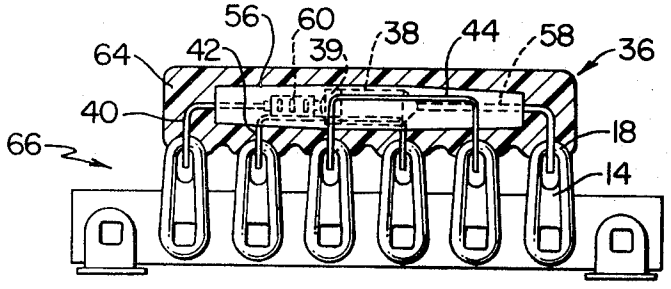


FIG. 5




FIG. 5A

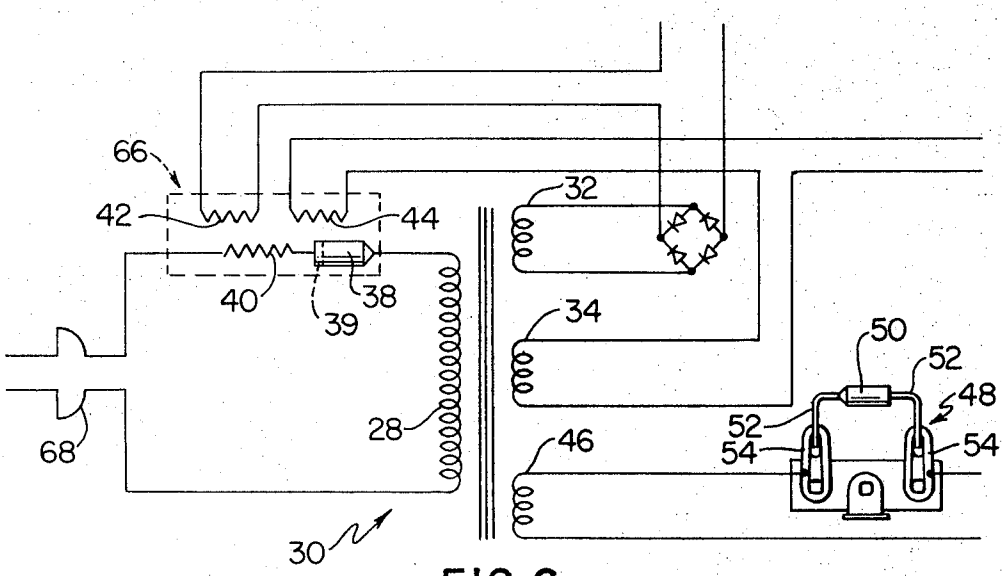

66
42
44
32
40
38
39
34
50
52
48
52
54
54
28
46
68
30

FIG. 6

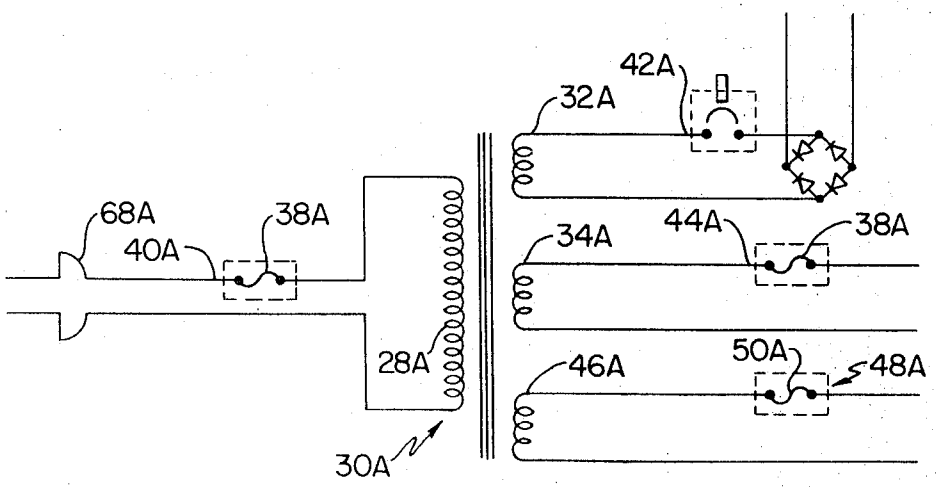

42A
32A
68A
38A
40A
34A
44A
38A
28A
46A
50A
48A
30A

FIG. 7

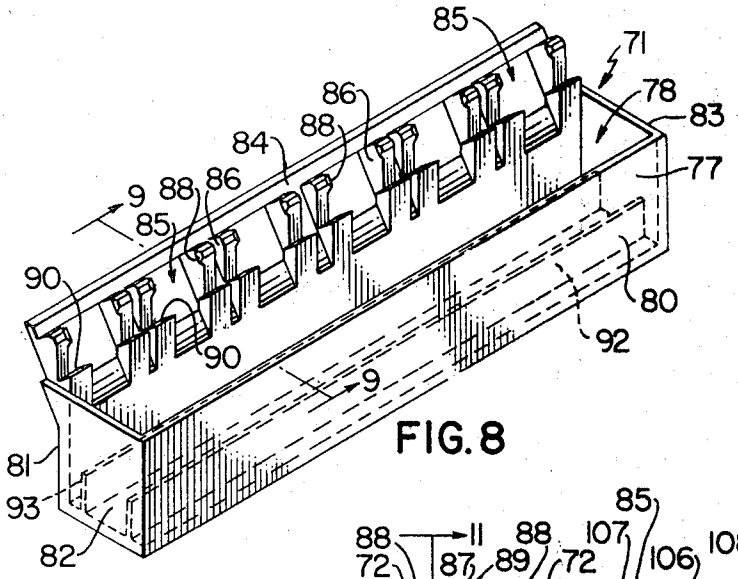


FIG. 8




FIG. 9

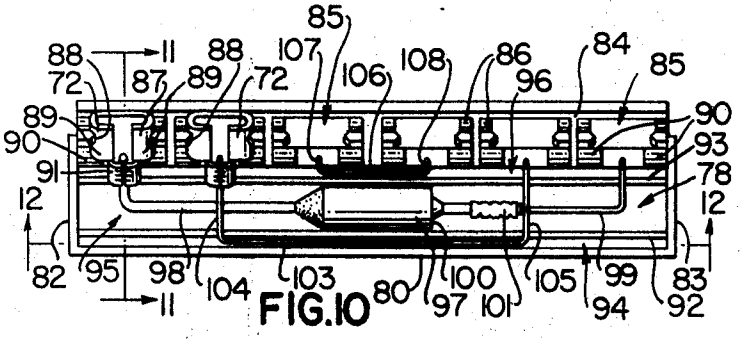


FIG. 10




FIG. 11

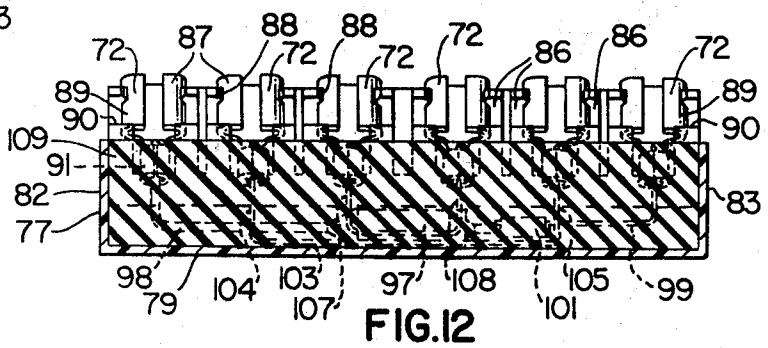


FIG. 12

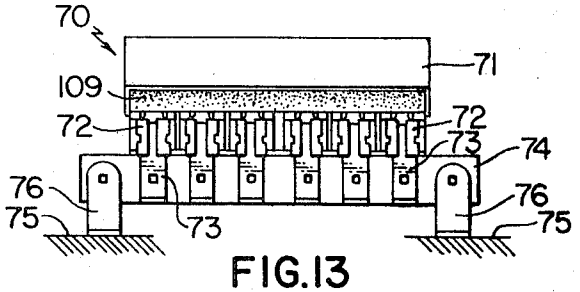


FIG. 13

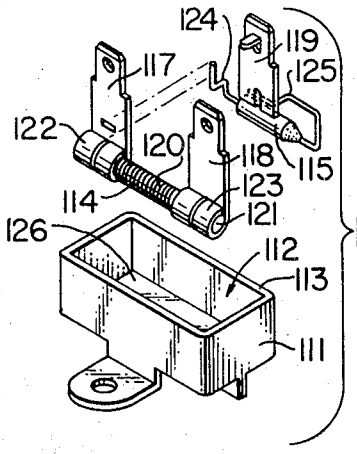


FIG.15

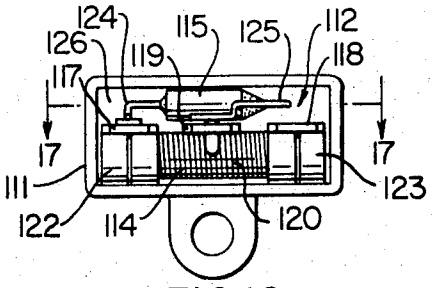


FIG.16

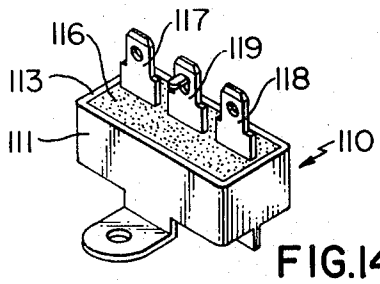


FIG.14

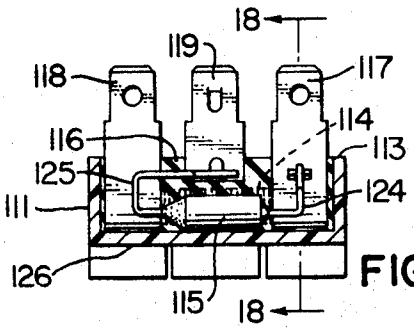


FIG.17




FIG.18

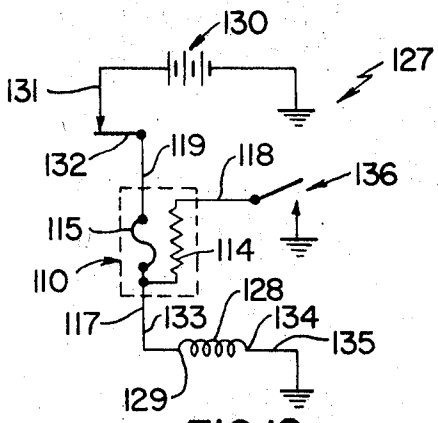


FIG.19

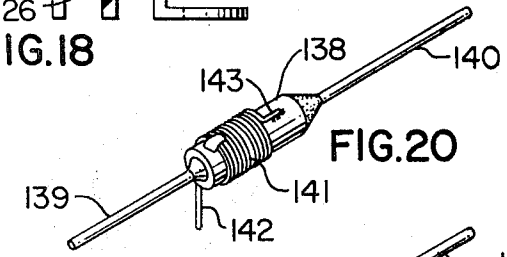


FIG.20

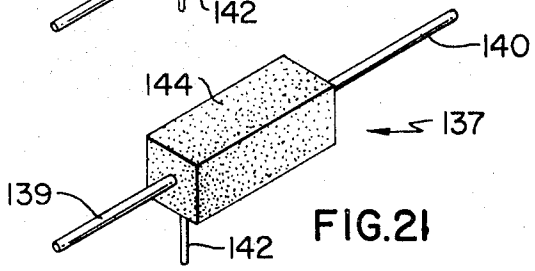


FIG.21

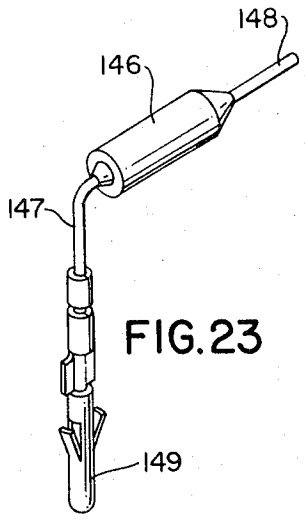


FIG. 23




FIG. 24

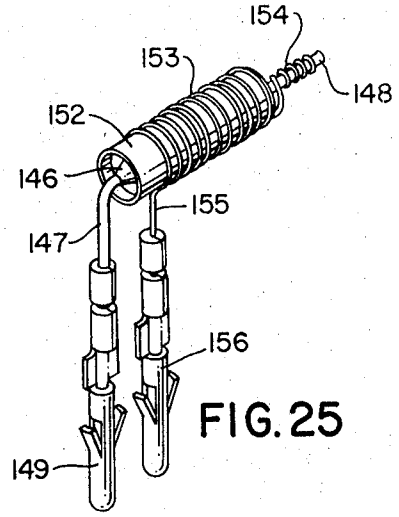


FIG. 25

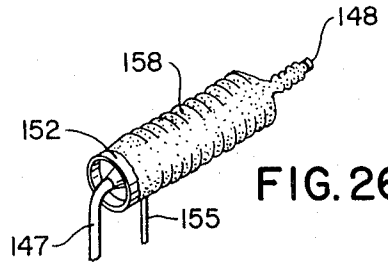


FIG. 26




FIG. 27

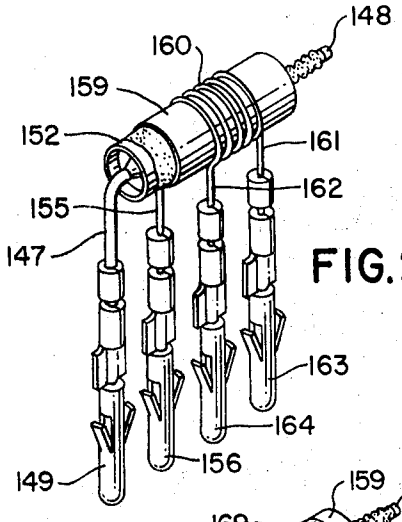


FIG. 28

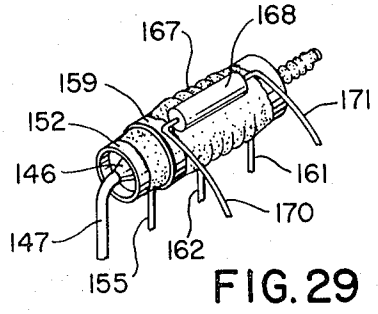


FIG. 29

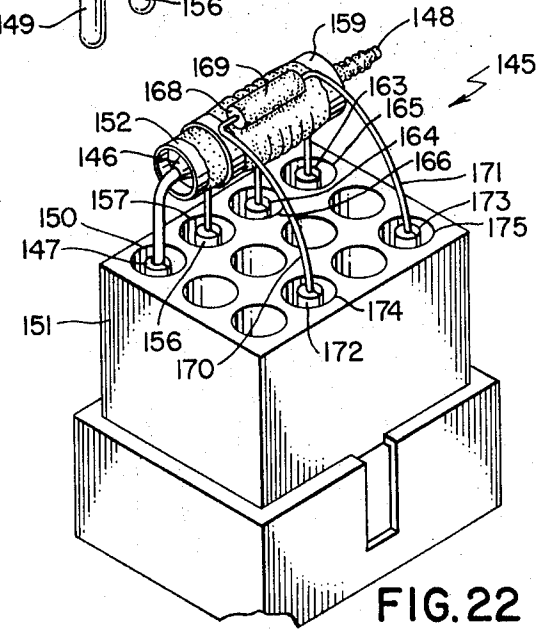


FIG. 22

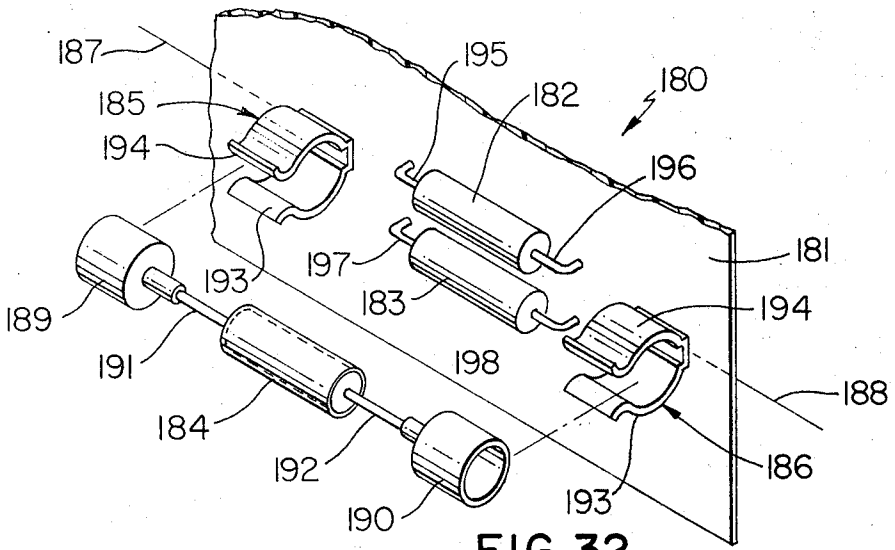


FIG. 32




FIG. 31

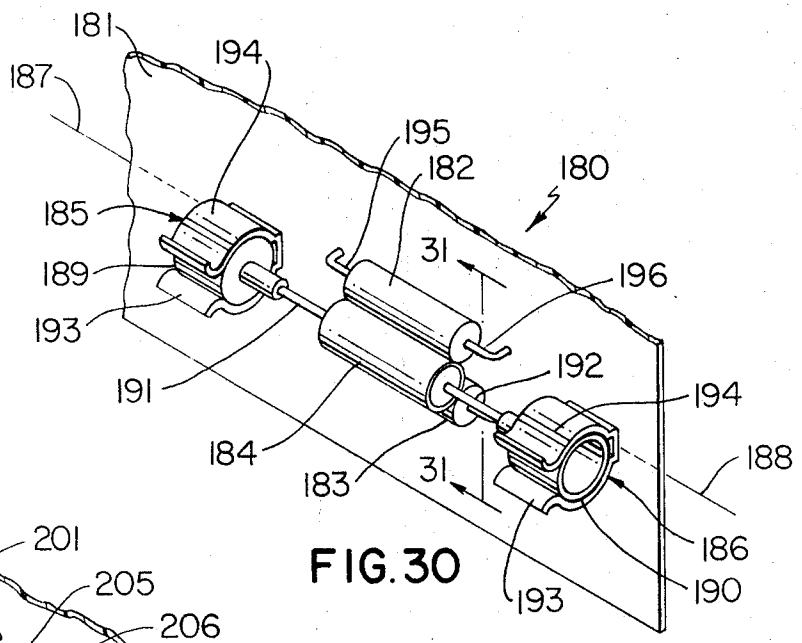


FIG. 30

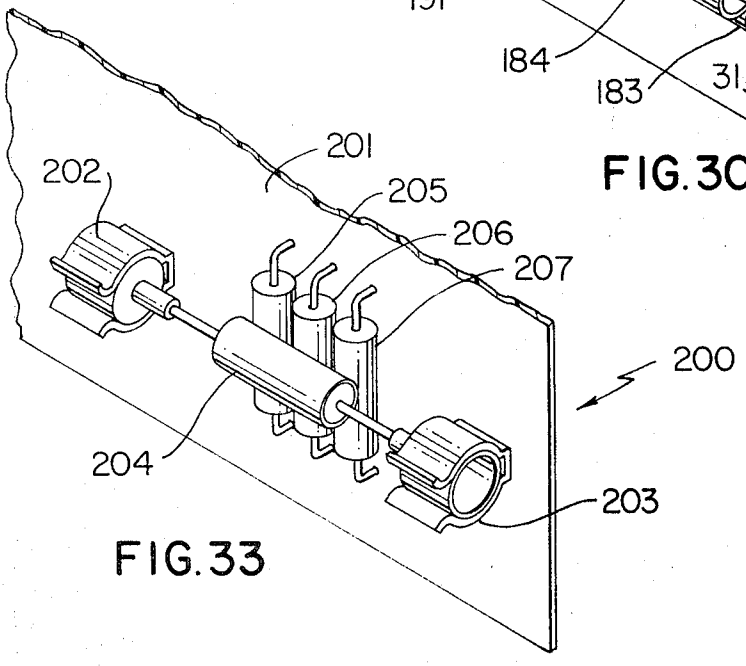


FIG. 33

THERMAL LIMITER CONSTRUCTION FOR ONE OR MORE ELECTRICAL CIRCUITS AND METHOD OF MAKING THE SAME

This application is a continuation-in-part application of its copending parent patent application, Ser. No. 217,927, filed Jan. 14, 1972, which, in turn, is a continuation-in-part application of its copending parent application, Ser. No. 101,848, filed Dec. 28, 1970, now U.S. Pat. No. 3,649,942, which in turn, is a continuation-in-part application of its copending parent application, Ser. No. 62,369, filed Aug. 10, 1970, and abandoned in favor of its continuation-in-part application, all of which are assigned to the same assignee to whom this application is assigned.

This invention relates to a thermal limiter construction for one or more electrical circuits and to method for making such a construction or the like.

For example, one embodiment of the thermal limiter construction of this invention can be used to limit multiple circuits in which a primary circuit energizes or controls one or more secondary circuits, such as a transformer having a primary circuit and secondary circuits. The limiter construction of this invention is a unitary construction which can be connected to such primary and secondary circuits in an efficient manner.

One feature of this invention is to provide a thermal limiter construction having a controlled delay action in the operation thereof to prevent accidental circuit limiting, such controlled delay action being provided by a fixed and controlled location of the heater element or elements relative to the limiter sensing element as will be apparent hereinafter.

In addition, other features of the limiter construction of this invention is to permit the selection of the heater element in its output temperature, the selection of the sensing element for the required sensed temperature for opening the circuit, and the selection of the desired characteristics of the insulating mass that secures the limiter parts together, such characteristics being the thermal conductivity of the mass material, the size of the mass utilized, etc. Other selectable variables of the limiter construction of this invention will be apparent hereinafter.

For example, one embodiment of a thermal limiter construction of this invention for at least one electrical circuit comprises a thermally responsive fuse and lead means operatively interconnected to the fuse for coupling the fuse in a desired electrical circuit. An electrical circuit heater means is disposed in a selected position relative to the fuse and an insulating mass covers and secures the heater means and the fuse in such selected position thereof with the lead means having at least portions thereof exposed from the mass whereby the insulating mass and the selected positioning of the heater means relative to the fuse, once the desired variables of the fuse, mass and heater have been selected, provides a controlled time delay in the heater means being adapted to cause the fuse to blow and thereby open the one electrical circuit.

Another such thermal limiter construction of this invention has a plurality of electric circuit heater means disposed in selected positions on the fuse and being in different spaced relations relative thereto by the insulating mass which covers and secures the heater means and the fuse in such selected positions thereof while the lead means for the fuse and the heater means have portions thereof exposed from the insulating mass for interconnection to desired electrical circuits. If desired, such heater means can comprise heater wires coiled about the fuse in different stratified layers thereon.

Another thermal limiter construction of this invention has a plurality of electrically operated heater means disposed adjacent the thermally responsive device with such heater means merely being supported in selected positions relative to the device by support means, with or without the previously described insulating mass, each heater means being adapted to cause the device to open an electrical circuit coupled thereto when the device is heated by the respective heater means a certain amount.

This invention also includes a method of making the limiter construction of this invention.

Many other features, advantages and objects will become obvious from this description, the appended claimed subject matter, and the accompanying drawings in which:

FIG. **1** is a side view of a plural circuit wire attachment toothed comb or comblike member to be used in this invention;

FIG. **2** is a cross section along the line **2—2**;

FIG. **3** is an opposite side view of FIG. **1**;

FIG. **4** is a view showing a partial assembly in the production of this invention and showing circuit wires secured to the free ends of the teeth of the comb members and with a thermally responsive fuse supported by two of said circuit wires;

FIG. **5** is a view similar to FIG. **4**, but showing a completed form of the invention;

FIG. **5A** is an end view of FIG. **5**;

FIG. **6** is a diagrammatic view of the invention used as a multiple circuit temperature limiter in the circuit wires of a part of a transformer circuit;

FIG. **7** is a diagrammatic view showing a transformer circuit somewhat similar to the circuit of FIG. **6** but in which the temperature is limited by separate limiters which can be eliminated by this invention.

FIG. **8** is a top perspective view of a housing structure for another multiple circuit thermal limiter of this invention.

FIG. **9** is a cross-sectional view taken on line **9—9** of FIG. **8**.

FIG. **10** is a top view of the housing structure illustrated in FIG. **8** and illustrates the fuse, heater wires and terminals assembled therein.

FIG. **11** is a cross-sectional view taken on line **11—11** OF FIG. **10**.

FIG. **12** is a cross-sectional view taken on line **12—12** of FIG. **10** and illustrates the structure of FIG. **10** after the insulating mass has been received in the housing means.

FIG. **13** is a side view of the completed multiple circuit thermal limiter of this invention as coupled to a plural circuit wire lead attachment means.

FIG. **14** is a top perspective view of another thermal limiter construction of this invention.

FIG. **15** is an exploded perspective view of the various parts forming the thermal limiter of FIG. **14**.

FIG. **16** is a top view of the parts of FIG. **15** in their assembled position and before the insulating mass has been disposed in the housing thereof.

FIG. **17** is a cross-sectional view taken on line **17—17** of FIG. **16** and illustrates the thermal limiter after the

insulating mass has been placed in the housing means of FIG. **16.**

FIG. **18** is a cross-sectional view taken on line **18—18** of FIG. **17.**

FIG. **19** is a schematic view illustrating an electrical circuit which can be utilized in combination with the thermal limiter of FIG. **14.**

FIG. **20** is a perspective view of another thermal limiter of this invention before the same has been covered and secured in position by an insulating mass.

FIG. **21** illustrates the thermal limiter of FIG. **20** in its completed form after the insulating mass has been disposed thereon.

FIG. **22** is a perspective view of another thermal limiter construction of this invention wherein a plurality of heater means are secured in different spaced relations relative to the fuse by an insulating mass.

FIG. **23** is a perspective view of the fuse part of the device of FIG. **22.**

FIG. **24** is a perspective view of the device of FIG. **23** with an insulating sleeve disposed over the same.

FIG. **25** is a perspective view of the device of FIG. **24** with a first heater coil coiled on the insulating sleeve of the fuse.

FIG. **26** is a perspective view similar to FIG. **25** and illustrates the first heater wire being covered by an insulating mass.

FIG. **27** is a perspective view of the device of FIG. **26** with an insulating sleeve disposed over the first insulating mass thereof.

FIG. **28** is a perspective view similar to FIG. **27** and illustrates another heater wire coiled on the outer insulating sleeve.

FIG. **29** is a perspective view similar to FIG. **28** and illustrates a covering mass over the outer coiled heater wire and another heater device being disposed against such outer insulating mass covered heater wire.

FIG. **30** is a fragmentary perspective view of another thermal limiter construction of this invention.

FIG. **31** is a cross-sectional view taken on line **31—31** of FIG. **30.**

FIG. **32** is a view similar to FIG. **30** and illustrating the thermally responsive device before the same is assembled in position.

FIG. **33** is a view similar to FIG. **30** and illustrates another thermal limiter construction of this invention.

A plural circuit wire attachment toothed comb or comblike member **10,** FIGS. **1, 2** and **3,** may be an article of manufacture now on the market and may have an electrically insulative base **12** carrying a plurality of electrically conductive wire attachment teeth or lead means **14.** These teeth **14** may have wire attaching base supported tooth ends **16** secured to the base **12.** The teeth **14** may also have wire attaching free tooth ends **18** extending away from said base **12.**

The base **12** may be a relatively rigid insulative board strip made of any suitable material.

The wire attachment teeth **14** may have wire attachment openings **20** embedded in said insulative base **12** and other wire attachment openings **22** at the free ends of the teeth.

The base **10** may be a stiff insulative strip of any suitable material to which the base supported tooth ends **16** are secured by hollow rivets **24.** These hollow rivets may be square tubes punched out of the tooth ends **16** so that the tubes pass through the strip **10** and have their punched ends formed into rivets with outward tongues **26** for attachment of circuit wires thereto. The free ends **18** of the teeth may have the wire attachment openings **22** punched therein.

Suitable L-shaped support brackets **19** may be similarly riveted to the board strip or base **12.**

The article shown in FIGS. **1, 2** and **3** may be used in making the multiple circuit limiter shown in FIGS. **4, 5** and **5A** which is suitable for simultaneously limiting or breaking multiple circuits such as the primary circuit **28** of a transformer arrangement **30** and one or more secondary circuits **32** and **34** of the transformer arrangement **30,** which transformer may be a transformer for a television set.

The multiple circuit limiter or breaker shown in FIG. **5** may include an insulative coating structure **36** which covers and separates the various circuit wires which are mounted on the free ends **18** of the teeth **14.** Such structure **36** may also cover a thermal fuse **38** and other parts to be described. The fuse **38** may be of the thermally collapsible pellet type with the pellet **39** at one end of the fuse, such as disclosed in P. E. Merrill U.S. Pat. No. 3,180,958, patented April 1965. The result is that the mass **36** may be heated by any one of the heating wires **40, 42** and **44** so that the heated mass **36** causes the thermal fuse **38** to open or blow the primary circuit **28** of the transformer **30** and thereby also deenergize the secondary circuits **32** and **34** and prevent damage to the transformer arrangement or the like.

It may be that one or more other secondary circuits **46** may be energized by the primary circuit **28** of transformer **30.** However, such secondary circuit **46** may be of such current characteristics that it cannot be embodied in the mass **36.** Under such conditions, a separate circuit breaker **48** may be provided in the secondary circuit **46** which has a thermal fuse **50.** The wires **52** and/or pins **54** may be made with sufficient resistance to blow the fuse **50** and also break the one or more additional secondary circuits without breaking the transformer circuit arrangement previously described.

The insulative mass **36** may be formed as shown in FIGS. **4, 5** and **5A.**

For example, any suitable insulative heat shrinkable sleeve **56,** FIG. **4,** may be placed around the fuse **38** and the circuit wires **40** and **58** also partly inside the sleeve **56** and extend out of said sleeve. The circuit wire **40** may be electrically resistive sufficiently to blow the fuse **38** when wire **40** is overloaded. The wire **58** is sufficiently conductive not to blow the fuse. A substantially electrically nonresistive splice **60** may connect wire **40** and fuse **38.** The collapsible pellet **39** is sufficiently close to the heating wire **40** to be blown if the wire **40** is overloaded.

Thereafter, the ends of the wires **40** and **58** may be secured to the free tooth ends **18A** and **18B.**

Then a heating circuit wire **42** is placed adjacent to and outside the sleeve **56** and is secured to free tooth ends **18C** and **18D** so that the main body of heating wire **42** is sufficiently close to fuse **38** to blow the fuse if the wire **42** is overloaded.

Thereafter, a heating circuit wire **44** is placed adjacent to and outside sleeve **56** and also spaced from wire **42,** but with its main body adjacent the fuse **38** sufficiently close to the fuse to blow the same if the wire **42** is overloaded. The ends of the wire **44** are secured to the free tooth ends **18E** and **18F.**

The insulative sleeve **56** may be made of any suitable heat shrinkable polyester such as mylar which is

wrapped around parts of the wires **42** and **58** and is then lightly heat shrunk, if desired.

The assembly, as so far assembled in FIG. **4**, is then dipped in any well known ceramic or epoxy cement to form the insulative mass **64** around the sleeve **56** and around the wires **40, 42, 44** and **58.** The mass **64** may be somewhat oblong when viewed transversely, as in FIG. 5A, with parts extending to cover substantially all of said wires **40, 42, 44** and **58** and the free ends **18**A, **18**B, **18**C, **18**D and **18**E of the comb teeth. In this manner, the solidified mass **64** holds the heating wires, **40, 32** and **34** in a fixed position relative to the pellet **39** of the fuse **38** for a purpose hereinafter set forth.

FIG. **7** shows a transformer circuit somewhat similar to that shown in FIG. **6.** However, the limiters in FIG. **7** are individual to their respective primary and secondary circuits. These limiters have been individually mounted within the television cabinet or the like in a manner to require experienced service means to provide service on the parts rather than permit the owner to try and correct a blown circuit by mere fuse replacement and not correct service on the malfunctioning part.

The parts on the circuit of FIG. **7** have been marked with reference numerals of FIG. **6** to indicate how the parts are unified by this invention.

In FIG. **6,** the transformer primary circuit may be connected to a plug-in structure **68** so that the primary circuit energizes a plurality of secondary circuits **32, 34** and **46,** or more.

The finished product shown in FIG. **5** may be placed anywhere in the primary circuit so that all the heater wires **40, 42** and **44** can heat the insulative mass **64** which acts as a heat sink in a controlled manner to cause the fuse **38** to blow if any of the heater wires are overloaded.

In particular, the position of the heating wires **40, 32** and **34** as held by the mass **64** in relation to the pellet **39** of the fuse as well as the heat conductive characteristics of the mass **64** are so selected that the fuse **38** will not immediately blow but will blow only after a certain time period from the initial heating of one or more wires **40, 32** and **34** and the continued heating thereof in order to prevent inadvertent blowing of the fuse **38** should the service man accidently cause a temporary short circuiting by a screwdriver engagement during a service check, etc.

Any isolated secondary circuit such as **46** can be broken by an individual thermal fuse or current breaker **48.**

Thus, it is to be seen that this invention includes an improved multiple circuit thermal limiter **66,** FIG. **5,** which can be combined with a multiple circuit such as a transformer circuit as shown in FIG. **6.** An efficient method of making such limiter is also provided.

Another multiple circuit thermal limiter of this invention is generally indicated by the reference numeral **70** in FIG. **13** and comprises a housing means or base **71** formed of suitable insulating material and carrying a plurality of quick connect and disconnect sleeve-like lead members **72** for effectively receiving bayonet type lead strips **73** carried on an electrically insulating base or strip **74** adapted to be mounted to a desired supporting structure **75** by suitable leg means **76** whereby the thermal limiter **70** of this invention is adapted to be coupled to the lead attachment strips **73** of the board or vase **74** by merely having the lead sleeves **72** telescoped over the projecting portions of the lead strips **73** so that the thermal limiter **70** of this invention can be coupled into a desired circuit means interconnected to the lead strips **73** in a conventional manner.

The multiple circuit thermal limiter **70** of this invention has the housing means **71** thereof provided with a substantially rectangular base portion **77** with a cavity **78** formed therein and defining a closed end wall means **79,** opposed side wall means **80** and **81** and opposed end walls **82** and **83** of the housing means **71** with the side wall **81** having an extension **84** angled therefrom in the manner illustrated in FIGS. **8, 9** and **10.** The angled wall **84** has a plurality of pockets **85** formed therein and defined between outwardly extending ridge means **86** utilized for snap fitting and retaining the sleeve-like lead means **72** in a pre-assembled position relative thereto.

For example, each lead means **72** comprises an upper sleeve-like portion **87** adapted to slip into a pocket means **85** under inwardly directed ears **88** of the cooperating ridge means **86** so as to be held flat against the angled wall **84** with the lower end **89** of the sleeve **87** abutting against locating shoulder means **90** on the ridge means **86** as illustrated in FIG. **12** whereby a lower wire attaching means **91** of the lead means **72** extends into the chamber or recess **78** of the housing means **71.** In this manner, the sleeve-like lead means **72** of the thermal limiter **70** can be disposed in the pocket means **85** of the housing means **71** so that the same will be uniformly positioned relative thereto by the stop means or shoulders **90** and ears **88** of the ridge means **86** whereby the sleeve-like lead means **72** will be in proper positions relative to the lead strips **73** of the insulating base **74** when it is desired to couple a thermal limiter **70** of this invention thereto.

If desired, the spacing between the pockets **85** on the angled side wall **84** of the housing means **71** can be so spaced relative to each other that the same will be compatible with like spacing of the strips **73** on the insulating board **74** so that the thermal limiter **70** can be only coupled to the strips **73** on the board **74** when the limiter **70** is held in a certain position relative thereto so that wrong connecting to the board **74** will be prevented. For example, it can be seen that the spacing between the middle two sleeve members **72** of the thermal limiter **71** of this invention is greater than the spacing between any other adjacent pair of lead means **72** so as to be compatible with like spacing between the lead strips **73** on the base **74.**

The end or bottom wall **79** of the housing means **71** of the thermal limiter **70** has upwardly extending longitudinal dividers **92** and **93** formed integrally therewith and dividing the recess **78** into three chambers **94, 95** and **96** as illustrated in FIG. **11** whereby the chamber **95** is adapted to receive a temperature responsive fuse **97** formed in the same manner as the fuse **38** previously described and be electrically interconnected to the two outboard lead means **72** by supporting wires **98** and **99** as illustrated in FIG. **10,** the wire **99** being a heater wire in the same manner as the heater wire **40** previously described and being coupled to the right side **100** of the fuse **97** by a substantially electrically non-resistive splice member **101** in the same manner as the splice member **60** previously described.

A heater wire **103** can be disposed in the chamber **94** and have its opposed ends **104** and **105** respectively interconnected to the next two inboard lead means **72.**

Another heater wire **106** is adapted to be disposed in the chamber **96** and have its opposed ends **107** and **108** respectively interconnected to the two innermost lead sleeves **72** as illustrated in FIGS. **10** and **12.**

In this manner, it can be seen that the dividers **92** and **93** separate the heating wires **103** and **106** from the thermal fuse **97** as well as the lead attachment wires thereof during the assembly operation as illustrated in FIG. **10.**

Thereafter, the desired insulative mass **109** is disposed in the recess **78** of the housing means **71** to fill the same to the desired level, which in the embodiment illustrated in the drawings is to the top of the end walls **82, 83** and side walls **77,** so as to not only cover and secure the heating wires **99, 103** and **106** in the desired selective positioning thereof relative to the fuse **97** when the mass **109** hardens, but also to cover the lower ends **91** of the lead means **72** so as to secure the lead means **72** in their assembled relation in the pockets **85** so that the same cannot be subsequently moved relative to the housing means **71.**

In this manner the completed thermal limiter **70** of this invention is adapted to be coupled to the lead board **74** in the manner previously described and be uncoupled thereto by merely telescoping or untelescoping the sleeve means **70** thereof to or from the lead strips **73** of the board **74** in a simple and effective manner.

Thus, it can be seen that the thermal limiter **70** of this invention is adapted to have the fuse **97** thereof open a circuit connected to the outermost pair of terminals **72** thereof when any one of the heating means **99, 103** and **106** generates sufficient heat to be conducted to the fuse **97** by the thermal mass **109** to cause the fuse **97** to blow, it being understood that the selection of the positioning of the heating wires relative to the fuse **97** as well as the conductive characteristics of the mass **109** are so selected that accidental blowing of the fuse **97** will not take place until the overloaded or short circuited condition is in existence for a length of time which would require a circuit opening.

If desired, the thermal limiter **70** can be utilized in the same manner as the thermal limiter **66** previously described or in other circuit means for like purposes.

Another thermal limiter or thermal limiter construction of this invention is generally indicated by the reference numeral **110** in FIG. **14** and comprises an electrically insulating housing means or base **111** having a recess **112** interrupting the top surface **113** thereof and receiving a heating means **114** and a thermal fuse **115** therein to be selectively positioned therein and subsequently covered and secured in such selective positioning by suitable insulating means or mass **116** so that three lead means **117, 118** and **119** respectively extend outwardly from the mass **116** for coupling the thermal limiter **110** in a desired circuit, such as the electrical circuit illustrated in FIG. **19** and hereinafter described.

The heating means **114** includes a heating wire **120** mounted on a rod **121** and has its opposed ends respectively interconnected to the terminals **117** and **118** having the lower portions **122** and **123** thereof disposed in coiled fashion about the rod **121** to be rigidly secured thereto.

The thermal fuse **115,** similar to fuse **38** previously described, has opposed lead wires **124** and **125** extending therefrom with the lead wire **125** being secured to the terminal means **119** and with the lead wire **124** being interconnected to the terminal **117** as illustrated, the wires **124** and **125** being of sufficient strength to support the fuse **115** in spaced relation relative to the heating means **114** in the manner illustrated in FIG. **16** when the same are disposed in the housing means **111** against a bottom wall means **126** thereof in the manner illustrated in FIG. **16** so that the insulating mass **116** can be subsequently disposed in the housing means **111** to cover and secure the fuse **115** and heating means **114** in the selected positioning thereof as illustrated, the insulating mass **116** being disposed between the fuse **115** and the heating means **114** as illustrated in FIG. **18** to provide insulation therebetween in the same manner as the divider walls **92** and **93** of the housing means **71.**

The thermal limiter **110** of FIG. **14** is adapted to be utilized in the particular electrical circuit **127** of FIG. **19** in a manner now to be described, but it is to be understood that the thermal limiter **110** can be utilized for other purposes as desired.

As illustrated in FIG. **19,** the electrical circuit **127** is adapted to be utilized for an air conditioner or the like wherein an electrically operated drive clutch **128** is provided for the compressor and is adapted to have its side **129** interconnected to a suitable power source **130** by a lead means **131** interconnected by the conventional air conditioning on-and-off temperature responsive switch **132** to the terminal **119** of the thermal limiter **110** of this invention while the other terminal **117** thereof is interconnected by a lead **133** to the side **129** of the clutch means **128.** The other side **134** of the clutch means **128** is interconnected by a lead **135** to ground in the same manner that the other side of the source **130** is interconnected to ground.

The terminal **118** of the thermal limiter **110** is interconnected to a loss-of-charge sensor switch **136** which is in a normally open condition as long as there is no loss of refrigerant of the air conditioning unit utilizing the circuit **127.**

Thus, it can be seen that the electrically operated clutch means **128** is adapted to function as long as the switch **136** is in an open condition since the clutch means **128** is placed across the power source by the thermal limiter **110** of this invention when the switch **132** is closed to demand that the compressor be operating.

However, if the loss-of-charge switch **136** closes due to the refrigerant escaping from the refrigerant system, the compressor would burn out within a few minutes because the same would not receive sufficient lubrication whereby the heating means **114** now operatively interconnected to the source **130** will heat up sufficiently to cause the fuse **115** to blow and, thus, open the circuit that operates the clutch **128** so that the clutch **128** can no longer operate until the thermal limiter **110** is replaced.

However, in a normally performing air conditioning system, the loss-of-charge switch **136** can close for a minute or so under some unusual weather conditions whereby it would not be desired for the thermal limiter **110** to blow and, thus, require a serviceman to replace the same before the air conditioner can be operated. Thus, the thermal limiter **110** of this invention has been so constructed and arranged in the positioning of the heating means **114** relative to the fuse **115** as well as in

the selection of the thermal mass **116** to permit the loss-of-charge switch **136** to be temporarily closed only for a minute or so without causing the fuse **115** to blow during the unusual weather conditions, but will assure that the fuse **115** will blow should the loss-of-charge switch **136** be closed for a time short of an adverse situation wherein the compressor would burn out or the like.

Thus, it can be seen that the thermal limiter **110** of this invention is adapted to protect an air conditioning system in the manner illustrated in FIG. **9** through a controlled time delay thereof.

Another thermal limiter or thermal limiter construction of this invention is generally indicated by the reference numeral **137** in FIG. **21** and is formed of the parts illustrated in FIG. **20** wherein a thermal fuse **138**, similar to the fuse **38** previously described, has opposed leads **139** and **140** extending from opposed sides thereof for completing a circuit therethrough and has a heating wire **141** coiled upon the same with the opposed ends **142** and **143** of the heating wire **141** so disposed that the lead **143** is coupled to the fuse **138** in the same manner as the lead wire **139** whereas the lead wire **142** extends away from the fuse **138** as illustrated. Subsequently, an insulating mass **144**, formed in any suitable shape, is disposed about the assembly illustrated in FIG. **20** so as to secure and cover the fuse **138** and heating wire **141** to hold the same in the selected positioning illustrated in FIG. **20** so that the lead means **139**, **142** and **140** extend outwardly from the mass **144** for coupling into a desired circuit. For example, the thermal limiter **137** is adapted to be utilized in place of the thermal limiter **110** in FIG. **19** and serve the same function thereof wherein the lead **142** is interconnected to the loss-of-charge switch **136** and the leads **139** and **140** are adapted to be respectively interconnected to the on/off switch **132** and the electrical clutch **128**.

While the device **137** previously described has only one heater wire **141** coiled thereon, it is to be understood that the fuse **138** could have a plurality of heater wires disposed thereon and be secured thereto and covered by the mass **144** in various selected positions relative to the device **138**.

For example, reference is now made to FIG. **22** wherein another thermal limiter or thermal limiter construction of this invention is generally indicated by the reference numeral **145** in FIG. **22** and is formed of various parts in the manner illustrated in FIGS. **23–29** and as hereinafter described wherein it can be seen that a thermal fuse **146** similar to the fuse **38** previously described has opposed leads **147** and **148** extending from opposed sides thereof in the manner illustrated in FIG. **23**. The lead **147** can be interconnected to a plug-in type of lead member or element **149** which can be subsequently mounted in a suitable opening **150** of a plug-in terminal block **151** that can be coupled to other electrical leads in a plug-in manner that is well known in the art.

A sleeve **152** of insulating material such as plastic sheathing or the like, can be telescoped over the thermal fuse **146** in the manner illustrated in FIG. **24** so as to space a heater wire **153** subsequently coiled thereon from the fuse **146** a predetermined amount in the manner illustrated in FIG. **25**. The coil **153** has one end **154** thereof coiled on the lead **148** so as to be in electrical connection therewith while the other end **155** of the coiled heater wire **153** is interconnected to another plug-in terminal element **156** to be received in a hole **157** of the terminal block **151**. In this manner, it can be seen that the coiled part of the heater wire **153** is spaced from the thermal element **146** by the insulating sleeve **152** with the insulating sleeve **152** also electrically spacing the heater wire **153** therefrom. However, since the end **154** of the heater wire **153** is in electrical contact with the lead **148** of the thermal device **146**, it can be seen that the heater wire **153** is disposed in series with the thermal fuse **146** by being disposed between the lead **156** and the thermal element **146** so that a circuit between the plug-in elements **149** and **156** includes the thermal element **146** and heater wire **153** in series.

After the heater wire **153** has been coiled on the thermal fuse **146** in the manner illustrated in FIG. **25**, an insulating mass **158** is disposed on the assembly of FIG. **25** in the manner illustrated in FIG. **26** to completely cover the coiled portion of the heater wire **153** on the sleeve **152** as well as to completely cover and insulate the interconnection between the coiled end **154** of the heater wire **153** and the lead **148** of the thermal fuse **146** as illustrated. In this manner, it can be seen that the insulative mass **158** in combination with the insulating sleeve **152** holds and spaces the heater coil **153** from the thermal fuse **146** in a desired manner for the reasons previously set forth.

Thereafter, another insulating sleeve **159** can be telescoped over the mass covered coiled heater wire **153** in the manner illustrated in FIG. **27** so as to permit another heater wire **160** of FIG. **28** to be coiled thereon and thereby be further spaced from the thermal fuse **146** by a distance equal to the thickness of the two sleeves **152** and **159** as well as by the spacing and securing mass **158** previously described.

The opposed ends **161** and **162** of the coiled heater wire **160** are respectively interconnected to plug-in elements **163** and **164** respectively being adapted to be disposed in holes **165** and **166** of the plug-in terminal block **151** as illustrated in FIG. **22**, whereby the heater wire **160** would be responsive to an electrical circuit placed across the plug-in terminals **163** and **164**.

After the heater wire **160** has been coiled on the sleeve **159** in the manner illustrated in FIG. **28**, the coiled portion thereof is covered by another insulating mass **167** in the manner illustrated in FIG. **29** so as to secure and hold the heater wire **160** in the position illustrated in FIG. **28**.

If desired, another heater wire or resistance element **168** can then be positioned against the mass covered outer coiled heater wire **160** in the manner illustrated in FIG. **29** and be subsequently secured thereto by another insulating mass **169** in the manner illustrated in FIG. **22**.

The heater wire or resistance element **168** has the opposed leads **170** and **171** thereof respectively interconnected to the plug-in terminals **172** and **173** adapted to be disposed in holes **174** and **175** of the terminal block **151** in the manner illustrated in FIG. **22** whereby it can be seen that the resistance member **168** is spaced from the thermal fuse **146** by the distance comprising the thickness of the sleeves **152**, **159** and the covering insulative masses **158** and **167**.

Thus, the three heater means **153**, **160** and **168** are held in different positions relative to the thermal fuse **146** by the insulating masses **158**, **167** and **169** so that,

in effect, the heater means are in different stratified positions relative to the fuse **146** for the reasons previously set forth.

While all of the previously described thermal limiter constructions of this invention have the heater means and the thermally responsive device therefor secured in a selected positioning thereof by an insulating mass, it is to be understood that a thermal limiter construction of this invention can be provided wherein the selected positioning of the heater means and the thermally responsive device are maintained by means other than the insulating mass even though the insulating mass could additionally be utilized, if desired.

For example, reference is now made to FIGS. **30–32** wherein another thermal limiter construction of this invention is generally indicated by the reference numeral **180** and comprises an electrically insulating support means **181** for supporting a plurality of electrically operated heater means **182** and **183** in fixed positions relative to a thermally responsive device **184** that is also supported on the support means **181.**

The support means **181** can carry conductive spring clips **185** and **186** respectively electrically interconnected to lead means **187** and **188** comprising an electrical circuit that is to be protected by the thermally responsive device **184,** which can be of the fuse type previously described and has conductive cylindrical ferrules **189** and **190** secured to the outer ends of the opposed conductors **191** and **192** of the thermally responsive device **184** so as to readily permit the same to be detachably secured to the spring clips **185** and **186** by being snap fitted between the opposed spring legs **193** and **194** thereof in the manner illustrated in FIGS. **30** and **32.**

Thus, it can be seen that when the thermally responsive device **184** has its conductive ferrules **189** and **190** respectively snap fitted to the spring clips **185** and **186,** the thermally responsive device **184** is disposed in series between the leads **187** and **188** to protect the circuit thereof should one or more of the heater means **182** and **183** be operating for a certain amount of time to heat and thereby cause the fuse or thermally responsive device **184** to open the circuit therethrough in the manner previously described.

The electrical heater means **182** and **183** illustrated in FIGS. **30–32** comprise cylindrical, carbon resistance devices respectively having their longitudinal axes supported in a spaced apart parallel relation by having the leads **195, 196** and **197** and **198** thereof secured to the support means **181** in the manner illustrated so that the thermally responsive device **184,** when having its ferrules **189** and **190** properly inserted in the spring clips **185** and **186,** will nest in abutting contact between the heater means **182** and **183** in the manner illustrated in FIG. **31.** Thus, it can be seen that the thermally responsive device **184** is also substantially cylindrical and has its longitudinal axis parallel with the longitudinal axes of the heater means **182** and **183.**

If desired, an insulative sleeve **199** can be disposed over the thermally responsive device **184** in the same manner that the sleeve **152** is disposed over the thermally responsive device **146** of the embodiment illustrated in FIG. **24.**

The operation of the thermal limiter construction **180** will now be described.

As long as the thermally responsive device **184** is electrically interconnecting the leads **187** and **188** together, the circuit comprising the leads **187** and **188** can continue to operate but should one or both of the heater means **182** and **183** be electrically operated for a certain length of time so that the heat thereof causes the thermally responsive device **184** to open, the thus opened thermally responsive device **184** will terminate the operation of the electrical circuit being protected thereby.

Accordingly, if the thermally responsive device **184** is a fuse that blows when heated to a certain degree by one or more of the heater means **182** and **183,** then such blown thermally responsive device **184** must be removed from the support means **181** and a new thermally responsive device **184** must be replaced therefor before the circuit means **187, 188** can be operated in the manner previously described.

Thus, by having the ferrules **189** and **190** on the conductors **191** and **192** of the thermally responsive device **184,** such arrangement together with the spring clips **185** and **186** readily permits the support means **181** to detachably support the thermally responsive device **184** in the proper position for sensing the heat of the heater means **182** and **183** should the same subsequently be turned on.

Of course, it is to be understood that if it is desired to place an insulating mass over the arrangement illustrated in FIG. **30,** such insulating mass can be provided if desired for the reasons previously set forth.

Further, while the arrangement of the heater means **182** and **183** and the thermally responsive device **184** in the embodiment of FIGS. **30–32** all have the longitudinal axes thereof disposed parallel to each, it is to be understood that the heater means could be arranged in different directions if desired.

For example, reference is now made to FIG. **33** wherein another thermal limiter construction of this invention is generally indicated by the reference numeral **200** and comprises a support plate **201** and spring clips **202** and **203** for carrying a thermally responsive device **204** on the support means **201** for the same purpose that the thermally responsive device **184** was carried on the support means **181** previously described. However, the plurality of electrically operated cylindrical heater means **205, 206** and **207** of the thermal limiter construction **200** illustrated in FIG. **33** all have their axes disposed parallel to each other in an aligned side-by-side arrangement and transverse to the longitudinal axis of the thermally responsive device **204** while still being disposed in abutting relation therewith.

Thus, it can be seen that the thermally responsive device **204** is adapted to be activated by the heat from one or more of the heater means **205, 206** or **207** to open the circuit being protected by the device **204** should the device **204** be heated a certain amount.

While it has been stated throughout the previous description of the various embodiments of this invention that the device sensing the heat of the various heater means, whether the same be wires or resisters, is a thermally responsive fuse which blows when sensing a certain temperature for a certain period of time, it is to be understood that such fuse could be merely a thermally responsive thermostat which when heated to a certain temperature will open an electrical circuit, but when subsequently cooled, will again complete the electrical circuit so that the same will not be a throw-away device once the circuit has been opened thereby, but still would be a thermal limiter under the control of the var-

ious heaters being secured thereto by the insulative mass for the reasons previously set forth.

Therefore, the term "thermally responsive device" is intended to cover not only fuses, thermostats, etc., but also other means for opening circuits through the sensing of a certain temperature for a certain desired period of time whether such time period be substantially instantaneous or delayed.

Further, while the term "heater wires" is utilized throughout this description for the various embodiments of the thermal limiters of this invention, it is to be understood that the heater wires could be merely other forms of resisters and not necessarily just wires themselves.

In view of the above, it can be seen that this invention not only provides an improved thermal limiter wherein a controlled time delay thereof is provided by selective positioning of the heating means and the fuse together with the desired heat conductive characteristics of the securing mass, but also this invention provides an improved method of making such a thermal limiter or the like.

While the forms and methods of this invention have been described and illustrated as required by the Patent Statutes, it is to be understood that other forms and methods can be utilized and still come within the scope of the appended claims.

What is claimed is:

1. A thermal limiter construction for at least one electrical circuit comprising a thermally responsive device of a generally cylindrical configuration having lead means for being interconnected into said circuit, a plurality of electrically operated carbon resistance heater means each of a generally cylindrical configuration disposed adjacent said device and each being adapted to cause said device to open said circuit when heated by the respective heater means a certain amount, said heater means each being disposed in selected positions relative to said device, and a support means supporting said device and said heater means in said selected positions relative to each other and holding said device in abutting engagement with each of said heater means.

2. A contruction as set forth in claim **1** wherein said support means has means for detachably securing said device in its said selected position relative to said heater means.

3. A construction as set forth in claim **1** wherein said heater means each have a longitudinal axis and are supported by said support means with the axes thereof disposed in spaced parallel relation.

4. A construction as set forth in claim **3** wherein said device has a longitudinal axis and is supported by said support means so that said axis thereof is disposed transverse to said axes of said heater means while said device makes said abutting contact with said heater means.

5. A construction as set forth in claim **3** wherein said device has a longitudinal axis and is supported by said support means so that said axis thereof is disposed parallel to said axes of said heater means while said device makes said abutting contact with said heater means.

* * * * *