

(22) **Date de dépôt/Filing Date:** 2018/08/01

(41) Mise à la disp. pub./Open to Public Insp.: 2019/03/04

(45) **Date de délivrance/Issue Date:** 2020/04/21

(30) **Priorité/Priority:** 2017/09/04 (DE10 2017 008 314.2)

(51) **Cl.Int./Int.Cl. F16J 15/3296** (2016.01),
G01N 19/08 (2006.01)


(72) **Inventeurs/Inventors:**
NAHRWOLD, OLAF, DE;
SINDLINGER, STEFAN, DE;
LAUER, FRANK, DE;
TRABER, BORIS, DE;
MENZEL, JASMIN, DE;
KRAMER, THOMAS, DE

(73) **Propriétaire/Owner:**
CARL FREUDENBERG KG, DE

(74) **Agent:** BORDEN LADNER GERVAIS LLP

(54) **Titre : ARRANGEMENT D'ETANCHEITE ET BAGUE D'ETANCHEITE FAITE DUDIT ARRANGEMENT**

(54) **Title:** SEALING ARRANGEMENT AND SEALING RING CONSISTING THEREOF

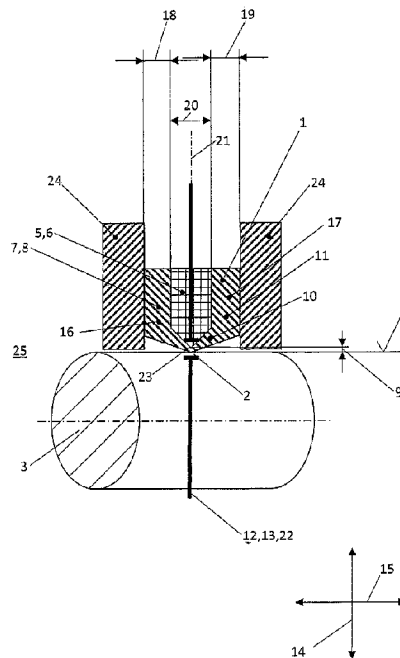

(57) Abrégé/Abstract:

Sealing arrangement, comprising a sealing ring (1) having at least one dynamically loaded sealing lip (2), and a machine element (3) to be sealed that has a surface (4) to be sealed, which surface is electrically conductive and surrounded by the sealing lip (2) in a radially prestressingly sealing manner, the sealing ring (1) comprising a core (5) made of an electrically conductive material (6) and a casing (7) made of an electrically insulating material (8), the casing (7) having a material thickness (9, 10, 11), surrounding the core (5) at least in part and comprising the sealing lip (2), said sealing arrangement comprising a wear detector (12), which has an electric measurement device (13) for detecting the state of wear of the sealing ring (1), wherein, when viewed in section, the material thickness (9) of the sealing lip (2) is smaller in the radial direction (14) than the material thickness (10, 11) of the remainder of the casing (7).

Abstract

Sealing arrangement, comprising a sealing ring (1) having at least one dynamically loaded sealing lip (2), and a machine element (3) to be sealed that has a surface (4) to be sealed, which surface is electrically conductive and surrounded by the sealing lip (2) in a radially prestressingly sealing manner, the sealing ring (1) comprising a core (5) made of an electrically conductive material (6) and a casing (7) made of an electrically insulating material (8), the casing (7) having a material thickness (9, 10, 11), surrounding the core (5) at least in part and comprising the sealing lip (2), said sealing arrangement comprising a wear detector (12), which has an electric measurement device (13) for detecting the state of wear of the sealing ring (1), wherein, when viewed in section, the material thickness (9) of the sealing lip (2) is smaller in the radial direction (14) than the material thickness (10, 11) of the remainder of the casing (7).

Sealing arrangement and sealing ring consisting thereof

Description

Technical field

The invention relates to a sealing arrangement, comprising a sealing ring having at least one dynamically loaded sealing lip, and a machine element to be sealed that has a surface to be sealed, which surface is electrically conductive and surrounded by the sealing lip in a radially prestressingly sealing manner, the sealing ring comprising a core made of an electrically conductive material and a casing made of an electrically insulating material, the casing having a material thickness, surrounding the core at least in part and comprising the sealing lip, said sealing arrangement comprising a wear detector, which has an electric measurement device for detecting the state of wear of the sealing ring.

The invention also relates to a sealing ring consisting of the sealing arrangement, as described above.

Prior art

A sealing arrangement of this kind and a sealing ring of this kind are disclosed in earlier application DE 10 2016 012 552.7, filed on October 20, 2016 and published on April 26, 2018.

The electrically insulating casing has a material thickness that is constant in all peripheral regions around the electrically conductive core. The casing has a relatively low material thickness and rests flat on the core.

The wear detector comprises an electric measurement device that is designed as a capacitive measurement device. A measurement principle of this kind is based on an electric voltage being applied between the surface to be sealed of the machine element to be sealed and the core of the sealing ring, and the electrical capacity between the surface to be sealed and the core being determined. Variables that influence the electrical capacity are the dielectric constant of the casing and the radial distance between the surface to be sealed and the core.

Sealing rings having a sealing lip made of a sealing material, in particular dynamically loaded sealing lips, wear down when the sealing ring is used as intended. Wear of this kind may lead to there initially being a leak in the sealing arrangement and then a breakdown of the entire sealing system.

When the material thickness of the sealing lip, which is part of the casing, changes as the wear becomes more severe, the electrical capacity between the surface to be sealed and the core of sealing ring also changes, this change in the electrical capacity being determined by suitable analysis electronics.

As is disclosed in the earlier application, gradual changes in the operating behavior of the sealing ring and gradual wear of the sealing lip can therefore also be detected. The state of the sealing ring is thus continuously monitored.

A further sealing arrangement is known from DE 10 2007 007 405 B4. The known sealing arrangement comprises a dynamically loaded sealing ring and an electric apparatus for detecting the state of wear of the sealing ring, the sealing arrangement consisting of an electrically conductive first sealing material, on which an electrically non-conductive second sealing material is attached, which is in sealing contact with the surface to be sealed of the machine element to be sealed. The surface to be sealed is electrically conductive, in the same way as the first sealing material.

When the second sealing material is completely worn, the electrically conductive surface to be sealed touches the also electrically conductive first sealing material, and a circuit for indicating complete wear, i.e. for indicating the destruction of the sealing ring, is closed.

In the case of such an embodiment of the sealing arrangement, it should be noted that it is not possible to detect a gradual change in the state of the sealing ring. As a result of the closure of the circuit, it is merely indicated that the sealing ring is no longer in working order and must be immediately replaced.

Description of the invention

It is desirable to develop a sealing arrangement and a sealing ring of the type mentioned at the outset such that it is possible to continuously monitor the state of the sealing ring, such that the electric measurement device that is used to continuously monitor the state produces particularly accurate results, and such that in particular disruptive influences that may detrimentally influence the accuracy of the measurement results, such as parasitic capacitance, are minimized as far as possible.

In one aspect, the present invention provides a sealing arrangement, comprising a sealing ring having at least one dynamically loaded sealing lip, and a machine element to be sealed that has a surface to be sealed, which surface is electrically conductive and surrounded by the sealing lip in a radially prestressingly sealing manner, the sealing ring comprising a core made of an electrically

conductive material and a casing made of an electrically insulating material, the casing having a material thickness, surrounding the core at least in part and comprising the sealing lip, said sealing arrangement comprising a wear detector, which has an electric measurement device for detecting the state of wear of the sealing ring, wherein, when viewed in section, the material thickness of the sealing lip is smaller in the radial direction than the material thickness of the remainder of the casing.

In a further aspect, the present invention provides a sealing ring of a sealing arrangement described herein, wherein, when viewed in section, the material thickness of the sealing lip is smaller in the radial direction than the material thickness of the remainder of the casing.

The material thickness of the sealing lip, when viewed in section, is smaller in the radial direction than the material thickness of the remainder of the casing.

The advantage here is that substantially only the material thickness of sealing lip, which decreases in the radial direction as a result of operation, influences the measurement result from the electric measurement device.

Based on the relatively smallest material thickness of the sealing lip, the relatively larger material thickness of the remainder of the casing ensures that disruptive influences that could detrimentally influence the measurement accuracy of the measurement result are practically eliminated. Without screening by means of the larger material thickness of the remainder of the casing, undesirable capacitive disruptive influences of this kind from regions adjacent to the sealing lip could be incorporated into the measurement for detecting the state of wear of the sealing ring and would detrimentally distort the measurement result. Disruptive influences could originate, for example, from the housing that surrounds the sealing ring or from the medium to be sealed. It would thus no longer be possible to reliably detect the current state of wear of the sealing ring and thus the entire sealing arrangement.

The material thickness of the casing is preferably adjusted to the application in question such that the material thickness of the casing is increased where disruptive levels of capacitance may arise. The material thickness of the sealing lip made of electrically insulating material is relatively the lowest only at the point at which the actual capacitance measurement takes place, specifically at the measurement point, which is delimited, on either side of the sealing lip in the radial direction, by the surface to be sealed on one radial side and by the core on the other radial side.

Since no undesirable capacitive disruptive influences are incorporated into the measurement by

means of the electric measurement device, the measurement result is particularly accurate.

The core may consist of an elastomer material, in particular common sealing materials.

The elastomer material may be made electrically conductive by means of electrically conductive particles, for example. Particles of this kind may be metal particles, for example.

The casing may also consist of an elastomer material or a PTFE material or another polymer material, such as PTFE, PEEK or PPS.

If both the core and the casing consist of an elastomer material, the core and the casing integrally adhere to one another particularly effectively on account of the similar material that they are made of.

If, by contrast, the casing consists of a PTFE material, the sealing lip has a particularly low coefficient of static friction and has high chemical resistance. A sealing lip made of a PTFE material is overall particularly wear-resistant.

According to one advantageous embodiment, the remainder of the casing may have the largest material thickness, the ratio of the largest material thickness to the material thickness of the sealing lip being at least 5, more preferably from 5 to 10. A ratio of this kind shows that the material thickness of the remainder of the casing is considerably greater than the material thickness of the sealing lip. On account of the relatively large material thickness and the resultant effective screening from external parasitic capacitance, it is possible to detect the operation-related change in the state of the sealing lip and thus the operation-related change in the sealing effect of the sealing ring and therefore the entire sealing arrangement in a particularly accurate manner.

Premature replacement of a still properly functioning sealing ring and damage to the sealing ring, or destruction thereof, to the surprise of the user are things of the past on account of the high measurement accuracy.

Starting from the sealing lip, the material thickness of the casing may continuously increase, at least to begin with, in the radial and/or axial direction. Sudden changes in direction, which could lead to notch stress in the material of the sealing ring and thus to premature breakdown of the sealing arrangement, are thus prevented.

When viewed in section, the casing may be substantially U-shaped and comprise two side faces, which extend substantially in the radial direction and between which the core is arranged, when viewed in the axial direction. The electrically conductive core is therefore practically enveloped in

the electrically insulating casing. Only in the region of the sealing lip does the electrically insulating casing have the lowest material thickness. By contrast, in all other regions, specifically outside the measurement point, the insulating casing has a larger material thickness in order to keep external parasitic capacitance away from the measurement point and increase the measurement accuracy. According to one advantageous embodiment, the side faces may each have an axial thickness that substantially corresponds to the axial thickness of the core. Both the measurement point and the core, which is located axially between the side faces, are screened from parasitic capacitance originating, for example, from a housing in which the sealing ring is arranged, on account of the relatively thick side faces of the casing.

The core is annular and, on the side radially facing the sealing lip, preferably has a shape that is substantially congruent with the sealing lip, when viewed in section.

On the side radially facing the sealing lip, the core may be substantially cone-shaped, when viewed in section. The sealing ring has an overall simple structure as a result of an embodiment of this kind. By adjusting the cone angle of the core and on account of the U-shaped design of the casing, the desired material thickness of the casing around the measurement and the screening effect of the casing can be particularly simply adapted to the particular circumstances of the application.

If the cone angle of the core on the side radially facing the sealing lip is reduced, the material thickness of the casing increases relatively sharply outside the sealing lip / outside the measurement point, as does also the effectiveness of the screening of undesirable parasitic capacitance.

If, by contrast, the cone angle is relatively large, the sealing lip and thus the measurement point may also be widened, when viewed in the axial direction.

The sealing ring may have an imaginary radial plane at the center in the axial direction and be symmetrical in relation to the radial plane. The advantage here is that a sealing ring of this kind is particularly easy to produce and can be installed both ways round in the sealing arrangement. The risk of installation mistakes is minimized.

As is described above, the electric measurement device is preferably designed as a capacitive measurement device for continuously detecting the material thickness of the sealing lip in the radial direction. Since the material thickness of the sealing lip in the radial direction is continuously detected, the imminent breakdown of the sealing ring is signaled in sufficient time that the

operator of the sealing arrangement can take timely, precautionary measures in advance, for example for a quick repair.

In comparison with an electric measurement device that only indicates the breakdown of a sealing ring / a sealing arrangement when said breakdown has actually occurred, this is hugely advantageous.

The capacitive measurement device has a measurement point, which is delimited, on either side of the sealing lip in the radial direction, by the surface to be sealed on one radial side and by the core on the other radial side. In the region of the measurement point, the material thickness of the sealing lip made of electrically insulating material thickness is the lowest.

The above-described sealing arrangement having the above-described sealing ring may be used in hydraulics or pneumatics, in the chemical industry, and in the food and drinks industry.

The sealing arrangement and the sealing ring consisting thereof may particularly preferably be used as a shaft seal for valves.

Brief description of the drawings

Fig. 1 and 2 are schematic views of two embodiments of sealing arrangements.

Fig. 1 shows a sealing arrangement, as is disclosed in the earlier application mentioned at the outset,

Fig. 2 shows an embodiment of a sealing arrangement according to the invention, in which a sealing ring according to the invention is used.

Embodiment of the invention

Fig. 1 shows an embodiment disclosed in the earlier application mentioned at the outset.

The sealing arrangement comprises a sealing ring 1 having a dynamically loaded sealing lip 2 which, in a radially prestressingly sealing manner, surrounds a surface 4 to be sealed of a machine element 3 to be sealed.

The surface 4 to be sealed is electrically conductive.

The sealing ring 1 comprises a core 5, which is enveloped in a casing 7 in the region of the side faces 16, 17 of said casing and on the side facing the surface 4 to be sealed.

The core 5 consists of an electrically conductive material 6, while the casing 7 consists of an electrically insulating material 8.

A wear detector 12, which comprises an electric measurement device 13 for detecting the state of wear of the sealing ring 1, is shown schematically.

When viewed in the section shown here, the casing 7 has a constant material thickness 9, 10, 11 overall. The material thickness 9 of the sealing lip 2 in the region of the measurement point 23 corresponds to the material thickness 10 outside the measurement point 23.

So that external parasitic capacitance, for example from the housing 24 or the medium 25 to be sealed, is kept away from the measurement point 23, the sealing arrangement according to the invention is provided with the sealing ring according to the invention.

Fig. 2 shows an embodiment of the sealing arrangement according to the invention having a sealing ring according to the invention.

In contrast with the sealing ring 1 from Fig. 1, the sealing ring 1 from Fig. 2 has a casing 7, in which, when viewed in the section shown here, the material thickness 9 of the sealing lip 2 is smaller in the radial direction 14 than the material thickness 10, 11 of the remainder of the casing 7. On account of the relatively larger material thickness 10, 11 outside the measurement point 23, the electric measurement device 13 is screened from disruptive electrical influences. The measurement result is therefore far more accurate and allows reliable conclusions to be drawn as to the current state of the sealing ring, in particular the state of the sealing lip 2.

In the embodiment shown here, the remainder of the casing 7 has the largest material thickness 11, the ratio of the largest material thickness 11 to the material thickness 9 of the sealing lip 2 being approximately from 7 to 8.

Starting from the sealing lip 2, the material thickness 10, 11 of the casing 7 increases continuously in the radial direction 14 and the axial direction 15 until the electrically insulating casing 7 transitions into the side faces 16, 17, which extend in the radial direction 14. On the side faces 16, 17, the material thickness 10, 11 of the casing 7 is constant and at its largest.

The side faces 16, 17 each approximately have an axial thickness 18, 19 that corresponds to the axial thickness 20 of the core 5. The core 5 is therefore particularly effectively screened from the influence of undesirable parasitic capacitance.

The sealing ring 1 is particularly simple and cheap to produce and can also be installed in process-reliable manner, also for the reason that, at the center in the axial direction 15, said sealing ring has an imaginary radial plane 21, in relation to which said sealing ring is symmetrical.


By means of the wear detector 12 and its electric measurement device 13, which is designed as a capacitive measurement device 22, the material thickness 9 of the sealing lip 2 in the radial direction can be continuously detected. The measurement point 23 is delimited, on either side of the sealing lip 2 in the radial direction 14, by the surface 4 to be sealed on one radial side and by the core 5 on the other radial side, the surface 4 to be sealed and the core 5 each consisting of an electrically conductive material.

CLAIMS:

1. Sealing arrangement, comprising a sealing ring (1) having at least one dynamically loaded sealing lip (2), and a machine element (3) to be sealed that has a surface (4) to be sealed, which surface is electrically conductive and surrounded by the sealing lip (2) in a radially prestressingly sealing manner, the sealing ring (1) comprising a core (5) made of an electrically conductive material (6) and a casing (7) made of an electrically insulating material (8), the casing (7) having a material thickness (9, 10, 11), surrounding the core (5) at least in part and comprising the sealing lip (2), said sealing arrangement comprising a wear detector (12), which has an electric measurement device (13) for detecting the state of wear of the sealing ring (1), wherein, when viewed in section, the material thickness (9) of the sealing lip (2) is smaller in the radial direction (14) than the material thickness (10, 11) of the remainder of the casing (7).
2. Sealing arrangement according to claim 1, wherein the remainder of the casing (7) has the largest material thickness (11), and in that the ratio of the largest material thickness (11) to the material thickness (9) of the sealing lip (2) is at least 5.
3. Sealing arrangement according to claim 2, wherein that the ratio is from 5 to 10.
4. Sealing arrangement according to any one of claims 1 to 3, wherein, starting from the sealing lip (2), the material thickness (9, 10, 11) of the casing (7) continuously increases, at least to begin with, in the radial (14) and/or axial direction (15).
5. Sealing arrangement according to any one of claims 1 to 4, wherein, when viewed in section, the casing (7) is substantially U-shaped and comprises two side faces (16, 17), which extend substantially in the radial direction (14) and between which the core (5) is arranged, when viewed in the axial direction (15).
6. Sealing arrangement according to claim 5, wherein the side faces (16, 17) each have an axial thickness (18, 19) that corresponds substantially to the axial thickness (20) of the core (5).

7. Sealing arrangement according to any one of claims 1 to 6, wherein the core (5) is annular and, on the side radially facing the sealing lip (2), has a shape that is substantially congruent with the sealing lip (2), when viewed in section.
8. Sealing arrangement according to any one of claims 1 to 7, wherein, on the side radially facing the sealing lip (2), the core (5) is substantially cone-shaped, when viewed in section.
9. Sealing arrangement according to any one of claims 1 to 8, wherein the sealing ring (2) has an imaginary radial plane (21) at the center in the axial direction (15) and is symmetrical in relation to the radial plane (21).
10. Sealing arrangement according to any one of claims 1 to 9, wherein the electric measurement device (13) is designed as a capacitive measurement device (22) for continuously detecting the material thickness (9) of the sealing lip (2) in the radial direction (14).
11. Sealing arrangement according to claim 10, wherein the capacitive measurement device (22) has a measurement point (23), which is delimited, on either side of the sealing lip (2) in the radial direction (14), by the surface (4) to be sealed on one radial side and by the core (5) on the other radial side.
12. Sealing ring of the sealing arrangement according to any one of claims 1 to 11, wherein, when viewed in section, the material thickness (9) of the sealing lip (2) is smaller in the radial direction (14) than the material thickness (10, 11) of the remainder of the casing (7).

Fig. 1

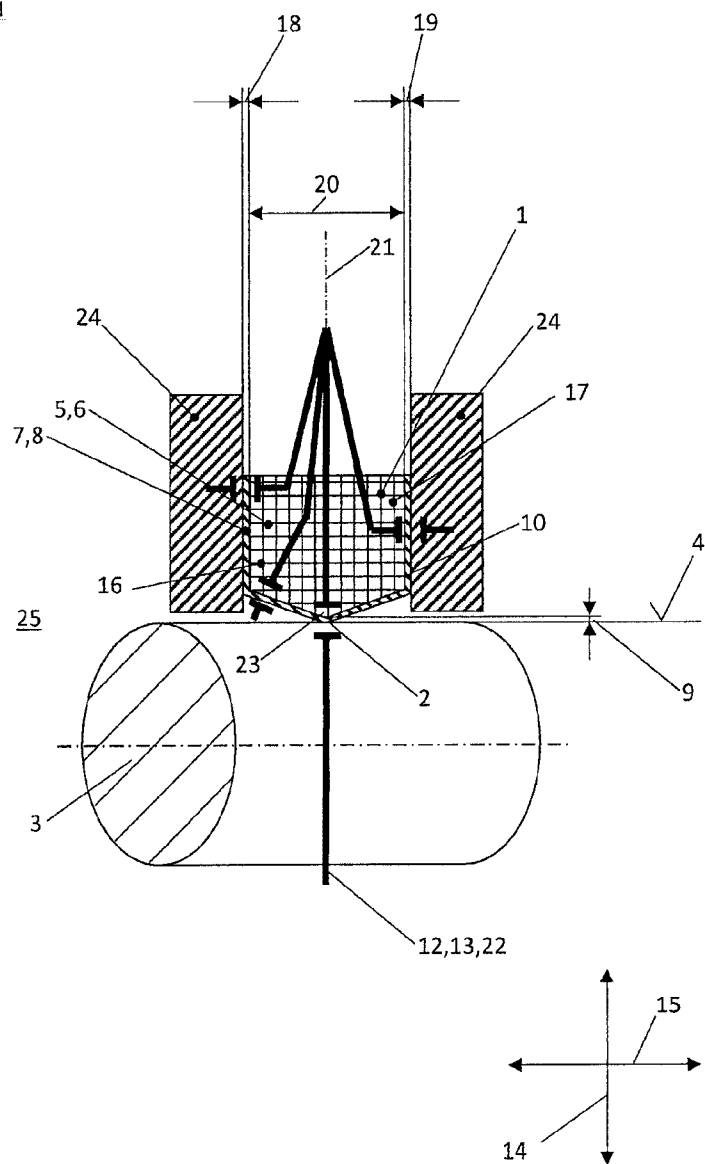

Art from DE 10 2016 012 552.7

