



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01J 1/62		A1	(11) International Publication Number: WO 98/07173 (43) International Publication Date: 19 February 1998 (19.02.98)
(21) International Application Number:	PCT/US97/13451	(81) Designated States:	AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date:	30 July 1997 (30.07.97)	(30) Priority Data:	
		60/024,001 08/789,319	12 August 1996 (12.08.96) 23 January 1997 (23.01.97)
(71) Applicant:	THE TRUSTEES OF PRINCETON UNIVERSITY [US/US]; P.O. Box 36, Princeton, NJ 08544 (US).	(72) Inventors:	GU, Gong; 24E King Street, Princeton, NJ 08540 (US). BURROWS, Paul; 413 Clarksville Road, Princeton Junction, NJ 08550 (US). FORREST, Stephen, R.; 148 Hunt Drive, Princeton, NJ 08540 (US).
(74) Agents:	MEAGHER, Thomas, F. et al.; Kenyon & Kenyon, 1 Broadway, New York, NY 10004 (US).	(75) Published	<i>With international search report.</i>

(54) Title: NON-POLYMERIC FLEXIBLE ORGANIC LIGHT EMITTING DEVICE

(57) Abstract

An organic light emitting device (OLED) is disclosed for which the hole transporting layer, the electron transporting layer and/or the emissive layer, if separately present, is comprised of a non-polymeric material. A method for preparing such OLED's using vacuum deposition techniques is further disclosed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5

NON-POLYMERIC FLEXIBLE ORGANIC LIGHT EMITTING DEVICE

RELATED APPLICATION

10 This invention is related to provisional Application
60/024,001 dated August 12, 1996.

FIELD OF THE INVENTION

15 The subject invention is directed to flexible organic light
emitting devices (OLED's) including a hole transporting layer
and/or an electron transporting layer comprised of a vacuum-
deposited, non-polymeric material.

BACKGROUND OF THE INVENTION

20 In one type of electrically controlled light emitting device,
organic material is placed between a layer of conductive
material that can inject electrons and a layer of conductive
material that can inject holes. When a voltage of proper
polarity is applied between the outer layers of conductive
25 material, electrons from one layer combine with holes from the
other so as to release energy as light that is, to produce
electroluminescence (EL). These devices are referred to as
organic light emitting devices, OLED's.

30 OLED's have been constructed from polymers so as to have a
highly advantageous flexibility that enables them to be used

for light weight, portable, roll-up displays or to be used for conformable displays which can be readily attached to windows, windshields or instrument panels that may have curved surfaces; "The Plastic LED: A Flexible Light-Emitting Device 5 Using a Polyaniline Transparent Electrode" by G. Gustafsson et al in "Synthetic Metals", 55-57 4123-4227 (1993). Even though there is a widespread application of vacuum-deposited, small-molecule-based heterostructural OLED's, which have been constructed on inflexible glass substrates and use ITO as the 10 hole emitting layer, the devices of Gustafsson were fabricated using a polymer, that is, soluble semiconducting polymer poly(2-methoxy,5-(2'-ethyl-hexoxy)-1,4-phenylene-vinylene) (MEH-PPV) as the emissive layer, since the mechanical properties of polymers were deemed to be unique with respect 15 to making such devices.

It would be desirable if flexible OLED's could be fabricated having improved electroluminescent properties as well as the advantage of being readily fabricated using the vacuum 20 deposition techniques typically used for preparing OLED's.

SUMMARY OF THE INVENTION

In accordance with this invention, a flexible OLED using small molecule based heterostructure of organic material is provided 25 in which the hole transporting layer, the electron transporting layer, and/or the emissive layer, if separately present, includes a non-polymeric material, that is, a layer comprised of small molecules.

30 The term "small molecules" is used herein to refer to molecules which are small in the sense that such molecules are

not made up of a plurality of repeating molecular units such as are present in a polymeric material. Thus, for purposes of this invention, the term "small molecule" is intended to be used interchangeably with the term "non-polymeric." In fact, 5 the term "small molecules" may embrace relatively large molecules such as are typically used in the hole transporting layer, the electron transporting layer and/or the emissive layer that is present in an OLED.

10 The subject invention is further directed to a method of fabricating flexible OLED's wherein the hole transporting layer, the electron transporting layer and/or the emissive layer, if present, may be prepared using vacuum deposition techniques, rather than using the less convenient fabrication 15 technique such as employed by Gustafsson et al, that is, rather than spin coating a layer of polymer, such as polyaniline onto the flexible substrate. Such vacuum deposition methods are particularly suitable for use in fabricating the OLED's of the subject invention since the 20 other layers of the OLED are also typically prepared using vacuum deposition techniques. Integration of all the vacuum deposition steps into a single overall sequence of steps for fabricating the OLED, without requiring the use of solvents or removing the air sensitive layers from a vacuum chamber and 25 exposing them to ambient conditions provides an additional especially beneficial advantage. Thus, the subject invention is directed to a method, wherein the hole transporting, electron transporting, and/or separate emissive layer, if present, may be prepared using vacuum deposition steps.

30

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross section of one embodiment of a flexible OLED constructed in accordance with this invention;

5 Fig. 2 contains graphs illustrating the current vs. voltage characteristic of an OLED such as shown in Fig. 1 before and after repeated bending and the current vs. voltage characteristic of a prior art OLED having a glass substrate in place of the flexible polyester substrate; and

10 Fig. 3 contains graphs illustrating the optical power vs. current characteristics of an OLED such as shown in Fig. 1 before and after repeated bending and the current vs. voltage characteristic of a prior art OLED used in a glass substrate 15 in place of the flexible polyester substrate.

Fig. 4 shows atomic force microscope (AFM) images of a typical ITO-coated polyester substrate film wherein (a) shows the ITO (top) substrate and (b) shows the polyester (bottom) substrate 20 surface. The height range of the images was ~50 nm (nanometers).

Fig. 5 shows a photograph of an array of nine unpackaged 1 cm² vacuum-deposited, non-polymeric flexible OLED's. One device 25 in contact with the probe arm is shown operating in air in a well-illuminated room at normal video display brightness (~100 cd/m²).

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

30 The subject invention will now be described in detail for specific preferred embodiments of the invention, it being

understood that these embodiments are intended only as illustrative examples and the invention is not to be limited thereto.

5 As illustrative embodiments of the subject invention, the subject OLED's may be incorporated into a single heterostructure or in a double heterostructure. The materials, methods and apparatus for preparing the single and double heterostructures are disclosed, for example, in U.S. 10 Patent No. 5,554,220, which is herein incorporated in its entirety by reference. The subject invention as disclosed herein may be used in conjunction with co-pending applications, "High Reliability, High Efficiency, Integratable Organic Light Emitting Devices and Methods of Producing Same;" 15 "Novel Materials for Multicolor LED's;" "Electron Transporting and Light Emitting Layers Based on Organic Free Radicals;" "Multicolor Display Devices;" "Red-Emitting Organic Light Emitting Devices (LED's);" and "High Efficiency Organic Light Emitting Device Structures;" each of said co-pending 20 application being filed on December 23, 1996, and being herein incorporated in their entirety by reference. The subject invention may also be used in conjunction with co-pending U.S. 25 Serial Nos. 08/354,674; 08/613,207; 08/632,316; 08/632,322; and 08/693,359; which are also herein incorporated in their entirety by reference.

30 The single or double heterostructures, as referred to herein, are intended solely as examples showing how an OLED embodying the subject invention may be fabricated without in any way intending the invention to be limited to the particular sequence or order of making the layers shown. For example, a

single heterostructural OLED of the subject invention includes a flexible substrate, which is preferably transparent; a first electrode, which may typically be an indium tin oxide (ITO) anode layer; a hole transporting layer; an electron transporting layer; a second electrode layer, for example, a metal cathode layer of Mg:Ag; and a metal protective layer, for example, made of a layer of Ag, for protecting the Mg:Ag cathode layer from atmospheric oxidation. A double heterostructure would also include an additional layer containing an emissive material. This additional layer is herein referred to as a "separate emissive layer" so as to distinguish it from the other layers, since the hole transporting layer and the electron transporting layer can be made to produce electroluminescent emission without the need for this separate emissive layer.

Although not limited to the thickness ranges recited herein, the ITO anode layer may be about 1000 Å (1 Å = 10⁻⁸ cm) to greater than about 4000 Å thick; the hole transporting layer about 50 Å to greater than about 1000 Å thick; the layer containing emissive material about 50 Å to about 200 Å thick; the electron transporting layer about 50 Å to about 1000 Å thick; and each metal layer, about 50 Å to greater than about 100 Å thick, or substantially thicker if the cathode layer is not intended to be transparent.

The ability to achieve highly flexible displays vacuum-deposited molecular organic materials, which have stable electroluminescent properties, depends on, *inter alia*, the following two factors. First, the molecular bonds responsible for the mechanical properties of the thin films comprising the

OLED needs to be reasonably tolerant of the stress applied to the structure on bending, and, second, the substrates needs to be sufficiently flat and uniform such that mechanical defects are not formed during growth or flexing.

5

Concerning the first factor, virtually all organic materials used in vacuum-deposited OLED's are held together by highly flexible van der Waals bonds. Previously, it has been shown, Y. Zhang and S. R. Forrest, Phys. Rev. Lett. 71, 2765 (1993), that the bonding of aromatic molecules similar to those used in OLED's is highly compressible. For example, it was shown that the compressibility of the van der Waals-bonded naphthalene-based molecular crystal NTCDA has a roughly 20-times-higher compressibility than most ductile metals such as In or Al. C. Kittel, Solid State Physics, 4th ed. (Wiley, New York, 1971) p. 143. While not intending to be limited to the theory of why the subject invention is capable of producing stable electroluminescence, such considerations help to explain why the molecular materials disclosed herein are sufficiently ductile to undergo significant stress without cracking.

The second factor, that the substrates used be sufficiently flat, was established through the use of images produced by an atomic force microscope. These images, such as shown in Fig. 4, shows that the ITO surface had a rms roughness of only 1.8 nm, whereas the polyester surface of the flexible was somewhat rougher, with a rms value of 2.8 nm. Although there was some variation from substrate to substrate, ITO surface roughness did not exceed 3.6 nm. In either case, the substrates were sufficiently smooth (i.e., the height of the surface features

was a small fraction of the total device thickness) such that no significant damage was observed for the subject OLED heterostructure on growth or bending.

5 Based on such considerations, the subject devices grown on flexible substrates were found to have efficiencies comparable with conventional vacuum-deposited OLED's grown on glass and, furthermore, such devices were found to be mechanically robust.

10 This invention will now be described in detail with respect to showing how certain specific representative embodiments thereof will be made, the materials, apparatus and process steps being understood as examples that are intended to be 15 illustrative only. In particular, the invention is not intended to be limited to the methods, materials, conditions, process parameters, apparatus and the like specifically recited herein.

20 EXAMPLES
In the cross section of the particular embodiment of the invention illustrated in Fig. 1, a flexible substrate 2 for the device is comprised of any suitable flexible polymer sheet such as a polyester. Preferably, the flexible substrate is 25 capable of being bent to a radius of curvature down to 0.5 cm or less. The flexible substrate 2 is precoated with a thin film 4 of indium tin oxide, ITO, such as is available from Southwall Technologies, Inc., 1029 Corporation Way, Palo Alto, Calif., 94303, Part No. 903-6011. In this particular 30 embodiment, the hole transport layer 6 was comprised of N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl-4,4'-diamine

(TPD), and the electron transporting layer 8 was comprised of tris-(8-hydroxyquinoline) aluminum(Alq_3). Other non-polymeric materials, such as known in the art for preparing hole transporting layers, electron transporting layers and emissive layers may also be used. The hole conducting layer 6 of TPD is formed on top of the hole injecting ITO layer 4, and a light emitting layer 8 of Alq_3 is formed on the layer 6. Alternatively, a single layer can be used in place of the layers 6 and 8 in which TPD and Alq_3 are combined. A layer 10 of Mg-Ag is formed on the Alq_3 layer 8, and a layer 12 of Ag is formed on the Mg-Ag layer 10. A power supply 14 is connected between the Ag layer 12 and the precoated ITO layer 4.

Although the layers could have different thicknesses than those shown in the table below, the thicknesses shown produced the characteristics illustrated by the graphs of Figs. 2 and 3.

	<u>Layer No.</u>	<u>Layer Thickness</u>
20	layer 2	175 μM
	layer 6	800 \AA
	layer 8	800 \AA
	layer 10	1500 \AA
	layer 12	500 \AA

25

In accordance with another aspect of the invention, the light emitting device of Fig. 1 may be fabricated as follows. In this example, the substrate 2 is a 175 μM thick ($1 \mu M = 10^{-6}$ meters) transparent polyester sheet precoated with a transparent, conducting ITO thin film 4. The thickness of the

flexible substrate may be either substantially thicker or thinner depending on the needs of the particular application which the OLED is used. The sheet resistance of the ITO thin film 4 was $60 \Omega/\square$, and the transparency of the coated 5 substrate was ~80% throughout the visible spectrum. Prior to the deposition of the organic film, the substrate 2 was ultrasonically cleaned in detergent for two minutes, then rinsed with deionized water. Next, it was rinsed in 2-propanol, held at room temperature for two to three minutes, 10 and then boiled in 2-propanol again for two to three minutes, followed by drying with a blow gun using a stream of filtered dry nitrogen. An 800 Å thick layer 6 of the hole conducting material, TPD, was deposited by thermal evaporation in a vacuum of $<4 \times 10^{-7}$ Torr, followed by the deposition of a 800 Å thick Alq₃ layer. The top electrode consisted of a 1500 Å thick layer of Mg-Ag and a 500 Å thick Ag cap deposited 15 through a shadow mask. A conventional device on an ITO-precoated glass substrate was simultaneously fabricated for comparison using identical cleaning and deposition procedures. 20 The sheet resistance and transparency of the ITO-precoated glass substrate was $20 \Omega/\square$ and ~90%, respectively.

Fig. 2 shows the current-voltage characteristics of a 1 mm diameter flexible device prior to bending, curve 16, after 25 repeated bending (4 to 5 times) over a small radius of curvature (~0.5 cm), curve 18, and the conventional device on a glass substrate, curve 20. All the current/voltage curves are shown to follow the power law dependence of current-on-voltage. At lower voltages, the current/voltage curves indicate ohmic behavior; while at higher voltages, the curves 30 indicate trap-limited behavior; while at higher voltages, the curves follow $I = V^{m+1}$ with $m=7$, suggestive of trap-limited

conduction typical of OLED's. The power law dependence was observed for at least four orders of magnitude change in current in the high current region. There was no obvious change in the current/voltage characteristics after the device was repeatedly flexed. The turn-on voltages (defined as the voltages at which the current due to ohmic and trap limited conduction are equal) of the three curves was almost identical (~6.5V), while the leakage current at low voltages of the flexible device was even less than that of the conventional device, and was not increased after bending. This indicated that the ITO film precoated on the flexible substrate is sufficiently uniform such that current shunt paths between the top and bottom contacts 12 and 4 are not induced after bending, even for very thin film (~1600 Å molecular organic structures).

The light output power versus current (L-I) characteristics of the flexible device before and after bending, and of the conventional device are shown in Fig. 3 by graph 22. Curve 24 illustrates the L-I output of a standard device having a glass substrate. The external quantum efficiency of the flexible device was 0.20%, and that of the conventional device was 0.14%. In both cases, the efficiency was calculated from light emitted only in the forward scattering direction. This considerably underestimates the true quantum efficiency but is useful for comparing between devices. Once again, the quantum efficiency of the flexible device was demonstrated not to be affected by repeated bending. The fact that there was no appreciable change in either the I-V or L-I characteristics after the device was flexed indicated that the ITO contact, the organic layers, and the alloy top contact were not

significantly affected by bending even over a small radius of curvature.

Large-area (-1 cm²) devices were also fabricated by similar methods. As in the case of the smaller devices, the large devices were also be bent over radii of ~0.5 cm without apparent degradation. That these larger areas can be achieved indicates that flexible OLED's can be used in large, roll-up, or conformable flat panel displays. This, in conjunction with the fact that the ITO-precoated substrate is available in large spools, indicates that flexible, OLED-based displays can be mass manufactured on a roll-to-roll basis by use of suitable volume growth technologies such as organic vapor phase deposition.

Failure modes of the large-area device were also studied. If on the convex side of a curved substrate the device can be bent without failure even after a permanent fold occurs in the polyester film. If on the concave side the device remains operational when bent over a radius of curvature down to 0.5 cm. At smaller radii, cracks propagate through the device, and current-shunt paths are created between bottom and top contacts after further bending. When ITO-precoated substrates are similarly bent, the same cracking phenomenon is observed, from which it can be inferred that the cracks occur in the ITO rather than in the OLED itself.

In conclusion, vacuum-deposited, van der Waals-bonded, non-polymeric flexible OLED's, such as illustrated in Fig. 5, have been fabricated using an ITO-precoated transparent polyester film as the substrate. It has been shown that an ITO thin

film, when precoated on a flexible substrate, provides a flat, highly transparent, conductive, flexible contact suitable for OLED applications. This hole-injecting ITO-coated substrate may also be used with OLED's comprising polymeric hole transporting, electron transporting, and/or emissive layers comprised of polymers. In addition, performance similar to that disclosed herein is expected if non-polymeric devices are vacuum deposited on polymeric, transparent hole-injecting contacts such as polyaniline, which may be useful if even greater flexibility is required in certain applications.

Although a particular OLED structure of Fig. 1 has been described, it is to be understood that any OLED structure having layers that are vacuum formed could be formed on a flexible polymeric substrate in accordance with this invention. Those of skill in the art may recognize certain modifications to the various embodiments of the invention, which modifications are meant to be covered by the spirit and scope of the appended claims.

20

What Is Claimed Is:

1. A flexible organic light emitting device comprising:
an organic light emitting device comprising a flexible substrate layer and:
 - a) a hole transporting layer comprised of a non-polymeric material or
 - b) an electron transporting layer comprised of a non-polymeric material.
2. The flexible organic light emitting device of claim 1 wherein said organic light emitting device includes a hole transporting layer comprised of a non-polymeric material and an electron transporting layer comprised of a non-polymeric material.
3. The flexible organic light emitting device of claim 1 wherein said organic light emitting device further includes a separate emissive layer comprised of a non-polymeric material.
4. The flexible organic light emitting device of claim 1 wherein said flexible substrate is transparent.
5. The flexible organic light emitting device of claim 1 wherein said flexible substrate is polymeric.
6. The flexible organic light emitting device of claim 1 wherein said flexible substrate comprises a polyester.

7. The flexible organic light emitting device of claim 1 wherein said organic light emitting device further includes an anode layer comprised of indium tin oxide.
8. The flexible organic light emitting device of claim 1 wherein said hole transporting layer comprises N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1-1'biphenyl-4,4'diamine.
9. The flexible organic light emitting device of claim 1 wherein said electron transporting layer comprises tris-(8-hydroxyquinoline)aluminum.
10. A flexible organic light emitting device comprising:
a flexible substrate,
an anode layer on said flexible substrate,
a hole transporting layer on said anode layer,
an electron transporting layer on said hole transporting layer and
a cathode layer on said electron transporting layer,
wherein said hole transporting layer or said electron transporting layer is comprised of a non-polymeric material.
11. A flexible organic light emitting device comprising:
a flexible substrate,
a cathode layer on said flexible substrate,
a hole transporting layer on said cathode layer,
an electron transporting layer on said hole transporting layer and

an anode layer on said electron transporting layer, wherein said hole transporting layer or said electron transporting layer is comprised of a non-polymeric material.

12. A method of preparing a flexible organic light emitting device comprising:
fabricating an organic light emitting device on a flexible substrate wherein the fabrication of said organic light emitting device includes the step of vacuum depositing a hole transporting layer or the step of vacuum depositing an electron transporting layer.
13. The method according to claim 12 wherein said fabrication step includes the steps of vacuum depositing a hole transporting layer and of vacuum depositing an electron transporting layer.
14. The method according to claim 12 wherein said fabrication step further includes the step of vacuum depositing a separate emissive layer.
15. A method of preparing a display device comprising:
incorporating a flexible organic light emitting device into a display device wherein said flexible organic light emitting device is fabricated on a flexible substrate using a method that includes the step of vacuum depositing a hole transporting layer or the step of vacuum depositing an electron transporting layer.

16. A display incorporating the flexible organic light emitting device of any one of claims 1 through 11.
17. A vehicle incorporating the flexible organic light emitting device electron transporting layer of any one of claims 1 through 11.
18. A computer incorporating the flexible organic light emitting device electron transporting layer of any one of claims 1 through 11.
19. A television incorporating the flexible organic light emitting device electron transporting layer of any one of claims 1 through 11.
20. A printer incorporating the flexible organic light emitting device electron transporting layer of any one of claims 1 through 11.
21. A wall, theater or stadium screen incorporating the flexible organic light emitting device electron transporting layer of any one of claims 1 through 11.
22. A billboard or a sign incorporating the flexible organic light emitting device of any one of claims 1 through 11.
23. A flexible organic light emitting device comprising:
a flexible, transparent polyester substrate,
an anode layer on said flexible, transparent polyester substrate, said anode layer being comprised of indium tin oxide;

a hole transporting layer on said anode layer, said hole transporting layer being comprised of N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'biphenyl-4,4'diamine;
an electron transporting layer on said hole transporting layer, said electron transporting layer being comprised of tris-(8-hydroxyquinoline) aluminum; and
a cathode layer on said electron transporting layer.

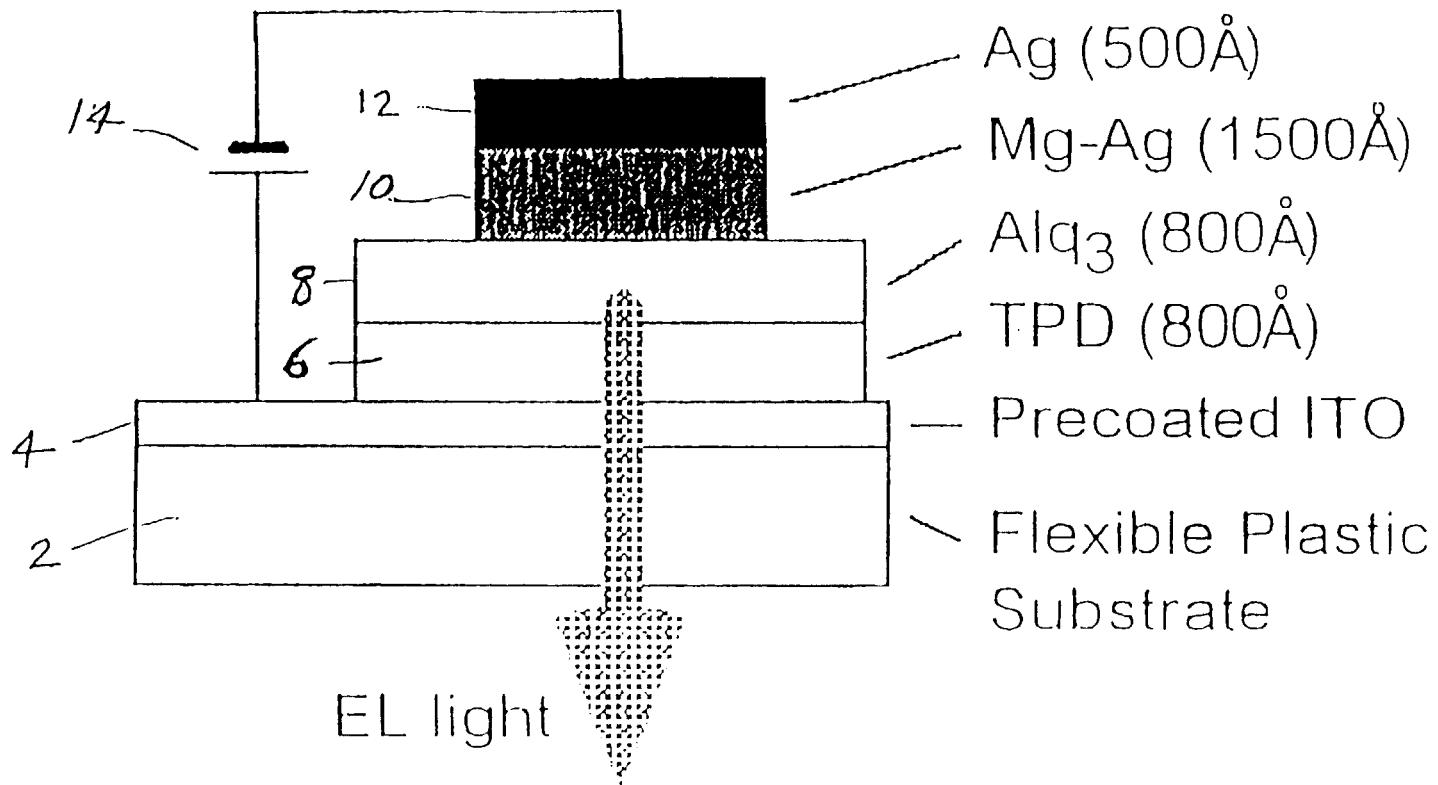
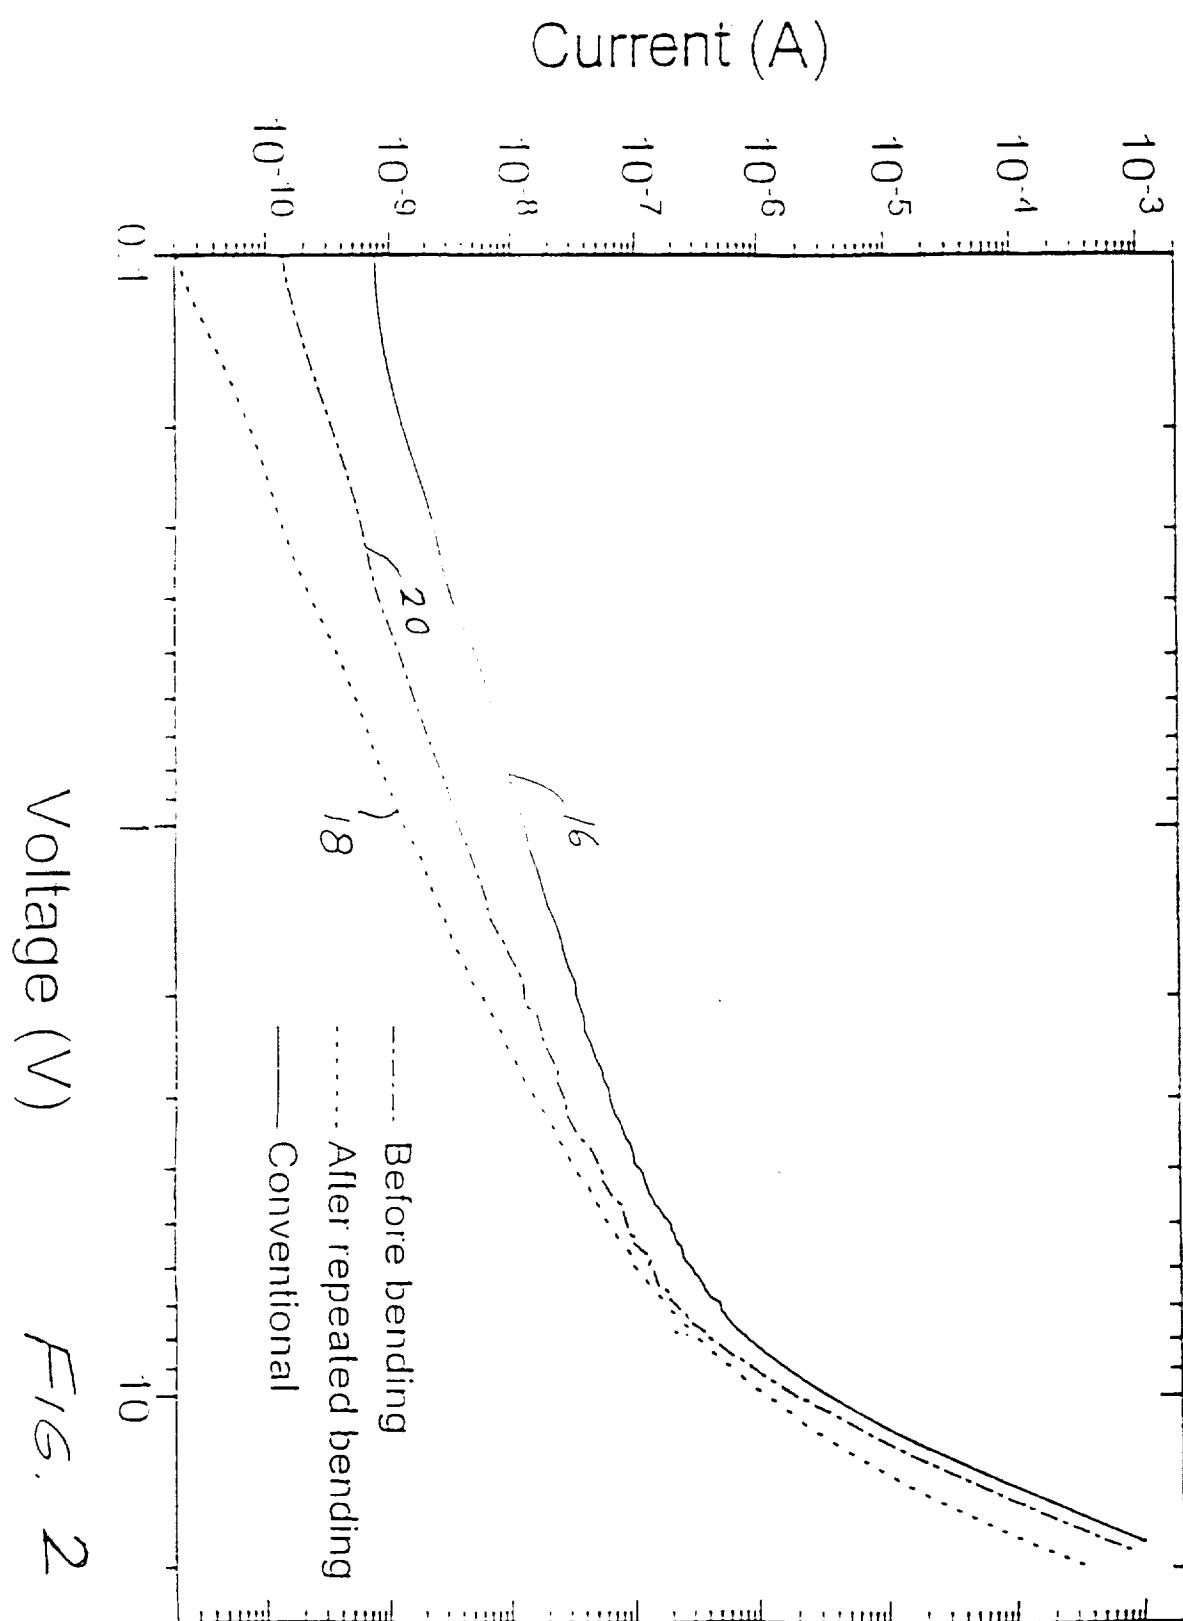


FIG. 1



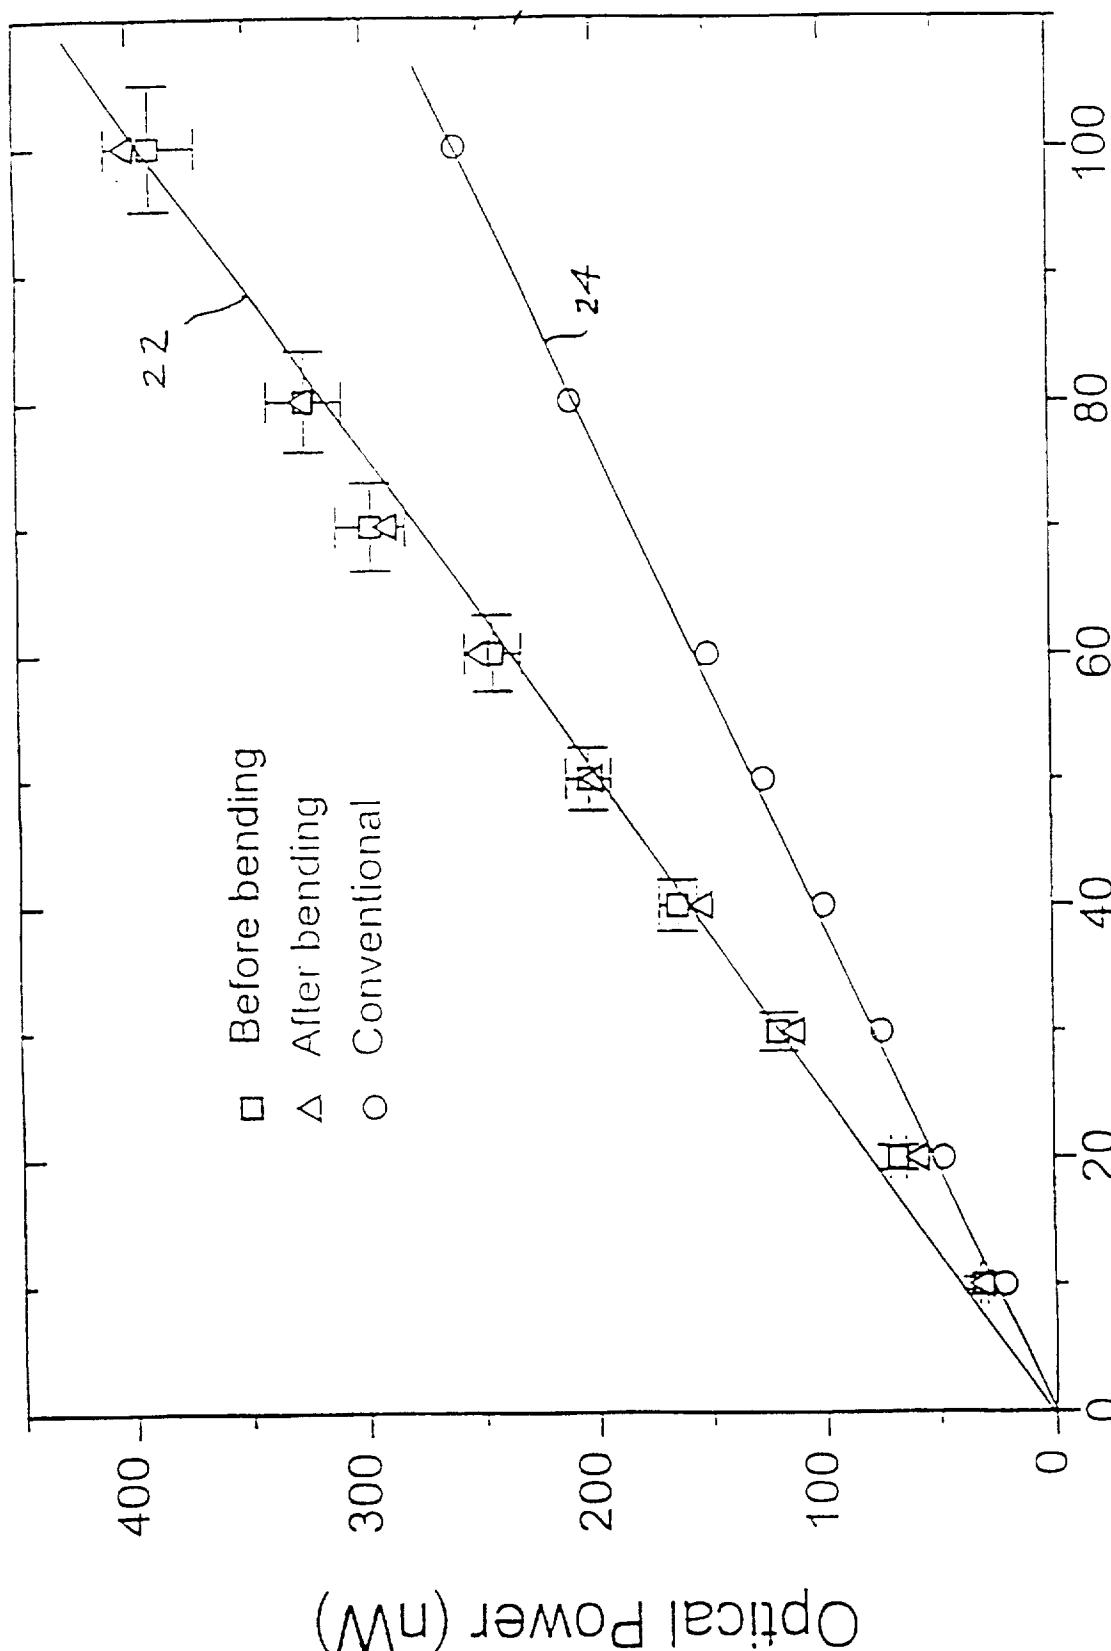


FIG. 3

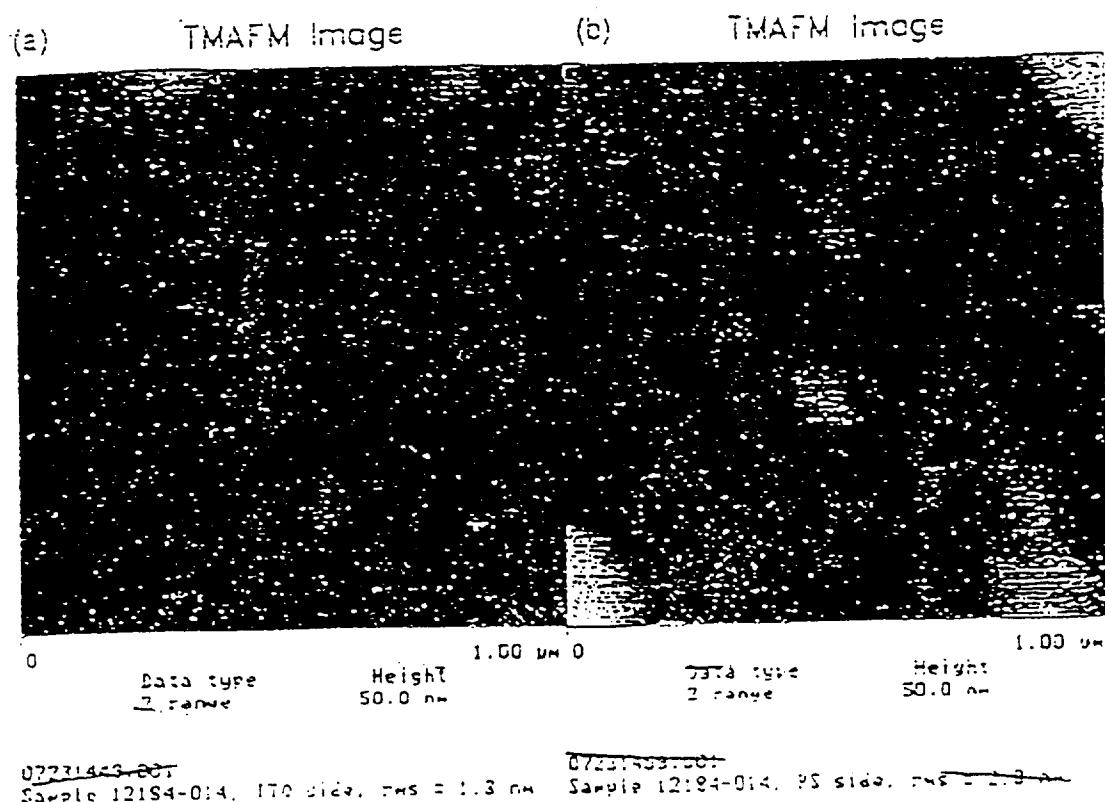


Fig. 4

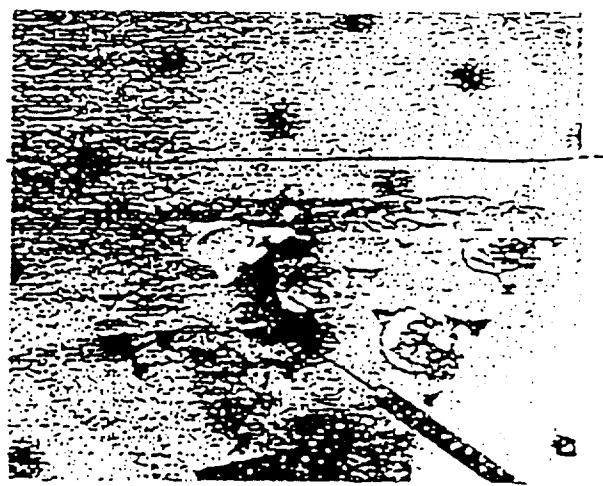


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/13451

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H01J 1/62

US CL :313/506, 511, 512

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 313/506, 511, 512

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

None

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

None

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,020,389 (DICKSON et al) 26 April 1977, figure 1.	

Further documents are listed in the continuation of Box C.

See patent family annex.

•	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"B"	earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z"	document member of the same patent family
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

06 OCTOBER 1997

Date of mailing of the international search report

28 NOV 1997

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

VIP PATEL

Telephone No. (703) 308-4900