

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 November 2007 (29.11.2007)

PCT

(10) International Publication Number
WO 2007/134382 A1

(51) International Patent Classification:

C21C 5/46 (2006.01) **C21B 7/10** (2006.01)
C21B 13/10 (2006.01) **C21C 5/42** (2006.01)

(21) International Application Number:

PCT/AU2007/000688

(22) International Filing Date: 18 May 2007 (18.05.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2006902687 18 May 2006 (18.05.2006) AU

(71) Applicant (for all designated States except US):
TECHNOLOGICAL RESOURCES PTY. LIMITED
[AU/AU]; 120 Collins Street, Melbourne, Victoria 3000 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MEDINA, Hector**
[AR/AU]; 16B Woodley Crescent, Melville, Western Australia 6165 (AU).

(74) Agent: **GRIFFITH HACK**; 509 St Kilda Road, Melbourne, Victoria 3004 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DIRECT SMELTING VESSEL AND COOLER THEREFOR

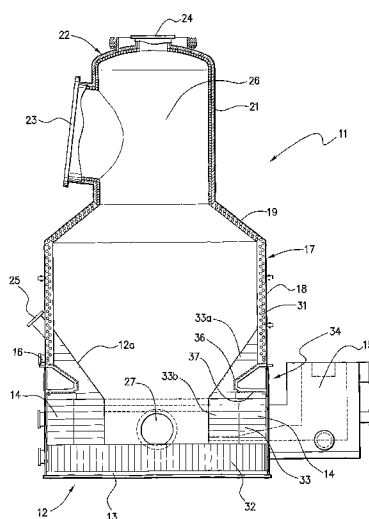

(57) Abstract: A direct smelting vessel and a hearth cooler element are disclosed. The vessel includes a refractory lined hearth. An inner surface of an upper part of the hearth extends upwardly and outwardly to side walls of the vessel. The upper part of the hearth incorporates a hearth cooler disposed outwardly behind the refractory lining of that part of the hearth and below the cooling panels on the side walls of the vessel. The hearth cooler comprises a plurality of cooler elements. Each cooler element has a hollow open-backed shell structure having base, top and side walls formed integrally in a cast structure and incorporating coolant flow passages.

WO 2007/134382 A1

- 1 -

DIRECT SMELTING VESSEL AND COOLER THEREFORTECHNICAL FIELD

5 The present invention relates to vessels used for performing direct smelting to produce molten metal in pure or alloy form from a metalliferous feed material such as ores, partly reduced ores and metal-containing waste streams.

10

 The present invention relates more particularly to coolers used as a part of the vessels

15

 A known direct smelting process, which relies on a molten metal layer as a reaction medium, and is generally referred to as the HIs melt process, is described in United States Patent 6267799 and International Patent Publication WO 96/31627 in the name of the applicant. The HIs melt process for producing molten iron as described in these publications comprises:

20

(a) forming a bath of molten iron and slag in a vessel;

25

(b) injecting into the bath:

(i) a metalliferous feed material, typically metal oxides; and

30

(ii) a solid carbonaceous material, typically coal, which acts as a reductant of the metal oxides and a source of energy; and

35

(c) smelting metalliferous feed material to metal in the metal layer.

- 2 -

The term "smelting" is herein understood to mean thermal processing wherein chemical reactions that reduce metal oxides take place to produce liquid metal.

5 The HIs melt process also comprises post-combusting reaction gases, such as CO and H₂ released from the bath, in the space above the bath with oxygen-containing gas and transferring the heat generated by the post-combustion to the bath to contribute to the thermal
10 energy required to smelt the metalliferous feed materials.

 The HIs melt process also comprises forming a transition zone above the nominal quiescent surface of the bath in which there is a favourable mass of ascending and
15 thereafter descending droplets or splashes or streams of molten metal and/or slag which provide an effective medium to transfer to the bath the thermal energy generated by post-combusting reaction gases above the bath.

20 In the HIs melt process the metalliferous feed material and solid carbonaceous material is injected into the metal layer through a number of lances/tuyeres which are inclined to the vertical so as to extend downwardly and inwardly through the side wall of the smelting vessel
25 and into the lower region of the vessel so as to deliver the solids material into the metal layer in the bottom of the vessel. To promote the post combustion of reaction gases in the upper part of the vessel, a blast of hot air, which may be oxygen enriched, is injected into the upper
30 region of the vessel through the downwardly extending hot air injection lance. Offgases resulting from the post-combustion of reaction gases in the vessel are taken away from the upper part of the vessel through an offgas duct.

35

 The HIs melt process enables large quantities of molten metal to be produced by direct smelting in a single

- 3 -

compact vessel. This vessel must function as a pressure vessel containing solids, liquids and gases at very high temperatures throughout a smelting operation which can be extended over a long period. As described in United States Patent 6322745 and International Patent Publication WO 00/01854 in the name of the applicant the vessel may consist of a steel shell with a hearth contained therein formed of refractory material and side walls extending upwardly from the sides of the hearth and provided with water cooled panels. The Hismelt Process is turbulent and this results in refractory erosion of the upper part of the hearth due to chemical attack and possibly physical erosion by slag and hot metal washing and splashing against the refractory material in the upper part of the hearth. This erosion is greater than is typically experienced in the hearths of blast furnaces in which the hot metal and slag is relatively quiescent.

The present invention enables a significant reduction of such refractory erosion of the hearth.

DISCLOSURE OF THE INVENTION

According to the invention there is provided a direct smelting vessel including a refractory lined hearth, side walls extending upwardly from the hearth, and a plurality of cooling panels disposed around the side walls so as to form an interior lining on those side walls, wherein an inner surface of an upper part of the hearth extends upwardly and outwardly to the side walls of the vessel and said upper part of the hearth incorporates a cooler disposed outwardly behind the refractory lining of that part of the hearth and below the cooling panels on the side walls of the vessel.

The vessel may be used, by way of example, for producing iron and/or ferro alloys by a molten bath-based

- 4 -

direct smelting process and it may further include a roof of the vessel, devices for tapping molten metal and slag from the vessel, lances for supplying solid feed materials including solid ferruginous material and carbonaceous
5 material into the vessel and lances for supplying an oxygen-containing gas into the vessel to post-combust gaseous reaction products generated in the direct smelting process.

10 The hearth cooler may have a cooling surface extending upwardly and outwardly immediately behind the refractory lining of the upper part of the hearth.

15 More specifically a bottom part of the hearth and the side walls of the vessel may be generally cylindrical, the cooling surface of the cooler may extend upwardly and outwardly and the refractory lining of the upper part of the hearth may overlay that cooling surface.

20 The refractory lining of the upper part of the hearth may be formed by courses of refractory bricks laid over the cooler.

25 Below the upper part of the hearth, the hearth lining may be formed by cylindrical courses of refractory bricks.

30 The cooler may be formed by a plurality of cooler elements disposed in an array extending circumferentially around the upper part of the hearth.

35 The cooler elements may be connected to an outer shell of the side wall of the vessel and consequently are not dependent on an underlying part of the hearth to support the elements.

Each cooler element may be comprised of a hollow

- 5 -

open-backed cast shell structure having base, top, front and side walls formed integrally together in the cast shell structure and incorporating coolant flow passages for flow of coolant therethrough, with the top wall
5 comprising a solid surface formed at least in part as a sloping surface.

The top wall of each cooler element may have an surface that inclines downwardly as the sloping surface to
10 the front wall of the cast shell structure. This sloping surface and a surface of the front wall define a front face of the element.

The vertical extent of the front wall of each
15 cooling element may be less than the vertical extent of the sloping surface of the top wall of the element.

The top wall of each cooler element may have a section that is parallel to the base wall and extends from
20 the rear of the cooler element and defines a flat land.

The size of the land of each cooler element may be selected so that there is a transition to the downwardly sloping front face of the element at a point
25 that is adjacent a front wall of the cooling panels that form part of the side walls of the vessel. That is, the radial extent of the land may be equal to the radial extent of the cooling panels that sit above the land. This selection minimises the possibility of a step forming
30 at the base of the cooling panels which may allow accretions to form a dam that might trap hot metal adjacent the cooling panel, the cooling element or the vessel shell. This is of particular concern where the cooling panels are of a type formed from a serpentine
35 arrangement of pipes with apertures therebetween.

The top wall may be stepped such that outer

- 6 -

surface has a series of stepped tier surfaces extending across the cooler element to support refractory bricks of the refractory lining of the upper part of the hearth.

5 The side walls of each cooler element may provide a solid surface.

 The side walls of each cooler element may be convergent toward the front wall of the element.

10

 More specifically the cooler may be formed as a ring with the cooler elements each shaped as a segment of that ring with their side walls extending radially of the ring and their front walls curved to extend

15

circumferentially of the ring.

 The side walls of each cooler element may be formed with flat surfaces.

20

 The cooler elements may be positioned in side by side relationship with a small clearance between adjacent elements.

 The clearance between adjacent cooling elements

25

may be 20 mm or less.

 Preferably the clearance is 15 mm or less.

 More preferably the clearance is in the range of

30

5-20 mm.

 The cooler elements may have coolant inlet and outlet connectors for flow of coolant to and from the coolant flow passages.

35

 The coolant flow passages may be formed by tubes cast into the shell structure of each coolant element and

- 7 -

extending between inlets and outlets at the open back of the shell.

5 The invention further provides a cast copper or a copper alloy cooler element for cooling refractory material in a hearth of a smelting vessel, comprising a hollow open-backed shell structure having base, top, front and side walls formed integrally in a cast structure and incorporating coolant flow passages therein formed by
10 tubes cast into the shell structure and extending between inlets and outlets at the open back of the element, with the top wall providing a solid surface formed at least in part as a sloping surface.

15 The tubes that form the coolant flow passages may be disposed in an array extending throughout the base, top, front and side walls of the cooler element.

The coolant flow passages may be in the form of
20 at least two continuous tubes which follow serpentine paths extending through the base, top, front and side walls.

The serpentine paths are preferably adjacent
25 serpentine paths.

The adjacent serpentine paths may be displaced with respect to each other to provide a substantially even distribution of tubes through at least the front and base
30 walls of the cooling element.

The tubes that form the coolant flow passages may be structured so that there is no doubling back of the tubes on the base wall.

35

Each tube that forms one coolant flow passage may be structured so that coolant can flow in one flow path

- 8 -

through the top wall and the front wall and then in a reverse flow path through the side walls and the base wall to an outlet or vice versa.

5 Preferably the flow paths of each tube follow a serpentine path across and adjacent to the top, front, side, and base walls of the cooling element.

10 Preferably the flow path of each tube through the base wall and the side walls is a sequential path between a front of the cooling element and a rear of the cooling element passing through the base wall and the side walls.

15 More preferably the sequential path is a serpentine path that passes repeatedly through each of the base wall and the side walls.

20 In an another, although not the only other, embodiment, one tube that forms one coolant flow passage may be structured so that coolant flows in a serpentine path from an inlet of the flow passage down the top wall and the front wall and then back up the front wall and the top wall to an outlet. In addition, another tube that forms another coolant flow passage may be structured so
25 that coolant flows in a serpentine path from an inlet of the flow passage along the side walls and the base wall to the front of the cooling element and then back along the side walls and the base wall to an outlet.

30 The top and front walls may form one generally inclined surface that slopes downwardly from the rear of the cooler element to the base wall at the front of the cooler element and defines a front face of the element.

35 The top wall may have a section that is parallel to the base wall and extends from the rear of the cooler element and defines a flat land.

- 9 -

The inlets and outlets for the coolant flow passages may initially pass through the parallel section of the top wall.

5

There may be coolant inlet and outlet connections for flow of coolant to and from the tubes that form the coolant flow passages.

10

The sloping surface of the top wall may be stepped such that its outer surface has a series of stepped tier surfaces extending across the element.

The tiers may be sized to separately receive a single row of refractory bricks resting on the tier.

15

The front face of each step in an upper surface on the top wall may have a linear groove extending across the cooling element.

20

An underside of the base wall may be provided with a series of linear grooves extending across the cooling element.

25

The cooling element may be shaped as a ring segment with convergent side walls such that a plurality of such elements disposed side by side can form a circular ring cooler with the bases of the elements forming a flat ring base, the top walls of the elements forming an upwardly and outwardly inclined ring surface having horizontal flat tiers and the side walls of the elements extending radially of the ring.

30

The invention further provides a cooling element for location in a refractory lined hearth of a direct smelting vessel, the cooling element comprising a hollow open-backed shell structure having water cooled base, top,

35

- 10 -

front and side walls formed integrally in a cast structure, with the cooling element being adapted for co-location with other cooling elements in the hearth with the water cooled side walls of the cooling elements
5 providing water cooling of clearance gaps between adjacent cooling elements.

The use of water cooled side walls enables a simple and robust design utilising vertical, preferably
10 flat, side walls that are substantially free of interlocking or other sealing between adjacent elements that might otherwise be required to prevent molten metal penetrating any such gaps and contacting the shell. Such concerns are exacerbated in a slag zone of direct smelting
15 process with an agitated and well mixed bath of molten metal and slag.

The clearance gaps between adjacent cooling elements may be 20 mm or less.

20

Preferably the clearance gaps are 15 mm or less.

More preferably the clearance gaps are in the range of 5-20 mm.

25

The invention further provides a cooling element for location in a refractory lined hearth of a direct smelting vessel having water cooled panels located on a side wall of said vessel immediately above said cooling
30 element, the cooling element comprising a hollow open-backed shell structure having water cooled base, top, front and side walls formed integrally in a cast structure, the top wall comprising a substantially horizontal section extending from a rear of the cooling
35 element, the top wall further comprising a sloping surface extending downwardly from the horizontal section to the front wall, the horizontal section extending radially

- 11 -

towards the front wall and transitioning into said sloping section at a point that, when installed in said vessel, is located adjacent a front face of a water cooled panel located immediately above the horizontal section of the top wall.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the invention may be more fully explained one particular embodiment of a direct smelting vessel and a cooler element of a hearth cooler will be described in some detail with reference to the accompanying drawings in which:

Figure 1 is a vertical cross section through the embodiment of the direct smelting vessel provided with a hearth cooler in accordance with the present invention;

Figure 2 is a plan view of the vessel shown in Figure 1;

Figure 3 is an enlargement of a lower part of the vessel of Figure 1;

Figure 4 is a perspective view of the embodiment of the cooler element of the hearth cooler;

Figure 5 is a plan view of the hearth cooler element;

Figure 6 is a vertical cross-section through the cooler element;

Figure 7 is a diagrammatic representation of the cooler element showing the configuration of coolant flow passages formed within it, as viewed from the rear of the element; and

- 12 -

Figure 8 is another diagrammatic representation of the cooler element showing the configuration of coolant flow passages formed within it, as viewed from the front of the element.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figures 1 to 6 of the drawings illustrate a direct smelting vessel suitable for operation of the HIs melt process as described in United States Patent 6267799 and International Patent Publication WO 96/31627. The metallurgical vessel is denoted generally as 11 and has a hearth 12 which includes a base 13 and sides 14 formed of refractory bricks, a forehearth 15 for discharging molten metal continuously and a tap hole 16 for discharging molten slag.

The base of the vessel is fixed to the bottom end of an outer vessel shell 17 made of steel and comprises a cylindrical main barrel section 18, an upwardly and inwardly tapering roof section 19, and an upper cylindrical section 21 and lid section 22 defining an offgas chamber 26. Upper cylindrical section 21 is provided with a large diameter outlet 23 for offgases and the lid 22 has an opening 24 in which to mount a downwardly extending gas injection lance (not shown) for delivering a hot air blast into the upper region of the vessel. The main cylindrical section 18 of the shell has eight circumferentially spaced tubular mountings 25 through which to extend solids injection lances (not shown) for injecting iron ore, carbonaceous material, and fluxes into the bottom part of the vessel.

In use the vessel contains a molten bath of iron and slag and the upper part of the vessel must contain hot gases under pressure and extremely high temperatures of

- 13 -

the order of 1200°C. The vessel is therefore required to operate as a pressure vessel over long periods and it must be of robust construction and completely sealed. Access to the interior of the vessel is extremely limited, access essentially being limited on shut down through lid opening 24 and reline access doors 27.

Vessel shell 17 is internally lined with a set of cooling panels 31 through which cooling water can be circulated and these cooling panels are coated with refractory material to provide a water cooled internal refractory lining for the vessel above the smelting zone. It is important that the refractory lining be virtually continuous and that all of the refractory material be subject to cooling as uncooled refractory will be rapidly eroded. The panels are formed and attached to the shell in such a way that they can be installed internally within the shell 17 and can be removed and replaced individually on shut down without interfering with the integrity of the shell. The construction and installation of panels 31 may be carried out in the manner fully disclosed in US Patent 6,267,799 and International Patent Publication WO 96/31627.

The base 13 of hearth 12 of the vessel is formed by deep refractory bricks 32 and the side 14 of the hearth is lined with successive courses of refractory bricks 33. The upper part 12a of the hearth tapers upwardly and outwardly to the vessel wall 18. In use of the vessel this part of the hearth is exposed to splashing with molten metal and slag. In accordance with the present embodiment this part of the hearth incorporates a cooler denoted generally as 34 disposed outwardly behind the bricks 33a lining the upper part of the hearth and disposed below the lowermost part of the cooling panels 31 on the side walls of the vessel.

- 14 -

Cooler 34 is formed by a series of individual cooler panel elements 35 disposed in an array extending circumferentially in the upper part of the hearth. It has a stepped upper cooling surface 36 extending upwardly and outwardly immediately behind the refractory lining 33a of the upper part of hearth 12 and a bottom flat cooling surface 37 resting on refractory bricks of the cylindrical courses of bricks 33b lining the side of hearth 12 below the upper part of the hearth.

Each cooler element 35 is self-supporting with respect to the underlying refractory bricks of the hearth 12. Specifically, each cooler element 35 is mounted to the outer vessel shell 17, as described hereinafter. It is noted that, whilst the cooler elements 35 are not supported significantly by the refractory bricks, the cooler elements nevertheless have the effect of assisting retaining the refractory bricks in place and reducing the tendency of the bricks to floating within the molten bath.

As most clearly seen in Figures 4 to 6, each cooling element 35 of cooler 34 comprises a hollow open backed cast shell structure 41 having a base wall 42 a top wall 43, a pair of side walls 44, and a front wall 45. The base wall 42 and the side walls 44 are flat with continuous outwardly facing surfaces whereas the top wall 43 inclines downwardly to the front wall 45 of the shell structure 41. Top wall 43 may be stepped such that its upper outwardly facing surface, which is a continuous surface, has a series of stepped tier surfaces 46 extending across the element to support refractory bricks 47 of the refractory lining 33a of the upper part of the hearth 12.

The shell 41 of each cooler element 45 is cast as a unitary structure in a metal of high thermal conductivity such as copper or a copper alloy. A pair of

- 15 -

copper or nickel (or alloy) tubes 48a, 48b are cast within this structure so as to form a series of coolant flow passages disposed in an array extending throughout the base, top and side walls 42, 43, 44, respectively, of the cooler element. The casting method disclosed in US patent 6,280,681 is suitable for forming the cooler element 45.

Each tube 48a, 48b is formed initially as a straight length of tube and then bent into a required serpentine arrangement, discussed further below, and positioned in a mould in which molten metal is subsequently poured to form the cast structure. The arrangement of tubes 48a, 48b shown in the Figures is typical of a number of different arrangements that could be used to achieve an appropriate flow of coolant (generally but not necessarily water) through the walls of the cooler element 35.

With reference to Figures 7 and 8, the tubes 48a, 48b forming the coolant flow passages extend from the upper part of the open back of the cooler element 35 and are fitted with inlet connectors 61 and outlet connectors 51 for flow of coolant to and from the coolant flow passages defined by the tubes 48a, 48b.

Specifically, the inlet ends of the tubes 48a, 48b extend outwardly to the left side wall 44 as shown in Figures 4, 7, and 8, and then forwardly a short distance in the plane of the top wall 43 and then across the top wall 43 to the right side wall 44 as shown in the Figures. This basic arrangement of the tubes 48a, 48b is repeated along the top wall 43 and down the front wall 45 until the tubes 48a, 48b reach the base wall 42 at the front of the cast shell structure 41. The tubes 48a, 48b then extend in a return path to the outlet connectors 51 in the open back of the cooling element 35. Specifically, the tubes 48a, 48b extend rearwardly a short distance in the plane

- 16 -

of one of the side walls 44, across the base wall 42 to the other side wall 44, vertically up to the top wall 43, rearwardly a short distance in the plane of the side wall 44, vertically downwardly to the base wall 42, and across
5 the base wall 42 to the other side wall. The basic arrangement is then successively repeated until the tubes 48a, 48b reach the outlet connectors 51.

A screw threaded stud 40 projects outwardly from
10 the upper part of the open back of each cooler element 35 between the respective inlet and outlet connectors 51. The cooler elements are firmly fastened in position by resting their lower back parts on steel foot plates 50 welded to the outer steel shell 17 of vessel 11, passing
15 the threaded studs 40 through holes in shell 17 and completing the fastenings by fitting nuts 60 to the studs. In this way, the cooler elements 35 are supported by the outer steel shell 17 rather than by the underlying refractory bricks in the hearth 12. Hence, it is possible
20 to replace the refractory bricks without having to also remove the cooler elements 35.

Each cooler element 35 is shaped as a ring segment with the side walls 41 convergent and the cooler
25 is formed by a plurality of those elements disposed side by side to form a circular ring cooler 34 with the base walls 42 of the cooler elements 35 forming a flat ring base, the top walls 43 of the cooler elements 35 forming an upwardly and outwardly inclined ring surface and the
30 side walls 44 of the cooler elements 35 extending radially of the ring.

The inner and outer margins of each cooler element 35 are curved to extend circumferentially of the
35 ring. Where steps are located in the top wall 43 they may also be curved so that the flat tier surfaces 47 of the cooler elements 35 together form a series of circular

- 17 -

tiers extending around the circular half of the vessel.

The vertical step surfaces between the upper tier surfaces 46 are provided with linear grooves 52 which
5 extend across each element 35 and in the assembled cooler line up to form annular grooves into which a flexible castable material can be packed to form seals between the stepped surface of the cooler and the refractory bricks
47. Additional groove 53, 54 are formed in the flat upper
10 and lower outwardly facing surfaces of each cooler element 35 to extend across the cooler element 35 and to receive castable packing material to abut courses of refractory bricks immediately above and immediately below the cooler
34.

15 In the illustrated embodiment of the invention the refractory lining of the upper part of the hearth 12 is efficiently cooled and supported by the cooler 34 and this significantly reduces the rate of erosion of the
20 refractory material. Operation of the cooler 34 also causes slag to freeze onto its surface if all of the refractory is eroded away. The incorporation of the cooler into the upper part of the hearth 12 prevents slag and molten metal from washing in behind or underneath the
25 bottom row of cooling panels 31 as can occur in the event that the refractory in the slag zone were to erode completely.

The described embodiment of the invention has
30 been advanced by way of example only and it is to be understood that the invention is not limited to the constructional detail of that embodiment.

By way of example, although the cooler elements
35 35 with stepped upper walls forming upright wall sections at the front margins of those elements is one option, another option is to modify this construction such that

- 18 -

the top walls 43 meet the base walls at an acute angle or join with upright front walls at the front parts of those elements. The top wall 43 could be formed without steps and with a generally conically curved upper (although
5 still retaining annular grooves into which flexible castable material can be packed) and the overlaying refractory bricks could thus be shaped to smoothly abut that upper surface. This option is schematically shown in Figure 7. It is to be understood that this and many other
10 variations will fall within the scope of the invention.

Further, it is understood that while the cooling elements 35 are cast with an open-backed shell structure, the addition of a backing plate, whether fixed or
15 otherwise does not limit the invention.

Further, the present invention is not confined to the particular arrangement of tubes 48a, 48b in the cooling element 35 shown in the Figures. In an
20 alternative, although not the only other possible alternative, arrangement, the inlet end of one of the tubes extends outwardly to the right side wall 44 as shown in Figures 4, 7, and 8, and then vertically downwardly to the base wall 42, across the base wall 42 to the left side
25 wall 44 as shown in the Figures, vertically upwardly to the top wall 43, forwardly and then vertically downwardly in the plane of the side wall 44 to the base wall 41, and then across the base wall 42 to the right side wall 44 as shown in the Figures. This basic arrangement of the tube
30 is repeated until the tube 48a reaches the front of the cast shell structure 41. The basic arrangement is then reversed and successively repeated until the other tube reaches the outlet connection 51. In addition, the inlet end of the tube extends outwardly to the to the left side
35 wall 44 as shown in Figures 4, 7, and 8, and then forwardly a short distance in the plane of the top wall 43 and then across the top wall 43 to the right side wall 44

- 19 -

as shown in the Figures. This basic arrangement of the tube is repeated along the top wall 43 and down the front wall 45 until the tube reaches the base wall 42 at the front of the cast shell structure 41. The basic
5 arrangement is then reversed and successively repeated until the tube reaches the outlet connector 51.

- 20 -

CLAIMS:

1. A direct smelting vessel including a refractory lined hearth, side walls extending upwardly from the hearth, and a plurality of cooling panels disposed around the side walls so as to form an interior lining on those side walls, wherein an inner surface of an upper part of the hearth extends upwardly and outwardly to the side walls of the vessel and said upper part of the hearth incorporates a cooler disposed outwardly behind the refractory lining of that part of the hearth and below the cooling panels on the side walls of the vessel.
2. The vessel defined in claim 1 wherein the hearth cooler has a cooling surface extending upwardly and outwardly immediately behind the refractory lining of the upper part of the hearth.
3. The vessel defined in claim 2 wherein a bottom part of the hearth and the side walls of the vessel are generally cylindrical, the cooling surface of the cooler extends upwardly and outwardly and the refractory lining of the upper part of the hearth overlays that cooling surface.
4. The vessel defined in claim 3 wherein the refractory lining of the upper part of the hearth is formed by courses of refractory bricks laid over the cooler.
5. The vessel defined in claim 4 wherein, below the upper part of the hearth, the hearth lining is formed by cylindrical courses of refractory bricks.
6. The vessel defined in any one of the preceding claims wherein the cooler is formed by a plurality of cooler elements disposed in an array extending

- 21 -

circumferentially around the upper part of the hearth.

7. The vessel defined in claim 6 wherein each cooler element is connected to an outer shell of the side wall of the vessel and consequently is not dependent on an underlying part of the hearth to support the element.

8. The vessel defined in claim 6 or claim 7 wherein each cooler element comprises a hollow open-backed cast shell structure having base, top, front and side walls formed integrally together in the cast shell structure and incorporating coolant flow passages for flow of coolant therethrough, with the top wall comprising a solid outwardly facing surface formed at least in part as a sloping surface.

9. The vessel defined in claim 8 wherein the top wall of each cooler element has a surface that inclines downwardly as the sloping surface to the front wall of the cast shell structure.

10. The vessel defined in claim 9 wherein the top wall of each cooler element has a section that is parallel to the base wall and extends from the rear of the cooler element and defines a flat land.

11. The vessel defined in claim 10 wherein the size of the land of each cooler element is selected so that there is a transition to the downwardly sloping front face of the element at a point that is adjacent a front wall of the cooling panels that form part of the side walls of the vessel.

12. The vessel defined in any one of claims 8 to 11 wherein the top wall is stepped such that outer surface has a series of stepped tier surfaces extending across the cooler element to support refractory bricks of the

- 22 -

refractory lining of the upper part of the hearth.

13. The vessel defined in any one of claims 8 to 12 wherein the side walls of each cooler element are
5 convergent toward the front of the element.

14. The vessel defined in any one of claims 8 to 13 wherein the cooler is formed as a ring with the cooler elements each shaped as a segment of that ring with their
10 side walls extending radially of the ring and their front parts curved to extend circumferentially of the ring.

15. The vessel defined in any one of claims 8 to 14 wherein the side walls of each cooler element are formed
15 with flat outwardly facing surfaces.

16. The vessel defined in any one of claims 8 to 15 wherein the cooler elements are positioned in side by side relationship with a small clearance between adjacent
20 elements.

17. The vessel defined in claim 16 wherein the clearance between adjacent cooling elements is 20 mm or less.
25

18. The vessel defined in claim 16 wherein the clearance is 15 mm or less.

19. The vessel defined in claim 16 wherein the
30 clearance is in the range of 5-20 mm.

20. The vessel defined in any one of claims 8 to 19 wherein the cooler elements have coolant inlet and outlet connectors for flow of coolant to and from the coolant
35 flow passages.

21. The vessel defined in claim 20 wherein the

- 23 -

coolant flow passages are formed by tubes cast into the shell structure of each coolant element and extending between inlets and outlets at the open back of the shell.

- 5 22. A copper or copper alloy cooler element for cooling refractory material in a hearth of a smelting vessel, comprising a hollow open-backed shell structure having base, top, front and side walls formed integrally in a cast structure and incorporating coolant flow
10 passages therein formed by tubes cast into the shell structure and extending between inlets and outlets at the open back of the element, with the top wall providing a solid outwardly facing surface formed at least in part as a sloping surface.
- 15 23. The cooler element defined in claim 22 wherein the tubes that form the coolant flow passages are disposed in an array extending throughout the base, top, front and side walls of the cooler element.
- 20 24. The cooler element defined in claim 22 or claim 23 wherein the coolant flow passages are in the form of at least two continuous tubes which follow serpentine paths extending through the base, top, front and side walls.
- 25 25. The cooler element defined in claim 24 wherein the serpentine paths are adjacent serpentine paths.
- 30 26. The cooler element defined in claim 24 or claim 25 wherein each tubes is structured so that coolant can flow in one flow path through the top wall and the front wall and then in a return flow path through the side walls and the base wall to an outlet or vice versa.
- 35 27. The cooler element defined in claim 26 wherein the flow paths of each tube follow a serpentine path across and adjacent to the top, front, side, and base

- 24 -

walls of the cooling element.

28. The cooler element defined in claim 27 wherein the flow path of each tube through the base wall and the side walls is a sequential path between a front of the cooling element and a rear of the cooling element passing through the base wall and the side walls.

29. The cooler element defined in claim 28 wherein the sequential path is a serpentine path that passes repeatedly through each of the base wall and the side walls.

30.. The cooler element defined in any one of claims 22 to 29 wherein the top and front walls form one generally inclined outwardly facing surface that slopes downwardly from the rear of the cooler element to the base wall at the front of the cooler element and defines a front face of the element.

31. The cooler element defined in claim 30 wherein the top wall has a section that is parallel to the base wall and extends from the rear of the cooler element and defines a flat land.

32. The cooler element defined in claim 30 or claim 31 wherein the sloping surface of the top wall is stepped such that its outer surface has a series of stepped tier surfaces extending across the element.

33. The cooler element defined in claim 32 wherein the tiers are sized to separately receive a single row of refractory bricks resting on the tier.

34. The cooler element defined in claim 32 or claim 33 wherein the front face of each step in an upper surface on the top wall has a linear groove extending across the

- 25 -

cooling element.

35 The cooler element defined in any one of claims
22 to 34 wherein the cooling element is shaped as a ring
5 segment with convergent side walls such that a plurality
of such elements disposed side by side can form a circular
ring cooler with the bases of the elements forming a flat
ring base, the top walls of the elements forming an
upwardly and outwardly inclined ring surface having
10 horizontal flat tiers and the side walls of the elements
extending radially of the ring.

36. A cooling element for location in a refractory
lined hearth of a direct smelting vessel, the cooling
15 element comprising a hollow open-backed shell structure
having water cooled base, top, front and side walls formed
integrally in a cast structure, with the cooling element
being adapted for co-location with other of the cooling
elements in the hearth with the water cooled side walls of
20 the cooling elements providing water cooling of clearance
gaps between adjacent cooling elements.

37. A cooling element for location in a refractory
lined hearth of a direct smelting vessel having water
25 cooled panels located on a side wall of said vessel
immediately above said cooling element, the cooling
element comprising a hollow open-backed shell structure
having water cooled base, top, front and side walls formed
integrally in a cast structure, the top wall comprising a
30 substantially horizontal section extending from a rear of
the cooling element, the top wall further comprising a
sloping surface extending downwardly from the horizontal
section to the front wall, the horizontal section
extending radially towards the front wall and
35 transitioning into said sloping section at a point that,
when installed in said vessel, is located adjacent a front
face of a water cooled panel located immediately above the

- 26 -

horizontal section of the top wall.

1/6

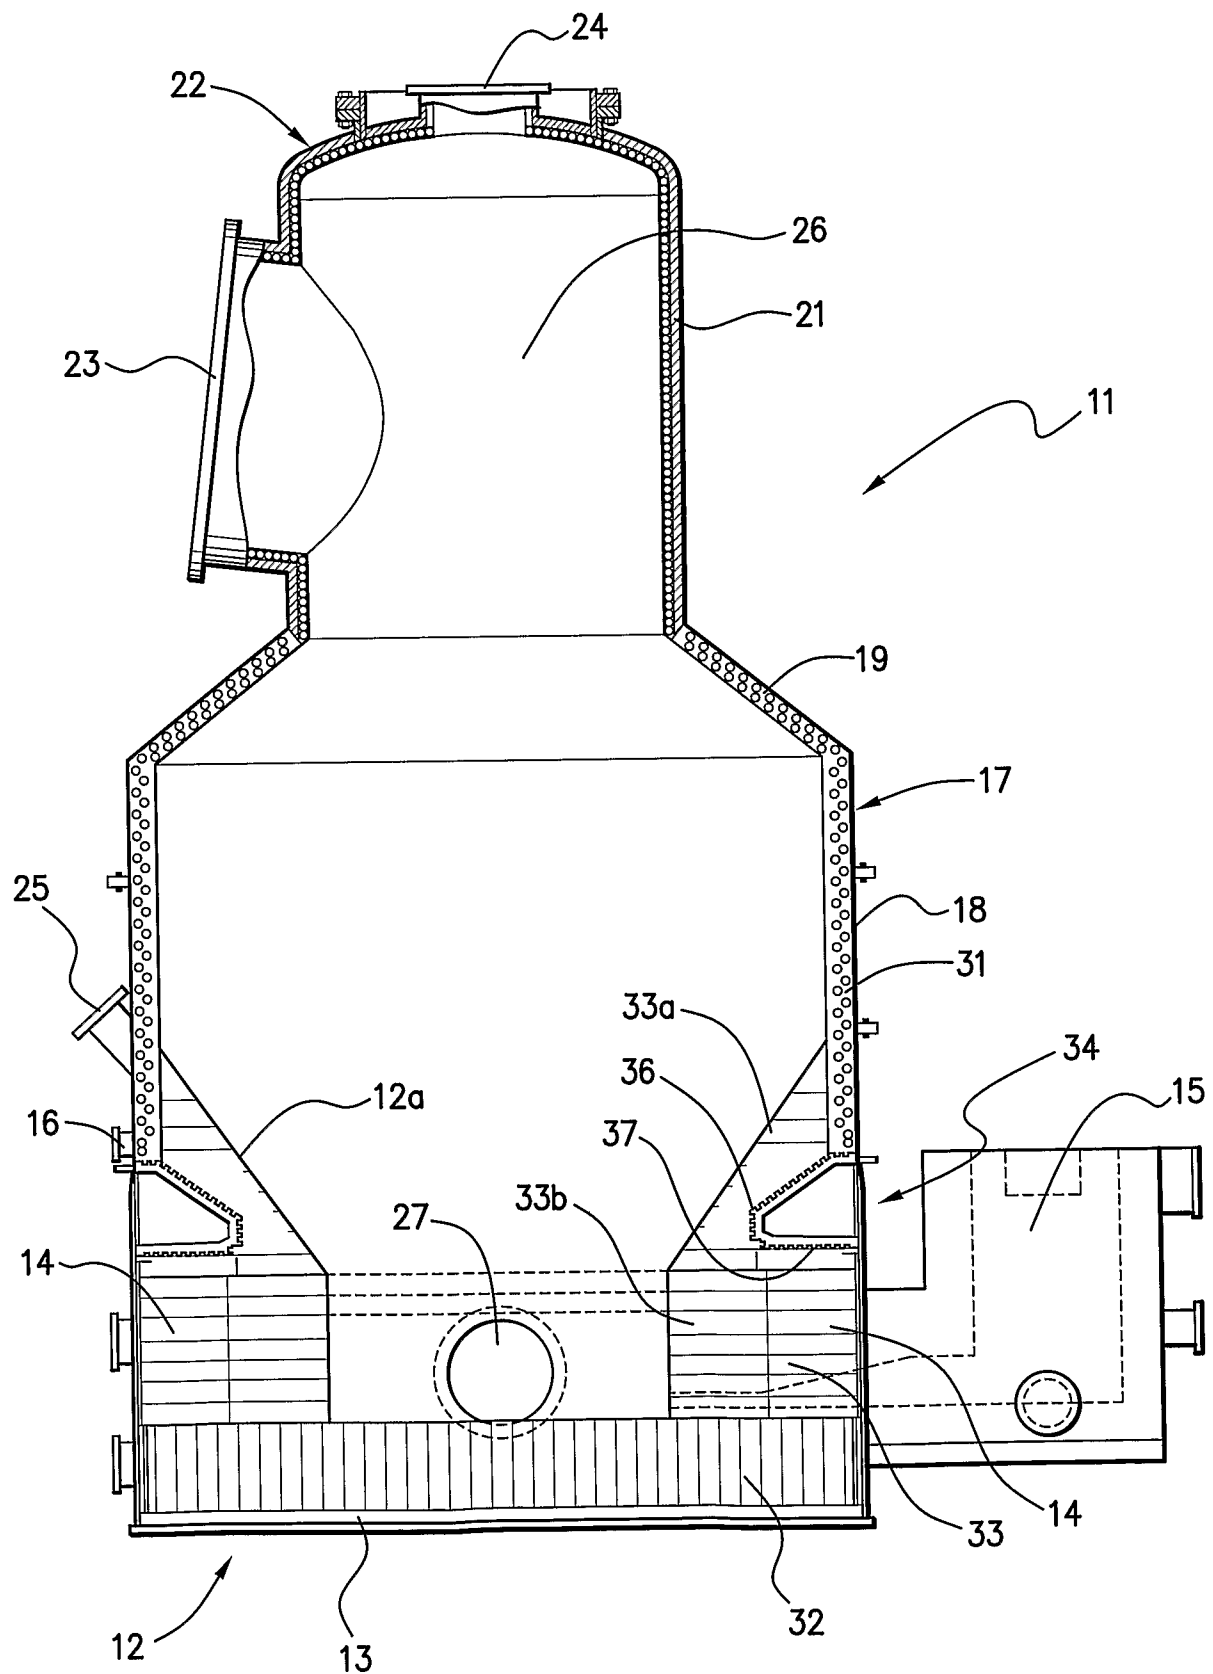


FIG. 1

2/6

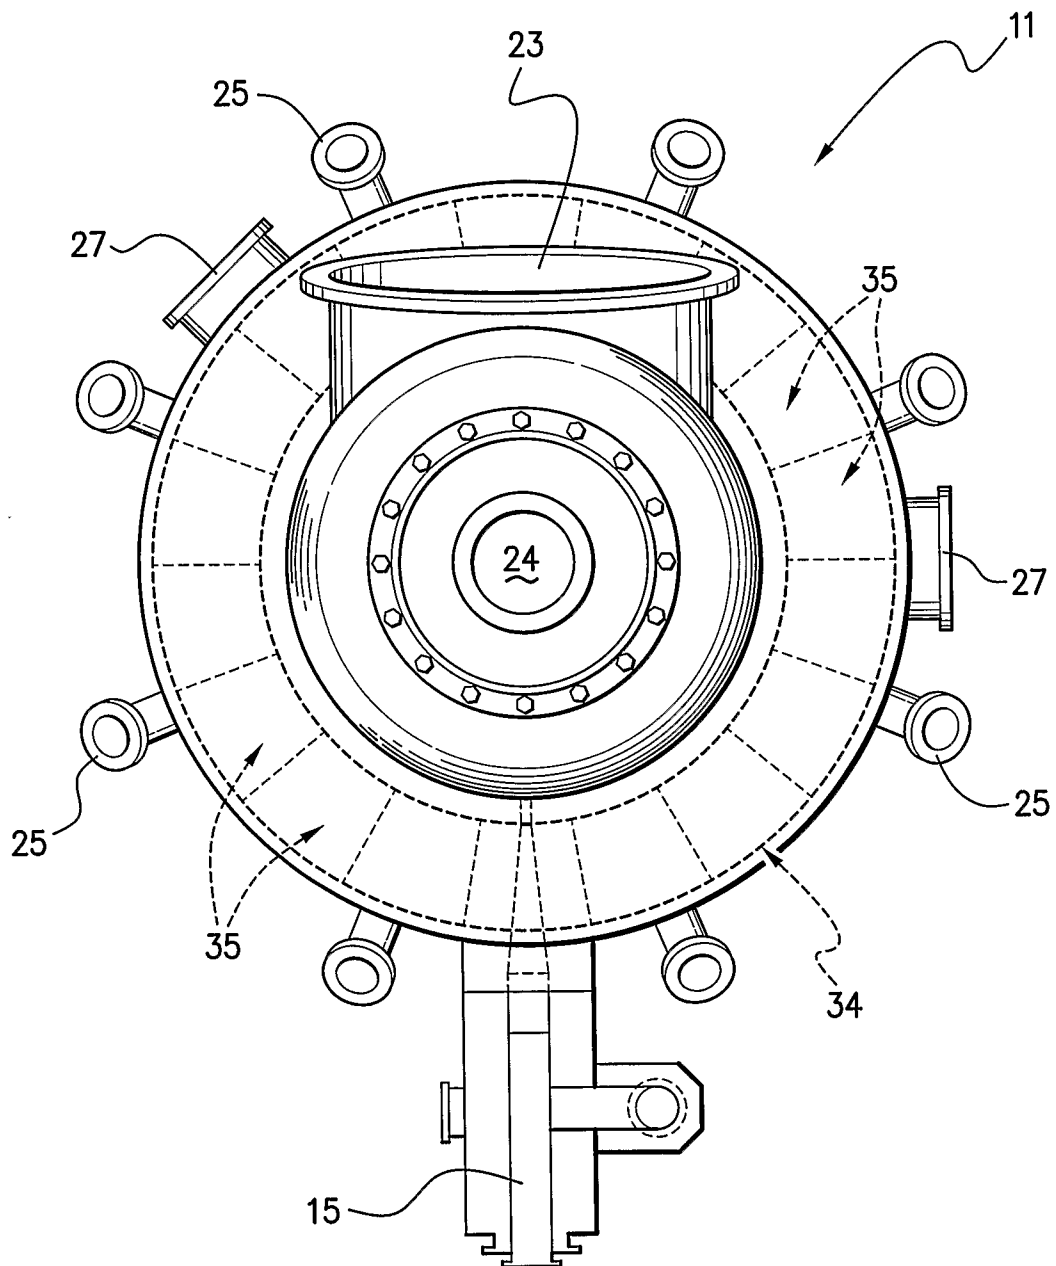
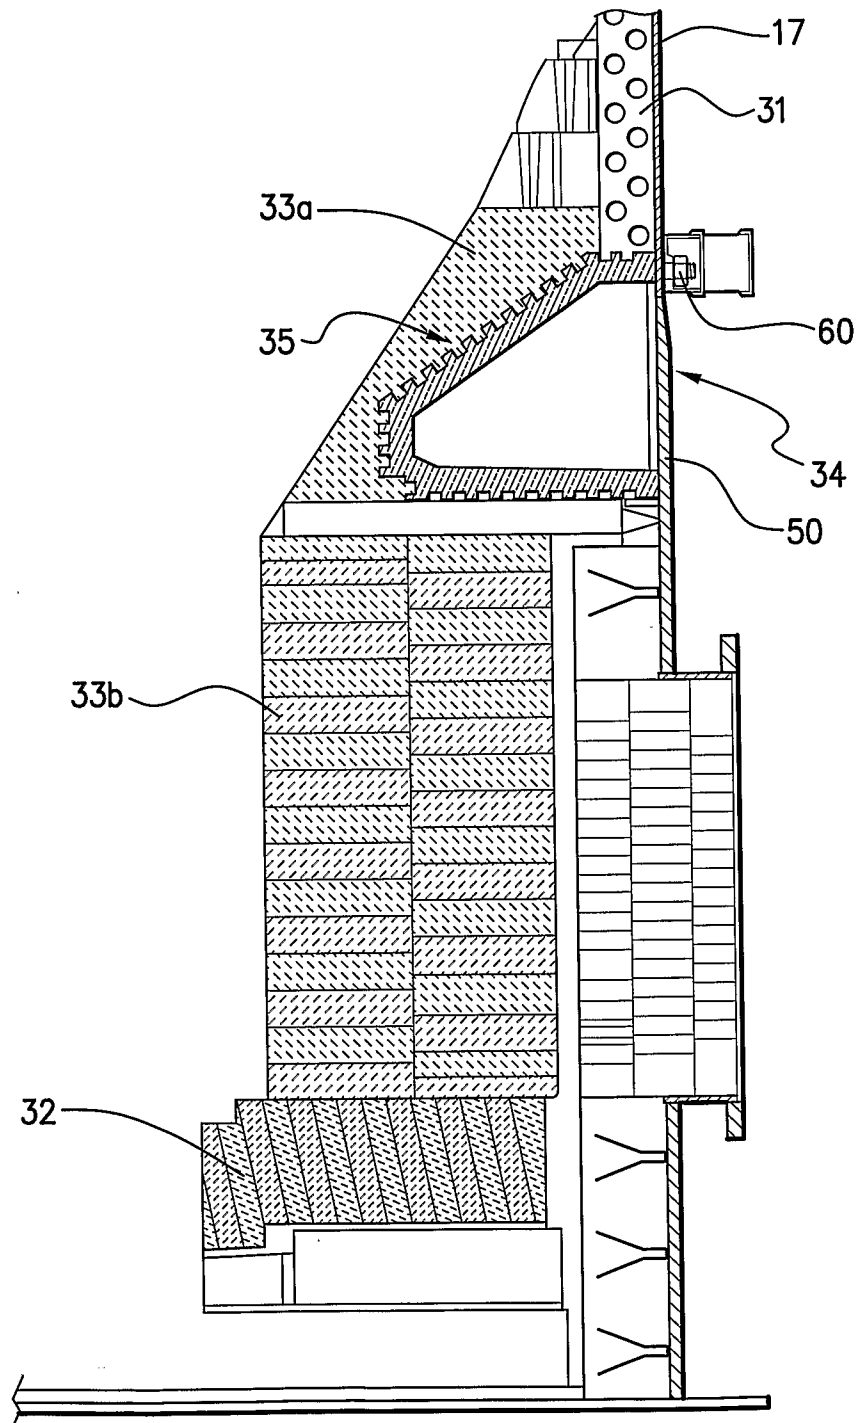


FIG. 2

3/6

**FIG. 3**

4/6

FIG. 4

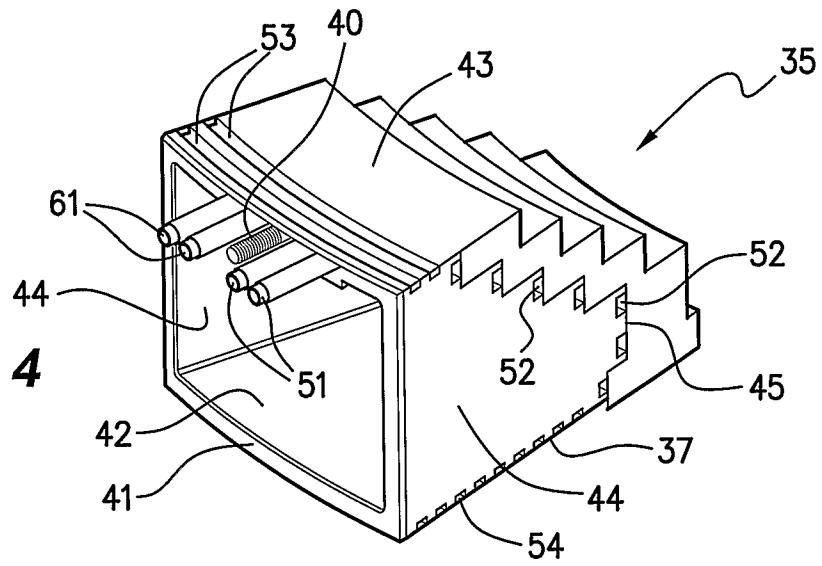


FIG. 5

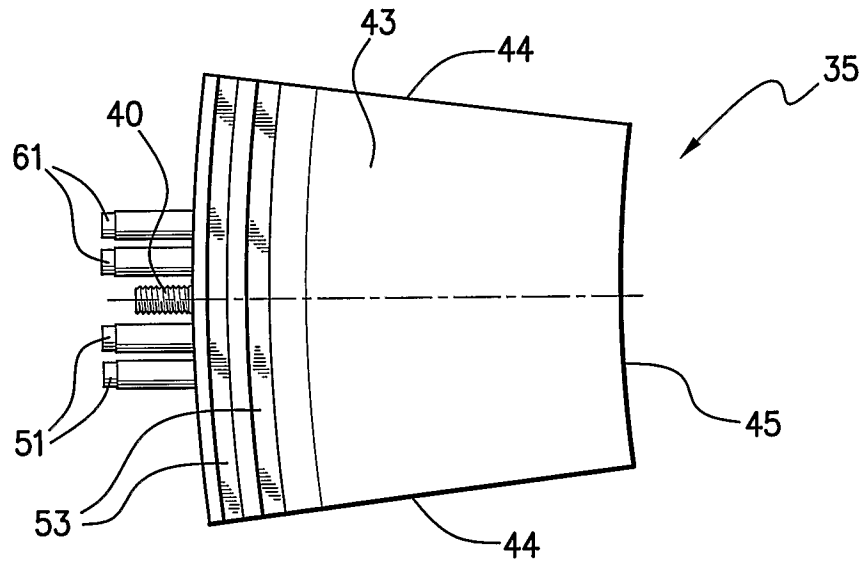
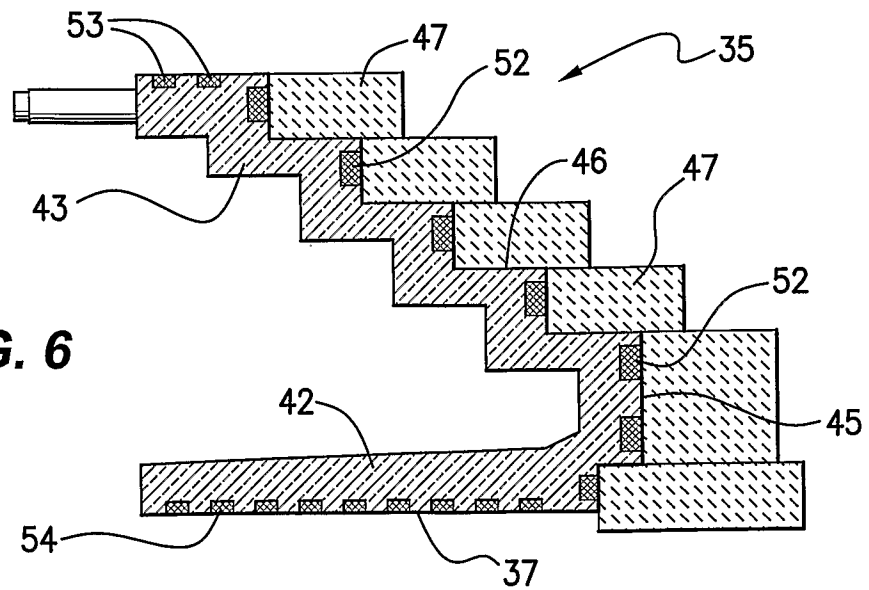


FIG. 6




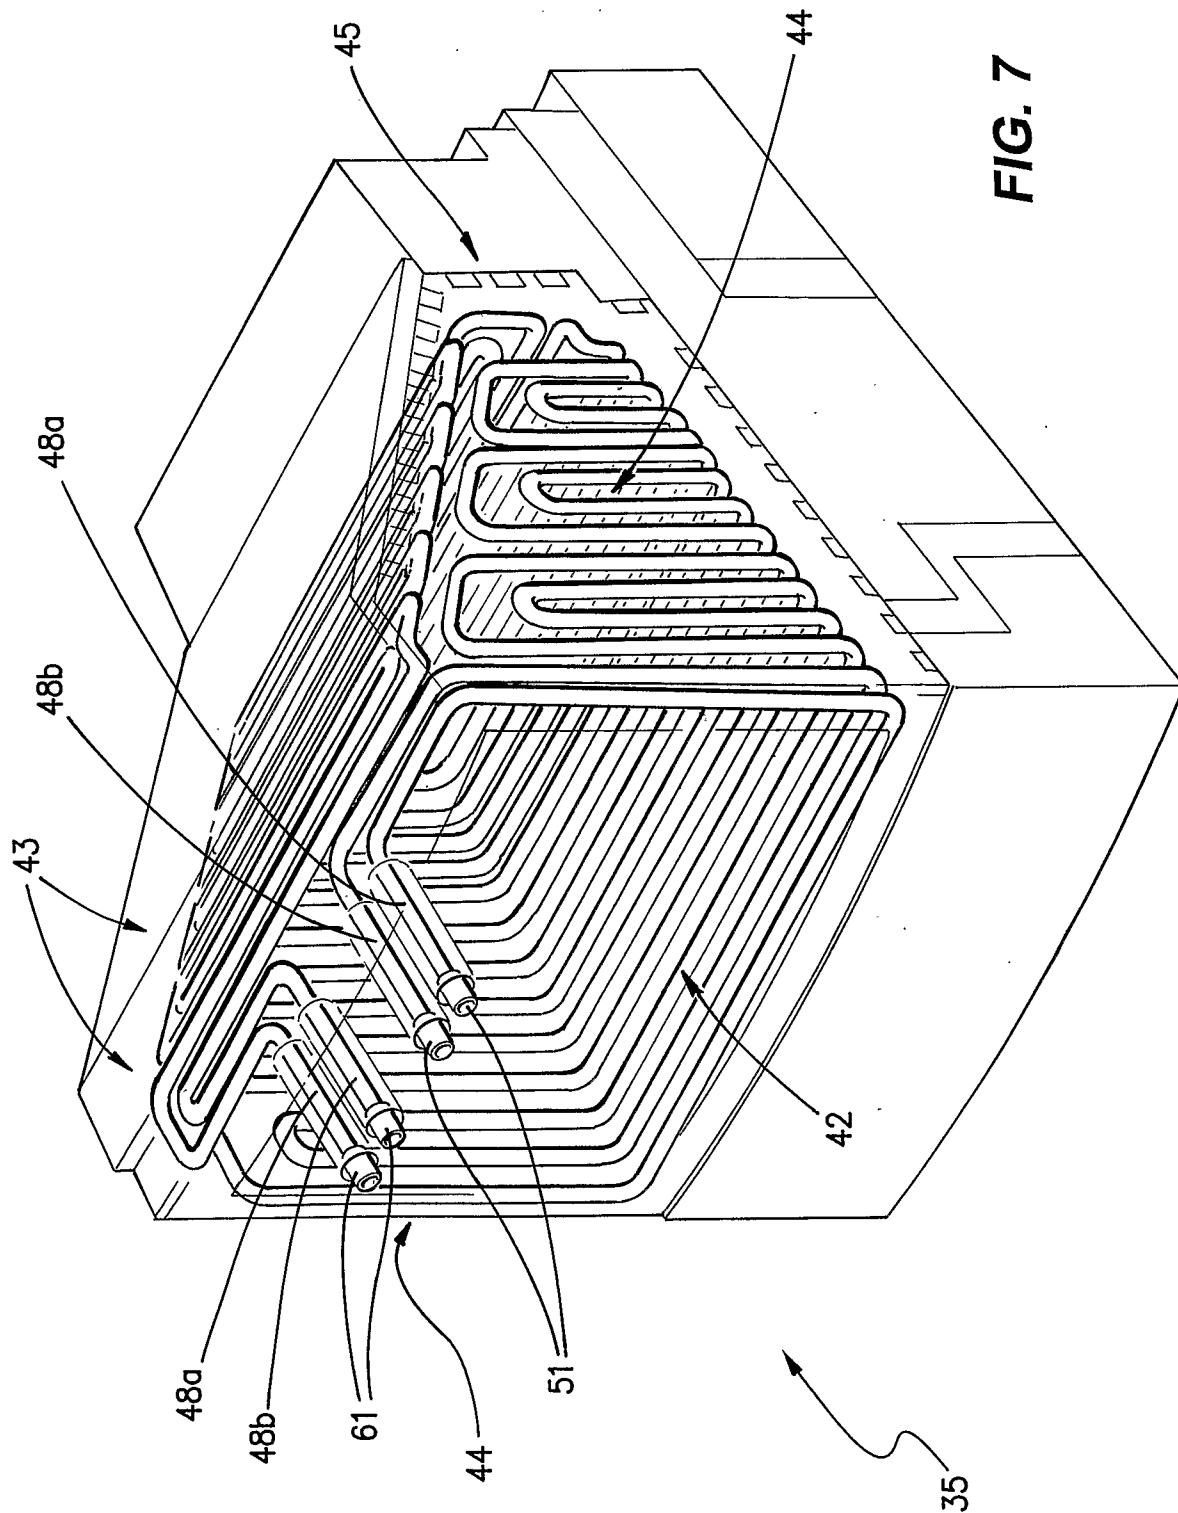


FIG. 8

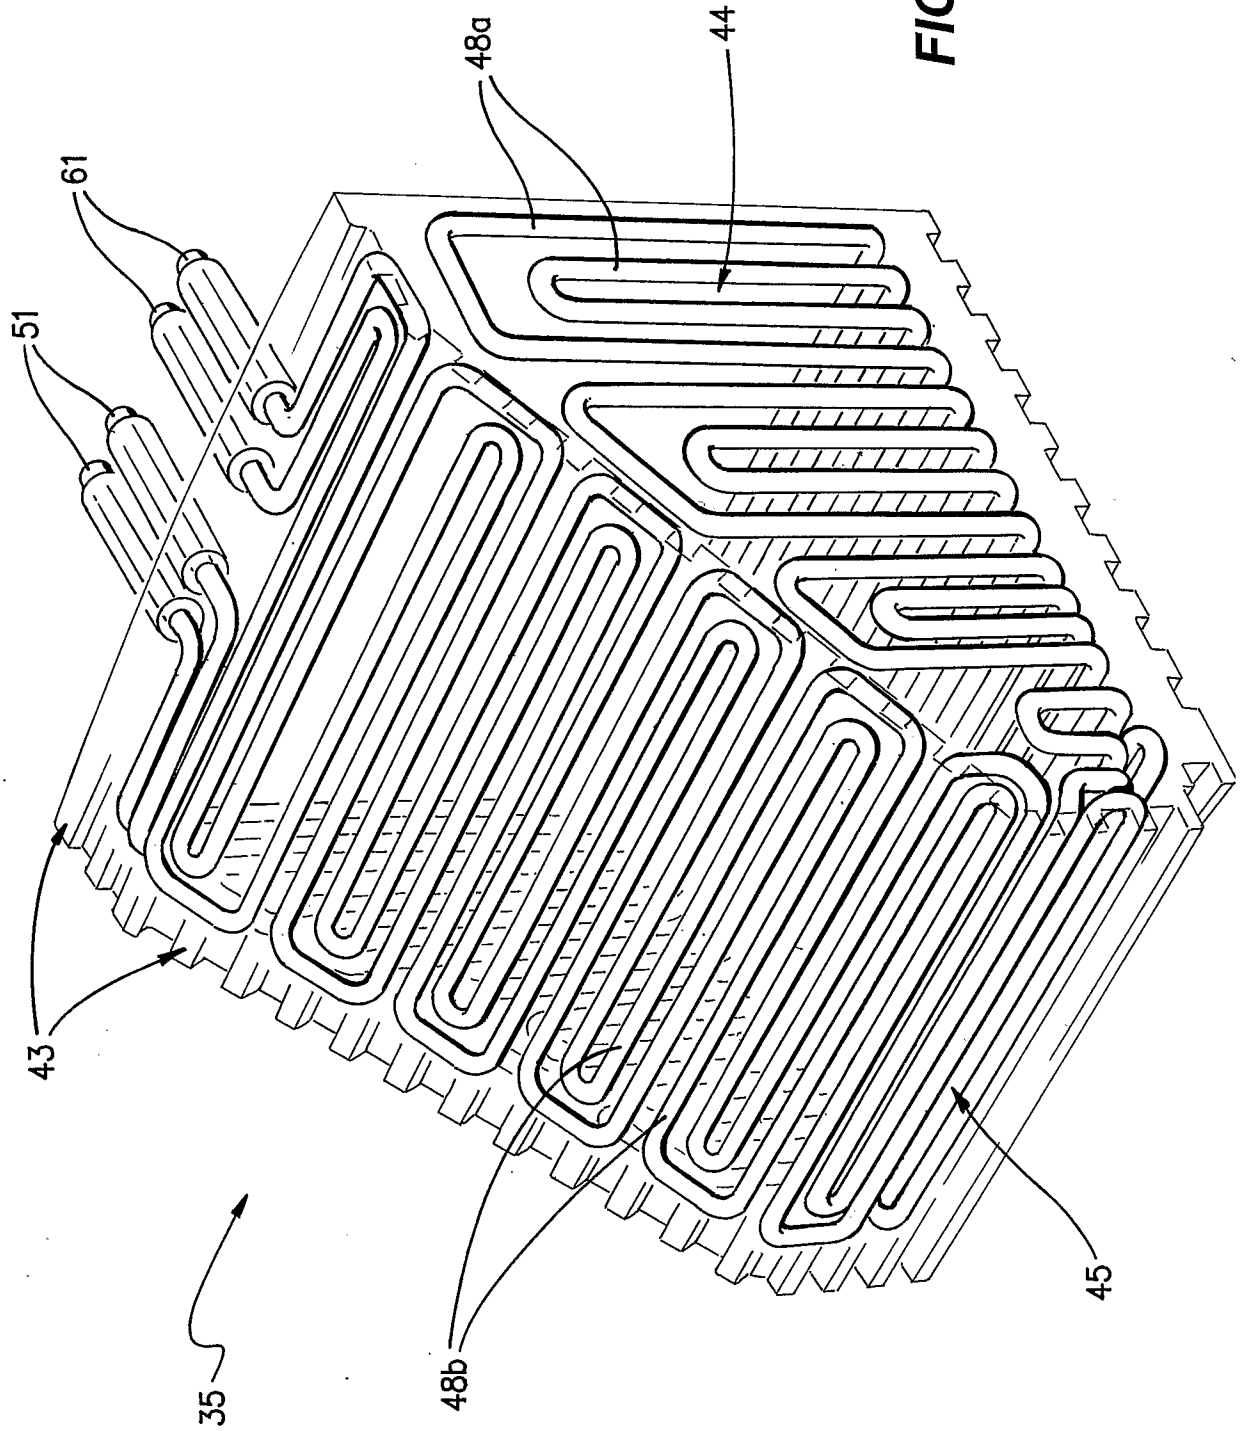

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/AU2007/000688

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

C21C 5/46 (2006.01) **C21B 13/10** (2006.01)
C21B 7/10 (2006.01) **C21C 5/42** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DWPI: IPC (C21B 7/10, 13/10, C21C 5/42, 5/46) and keywords (cool+, sidewall+ or side wall+, hearth+)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1170385 A2 (ELTI S.R.L) 9 January 2002 See whole document, especially paragraphs 0027 and 0035.	1-7
X	WO 2003/034791 A (PROCESS TECHNOLOGY INTERNATIONAL, INC.) 24 April 2003 See whole document, especially Figures 14-16 and 19 and page 19 lines 8-13.	1-11, 15, 20-29, 37
X	US 2002/0001332 A1 (SHVER) 3 January 2002 See whole document, especially Figure 19 and paragraph 0072	1-11, 15, 20-29, 37

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

 Date of the actual completion of the international search
 12 June 2007

Date of mailing of the international search report

18 JUN 2007

Name and mailing address of the ISA/AU

 AUSTRALIAN PATENT OFFICE
 PO BOX 200, WODEN ACT 2606, AUSTRALIA
 E-mail address: pct@ipaustalia.gov.au
 Facsimile No. (02) 6285 3929

Authorized officer

ROGER HOWE
 AUSTRALIAN PATENT OFFICE
 (ISO 9001 Quality Certified Service)
 Telephone No : (02) 6283 2159

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2007/000688

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5332199 A (KNAPP et al) 26 July 1994 See whole document	
A	WO 2001/060123 A1 (PROCESS TECHNOOGY INTERNATIONAL, INC.) 16 August 2001 See whole document	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2007/000688

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
EP	1170385	IT	MI20001510
WO	03034791	AU	34844/01
		CA	2449774
		CN	1526261
		EP	1413174
		MX	PA03011217
		US	6749661
		US	2002001332
		US	2005005735
		WO	02099143
		AU	2003213856
		CA	2453309
		CN	1537174
		EP	1414479
		US	6289035
		US	6805724
		US	2003000338
		US	2006069035
		WO	03006042
		BR	0211234
		CA	2488968
		EP	1232675
		EP	1507547
		US	6614831
		US	2001043639
		US	2003211095
		WO	0160123
		WO	03095476
US	5332199	CA	2024938
		US	4986847
		BR	0211234
		CA	2488968
		EP	1232675
		EP	1507547
		US	6614831
		US	2001043639
		US	2003211095
		WO	0160123
		WO	03034791
		DE	3931392
		AU	34844/01
		CA	2449774
		CN	1526261
		EP	1413174
		MX	PA03011217
		US	6749661
		US	2002001332
		US	2005005735
		WO	02099143
		WO	03095476
		AU	2003213856
		CA	2453309
		CN	1537174
		EP	1414479
		US	6289035
		US	6805724
		US	2003000338
		US	2006069035
		WO	03006042
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			
END OF ANNEX			