

(43) International Publication Date
13 December 2012 (13.12.2012)(51) International Patent Classification:
A61B 17/04 (2006.01)(21) International Application Number:
PCT/DK2012/050195(22) International Filing Date:
8 June 2012 (08.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

PA 2011 70294	10 June 2011 (10.06.2011)	DK
61/496,574	14 June 2011 (14.06.2011)	US
13/491,609	8 June 2012 (08.06.2012)	US

(71) Applicant (for all designated States except US): **COLO-PLAST A/S** [DK/DK]; Holtedam 1, DK-3050 Humlebaek (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GAYNOR, Allen** [US/US]; 10867 Butternut St, Coon Rapids, Minnesota 55448 (US). **KUBALAK, Thomas** [US/US]; 2623 Casco Point Road, Wayzata, Minnesota 55391 (US). **MC-CLURG, Steven** [US/US]; 1222 81st Court North, Brooklyn Park, Minnesota 55444 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SPOOL CONFIGURED TO RETAIN SUTURE FOR A SUTURE SYSTEM

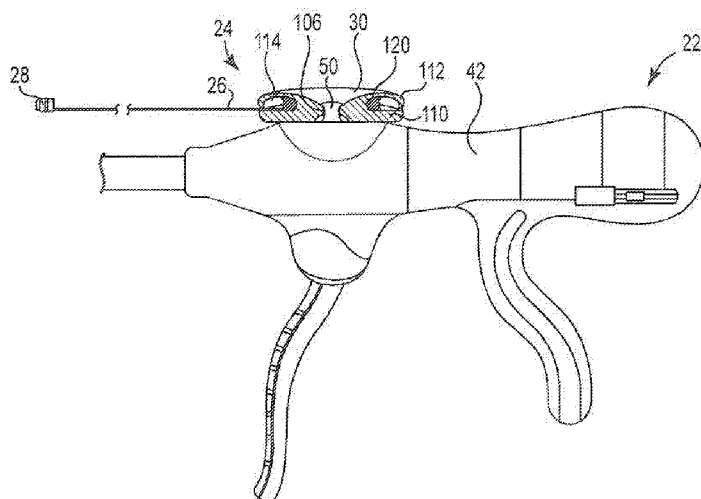**Fig. 7**

(57) Abstract: A suture system spool (30) is configured to retain suture (26) having a suture diameter and tension the suture between a distal and proximal end portions of a suturing tool. The spool includes a monolithically formed disc (100) defining a central opening (at 106) that provides the disc with an inside diameter (106). The disc includes a base (110) and a flap (112) joined with the base at the inside diameter, and the flap extends from the inside diameter to an outer periphery of the disc to define a cavity (114) between the flap and the base. The flap is spaced away from the base at a location between the inside diameter (S) and the outer periphery of the disc by a factor of at least two times the suture diameter, and the flap is spaced away from the base at the outer periphery of the disc by a distance (G) that is approximately equal to the suture diameter.

SPOOL CONFIGURED TO RETAIN SUTURE FOR A SUTURE SYSTEM

Background

Intracorporeal suturing of tissue during surgery presents challenges to the
5 surgeon in that the surgeon is called upon to manipulate suturing instruments within
the confines of a relatively small incision formed in the patient's body. In some
cases, the surgeon digitally palpates a desired location for placement of the suture
and is unable to see the suture site.

Improved suturing instruments and improved methods of delivering sutures
10 would be welcomed by the surgical staff.

Summary

One aspect provides a suture system spool configured to retain suture having
a suture diameter and tension the suture between a distal end portion and a proximal
15 end portion of a suturing tool. The spool includes a monolithically formed disc
defining a central opening that provides the disc with an inside diameter. The disc
includes a base and a flap joined with the base at the inside diameter, and the flap
extends from the inside diameter of the disc to an outer periphery of the disc to
define a cavity between the flap and the base. The flap is spaced away from the
20 base at a location between the inside diameter and the outer periphery of the disc by
a factor of at least two times the suture diameter, and the flap is spaced away from
the base at the outer periphery of the disc by a distance that is approximately equal
to the suture diameter.

Brief Description of the Drawings

25 The accompanying drawings are included to provide a further understanding
of embodiments and are incorporated in and constitute a part of this specification.
The drawings illustrate embodiments and together with the description serve to
explain principles of embodiments. Other embodiments and many of the intended

advantages of embodiments will be readily appreciated as they become better understood by reference to the following detailed description. The elements of the drawings are not necessarily to scale relative to each other. Like reference numerals designate corresponding similar parts.

5 Figure 1 is a side view of one embodiment of a suture system including a tool and a spool retaining suture.

 Figure 2 is a side sectioned view of a head of the tool illustrated in Figure 1.

 Figure 3 is a cross-sectional view of a needle of the tool positioned for engagement with a suture clip of the suture assembly.

10 Figure 4 is a cross-sectional view of one embodiment of the spool illustrated in Figure 1.

 Figure 5A is a cross-sectional view of one embodiment of the spool illustrated in Figure 4 with a portion of suture of the suture loaded into a cavity of the spool.

15 Figure 5B is a cross-sectional view of a gap formed in the spool that meters the suture as it exits the spool to allow only a single strand of the suture to be unwound off of the spool.

 Figure 5C is a cross-sectional view of one embodiment of a spool including serrated teeth, with the spool retaining suture attached to multiple suture clips.

20 Figure 6 is a bottom view of one embodiment of a spool configured to retain suture.

 Figure 7 is a cross-sectional view of one embodiment of the spool illustrated in Figure 5A coupled with a handle of the tool illustrated in Figure 1.

25 Figure 8 is a cross-sectional view of one embodiment of a mold provided for fabricating the spool illustrated in Figure 4.

Detailed Description

In the following Detailed Description, reference is made to the accompanying drawings, which form a part hereof, and in which is shown by way of

illustration specific embodiments in which the invention may be practiced. In this regard, directional terminology, such as “top,” “bottom,” “front,” “back,” “leading,” “trailing,” etc., is used with reference to the orientation of the Figure(s) being described. Because components of embodiments can be positioned in a number of different orientations, the directional terminology is used for purposes of illustration and is in no way limiting. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope of the present invention. The following detailed description, therefore, is not to be taken in a limiting sense, and the scope of the present invention is defined by the appended claims.

It is to be understood that the features of the various exemplary embodiments described herein may be combined with each other, unless specifically noted otherwise.

Tissue includes soft tissue, which includes dermal tissue, sub-dermal tissue, ligaments, tendons, or membranes. As employed in this specification, the term “tissue” does not include bone.

In this specification, end means endmost and end portion means that segment that is adjacent to and extends from the end. For example, a proximal end is that end location of a handheld instrument that is nearest a user, and a proximal end portion is that segment (e.g., a handle of the handheld instrument) that is adjacent to and extends distally away from the proximal end.

Embodiments provide a suturing tool having a needle housed in a proximal end portion of a head of the tool, where the needle is adapted to be deployed longitudinally out of the proximal end portion of the head through a mass of tissue to subsequently grasp a suture assembly. The needle retracts after engaging the suture assembly and pulls the suture assembly back along the needle path or channel formed in the tissue. In this manner, the needle moves through the tissue, grasps the suture assembly, and retracts the suture assembly through the tissue to complete a “stitch” in the tissue.

Embodiments provide a flexible and compressible spool that is configured to retain a length of suture for use by a suturing tool. The spool is configured to prevent the free spooling of the suture out of the spool by, for example, providing a flap or a lip that impinges against the suture. The flap provides a frictional force
5 that allows only a single strand of the suture to be unwound from the spool at any one time. The spool thus provides means for stripping the suture a single winding at a time out of the cavity.

Figure 1 is a side view of one embodiment of a suture system 20. The suture system 20 includes a tool 22, a suture assembly 24 including a length of suture 26
10 attached to a suture clip 28, and a spool 30 that retains multiple windings of the suture 26. The spool 30 is attachable to a proximal portion (post 50) of the tool 22 and the suture clip 28 is attachable to a distal portion 64 of the tool 22 in a manner that maintains the suture 26 between the proximal 50 and distal portions 64 of the tool 22.

15 The tool 22 includes a shaft 40 attached between a handle 42 and a head 44. The shaft 40 generally provides a major longitudinal axis of the tool 22 and is oriented along a longitudinal axis A. In one embodiment, the shaft 40 is a rigid shaft that is not bendable. In one embodiment, shaft 40 is a flexible shaft that is configured to be bent laterally left and right and vertically up and down and through
20 all points in-between.

The handle 42 includes a post 50 that is sized and configured to frictionally engage with the spool 30, a rigid thumb brace 52, and a movable actuator 54 located proximal the thumb brace 52. The handle 42 is configured to be grasped by a hand of a surgeon with the thumb wrapped around the thumb brace 52 and the actuator 54
25 operated by one or more fingers. Movement of the actuator 54 moves a rod or other mechanism located within the shaft 40 to cause movement of the needle 62 back and forth across throat 66.

The head 44 of the tool 22 includes a proximal portion 60 housing a needle 62 and a distal end 64 spaced apart from the proximal portion 60 by the throat 66.

The actuator 54 communicates with the needle 62 by a rod 72 (Figure 2) located inside the shaft 40 that moves the needle 62 between the proximal portion 60 and the distal end 64 of the head 44. In one embodiment, the needle 62 moves along the longitudinal axis A. In one embodiment, the distal end 64 is located off axis relative to the longitudinal axis A and the needle 60 moves in a direction that is not parallel with the longitudinal axis A such that the needle moves off axis (i.e., “shunts”) relative to the longitudinal axis A.

Figure 2 is a side sectional view of the head 44 of the tool 22 showing the needle 62 partially extending from a needle exit port 70 in response to the activation of actuator 54 (Figure 1). The distal end 64 of the head 44 provides a cavity 68 that is sized to receive the suture clip 28. The tool 22 operates to move the needle 62 through tissue to form a channel in the tissue, engage the needle 62 with the suture clip 28, and withdraw the suture clip 28 from the cavity 68 and back through the tissue channel. The tool 22 operates to pull the suture clip 28 and the suture 26 across the throat 66 to place the suture 26 into the tissue.

The needle 62 moves in response to movement of the actuator 54 (Figure 1) via a rod 72 that is located axially within the shaft 40 that communicates between the actuator 54 and the needle 62. In particular, the rod 72 is attached to a link 74 that is attached to the needle 62, and the needle 62 is engaged with a guide pin 76. The guide pin 76 is configured to rotate to allow the link 74 to move within a trace 78. For example, in one embodiment the distal end 64 is radially spaced apart from the longitudinal axis A by a distance H and the guide pin 76 rotates to allow the link 74 to move within the trace 78. The movement of the link 74 shunts the leading end of needle 62 away from the longitudinal axis A to a second direction aligned with an axis C that extends through cavity 68. This offset configuration of the distal end 64 of the head 44 provides the tool 22 with an improved mechanical advantage over linear tools, which allows the tool 22 to secure suture into tough tissue, such as ligaments.

Figure 3 is a side view of the needle 62 aligned for engagement with the suture clip 28 of the suture assembly 24. The suture clip 28 is attached to the suture 26. In one embodiment, the suture clip 28 is molded from plastic to integrally capture the suture 26. Suitable plastic materials for fabricating the suture clip 28 include polypropylene, polysulfone, urethane, or polyetherimide as examples and the suture 26 is selected to be compatible with these materials.

In one embodiment, the suture clip 28 is fabricated from metal and attached to one of a variety of sutures, for example a thermoplastic suture, a resorbable suture, body-absorbable suture, a multi-filament suture, a mono-filament suture, or a bioabsorbable suture. Bioabsorbable sutures are generally fabricated from a material having a melting point that is incompatible with overmolding or welding to a polypropylene suture clip 28. A metal suture clip 28 is compatible with attachment to all forms of suture material, including bioabsorbable suture. To this end, a metal suture clip 28 is suited for attachment to fine diameter suture having a suture size of 0 or larger diameter suture having a suture size of 0 or larger.

Suitable suture is available from Teleflex, Limerick, PA or CP Medical, Portland, OR. Other suitable suture is available from Ethicon™, a J&J Company located in Somerville, NJ, and include resorbable and other sutures such as Monocryl™ (polyglycaprone 25) sutures, coated Vicryl™ (polyglactin 910) sutures, Ethicon Plus™ Sutures, or polydioxanone sutures as examples. Examples of suitable body-absorbable sutures are the Caprosyn™ Polysorb™, and Biosyn™ absorbable sutures available from Covidien, Mansfield, MA.

The needle 62 is formed from metal such as stainless steel or a shape memory alloy such as NITINOL (Nickel Titanium Naval Ordinance Laboratory), or titanium as examples. In one embodiment, the needle 62 is shaped to promote secure engagement with the suture clip 28 and a leading end 80 is formed to have a conical point with a shoulder 82 that is sized to be pressed into engagement with a flange 84 formed inside the suture clip 28. The guide pin 76 (Figure 2) is provided

to disengage the suture clip 28 from the needle 62 as the needle 62 moves rearward through the guide pin 76.

The conical point of the needle 62 is configured to form a channel when advanced through tissue, and the suture clip 28 is sized to be pulled through the
5 channel in the tissue made by the needle 62. In one embodiment, the leading end portion 86 of the suture clip 28 is chamfered and the needle 62 is configured to draw the chamfered (or truncated) leading end portion 86 through the tissue channel.

In one exemplary embodiment, the needle 62 has a first diameter D1 and the suture clip 28 has a diameter D2, where diameter D1 is equal to or greater than
10 diameter D2. In this manner, the suture clip 28 is sized to follow needle 62 and be retracted through the channel formed in the tissue by needle 62.

The needle 62 is sized to frictionally engage with the recess formed in the suture clip 28. For example, in one embodiment the leading end 80 of the needle 62 has a diameter D3 that is slightly greater than a diameter D4 formed in the channel
15 of the suture clip 28. In this manner, when the leading end 80 of the needle 62 is inserted into recess, the shoulder 82 of the needle 62 seats with the shoulder 82 to allow the needle 62 to engage with the suture clip 28.

Figure 4 is a cross-sectional view of the spool 30. In one embodiment, the spool 30 is a monolithically formed disc 100 having an outer periphery 102 and a
20 central opening 104 that provides the disc 100 with an inside diameter 106. The spool 30 includes a base 110 and a flap 112 joined to the base 110 at the inside diameter 106. The flap 112 extends from the inside diameter 106 to the outer periphery 102 to define a cavity 114 between the flap 112 and the base 110. The cavity 114 provides a cavity height S that is sized to retain multiple windings of the
25 suture 26 (See Figure 5A).

The flap 112 is configured to prevent more than one strand of the suture 26 from unspooling from the cavity 114 as the suture 26 is unwound from the spool 30. For example, in one embodiment the flap 112 defines an arc that locates an outer radial end 116 of the flap 112 within a gap distance G of the base 110. The outer

radial end 116 of the flap 112 is configured to impinge or pinch against the suture 26 to provide a frictional resistance force that prevents more than one strand of the suture 26 from exiting the cavity 114 during suture unwinding. Unspooling of the suture 26 is undesirable. Unspooling means that multiple strands of the suture 26
5 exit the cavity together as the suture 26 is unwound from the spool 30.

Embodiments of the spool 30 reduce or eliminate the undesirable unspooling of the suture 26 from out of the cavity 114 of the spool 30. In this manner, the base 110 and the flap 112 combine to provide the spool with means for stripping the suture 26 a single winding at a time from the cavity 114.

10 In one embodiment, the flap 112 is cantilevered from the inside diameter 106 of the disc 100. The flap 112 is configured to be flexible and so provided to flex away from the base 100 to allow the suture 26 to deflect the flap 112 upward as the suture 26 is removed from the cavity 114. In addition, the flap 112 provides a friction force against the suture 26 that reduces or eliminates the undesirable
15 unspooling of suture 26 out of the cavity 114.

In one embodiment, an exterior surface of the flap 112 is curved and an exterior surface of the base 110 is substantially planar.

The base 110 and a flap 112 are formed as a single integral unit such that the disc 100 is a monolith formed from a flexible material. Suitable materials for
20 fabricating the disc 100 include thermoplastic elastomers (TPE) such as the TPE available from ExxonMobil, Houston, TX as Sanoprene™ elastomer or a butadiene-based butyl rubber (BUNA).

Figure 5A is a cross-sectional view of the spool 30 loaded with multiple windings 120 of the suture 26, where the suture 26 has a suture thickness or suture
25 diameter of T.

In one embodiment, a tail end portion 122 of the multiple windings 120 of the suture 26 projects out of the cavity 114 and is pinched between the flap 112 and the base 110 at the outer periphery 102 of the disc 100. In this manner, the outer radial end 116 of the flap 112 is positioned to pinch against the tail end portion 122

of the suture 26 to frictionally resist unwinding of more than one strand of the suture 26 at a time from the cavity 114.

In one embodiment, the flap 112 is spaced away from the base 110 at a location between the inside diameter 106 and the outer periphery 102 to provide the
 5 cavity height S with a dimension that is a factor of at least 2 times the suture diameter T , and the end 116 of the flap 112 is spaced away from the base 110 by a gap distance G that is selected to be substantially equal to the suture diameter. In other words, $S > 2T$ and $G \sim T$.

Figure 5B is a cross-sectional view of the outer radial end 116 of the flap
 10 112 cooperating with the base 110 to reduce or eliminate undesirable unspooling of suture 26 off of the spool 30. The gap distance G is selected to be smaller than the suture diameter of T such that the outer radial end 116 of the flap 112 allows only a single strand of the suture 26 to be unwound off of the spool 30. In this manner, the end 116 of the flap 112 is a limiter that prevents the wound strands 124 from exiting
 15 the spool 30 until after the strand of suture 26 moves through the gap G .

In one embodiment, the gap G is selectively sized to be less than the suture diameter (e.g., $G < T$) and the flap 112 is flexible to allow only a single strand of the suture to be metered past the end 116 of the flap 112 to be unwound from the cavity 114.

Figure 5C is a cross-sectional view of one embodiment of a spool 125
 20 including serrated teeth 126, with the spool 125 retaining a suture 26 attached to multiple suture clips 28. The spool 125 has an outer periphery 102' with a central opening 104' that provides the disc with an inside diameter 106'. The spool 125 includes a base 110' and a flap 112' joined to the base 110' at the inside diameter
 25 106'. The flap 112' extends from the inside diameter 106' to the outer periphery 102' to define a cavity 114' between the flap 112' and the base 110'. The cavity 114' provides a cavity height S that is sized to retain multiple windings 120' of the suture 26. In one embodiment, inside surfaces of the flap 112' and the base 110' form serrated teeth 126 that are configured to grasp the suture 26 after the needle 62

engages with one of the multiplicity of suture clips 28 attached to the suture 26. In one embodiment, the spool 125 is monolithically formed as a single integral unit.

Figure 6 is a bottom view of one embodiment of a spool 130. The spool 130 includes a recess 132 formed in an exterior surface of a base 110'. In one
5 embodiment, the suture clip 28 is attached to one end of the suture 26 and a suturing hook 134 is attached to an opposite end of the suture 26. The recess 132 provides a convenient and safe storage place for the crescent needle 134.

Figure 7 is a partial cross-sectional view of spool 30 loaded with the suture assembly 24 and attached to the post 50 of the tool 22. In one embodiment, the
10 inside diameter 106 of the spool provides a compressible surface that flexes for frictional engagement of the spool 30 to the post 50. The cavity 114 retains multiple windings 120 of the suture 26. The flap 112 and the base 110 combine to provide a meter or a limiting device that prevents the suture 26 from unspooling from the cavity 114.

15 A portion of the suture 26 extends from the cavity 114 to allow the suture clip 28 to be engaged in the cavity 68 formed in the head 44 of the tool 22 (Figure 2). The spool 30 is attached to the post 50 of the handle 42. In this manner, the spool 30 retains multiple windings 120 of the suture 26 and also maintains a suture 26 in tension between the head 44 and a handle 42 of the tool 22.

20 Figure 8 is a cross-sectional view of one embodiment of a mold 150 provided for fabricating the spool 30 illustrated in Figure 4. The mold 150 includes a top section 152 that mates with a bottom section 154 and a central section 156 that moves radially inward / outward relative to the section 152, 154. The top section 152 is configured to fabricate an image of the upper surface (or flap 112) of the
25 mold 30 and the bottom section 154 is configured to fabricate an image of the lower surface (or base 110) of the mold 30. The central section 156 is shaped to replicate the cavity 114.

In one acceptable molding process, the top section 152 is lowered and the bottom section 154 is raised to seal against the central section 156 that is inserted

centrally within the mold 150. Mold material is injected into the cavity 158 of the mold 150 through a port 160 to provide a replication of the spool 30. The port 160 is formed in the bottom section 154, although other locations for port 160 are also acceptable. After injection of the mold material, the top section 152 is raised and the bottom section 154 is lowered relative to the central section 156 to separate the mold 150, and the central section 156 is moved radially outward to form the cavity 114 inside the spool 30. In one embodiment, the mold material is a flexible material, such as one of the elastomers described above, which allows the central section 156 that is larger than the gap distance G (Figure 4) to be withdrawn out of the narrower gap distance G. In particular, the flexible material of the flap 112 and the base 110 allows these components to be displaced as the central section 156 is withdrawn, which allows the relatively tall cavity 114 to be formed between the flap 112 and the base 110. In addition, the flexible material allows the flap 112 to recover or spring back after the central section 156 is withdrawn, which locates the flap 112 at the gap distance G away from the base.

Embodiments provide a spool that is configured to retain a length of suture for use by a suturing tool, where the spool is configured to prevent the free spooling of the suture out of the spool by. Embodiments include a flap that flexes to pinch against the suture. The flap thus provides a frictional force that allows only a single strand of the suture to be unwound from the spool at any one time.

Although specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that a variety of alternate and/or equivalent implementations may be substituted for the specific embodiments shown and described without departing from the scope of the present invention. This application is intended to cover any adaptations or variations of medical devices as discussed herein. Therefore, it is intended that this invention be limited only by the claims and the equivalents thereof.

WHAT IS CLAIMED IS:

1. A suture system spool configured to retain suture having a suture diameter and tension the suture between a distal end portion and a proximal end portion of a suturing tool, the spool comprising:
a monolithically formed disc defining a central opening that provides the disc with an inside diameter, the disc including a base and a flap joined with the base at the inside diameter, the flap extending from the inside diameter of the disc to an outer periphery of the disc to define a cavity between the flap and the base;
wherein the flap is spaced away from the base at a location between the inside diameter and the outer periphery of the disc by a factor of at least two times the suture diameter, and the flap is spaced away from the base at the outer periphery of the disc by a distance that is approximately equal to the suture diameter.
2. The suture system spool of claim 1, wherein a gap is formed between the flap and the base at the outer periphery of the disc, and the gap is less than the suture diameter.
3. The suture system spool of any one of claims 1-2, wherein the flap is cantilevered from the inside diameter of the disc, the flap configured to flex away from the base to allow the suture to be removed from the cavity.
4. The suture system spool of claim 3, wherein an outer peripheral end portion of the flap is configured to flex away from the base at the outer periphery of the disc to allow only a single strand of the suture to be unwound from the cavity.
5. The suture system spool of any one of claims 1-4, wherein a tail end portion of the multiple windings of the suture projects out of the cavity and is pinched between the flap and the base at the outer periphery of the disc.

6. The suture system spool of any one of claims 1-5, wherein the suture includes a suturing hook connected to an end of the suture and an exterior surface of the base defines a recess that is sized to receive the suturing hook.

7. The suture system spool of any one of claims 1-6, wherein an exterior surface of the flap is curved and an exterior surface of the base is substantially planar.

8. The suture system spool of any one of claims 1-7, wherein the inside diameter formed by the central opening in the disc provides a compressible surface that is attachable to a post at the proximal end portion of the suturing tool.

9. A suture system configured to place suture in tissue, the suture system comprising:

a tool comprising a handle and a head located distal the handle, the head having a proximal portion housing a needle and a distal end spaced apart from the proximal portion by a throat, the needle is movable through a needle exit port formed in the proximal portion of the head to a cavity formed in the distal end of the head;

a suture assembly comprising a suture connected to a suture clip, the suture having a suture diameter and the suture clip insertable into the cavity formed in the distal end of the head; and

a spool attachable to the handle and configured to retain a portion of the suture and tension the suture between the handle and the head, the spool monolithically formed to define a central opening that provides the spool with an inside diameter, the spool including a base and a flap joined with the base at the inside diameter, the flap extending from the inside diameter of the spool to an outer periphery of the spool to define a cavity between the flap and the base;

wherein the flap is spaced away from the base at the outer periphery of the spool by a distance that is approximately equal to the suture diameter.

10. The suture system of claim 9, wherein the flap is spaced away from the base at the outer periphery of the spool by a distance that is less than the suture diameter.

11. The suture system of any one of claims 9-10, wherein the cavity has a height extending between the flap and the base that is at least two times the suture diameter.

12. The suture system of any one of claims 9-11, wherein an end of the flap flexes to provide a limiter that frictionally contacts the suture.

13. The suture system of claim 12, wherein the limiter prevents unspooling of the suture from out of the cavity.

14. The suture system of claim 9, wherein the suture includes a suturing hook connected to an end of the suture and an exterior surface of the base defines a recess that is sized to receive the suturing hook.

15. The suture system of any one of claims 9-14, wherein an inside surface of the flap comprises serrated teeth.

16. The suture system of claim 15, wherein an inside surface of the base comprises serrated teeth.

17. The suture system of any one of claims 9-16, wherein the suture is connected to a plurality of suture clips.

18. A suture system spool retaining suture having a suture diameter and attachable to a suturing tool, the spool comprising:

a monolithically formed disc defining a central opening that provides the disc with an inside diameter, the disc including a base and a flap joined with the base at the inside diameter, the flap extending from the inside diameter of the disc to an outer periphery of the disc to define a cavity between the flap and the base, the flap is spaced away from the base at a location between the inside diameter and the outer periphery of the disc by a factor of at least two times the suture diameter; and means for stripping the suture a single winding at a time from the cavity.

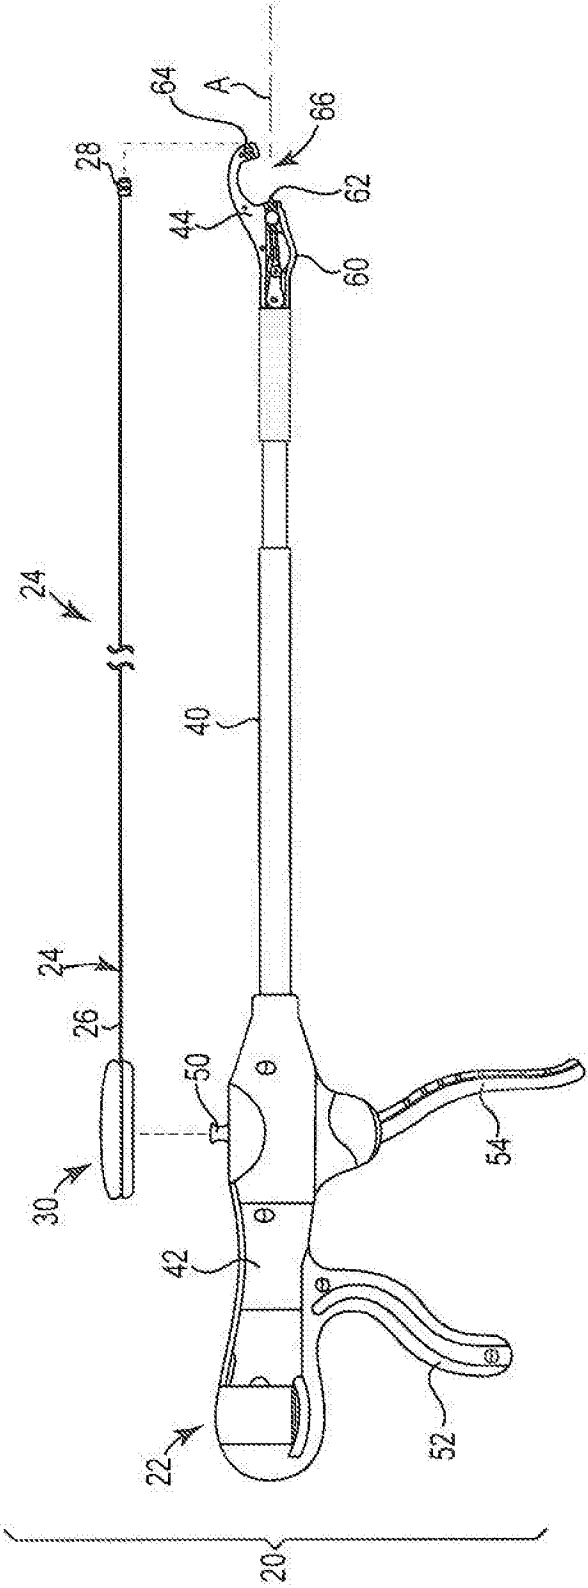


Fig. 1

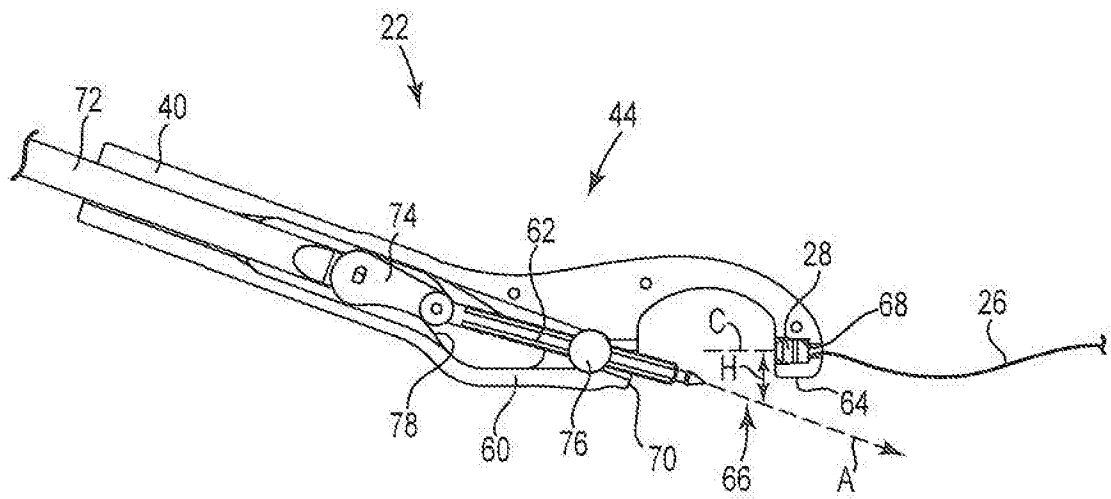


Fig. 2

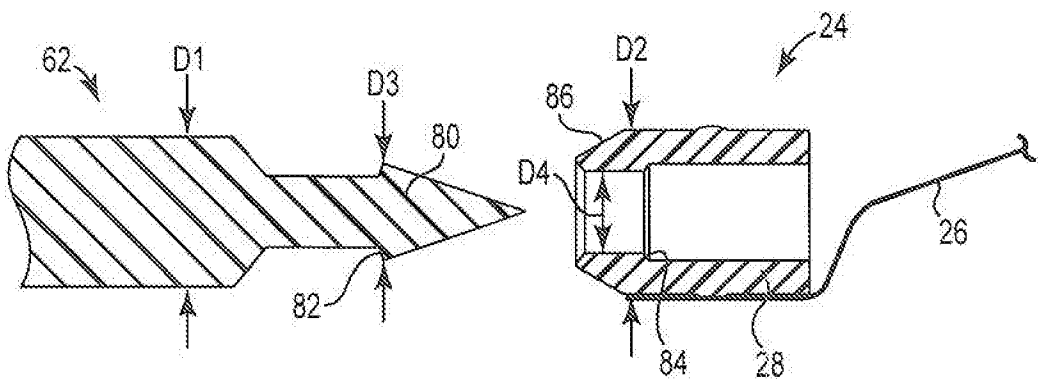


Fig. 3

4/9

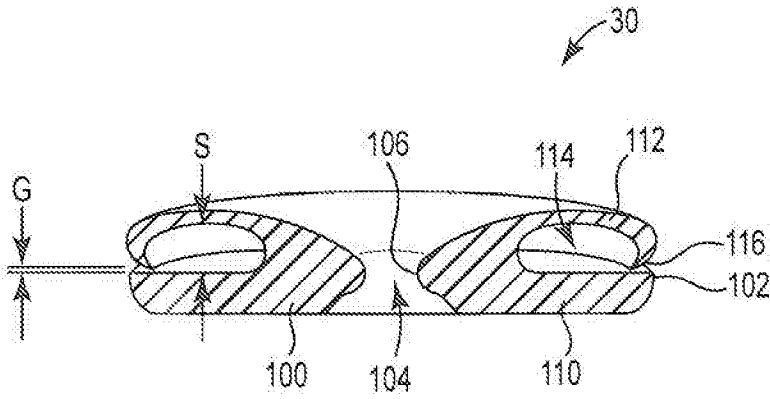


Fig. 4

5/9

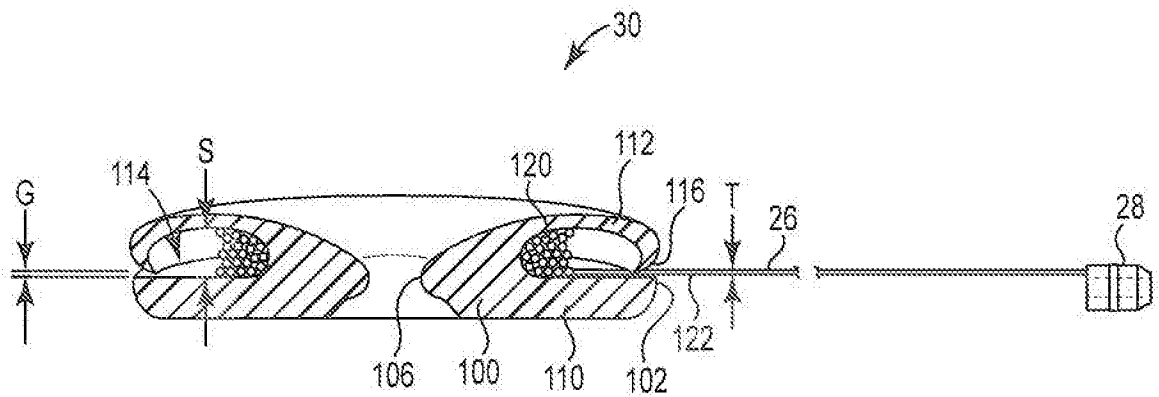


Fig. 5A

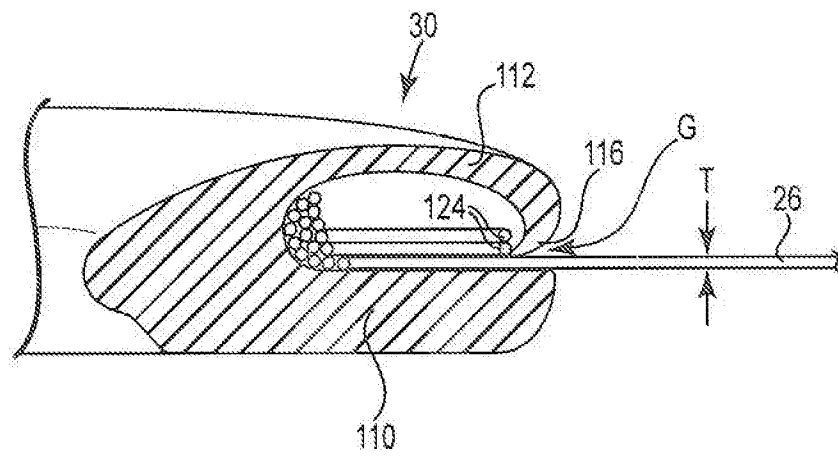


Fig. 5B

6/9

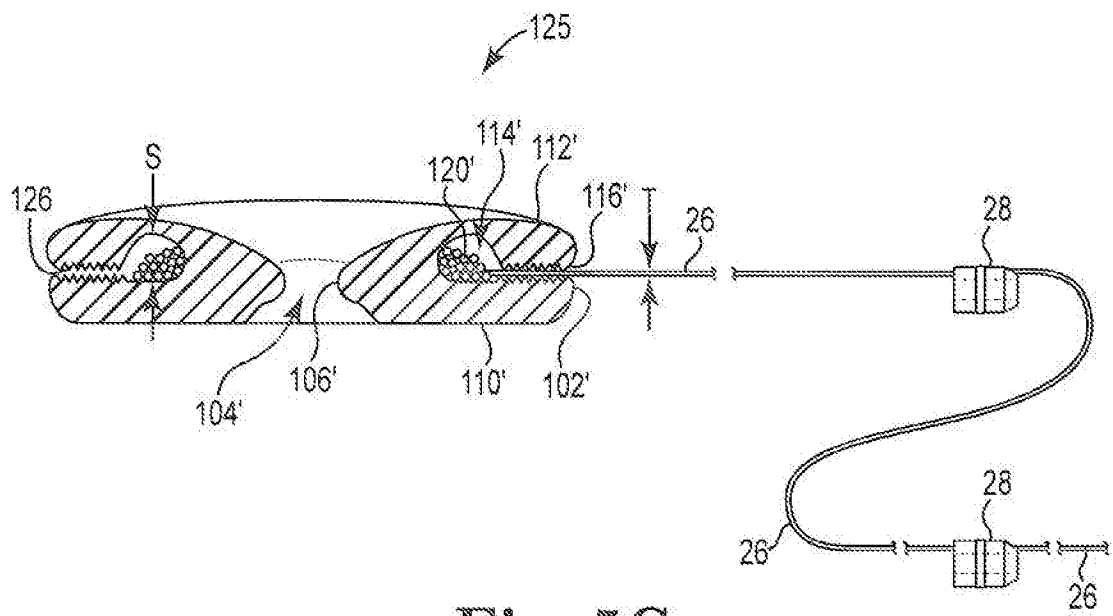
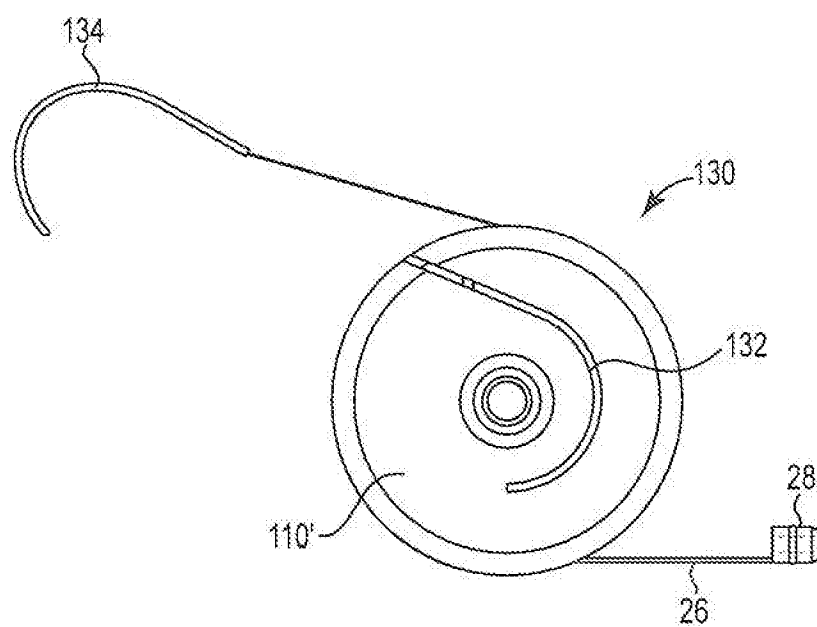


Fig. 5C

7/9

**Fig. 6**

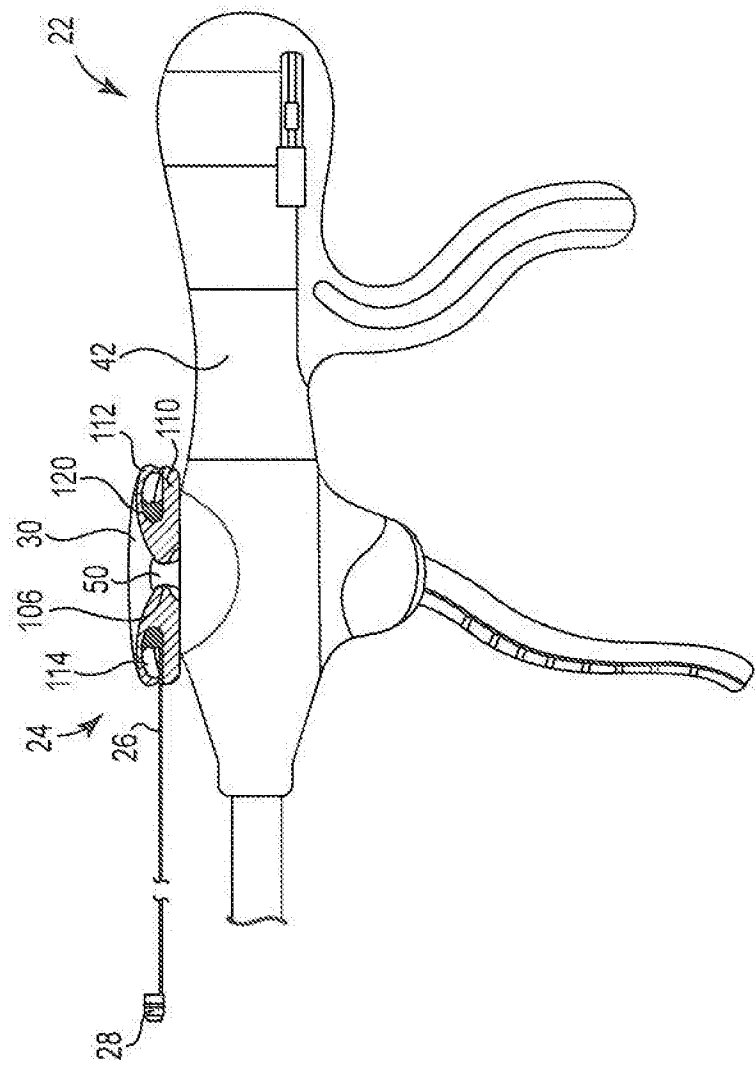


Fig. 7

9/9

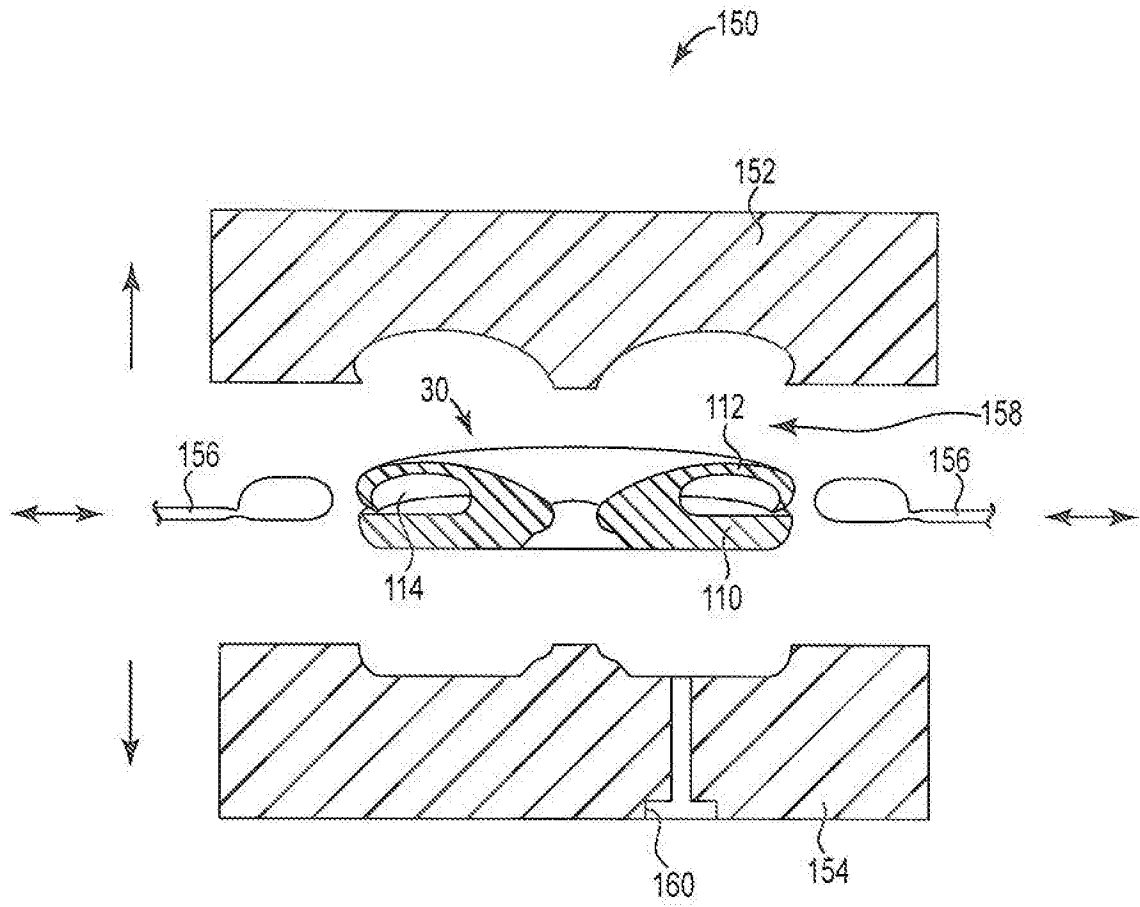


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/DK2012/050195

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61B17/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/046642 A1 (MCCLURG STEVEN [US] ET AL) 24 February 2011 (2011-02-24) paragraph [0038] - paragraph [0039] paragraph [0042] - paragraph [0043]; figures 1, 4B	1-13,17, 18
X	US 2 824 709 A (MACY JOHN M) 25 February 1958 (1958-02-25) column 3, line 31 - line 60; figures 1-3	1-9,18
X	US 5 263 585 A (LAWHON HARVEY A [US] ET AL) 23 November 1993 (1993-11-23) the whole document	1-8,18
X	US 3 138 309 A (HULTERSTRUM HAROLD D) 23 June 1964 (1964-06-23) the whole document	1-8,18
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 October 2012

Date of mailing of the international search report

07/11/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Strazdauskas, Gedas

INTERNATIONAL SEARCH REPORT

International application No

PCT/DK2012/050195

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/204195 A1 (KEANE MICHAEL [US] ET AL) 30 October 2003 (2003-10-30) the whole document -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/DK2012/050195

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011046642	A1	24-02-2011	CN 102469998 A 23-05-2012
			EP 2467064 A2 27-06-2012
			US 2011042245 A1 24-02-2011
			US 2011046642 A1 24-02-2011
			US 2011046645 A1 24-02-2011
			WO 2011020476 A2 24-02-2011

US 2824709	A	25-02-1958	NONE

US 5263585	A	23-11-1993	US 5263585 A 23-11-1993
			US 5407071 A 18-04-1995

US 3138309	A	23-06-1964	NONE

US 2003204195	A1	30-10-2003	AU 2003229714 A1 10-11-2003
			CA 2479820 A1 06-11-2003
			EP 1505909 A2 16-02-2005
			JP 2005523103 A 04-08-2005
			US 2003204195 A1 30-10-2003
			WO 03090627 A2 06-11-2003
