



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2382689 C 2009/12/22

(11)(21) **2 382 689**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2000/06/26
(87) Date publication PCT/PCT Publication Date: 2001/04/05
(45) Date de délivrance/Issue Date: 2009/12/22
(85) Entrée phase nationale/National Entry: 2002/02/22
(86) N° demande PCT/PCT Application No.: US 2000/017525
(87) N° publication PCT/PCT Publication No.: 2001/023504
(30) Priorité/Priority: 1999/09/24 (US09/404,813)

(51) Cl.Int./Int.Cl. *C10M 137/12* (2006.01),
A01N 57/34 (2006.01), *A01P 1/00* (2006.01)

(72) Inventeurs/Inventors:
MINYU, LI, US;
PERSON-HEI, KIMBERLY L., US;
CORDS, BRUCE R., US;
LOKKESMOE, KEITH D., US;
HERDT, JOY G., US


(73) Propriétaire/Owner:
ECOLAB INC., US

(74) Agent: CASSAN MACLEAN

(54) Titre : LUBRIFIANTS ANTIMICROBIENS UTILES POUR LUBRIFIER DES RECIPIENTS, PAR EXEMPLE DES
RECIPIENTS POUR BOISSONS, ET DES TRANSPORTEURS DE TELS RECIPIENTS
(54) Title: ANTIMICROBIAL LUBRICANTS USEFUL FOR LUBRICATING CONTAINERS, SUCH AS BEVERAGE
CONTAINERS, AND CONVEYORS THEREFOR

(57) **Abrégé/Abstract:**

A lubricant composition comprising a lubricating agent and a quaternary phosphonium compound is useful as a conveyor, container or beverage lubricant.

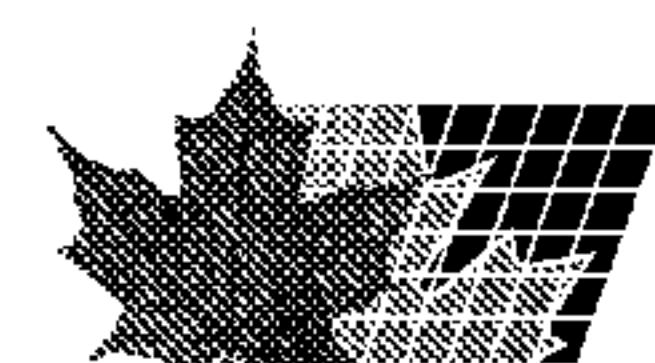

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23504 A1

(51) International Patent Classification⁷: **C10M 137/12**,
173/02, A01N 57/34 // C10N 30:16, 40:00

(21) International Application Number: PCT/US00/17525

(22) International Filing Date: 26 June 2000 (26.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/404,813 24 September 1999 (24.09.1999) US

(71) Applicant: **ECOLAB INC.** [US/US]; Ecolab Center, St. Paul, MN 55102 (US).

(72) Inventors: **MINYU, Li**; 7021 19th Street North, Oakdale, MN 55128 (US). **PERSON-HEI, Kimberly, L.**; 2224 30th Avenue, Baldwin, WI 54002 (US). **CORDS, Bruce, R.**; 2893 96th Street East, Inver Grove Heights, MN 55077 (US). **LOKKESMOE, Keith, D.**; 14463 Monterey Avenue, Savage, MN 55378 (US). **HERDT, Joy, G.**; 11600 Leeward Avenue South, Hastings, MN 55033 (US).

(74) Agent: **SORENSEN, Andrew, D.**; Ecolab Inc., 840 Sibley Memorial Highway, Mendota Heights, MN 55118 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANTIMICROBIAL LUBRICANTS USEFUL FOR LUBRICATING CONTAINERS, SUCH AS BEVERAGE CONTAINERS, AND CONVEYORS THEREFOR

(57) Abstract: A lubricant composition comprising a lubricating agent and a quaternary phosphonium compound is useful as a conveyor, container or beverage lubricant.



WO 01/23504 A1

**ANTIMICROBIAL LUBRICANTS USEFUL FOR LUBRICATING
CONTAINERS, SUCH AS BEVERAGE CONTAINERS, AND CONVEYORS
THEREFOR**

5

BACKGROUND OF THE INVENTION

Field of the Invention

10 The present invention relates to antimicrobial lubricant compositions, and to their use, for example, to treat or lubricate containers and/or conveyor systems for containers. The invention also relates to containers and conveyor systems treated with an antimicrobial lubricant.

15 Description of Related Art

 Containers are receptacles in which materials are or will be held or carried. Containers are commonly used in the food or beverage industry to hold food or beverages. Often lubricants are used in conveying systems for
20 containers, to ensure the appropriate movement of containers on the conveyor.

 In the commercial distribution of many products, including most beverages, the products are packaged in containers of varying sizes. The
25 containers can be in the form of cartons, cans, bottles, Tetra Pak® packages, waxed carton packs, and other forms of containers. In most packaging operations, the containers are moved along conveying systems, usually in an upright position, with the opening of the container facing vertically up or down. The containers are moved from station to station,
30 where various operations, such as filling, capping, labeling, sealing, and the like, are performed.

Containers, in addition to their many possible formats and constructions, may comprise many different types of materials, such as metals, glasses, ceramics, papers, treated papers, waxed papers, polymeric materials, composites, and layered structures. Any desired polymeric materials can be used, such as polyolefins, including polyethylene, polypropylene, polystyrene, and mixtures thereof, polyesters such as polyethylene terephthalate (PET) and polyethylene naphthalate (PEN) and mixtures thereof, polyamides, polycarbonates, and the like. Also, containers, such as bottles, with layered, laminated films, formed from PEN, PET, copolymers of the monomers that form PEN and PET, or mixtures thereof, can be used. Containers can be coated with internal and/or external coatings, formed by, for example, thermosetting or UV curing, such as epoxy polymers cured with amines.

Lubricating solutions are often used on conveying systems during the filling of containers, for example, with beverages. There are a number of different properties that are desirable for such lubricants. For example, the lubricant should provide an acceptable level of lubricity for the system. It is also desirable that the lubricants have a viscosity which allows it to be applied by conventional pumping and/or application apparatus, such as by spraying, roll coating, wet bed coating, and the like, commonly used in the industry.

In the beverage industry, there is a high demand for conveyor lubricants that are beverage compatible, and have both lubricative and antimicrobial properties. By beverage compatible, is meant that the lubricant is compatible with the beverage so that it does not form solid deposits when it accidentally contacts spilled beverages on the conveyor system. This property is important since the formation of deposits on the conveyor system may change the lubricity of the system and could require shut-down of the equipment to facilitate cleaning.

Carbonated beverages contain ingredients with anionic charges, such as colors and flavors, which are held in solution through emulsification. Given this generally negative charge, the cationic constituents of a synthetic lubricant, such as quaternary ammonium salts, amines, and ether amines, 5 may react with the beverages to form precipitates. The precipitates accumulate on conveyors, housing, and floors as a tenacious soil, and may cause a halt in production to facilitate cleaning.

If the lubricant is for use on PET bottle lines, then good compatibility 10 with PET is desired. Currently, containers, including PET bottles, and/or the conveying system are often coated with an aqueous-based lubricant to provide lubricity to the container so that it can more easily travel down a conveyor system. Many currently used aqueous-based lubricants are disadvantageous because they are incompatible with many beverage 15 containers, such as PET and other polyalkylene terephthalate containers, and may lead to stress cracking and rupture of the PET bottles.

A sufficient lubrication of the conveyor ensures a proper movement of containers along the conveyor system. Lubricants having fatty acids are 20 known to have good lubricity, especially for metal surface lubrication. However, fatty acids generally need to be neutralized in order to have a good solubility in water. The use of sodium or potassium hydroxide as the neutralizing agent, in fatty acid containing lubricants, has been found to increase the alkalinity of the lubricant, and to thus contribute and promote 25 the stress cracking in PET containers.

PET bottle manufacturers and soft drink bottlers have come to a growing understanding that alkalinity is one root cause of stress crack failure of pressurized PET containers. As a result, alkalinity limits of less than 100 30 ppm as CaCO_3 have been proscribed for any water or lubricant that comes into contact with the PET article. This development has led to the obsolescence of many longstanding lubricant technologies. For example, as discussed above, fatty acid based lubricants require neutralization with

alkaline materials in order to achieve water solubility of the product. The resultant alkalinity of fatty acid products as applied to the conveyors and bottles often exceed the current alkalinity limit. It is also believed that PET stress cracking can be promoted by certain types of lubricant additives, such
5 as alkyl(ether)(di)amines and quaternary ammonium salts.

Lubricants generally contain an antimicrobial agent to reduce the growth of microbes. Antimicrobial agents are agents that eliminate or inactivate microorganisms, or prevent, frustrate, or reduce the growth of
10 microorganisms. Because conveyor lubricants are often used at low concentration, the antimicrobial agent should preferably be highly water soluble and effective at very diluted solutions. Although some types of alcohols, amines, and quaternary ammonium salts are known to satisfy these requirements, they are often disadvantageous because their
15 incompatibility with PET containers can enhance the PET stress cracking.

Also, there are generally known antimicrobial, beverage compatible conveyor lubricants, that contain a quaternary ammonium antimicrobial agent and phosphate esters. Such compositions often are disadvantageous
20 because certain ratios of the components may contribute to soiling due to the mixing of quaternary ammonium compound with soft drink spillage.

SUMMARY OF THE INVENTION

25

Therefore, there is a need to provide an alternative to currently available lubricants for containers and conveyors for the containers, that overcome one or more of the disadvantages of currently used lubricants. For example, it is desired to provide a lubricant composition with reduced
30 alkalinity, good PET compatibility such that stress cracking of PET is limited, superior lubricity for all types of containers, a stable product shelf life, improved beverage compatibility and effective antimicrobial properties.

It was also an object of the invention to provide methods of lubricating containers, such as beverage containers, that overcome one or more of the disadvantages of current methods.

5 In accordance with the objectives, there has been provided in accordance with the present invention, a beverage lubricant composition comprising a lubricant agent and a quaternary phosphonium compound.

10 In accordance with these objectives, there is also provided a container or a conveyor for a container whose surface is coated at least in part with a lubricant composition comprising a lubricant agent and a quaternary phosphonium compound.

15 There is also provided in accordance with the invention, a process for lubricating a container, comprising applying to a surface of the container, such a lubricant composition.

20 There is also provided in accordance with the invention, a process for lubricating a conveyor system used to transport containers, comprising applying such a lubricant composition to the conveying surface of a conveyor, and then moving containers on the conveyor.

25 There is also provided in accordance with the invention, a conveyor used to transport containers, which is coated on the portions that contact the container with such a lubricant composition.

30 There is also provided a lubricant composition, such as for a beverage, comprising a lubricant agent and a sulfonium or iodonium compound.

Further objects, features, and advantages of the invention will become apparent from the detailed description that follows.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention relates to a lubricating composition comprising a quaternary phosphonium compound. Any desired quaternary
5 phosphonium compound may be used. Such compounds may have the general structure $[R_1R_2R_3R_4P]_n + X^{n-}$ in which n is a number from 1-4 and corresponds to the valence of the anion X^{n-} . R_1 , R_2 , R_3 , and R_4 are the same or different groups. The R groups are independently organic groups, such as substituted or unsubstituted alkyl or cycloalkyl and substituted or
10 unsubstituted aryl. For example, R^1 , R^2 , R^3 , and R^4 can be independently a C_{1-24} aliphatic group, a C_{1-4} hydroxyaliphatic group, benzyl, C_{1-24} alkyl benzyl, or halo benzyl, and X^- represents an anion capable of imparting water solubility or dispersibility to the compound such as chloride, bromide, iodide, sulfate, methylsulfate, and others. This anion is linked to the nitrogen
15 through an electrovalent bond.

The hydrocarbon substituents R^1 , R^2 , R^3 , and R^4 may be alike or different, substituted or unsubstituted, branched or unbranched, and saturated or unsaturated. In somewhat greater detail, the hydrocarbon
20 substituents R^1 , R^2 , R^3 , and R^4 may be independently selected from hydrocarbon groups including specifically, but not exclusively: lower alkyl groups such as methyl, ethyl, propyl and butyl; higher alkyl groups such as pentyl, hexyl, heptyl, 2-ethylhexyl, octyl, isooctyl, nonyl, decyl, undecyl, dodecyl, tetradecyl, and eicosyl; substituted lower alkyl groups such as
25 hydroxyethyl and hydroxypropyl; lower alkenyl groups such as ethenyl, propenyl, and butenyl; lower alkynyl groups such as ethynyl, propynyl, and butynyl; cycloalkyl groups such as cyclohexyl; aryl groups such as benzyl, phenyl and naphthyl; and aralkyl/alkaryl groups such as tolyl, xylyl, alkyl substituted benzyl, and alkylnaphthyl.

30

Non-limiting examples of useful phosphonium salts are the compounds described in Canadian Patent No. 2,082,994, U.S. Patent No. 4,874,526, and European Patent No. 322,578.

Examples of useful phosphonium salts include tetrakis (hydroxymethyl) phosphonium sulfate, tetrabutyl phosphonium bromide, tetrabutyl phosphonium chloride, tributyl (tetradecyl) phosphonium chloride, trioctyl (octadecyl) phosphonium iodide, and tetrakis
5 (hydroxymethyl) phosphonium chloride. Particularly preferred is tetrakis (hydroxymethyl) phosphonium sulfate. A particularly useful compound is Tolcide PS 200 or 75 available from Albright & Wilson.

The lubricant composition includes a quaternary phosphonium
10 compound as an antimicrobial agent, in an amount effective to provide antimicrobial properties. Antimicrobial agents are agents that eliminate or inactivate microorganisms, or prevent, frustrate, or reduce the growth of microorganisms. The phosphonium can be present in an amount of from about 0.5 to about 25 percent by weight, preferably 1 to 15 percent by
15 weight, more preferably 2 to 10 percent by weight, most preferably about 4% by weight, based on the weight of the lubricant composition.

It has been found that a lubricant with an adequate biocidal activity can be obtained by incorporation of the quaternary phosphonium compound.
20 Moreover, unlike quaternary ammonium salts and other microbial surfactants, the quaternary phosphoniums are believed to be inert to PET bottle cracking. This provides the added benefit of improving the stability of pressurized PET bottles. Additionally, it has been found that the lubricant containing quaternary phosphonium does not form a soil with many types of
25 beverages, such as carbonated beverages. The compound is also compatible with the usual components of lubricant compositions, such as those described below.

In place of or in addition to the phosphonium compounds, other onium
30 salts, such as sulfonium and iodonium compounds can be used, in amounts analogous to those of the phosphoniums. It is believed that the sulfonium and iodonium compound can function as antimicrobial agents in the lubricant compositions. Non-limiting examples of useful iodonium and sulfonium salts

include diaryliodonium and triarylsulfonium salts such as diphenyl iodonium chloride, diphenyl iodonium iodide, triphenyl sulfonium hexafluorophosphate, and triphenyl sulfonium tetrafluoroborate.

5 Any desired lubricating agent can be used in the composition. Examples include water, amines such as fatty amines, fatty acids, sarcosinates, phosphate esters, water-soluble or water dispersible homopolymers or copolymers of (alkoxy)alkylene glycols, alcohol ethoxycarboxylates such as Neodox™ available from Hickson Danchem, and
10 water soluble or water dispersible oils.

 The lubricating agent or a combination thereof, is used in an amount to provide effective lubricity to the composition. For example, 1-95 percent by weight, preferably 3-60, more preferably 6-50 percent by weight of
15 lubricating agents can be included. If fatty acid is used, it can be in an amount from about 0.1 to about 20 percent by weight, preferably 0.25 to 12 percent by weight, more preferably 0.5 to 7 percent by weight, most preferably about 2.5% by weight. If a phosphate ester is used, it can be in an amount of from about 1 to about 50 percent by weight, preferably 2 to 30
20 percent by weight, more preferably 5 to 25 percent by weight, most preferably about 12 percent by weight of the composition.

 It has been found that the lubricity of the lubricant compositions including quaternary phosphonium compounds on metal conveyor systems
25 can often be improved by use of a non-neutralized fatty acid. It was unexpectedly found that such fatty acids not only improve lubricity, but lower alkalinity of the lubricant composition without destroying the product solution stability, that is, phase separation does not occur. The fatty acid is compatible with PET, but can also be used, for example, as a universal
30 lubricant for other containers, including glass, aluminum, and paperboard containers. The fatty acid is also compatible with many biocides, and is non-soiling in the event of contamination with spilled food products.

In conventionally used lubricant compositions, if a fatty acid is used as a lubricant, it is often necessary to neutralize the fatty acid to make it water soluble. This neutralization disadvantageously increases the alkalinity of the composition. It has been found, that in the present compositions, it is not
5 necessary to neutralize the fatty acid, thereby allowing the composition to have a pH of about 7 or lower. But it is acceptable to use neutralized fatty acids as well as partially neutralized fatty acids in the composition.

A wide variety of carboxylic or fatty acids may be usefully employed in
10 the antimicrobial lubricant compositions of the invention. Those acids found to provide effective lubricity include those having the general formula RCOOH wherein R represents an aliphatic group having from about 5 to about 23 carbon atoms (fatty acids having about 6 to 24 carbon atoms). The aliphatic group may be branched or unbranched and saturated or
15 unsaturated, but is preferably a straight chain alkyl group. Preferred carboxylic acids include the C_{10-18} fatty acids and mixtures thereof.

Specific examples of suitable carboxylic acids include such saturated fatty acids as enanthic (heptanoic) (C_7), caprylic (octanoic) (C_8), pelargonic
20 (nonanoic) (C_9), capric (decanoic) (C_{10}), undecylic (undecanoic) (C_{11}), lauric (dodecanoic) (C_{12}), trideclic (tridecanoic) (C_{13}), myristic (tetradecanoic) (C_{14}), palmitic (hexadecanoic) (C_{16}), stearic (octadecanoic) (C_{18}), arachidic (eicosanoic) (C_{20}), behenic (docosanoic) (C_{22}), and lignoceric (tetracosanoic) (C_{24}); monounsaturated fatty acids such as lauroleic (C_{12}), myristoleic (C_{14}),
25 palmitoleic (C_{16}), oleic (C_{18}), gadoleic (C_{20}), and brassidic (C_{22}); polyunsaturated fatty acids such as linoleic (di-unsaturated C_{18}), and linolenic (tri-unsaturated) (C_{18}), and linolenic (tri-unsaturated C_{18}); and substituted fatty acids such as ricinoleic (hydroxy-substituted C_{18}), etc.

30 Mixed fatty acids may be employed in the antimicrobial lubricant composition of the invention such as those derived from fats and oils. Coconut oil fatty acids are particularly useful in the antimicrobial lubricant compositions of the invention because of their ready availability and superior

lubricating properties. Coconut oil fatty acids include major fractions of lauric and myristic acids and minor fractions of palmitic, stearic, oleic and linoleic acids. Tall oil fatty acids, obtained as a byproduct of the paper industry from the tall oil recovered from pine wood black liquor, are also
 5 preferred fatty acids for use in the antimicrobial lubricant composition of the invention. Tall oil fatty acids include major fractions of oleic and linoleic acids and minor fractions of palmitic, stearic, and isotearic acids.

In a preferred embodiment, a fatty acid is used in combination with a
 10 phosphate ester. Any desired phosphate ester can be used (alone or with a fatty acid). Examples of useful phosphate esters are those available under the Rhodafac™ tradename from Rhone-Poulenc and Emphos™ tradename from Witco Corporation.

15 Any desired amine lubricating agent can be used. Useful amines have the formula $N(R^7)_3$, wherein R^7 can be hydrogen, a C_{1-20} aliphatic group, an aryl group, an alkaryl group, and various halo, nitro, sulfo, and hydroxyl substituted forms thereof. Representative examples of suitable amines include methyl amine, dimethyl amine, ether amine, ethylene amine,
 20 diethylene amine, aniline, chloroaniline, morpholine, pyridine, 2-ethylhexyl amine, didodecyl amine, hydroxyethyl amine, dihydroxyethyl amine, trimethyl amine, diethyl methyl amine, dodecyl dimethyl amine, di(aminoethyl) dodecyl amine, imidazoline, etc.

25 Useful amine compounds also include diamines (secondary amines containing one amine substituent) having the general formula:



30 wherein R^8 is a C_{8-24} aliphatic group and R^9 is a C_{1-20} alkylene group. Most preferably R^8 is a $C^{12} - C^{20}$ alkyl group and R^9 is a C_{1-5} alkylene. Examples of useful diamines represented by the general formula $(R^8)NH(CH_2)_{1-20}NH_2$ wherein R^8 is a C_{10-24} aliphatic group includes N-coco-alkyl-trimethylene

diamine, N-oleyl-alkyl-trimethylene diamine, N-tallow-alkyl-trimethylene diamine, and the like.

Also useful are ether amines of the general formula $R^8-O-NH-R^9-NH_2$,
5 where the variables are as defined above. Examples of useful ether amines include 1,3 propane diamine N-dodecyloxypropyl amine.

The lubricating agent can be a single component or a blend of materials from the same or different type or class of lubricant. Any desired
10 ratio of the two or more lubricating agents can be used so long as the desired lubricity is achieved. The lubricants can be in the form of a fluid, solid, or mixture of two or more miscible or non-miscible components such as solid particles dispersed in a liquid phase.

15 The lubricant composition of the invention can include any other desired agents, such as neutralizing agents, surfactants, water, and water-conditioning agents.

Any desired neutralizing agent can be used. Useful neutralizing
20 agents include the alkaline metal hydroxides and ammonium salts such as potassium hydroxide and sodium hydroxide. Other preferred neutralizing agents are alkyl amines, which may be primary, secondary or tertiary such as monoethanolamine, diethanolamine and triethanolamine. Other useful amines for neutralization include amino-methyl propanol, dimethyl decyl
25 amine, octyl amine, alkyl propylene amines, such as n-coco-1,3 diaminopropane, N-tallow 1,3 diaminopropane and ethoxylated amines such as ethoxylated coconut amine.

Generally the neutralizing agent is present in amount to adjust the pH
30 of the composition to a range of about 3 to about 9.5, preferably 4.5 to 8.0, and more preferably in the range of 5.5 to 7.5.

The lubricant compositions of the invention optionally, but preferably, may further include a surfactant. The surfactant functions as an adjuvant to increase detergency and lubricity. Compounds which may be used as surfactants in the invention include, nonionic surfactants, amphoteric
5 surfactants, anionic surfactants, and cationic surfactants among other compounds. Any desired surfactant can be used, in an amount effective to improve detergency and/or lubricity.

Anionic surfactants are generally those compounds containing a
10 hydrophobic hydrocarbon moiety and a negatively charged hydrophilic moiety. Typical commercially available products provide either a carboxylate, sulfonate, sulfate or phosphate group as the negatively charged hydrophilic moiety. Any commercially available anionic surfactants may be employed in the lubricant composition of the invention.

15

Nonionic surfactants are generally hydrophobic compounds that bear essentially no charge and exhibit a hydrophilic tendency due to the presence of oxygen in the molecule. Nonionic surfactants encompass a wide variety of polymeric compounds which include specifically, but not exclusively,
20 ethoxylated alkylphenols, ethoxylated aliphatic alcohols, ethoxylated amines, ethoxylated ether amines, carboxylic esters, carboxylic amides, ether carboxylates, and polyoxyalkylene oxide block copolymers. Any desired nonionic surfactant can be used.

25 Particularly suitable nonionic surfactants for use in the lubricant composition of the invention are the alkoxylated (preferably ethoxylated) alcohols having the general formula $R^{10}O((CH_2)_m O)_n$ wherein R^{10} is an aliphatic group having from about 8 to about 24 carbon atoms, m is a whole number from 1 to about 5, and n is a number from 1 to about 40 which
30 represents the average number of ethylene oxide groups on the molecule.

Nonionic surfactants are especially useful and can be used in an amount of about 0.5 to about 30 percent, preferably 1 to 15, more preferably 2 to 10, and most preferably about 5 percent by weight of the composition.

5 Cationic surfactants are also useful in the invention and may also function as an additional antimicrobial. Typical examples include amineoxides and quaternary ammonium chloride surfactants such as n-alkyl (C₁₂₋₁₈) dimethyl benzyl ammonium chloride, n-alkyl (C₁₄₋₁₈) dimethyl benzyl ammonium chloride, n-tetradecyl dimethyl benzyl ammonium chloride
10 monohydrate, and n-alkyl (C₁₂₋₁₄) dimethyl 1-naphthylmethyl ammonium chloride. Also, non-benzyl compounds such as didecyl dimethyl ammonium chloride and compounds with bromide counter ions such as cetyltrimonium bromide can be used.

15 Amphoteric surfactants, surfactants containing both an acidic and a basic hydrophilic group, can be used in the invention. Amphoteric surfactants can contain the anionic or cationic group common in anionic or cationic surfactants and additionally can contain either hydroxyl or other hydrophilic groups that enhance surfactant properties. Such amphoteric
20 surfactants include betaine surfactants, sulfobetaine surfactants, amphoteric imidazolinium derivatives and others.

Generally, the surfactant concentration ranges from about 1 wt.% to 50 wt.% and preferably from about 2 wt.% to 15 wt.%, by weight of the
25 lubricant composition. One or more surfactants can be used.

The lubricant composition of the invention also generally includes a carrier. Water is the most commonly used and preferred carrier for carrying the various ingredients in the formulation of the lubricant composition. It is
30 possible, however, to use a water-soluble solvent, such as alcohols and polyols such as ethanol, propanol, ethylene glycol, propylene glycol and the like, as well as mixtures. These solvents can be used alone or with water. The carrier is generally present in an amount of about 20 to about 95%,

preferably 30-90%, more preferably 40-80% by weight of the composition. The lubricant composition can also be in the form of a concentrate to which the carrier is later added.

5 It is also desired to include water conditioning or chelating agent in the lubricant composition. Where water is used as carrier, there is a tendency for the hardness cations, such as calcium, magnesium, and ferrous ions to reduce the efficacy of the surfactants, and even form precipitates when coming into contact with ions such as sulfates and carbonates. Water
10 conditioning agents can be used to form complexes with the hardness ions. Any such agents can be used. The preferable water conditioning agent is ethylene diamine tetracetic acid and its sodium salt, such as Versene™ sold by Dow Chemicals™, diethylene triamine pentacetic acid, and sodium salt of nitrilotriacetic acid and N-hydroxyethylene diamine triacetic acid.

15

Generally the water conditioning agent is present in the range about 0.1% to 15% by weight of the lubricant composition, more preferably in the range of 1% to 5%.

20

In addition to the components described above, other components can be included with the lubricant to provide desired properties. For example, other antimicrobial agents besides the quaternary phosphonium, colorants, foam inhibitors, foam generators, PET stress cracking inhibitors, viscosity modifiers, friction modifiers, antiwear agents, extreme pressure
25 agents, detergents, dispersants, corrosion inhibitors, and/or film forming materials can be used, each in amounts effective to provide the desired results.

30

Examples of useful antiwear agents and extreme pressure agents include zinc dialkyl dithiophosphates, tricresyl phosphate, and alkyl and aryl disulfides and polysulfides.

Examples of useful detergents and dispersants include alkylbenzene sulfonic acid, alkylphenols, carboxylic acids, alkylphosphonic acids and their calcium, sodium and magnesium salts, and polybutenylsuccinic acid derivatives.

5

Examples of useful foam inhibitors include methyl silicone polymers.

Useful additional antimicrobial agents (besides the phosphonium) include disinfectants, antiseptics and preservatives. Non-limited examples
10 include phenols including halo- and nitrophenols and substituted bisphenols such as 4-hexylresorcinol, 2-benzyl-4-chlorophenol and 2,4,4'-trichlor-2'-hydroxydiphenyl ether, organic and inorganic acids and its esters and salts such as dehydroacetic acid, peroxy-carboxylic acids, peroxyacetic acid, methyl p-hydroxy benzoic acid, cationic agents such as quaternary
15 ammonium compound, aldehydes such as glutaraldehyde, antimicrobial dyes such as acridines, triphenylmethane dyes and quinones and halogens including iodine and chlorine compounds.

Also, the phosphonium compound can be used alone or in
20 conjunction with an oxidizing and/or non-oxidizing antimicrobial agent. Examples of useful oxidizing antimicrobial agents are H_2O_2 , peracids, iodophors, chlorine dioxide, and interhalides. Examples of useful non-oxidizing antimicrobial agents include quaternary ammonium compounds, alkyl amines, phenolics, and tin and silver salts.

25

Non-limiting examples of useful foam generators include surfactants such as non-ionic, anionic, cationic and amphoteric compounds.

Non-limiting examples of useful friction modifiers include fatty acids
30 with 12-18 carbon atoms and fatty alcohols, esters of fatty acids such as glycerides, fatty amines and amides.

The lubricant composition of the invention can be used in any application where lubricity is desired. For example, the lubricant can be used to treat any type of container, including those mentioned in the Background section of this application. For example, glass or plastic
5 containers, including polyethylene terephthalate containers, and metal containers, such as aluminum cans, papers, treated papers, coated papers, laminates, ceramics, and composites can be treated.

By container is meant any receptacle in which material is or will be
10 held or carried. For example, beverage or solid or non-solid food and non-food containers are commonly used containers. Beverages include any liquid suitable for drinking, for example, fruit juices, soft drinks, water, milk, wine, artificially sweetened drinks, sports drinks, and the like. For example, containers used in the brewery, dairy, and food industry can be used. The
15 lubricant provides excellent lubricity and detergency, as well as antimicrobial activity and non-corrosivity. If used in the beverage or food industry, the lubricant composition should be non-toxic and environmentally acceptable.

The lubricant can also be used to lubricate any conveyor where
20 articles are intended to be conveyed as well as such articles. Examples of such articles include crates, carcasses, and mechanical parts.

Since the lubricant composition has high detergency and is non-corrosive, it can also be applicable to various cleaning applications such as
25 in dishwasher detergents and car washes, and other applications requiring these properties.

The lubricant composition can be applied to a conveyor system surface that comes into contact with containers, the container surface that
30 needs lubricity, or both. The surface of the conveyor that supports the containers may comprise fabric, metal, plastic, elastomer, composites, or mixture of these materials. Any type of conveyor system used in the field can be treated according to the present invention.

The lubricant composition can be applied in any desired manner, for example, by spraying, wiping, rolling, brushing, or a combination of any of these, to the conveyor surface and/or the container surface. If the container surface is coated, it is only necessary to coat the surfaces that come into contact with the conveyor, and/or that come into contact with other containers. Similarly, only portions of the conveyor that contacts the containers need to be treated.

The lubricant composition can provide a temporary or permanent coating on the container. A permanent coating is one that remains on the coated container during its life, whereas a temporary coating is one that can be or is removed during processing of the container or during its use. A temporary coating can be removed as desired, for example, by spraying with water.

The use of quaternary phosphonium is advantageous compared with amines because the amine compounds increase alkalinity of the system, and increase the likelihood of stress cracking in PET. The phosphonium does not have this disadvantageous property.

Examples

The invention can be better understood by the following examples. The examples are for illustration purposes only, and do not limit the scope of the invention.

Example 1: Antimicrobial efficiency measurement - Rate of Kill Test Results.

The rate of kill of a lubricating composition according to the invention (#2) and a comparative composition (#1) of the following compositions were tested.

Example 1: Antimicrobial efficiency measurement - Rate of Kill Test
Results.

The rate of kill of a lubricating composition according to the invention
5 (#2) and a comparative composition (#1) of the following compositions were
tested.

		#1 Quat. Am.	#2 Quat. Phos.
Material	ve %	Wt %	Wt %
DI water	100.00%	65.1	57.6
Tetrasodium EDTA PWD 4 H ₂ O	82.00%	4.9	4.9
Didecyl dimethyl ammonium chloride, 50%	50.00%	5	0
Tolcide™ PS 200, 20%	20.00%	0	12.5
Complex organo phosphate ester	100.00%	12.5	12.5
Polyethylene phenol ether phosphate	100.00%	2.5	2.5
Linear alcohol 60-70% ethoxylate	100.00%	8	8
Sodium hydroxide 50%	50.00%	2	2
	TOTAL	100	100

The Rate of Kill Antimicrobial Efficiency Test was carried out according to the method described below:

5

The bacteria, staphylococcus aureus ATCC6538 and enterobacter aerogenes ATCC 13048, were transferred and maintained on nutrient agar slants. Twenty-four hours prior to testing, 10ml tubes of nutrient broth were inoculated with a loopful of each organism, to provide sufficient volume for testing. The inoculated nutrient broth cultures were incubated at 35 degrees C. Shortly before testing, equal volumes of both incubated cultures were mixed and used as the test inoculum.

15 The test solution was diluted to 0.5% wt. with sterile soft water. One ml of the inoculum was combined with 99 mls of the lubricant solution and swirled.

20 A one ml sample of the lubricant/inoculum mixture was removed after a 60 minute exposure time and added to 9 mls of a sterile chambers neutralizing broth. The neutralized sample was serially diluted with buffered water and plated in duplicate using TGE (tryptone glucose extract) neutralizing agar. The plates were incubated at 37 degrees C for 48 hours then examined.

Controls to determine initial inoculum were prepared by adding one ml of inoculum to 99mls of buffered water, serially diluting the mixture with additional buffered water, and plating with TGE.

- 5 The % reduction and log reduction were calculated as:

% Reduction = $[(\# \text{ of initial inoculum} - \# \text{ of survivors}) / (\# \text{ of initial inoculum})] \times 100$ where: $\# \text{ of initial inoculum} = 3.4 \times 10^6 \text{ CFU/ml}$

- 10 CFU/ml: Colony forming units/ml

Log Reduction = $-(\log_{10}) (\# \text{ of survivors} / \# \text{ of initial inoculum})$

A Log reduction of 1 indicates a 90% reduction of the microorganisms.

15

Log reduction at 0.5% concentration, 60 mins exposure

Formula	Log reduction	
#1	> 6.26	Quaternary ammonium containing lube for comparison (#1)
#2	> 6.26	Quaternary phosphonium containing lube (#2)

- 20 Example 1 indicates that the phosphonium-based composition has a significant kill efficiency.

Example 2: Effect of combination of fatty acid and quaternary phosphonium on antimicrobial properties

Stock solution:

Material	Active %	% solution
DI water	100.00%	70.1
Tetrasodium EDTA PWD 4 H ₂ O	82.00%	4.9
Complex organo phosphate ester	100.00%	12.5
Polyethylene phenol ether phosphate	100.00%	2.5
Linear alcohol 60-70% ethoxylate	100.00%	8
Sodium hydroxide 50%	50.00%	2
Total		100

To 25.0g of the above solution was added:

#1	0.63g Tolcide PS 75, 0.68g Oleic acid
#2	0.83g Tolcide PS 75, 1.095g Oleic acid
#3	1.17g Tolcide PS 75, 0.63g Oleic acid

5 The solutions were tested by the same method described above for Example 1.

Log reduction at 0.5% concentration, 60 mins exposure

Formula	Log reduction
#1	> 5.97
#2	> 6.04
#3	> 5.97
Example-1 #2	> 5.97

10

The above examples 1 and 2 demonstrate that the quaternary phosphonium containing lube showed an adequate kill as compared with the quaternary ammonium, and the addition of certain amount of oleic acid to the quaternary phosphonium lube did not reduce the kill. The later results are especially surprising because it would have been expected that the anionic oleic acid would interact with the cationic quaternary phosphonium and reduce the killing efficiency of the composition. This is because it known that oleic acid reduces the antimicrobial efficiency when combined with quaternary ammonium.

20

Example 3: Pet bottle stress crazing/cracking test
:

PET 2L bottles were charged with 1850g of chilled water, 31.0g of Na bicarbonate and 31.0g of citric acid. The charged bottles were rinsed with DI water and set on clean paper towels for 6 hours.

25

Each of the charged bottles was then placed into a plastic bag containing 100g of the testing solution and the bag was sealed. 3 bottles for each solution were prepared. The charged bottles sealed inside the bag

30

were placed in a lined bin and aged at 43.3 degrees C, 50% RH in an environmental chamber. The base of the bottles was examined for craze after 65 hours aging.

5 Results:

Sample	Chemical	WL(g) in 100g DI H2O	Active Compound	WL (g) of Active Compound	Base Appearance after Aging
#1	Bardac™ 2250 (50%)	0.09	Didecyl dimethyl ammonium chloride	0.045	Bottle 1: crazed
					Bottle 2: crazed
					Bottle 3: crazed
#2	Tolcide PS 200 (20%)	0.225	Tetrakis(hydroxymethyl) phosphonium sulphate	0.045	Bottle 1: no craze
					Bottle 2: no craze
					Bottle 3: no craze

These results demonstrate that Tolcide PS 200 did not craze the PET bottle while Bardac did under the experimental condition, indicating that the quaternary phosphonium compound has less tendency than the quaternary ammonium to contribute to PET stress crazing.

Example 4: Beverage Compatibility Test

The beverage compatibility of the lubricant composition was determined as follows. The testing lubricants were diluted to 0.1% and/or 0.5% with soft water. The diluted lubricant was then mixed with a cola beverage at the ratios as indicated in the examples to prepare the lubricant-beverage combination. The mixture clarity was observed at time of 0 and 24 hours after the mixing. A cloudy mixture indicated an inadequate beverage compatibility.

Formula of the invention:

Material	active %	% solution	RM wt g	solid wt g
DI water	100%	66.97%	70.1	
tetrasodium EDTA PWD 4 H2O	82%	4.68%	4.9	4.02
Tolcide PS75	75%	4.46%	4.67	3.5
Oleic acid	100%	2.39%	2.5	2.5
complex organo phosphate ester	100%	11.94%	12.5	12.5
linear alcohol 60-70% ethoxylate	100%	7.64%	8	8
sodium hydroxide 50%	50%	1.91%	2	1
Total		100%	104.67	31.52

The comparison product evaluation for comparison study was DicolubeTM RS 148 (an amine containing synthetic lube), commercially available from Diversey-Lever.

5 Pepsi Cola was used for evaluation and soft water was used for lubricant dilution.

	Dicolube TM RS 148 0.5%	Formula of the Invention, 0.5%	Soft Water
Pepsi TM Cola	30 ml	30 ml	30 ml
0.5% lube	10 ml	10ml	
Soft water			10 ml
Observation at 0 hr.	Cloudy	Clear	Clear
Observation at 24 hr.	Solid precipitated	Clear	Clear

The results indicated that the beverage compatibility of the lubricant of the invention is superior to DicolubeTM RS 148.

10

The beverage compatability of the lubricating composition of the invention is shown below at various concentrations.

			Solution Clarity					
			Soft Water (control)		0.1% Lube		0.5% lube	
Beverage	Beverage ml	Lube (or water) ml	At 0 hr.	At 24 hr.	At 0 hr.	At 24 hr.	At 0 hr.	At 24 hr.
Coke TM	30	10	Clear	Clear	Clear	Clear	Clear	Clear
Coke	20	20	Clear	Clear	Clear	Clear	Clear	Clear
Coke	10	30	Clear	Clear	Clear	Clear	Clear	Clear
Diet Coke TM	30	10	Clear	Clear	Clear	Clear	Clear	Clear
Diet Coke	20	20	Clear	Clear	Clear	Clear	Clear	Clear
Diet Coke	10	30	Clear	Clear	Clear	Clear	Clear	Clear
Pepsi	30	10	Clear	Clear	Clear	Clear	Clear	Clear
Pepsi	20	20	Clear	Clear	Clear	Clear	Clear	Clear
Pepsi	10	30	Clear	Clear	Clear	Clear	Clear	Clear
Mountain Dew TM	30	10	Clear	Clear	Clear	Clear	Clear	Clear
Mountain Dew	20	20	Clear	Clear	Clear	Clear	Clear	Clear
Mountain Dew	10	30	Clear	Clear	Clear	Clear	Clear	Clear

WO 01/23504

PCT/US00/17525

			Solution Clarity					
			Soft Water (control)		At 0.1% hr.		0.5% lube	
Beverage	Beverage ml	Lube (or water) ml		At 24 hr.	At 0 hr.	At 24 hr.	At 0 hr.	At 24 hr.
Minute Maid™ Orange	30	10	Clear	Clear	Clear	Clear	Clear	Clear
Minute Maid Orange	20	20	Clear	Clear	Clear	Clear	Clear	Clear
Minute Maid Orange	10	30	Clear	Clear	Clear	Clear	Clear	Clear
Root Beer	30	10	Clear	Clear	Clear	Clear	Clear	Clear
Root Beer	20	20	Clear	Clear	Clear	Clear	Clear	Clear
Root Beer	10	30	Clear	Clear	Clear	Clear	Clear	Clear
7 Up™	30	10	Clear	Clear	Clear	Clear	Clear	Clear
7 Up	20	20	Clear	Clear	Clear	Clear	Clear	Clear
7 Up	10	30	Clear	Clear	Clear	Clear	Clear	Clear

The results of this table show that the quaternary phosphonium
 5 containing lube has an exceptional beverage compatibility and outperforms the comparison product.

Example 5: Effect of adding non-neutralized oleic acid on lubricity.

10 The lubricity was tested as follows: Lubricity test was done by measuring the drag force (frictional force) of a weighted cylinder (228g) riding on a rotating disc, wetted by the test sample. The material for the cylinder is mild steel and for the rotating disc is stainless steel, respectively. The drag force, using an average value, was measured with a solid state transducer,
 15 which is connected to the cylinder by a thin flexible string. The weight of the cylinder made from the same material is consistent for all the measurements.

The drag force is directly related to the friction coefficient of the lubrication.
 20 A higher drag force indicates a higher coefficient of friction or a poorer lubricity. A good lubricant would have a typical drag force less than 45.

		#1	#2	#3	#4
	Active%	RM wt g	RM wt g	RM wt g	RM wt g
DI water	100.0%	70.10	70.1	70.10	70.10
Tetrasodium EDTA PWD 4 H ₂ O	82.0%	4.90	4.9	4.90	4.90
Tolcide PS75	75.0%	3.32	3.32	3.32	4.00
Oleic acid			2.52	4.38	3.76
Complex organo phosphate ester	100.0%	12.50	12.5	12.50	12.50
Polyethylene phenol ether phosphate	100.0%	2.50	2.5	2.50	2.50
Linear alcohol 60-70% ethoxylate 7	100.0%	8.00	8	8.00	8.00
Sodium hydroxide 50%	50.0%	2.00	2	2.00	2.00
Total		103.32	105.84	107.70	107.76

Lubricity test results of the solution at 0.1% conc. In soft water

Frictional force (g)	#1	#2	#3	#4
Minimum	33.4	29	29.3	28.1
Maximum	45.7	32.8	33	31.8
Average	39.6	30.9	31.2	30

5

This example shows that the addition of oleic acid significantly increased the mild steel on stainless steel lubricity.

Example 6: Effect of neutralization of oleic acid on alkalinity of the lubricant.

10

The testing solutions were diluted to 1.0% with DI water then titrated with 0.1N HC1. The total alkalinity was calculated by:

$$\% \text{ alkalinity as CaCO}_3 = \frac{(\text{mls HC1 to pH 4.0})(\text{N HC1})}{(\text{g sample titrated})} \times \frac{100.1}{2} \times \frac{100}{1000}$$

15

		solution A	solution B	solution C
Material	active %	RM wt(g)	RM wt(g)	RM wt(g)
DI water	100.0%	35.05	32.33	22.22
Tetrasodium EDTA PWD 4 H2O	82.0%	2.45	2.45	2.45
Tolcide PS75	75.0%	2.34	2.34	2.34
Oleic acid	100.0%	1.25	0.00	
Oleic acid neutralized with NaOH*	8.9%			14.08
complex organo phosphate ester	100.0%	6.25	6.25	6.25
linear alcohol 60-70% ethoxylate	100.0%	4.00	4.00	4.00
sodium hydroxide 50%	50.0%	1.00	1.00	1.00

*Oleic acid was neutralized with NaOH as follows:

- 5 10.0 g (0.0354 moles) of oleic acid in 100g of DI was neutralized with 2.65g (0.0331 moles) of 50% NaOH to result in a clear solution with pH = 9.65.

Results of alkalinity analysis:

10

Solution		Alkalinity as CaCO ₃ At 1% of conc. Lube (ppm)
A	With Non-neutralized oleic acid	80.5
B	With No oleic acid	90.0
C	With Neutralized oleic acid	121.5

15 This example demonstrates alkalinity was reduced by non-neutralized oleic acid The alkalinity of solution C does not conform to current guidelines of less than 100 ppm. It is desirable to reduce alkalinity because alkalinity is known to decompose PET.

Example 7: Effect of adding fatty acid on solution stability:

Material	Active %	#1	#2
		Wt. %	Wt.%
DI water	100.00%	65.1	57.6
Tetrasodium EDTA PWD 4 H2O	82.00%	4.9	4.9
didecyl dimethyl ammonium chloride, 50%	50.00%	5	0
Tolcide PS 200, 20%	20.00%	0	12.5
complex organo phosphate ester	100.00%	12.5	12.5
Polyethylene phenol ether phosphate	100.00%	2.5	2.5
linear alcohol 60-70% ethoxylate	100.00%	8	8
sodium hydroxide 50%	50.00%	2	2
	total	100	100

0.7g of oleic acid was added to 25.0g of the above solutions and mixed, then the mixture appearance was examined:

#1	Cloudy and phase separation appeared
#2	Clear

- 5 This example demonstrates that adding certain amount of fatty acid to the phosphonium based lube does not create a phase separation, whereas with the ammonium based lube phase separation occurred.

10 The materials used in the above examples are shown in the following Table:

Function	Chemical Name	Trade Name	Vendor
Carrier	DI water		
Chelating agent	Tetrasodium EDTA PWD 4 H ₂ O	Versene (R) 220	Dow Chem.
Antimicrobial agent	Tetrakis(hydroxymethyl) phosphonium sulphate, 75% in water	Tolcide PS75	Albright and Wilson
Antimicrobial agent	Tetrakis(hydroxymethyl) phosphonium sulphate, 20% in water	Tolcide PS200	Albright and Wilson
Lubricating agent	Oleic acid	Emersol™ 213	Henkel
Lubricating agent and detergent	Complex organo phosphate ester	Emphos PS-236	Witco
Detergent	linear alcohol 60-70% ethoxylate	Neodol™ 25-7	Shell
Neutralizer	sodium hydroxide 50%		
Antimicrobial agent	Didecyl dimethyl ammonium chloride	Bardac 2250	Lonza
Detergent and lubricating agent	Polyethylene phenol ether phosphate		Rhone-Poulenc

- 15 The invention provides use of quaternary phosphonium compounds in a beverage lubricant sufficient to provide antimicrobial properties, good PET compatibility, and beverage compatibility and retained good product stability even if a non-neutralized fatty acid is used.

It has also been found that using non-neutralized fatty acid as a lubricating agent, not only significantly enhances the universal lubricity, but

also reduces the alkalinity of the lubricant. Hence reduction in PET bottle stress cracking is anticipated.

Moreover, it has been found that the addition of a fatty acid to the
5 quaternary phosphonium lubricant does not alter the concentrated solution stability. In contrast, a phase separation often results while adding the fatty acid to quaternary ammonium containing lubricants.

It is believed that Applicants' invention includes many other
10 embodiments, which are not herein described, accordingly this disclosure should not be read as being limited to the foregoing examples or preferred embodiments.

WHAT WE CLAIM IS:

1. A container or a conveyor for a container, whose surface is at least temporarily coated at least in part with a lubricant composition comprising a lubricating agent and an antimicrobial effective amount of a quaternary phosphonium compound wherein the container is made from polyethylene terephthalate.
2. A container or conveyor as claimed in claim 1, wherein the composition comprises water as a carrier.
3. A container or conveyor as claimed in claim 1, wherein the lubricating agent comprises a non-neutralized fatty acid.
4. A container or conveyor as claimed in claim 3, wherein the non-neutralized fatty acid comprises oleic acid or tall oil fatty acid.
5. A container or conveyor as claimed in claim 1, wherein the quaternary phosphonium compound comprises a phosphonium sulfate.
6. A container or conveyor as claimed in claim 1, wherein the container is a beverage container.
7. A container or conveyor as claimed in claim 6, wherein a bottom surface of the container is treated with the lubricant composition.
8. A process for lubricating a container, comprising applying to at least a portion of a surface of the container a lubricant composition comprising a lubricating agent and an antimicrobial effective amount of a quaternary phosphonium compound, wherein the container is made from polyethylene terephthalate.

9. A process as claimed in claim 8, wherein the applying comprises coating with the lubricant composition portions of the container that come into contact with other containers or a conveyor.

5 10. A process as claimed in claim 8, wherein a conveyor is coated with the lubricant composition, whereby the lubricant composition on the conveyor system is applied to the container while the container is on the conveyor system.

10 11. A process for lubricating a conveyor, comprising applying to at least a portion of the conveyor, a lubricant composition comprising a lubricating agent and an antimicrobial effective amount of a quaternary phosphonium compound, and then moving a container on the conveyor.

15 12. A lubricant composition comprising a phosphate ester lubricating agent and an antimicrobial effective amount of a quaternary phosphonium compound.

13. A lubricant composition comprising a fatty acid lubricating agent and an antimicrobial effective amount of a quaternary phosphonium compound.

20 14. A lubricant composition as claimed in claim 13, wherein the fatty acid comprises a non-neutralized fatty acid.

25 15. A lubricant composition as claimed in claim 14, further comprising a phosphate ester lubricating agent.

16. A lubricant composition comprising an amine lubricating agent and an antimicrobial effective amount of a quaternary phosphonium compound.

30 17. A lubricant composition for lubricating at least a portion of a conveyor for transporting an object, or for coating at least in part the object for transportation by the conveyor, the lubricant composition comprising a quaternary phosphonium

compound and a quaternary ammonium compound.

18. A method of preventing or reducing stress cracking of polyethylene terephthalate containers comprising treating the container with a lubricating composition comprising a lubricating agent and a quaternary phosphonium compound.

19. A lubricant for a beverage container, the lubricant comprising a quaternary phosphonium compound and a lubricating agent.

20. A lubricant composition for lubricating at least a portion of a conveyor for transporting an object, or for coating at least in part the object for transportation by the conveyor, the lubricant composition comprising a quaternary phosphonium compound and one or more of an oxidizing antimicrobial agent and a non-oxidizing antimicrobial agent.

21. A container or conveyor as claimed in claim 1, wherein the phosphonium compound is selected from the group consisting of tetrakis (hydroxymethyl) phosphonium sulfate, tetrabutyl phosphonium bromide, tetrabutyl phosphonium chloride, tributyl (tetradecyl) phosphonium chloride, trioctyl (octadecyl) phosphonium iodide, and tetrakis (hydroxymethyl) phosphonium chloride.

22. A process as claimed in claim 8, wherein the phosphonium compound is selected from the group consisting of tetrakis (hydroxymethyl) phosphonium sulfate, tetrabutyl phosphonium bromide, tetrabutyl phosphonium chloride, tributyl (tetradecyl) phosphonium chloride, trioctyl (octadecyl) phosphonium iodide, and tetrakis (hydroxymethyl) phosphonium chloride.

23. A lubricant composition comprising about 0.5 to about 25 weight percent of a phosphonium compound, about 0.1 to about 20 percent by weight of a fatty acid, about 1 to about 50 percent by weight of a phosphate ester, a neutralizing agent in

an amount effective to provide the composition with a pH of about 3 to about 9.5, about 0.5 to about 30 percent by weight of a nonionic surfactant, and water as a carrier, the percents based on the total weight of the composition.

5 24. A lubricant composition comprising 2 to 10 weight percent of a phosphonium compound, 0.5 to 7 percent by weight of a fatty acid, 5 to 25 percent by weight of a phosphate ester, a neutralizing agent in an amount effective to provide the composition with a pH of 5.5 to 7.5, 2 to 10 percent by weight of a nonionic surfactant, and water as a carrier, the percents based on the total weight of the
10 composition.

25. An object for transportation by a conveyor or the conveyor for the object, whose surface is at least temporarily coated at least in part with a lubricant composition comprising a lubricating agent and an antimicrobial effective amount of
15 a quaternary phosphonium compound.

26. A lubricant composition as claimed in claim 13, wherein the fatty acid is partially neutralized.

20