


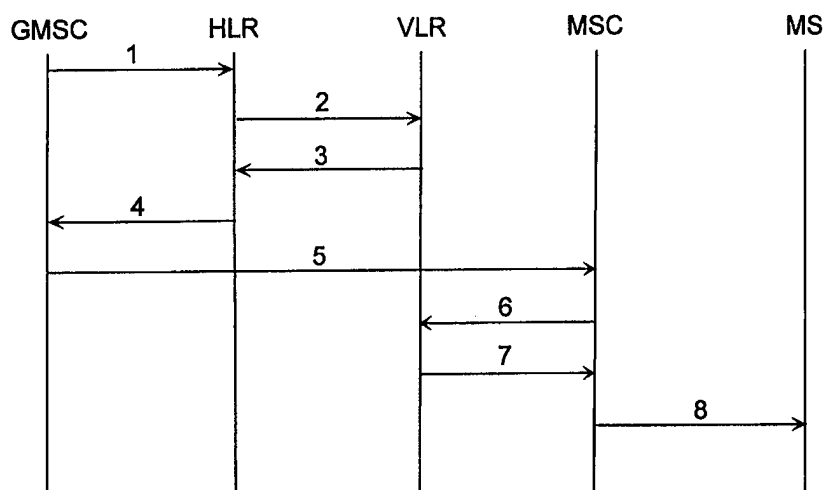

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38	A1	(11) International Publication Number: WO 98/25430 (43) International Publication Date: 11 June 1998 (11.06.98)
(21) International Application Number: PCT/FI97/00758 (22) International Filing Date: 4 December 1997 (04.12.97) (30) Priority Data: 964857 4 December 1996 (04.12.96) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): WALLENIOUS, Jukka [FI/FI]; Keinutie 8 G 41, FIN-00940 Helsinki (FI). (74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: CALL SET-UP IN MOBILE COMMUNICATIONS SYSTEM**(57) Abstract**

In a call set-up method a called mobile station (MS) is checked upon routing an incoming call to see if incoming calls are barred. In prior art call set-up an incoming call barring prevents the routing of all calls destined to the mobile station. The call set-up method of the present invention is characterised by bypassing the incoming call barring in the case of a priority call. The invention also relates to a mobile communications system comprising a first subscriber register (HLR) for permanent storage of subscriber data and a second subscriber register (VLR) for temporary storage of subscriber data. Incoming call barring is set in subscriber data. The mobile communications system of the invention is characterized by the system being arranged to bypass the incoming call barring in the case of a priority call.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CALL SET-UP IN MOBILE COMMUNICATIONS SYSTEM

FIELD OF THE INVENTION

The invention relates to a call set-up method in a mobile communications system, in which method a called mobile station is checked upon
5 routing an incoming call to see if incoming call barring is activated.

The invention further relates to a mobile communications system comprising a first subscriber register for permanent storage of subscriber data and a second subscriber register for temporary storage of subscriber data, in which subscriber data incoming call barring is set.

10

BACKGROUND OF THE INVENTION

In the mobile communications system the incoming calls to the mobile station subscriber are routed on the basis of the location information stored in a visitor register. However, the mobile station subscriber does not
15 necessarily always want to receive incoming calls. Then the number of calls to be routed can be restricted e.g. by using call barring or call forwarding. For example in the GSM mobile communications system the subscriber can prevent the connecting of incoming calls when the mobile station is located outside its home network, or the connecting of all incoming calls. The closed user
20 group also determined for a mobile communications system restricts the connecting of incoming calls. Only calls between subscribers within a group are allowed to the closed user group. For other subscribers the closed user group bars the routing of a call.

Figure 1 of the accompanying drawings shows a simplified block
25 diagram of the Pan-European GSM mobile communications system. Mobile Station MS is through a radio path connected to a Base Transceiver Station BTS, in the case shown in Figure 1 to base station BTS1. Base Station System BSS consists of Base Station Controller BSC and base transceiver stations BTS which are controlled by BSC. Mobile Services Switching Centre
30 MSC usually controls several base station controllers BSC. Mobile services switching centre MSC communicates with other mobile services switching centres and through Gateway Mobile Services Switching Centre GMSC the GSM network joins other networks, such as Public Switching Telephone Network PSTN, another Public Land Mobile Network PLMN, Integrated Services
35 Digital Network ISDN or Service Centre SC. Operation and Maintenance Centre OMC observes the function of the entire system. The subscriber data of

mobile station MS are permanently stored in Home Location Register HLR of the system and temporarily stored in that particular Visitor Location Register VLR in the area of which mobile station MS happens to be located. Information about visitor location register VLR within the area of which mobile station MS is located, is updated to home location register HLR upon location updating. Mobile station MS location information is stored in visitor location register VLR with an accuracy of Location Area LA.

Figure 2 of the accompanying drawings illustrates a normal mobile terminating call set-up in the GSM-type mobile communications system. Only the network elements that are relevant to the call set-up signalling are shown in the Figure. A call initiated by subscriber A is routed from the network of subscriber A, which can be for example a public land mobile network PLMN, an intelligent network IN or a public switching telephone network PSTN, to the gateway mobile services switching centre GMSC of the PLMN home network of subscriber B, which GMSC sends an inquiry (message 1) about the routing information to home location register HLR of subscriber B. Home location register HLR checks from the subscriber data of mobile station MS whether an incoming call barring or a user group code for restricting calls to a closed user group has been set for the mobile station. If the barring or the user group code have not been set, home location register HLR sends a roaming number request for visitor location register VLR at the location area of mobile station MS in message 2. Visitor location register VLR reserves Mobile Station Roaming Number MSRN and sends the number to home location register HLR in reply message 3. Home location register HLR sends the roaming number further to gateway mobile services switching centre GMSC that inquired about routing information in message 4. After this, gateway mobile services switching centre GMSC can on the basis of the roaming number route the call further to mobile services switching centre MSC of subscriber B using call set-up message 5. Mobile services switching centre MSC detects on the basis of mobile station roaming number MSRN that the called mobile station MS is located in the area controlled by mobile services switching centre and requests the subscriber data (message 6) of the called mobile station from visitor location register VLR. A user group code or user group codes for restricting calls to a closed user group may also have been set on visitor location register, whereby visitor location register VLR prevents during the inquiry stage of the subscriber data the further routing of the call if the user group code does not match. If the user

group barring has not been set on visitor location register VLR it sends the required subscriber data to mobile services switching centre MSC in message 7. In step 8 a normal mobile station MS page and a call set-up are performed when mobile station MS has responded.

- 5 If the subscriber data stored in home location register HLR of mobile station MS comprise an incoming call barring or a user group code, that differs from the CUG interlock code transmitted in the call set-up message, a roaming number request is not sent to visitor location register VLR but the call set-up is interrupted. Home location register HLR replies to the inquiry about
10 routing information sent by gateway mobile services switching centre GMSC (message 1 in Figure 2) informing with message 4 in Figure 2 that the routing of the call cannot be done. The call attempt initiated by subscriber A is aborted and an announcement about the prevention of the call set-up is sent to subscriber A. Correspondingly, if the user group barring has been set on the sub-
15 scriber data of visitor location register VLR, visitor location register VLR does not send the requested subscriber data to mobile services switching centre MSC but sends a notice about the interruption of the call set-up.

- A problem with said call barrings is that the barring applies to all calls irrespective of their importance. Thus, the routing of the call is interrupted
20 also e.g. in respect of an absolutely important announcement call initiated by the intelligent network, such as a wake-up call or an announcement about the number of prepaid call minutes.

SUMMARY OF THE INVENTION

- 25 An object of the present invention is to enable a call set-up of individual subscribers A when incoming calls to subscriber B are barred.

This new type of call set-up is achieved with the method of the invention characterized by bypassing, in this method, the incoming call barring in the case of a priority call.

- 30 The mobile communications method of the invention set forth in the preamble characterized by the mobile communications system being arranged to bypass an incoming call barring in the case of a priority call.

- The invention is based on the idea that individual subscribers A are provided with a bypass of call set-up barring. The priority subscriber identifier
35 is transmitted as a supplement to the call set-up signalling of a subscriber A entitled to bypass call barring, on the basis of said identifier the barring func-

tionality is bypassed upon call set-up and the call is routed to subscriber B.

An advantage of such a call set-up is that the barring of a call can be bypassed in respect of an important call.

5 BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the invention will be described in greater detail in connection with the preferred embodiments with reference to the accompanying drawings, in which:

Figure 1 shows the parts of the mobile communications network
10 that are essential to the invention;

Figure 2 shows the call set-up as a signalling diagram in the GSM mobile communications system; and

Figure 3 shows the call set-up method of the invention as a flow
15 diagram.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention can be applied to any mobile communications system. Below the invention is described in greater detail by way of example particularly in connection with the Pan-European digital GSM mobile
20 communications system. Figure 1 shows the simplified structure of the GSM network described earlier. With respect to the more detailed description of the GSM system reference is made to the GSM references and to the book "The GSM System for Mobile Communications", M. Mouly & M. Pautet, Palaiseau, France, 1992, ISBN:2-9507190-0-7.

25 What is meant by incoming call barring in this application is any barring set for a mobile station, on the basis of which the routing of the call to the mobile station is interrupted. Examples of call barring are: incoming call barring, incoming call barring when the mobile station is located outside its home network, call forwarding and a closed user group in respect of subscribers not
30 belonging to the group. Although call forwarding does not actually prevent call set-up but forwards a call to another number than to the one subscriber A has called, the functionality of the present invention can also be utilized in this case so that the call can be routed to the mobile station, for which e.g. the announcement call is destined.

35 An incoming call may also be a special function of the network, such as an announcement to a subscriber. Such a special call can come from

the service control point of the intelligent network (IN) in an SCP message INITIATE_CALL_ATTEMPT also comprising the number (ISDN-B) of subscriber B and the calling subscriber identity (CLI).

Figure 2 illustrates signalling associated with call set-up described earlier in connection with prior art call set-up. In the following, the invention will be described in greater detail in connection with a primary embodiment with further reference to Figure 2. In this embodiment the bypass of call barring is associated with message 1 of Figure 2. The call initiated by subscriber A is routed to gateway mobile services switching centre GMSC. Using MAP signalling of the GSM system gateway mobile services switching centre GMSC sends an inquiry with message SEND_ROUTING_INFORMATION (message 1) concerning routing information to home location register HLR. In the primary embodiment of the invention the priority subscriber identifier data, in this case a subscriber class of a calling subscriber (subscriber A), is added to the operator-specific field of this message. The subscriber classes entitled to bypass call barring are determined and subscriber A's subscriber class transmitted upon call set-up is compared with the determined priority subscriber classes. For example the values of the general subscriber class of the telecommunications network: an operator, a wake-up device, a priority user, a test user etc. can be determined to belong to the group of priority users the present invention refers to. The call barring bypass in accordance with the invention is carried out when the subscriber class is found in the priority list. On the basis of this identifier data home register HLR detects that the calling subscriber is entitled to bypass the possible call barring. When home location register HLR detects such identifier data it bypasses the incoming call barring established for the mobile station and performs the call set-up similarly as if no call barring had been set. In respect of the other messages of Figure 2 the call set-up of the mobile communications system utilizing the primary embodiment of the method of the invention is similar to a successful call set-up of the prior art described above. Thus, home location register HLR sends in message 2 of Figure 2 a roaming number request to visitor location register VLR, to which request visitor location register VLR replies by sending the reserved mobile station roaming number MSRN in message 3. In message 4 home register sends the roaming number to gateway mobile services switching centre GMSC that required the routing information, and on the basis of the roaming number the gateway mobile services switching centre GMSC routes the call to the correct

mobile services switching centre MSC (message 5). In message 6 mobile services switching centre MSC requests subscriber data from visitor location register VLR which replies by sending the requested subscriber data in message 7. Mobile station MS page and the connecting of the call is conducted in step 8.

In the other primary embodiments of the invention appropriate identifier data can be used as an indication of the importance of the call and as an identifier of a priority subscriber e.g. subscriber A's number or a particular important data parameter. The identifier data is compared with a predetermined list of identifiers entitled to call barring bypass. The interpretation of the identifier data entitled to bypass the call barring in accordance with the present invention is preferably performed in the particular element of the mobile communications system where the barring functionality is located e.g. in home location register HLR as described above in connection with the primary embodiment. The interpretation of the identifier data of the invention can also be performed in another network element suitable for the purpose e.g. in gateway mobile services switching centre GMSC. Then gateway mobile services switching centre GMSC interprets on the basis of subscriber A's identifier of the call routed to gateway mobile services switching centre GMSC, e.g. a subscriber class, if the call is entitled to bypass the call barring and connects a particular parameter to the inquiry about the routing information of priority calls, on the basis of which parameter the element implementing the barring functionality, e.g. home location register HLR, bypasses the call barring and proceeds normally with the routing of the call.

In the following, the primary embodiment of the call set-up method of the present invention is described in the flow diagram of Figure 3. The call initiated by subscriber A is routed to gateway mobile services switching centre GMSC that sends an inquiry about routing information to home location register HLR of subscriber B (block 31). In block 32 home location register HLR checks in accordance with the present invention, if an identifier is connected to the inquiry about routing information, e.g. the subscriber class or the number of subscriber A, which would identify the call in progress as a priority call. If subscriber A is detected as a priority subscriber of the invention the call barring check of block 33 is bypassed and the call set-up is continued from block 34. In block 34 home location register HLR sends visitor location register VLR a roaming number request, to which visitor location register VLR replies by

sending mobile station roaming number MSRN reserved for the call to home location register HLR. Home location register HLR transmits the roaming number further to gateway mobile services switching centre GMSC. The call is routed on the basis of the roaming number to subscriber B and a speech connection is established to mobile station MS (block 35).

If home location register HLR detects in block 32 of Figure 3 that subscriber A is not entitled to bypass the call barring, then the call set-up is performed in accordance with prior art, whereby home location register HLR checks in block 33, if incoming calls to subscriber B are barred. The call set-up then proceeds as described in the above prior art description either by interrupting the call set-up (block 36) if the incoming calls have been barred or by routing the call to mobile station MS (blocks 34-36) if no barring has been set.

The invention will next be described in greater detail in connection with the secondary embodiment with further reference to Figure 2. In this embodiment the call barring bypass is associated with messages 1, 5 and 6 of Figure 2. In the secondary embodiment of the invention the inquiry about routing information is performed as described above in the primary embodiment of the invention. The call initiated by subscriber A is routed to gateway mobile services switching centre GMSC which sends the routing information inquiry with message SEND_ROUTING_INFORMATION (message 1) to home location register HLR. The priority subscriber identifier data is added to the operator-specific field of this message in accordance with the present invention. On the basis of this identifier data home location register HLR detects that the subscriber is entitled to bypass the possible call barring. When home location register HLR detects such identifier data it bypasses the incoming call barring set for the mobile station and performs its part of the call set-up in the same way as if no call barring had been set. Thus, home location register HLR sends in message 2 of Figure 2 to visitor location register VLR a roaming number request, to which visitor location register VLR replies by sending reserved mobile station roaming number MSRN in message 3. In message 4 home register sends the roaming number to gateway mobile services switching centre GMSC which requested the routing information. On the basis of the routing number gateway mobile services switching centre GMSC routes in message 5 the call to proper mobile services switching centre MSC, in whose operator-specific field the priority subscriber identifier data is added in accordance with the secondary embodiment of the invention. In message 6

MAP_SEND_INFO_FOR_INCOMING_CALL mobile services switching centre MSC requests the subscriber data of the called mobile station from visitor location register VLR. The priority subscriber identifier data, e.g. the identifier transmitted from gateway mobile services switching centre GMSC in message 5 above, is added to subscriber data request message 6. On the basis of identifier data visitor location register VLR detects that the calling subscriber is entitled to bypass user group barring possibly set on the visitor register, whereby visitor location register VLR bypasses the possible call barring and replies to mobile services switching centre MSC by sending the requested subscriber data in message 7. Mobile station MS page and call connecting are performed in message 8 as described above in the description of the prior art.

In the following, the invention will be described in more detail in connection with the third embodiment of the invention with further reference to Figure 2. In this embodiment the call barring bypass is associated with messages 1 and 5 and step 8 of Figure 2. In the third embodiment of the invention the routing information inquiry is performed in the same way as in the primary embodiment of the invention described above. The call initiated by subscriber A is routed to gateway mobile services switching centre GMSC which sends the inquiry about routing information with message SEND_ROUTING_INFORMATION (message 1) to home location register HLR. The priority subscriber identifier data is added to the operator-specific field of this message in accordance with the invention, on the basis of which home location register HLR detects that the calling subscriber is entitled to bypass the call barring possibly set. When home location register HLR detects such identifier data it bypasses the incoming call barring set for the mobile station and performs the call set-up in the same way as if no call barring had been set. Thus, home location register HLR sends in message 2 of Figure 2 a roaming number request to visitor location register VLR, to which visitor location register VLR replies by sending mobile station roaming number MSRN in message 3. Home register sends in message 4 the routing number to gateway mobile services switching centre GMSC which inquired about the routing information. On the basis of the routing number gateway mobile services switching centre GMSC routes the call to proper mobile services switching centre MSC in message 5, in whose operator-specific field the priority subscriber identifier data is added as described above in connection with the secondary embodiment. In message 6 mobile services switching centre MSC in-

quires about the subscriber data of the called mobile station from visitor location register VLR which replies to mobile services switching centre MSC by sending the requested subscriber data in message 7. In step 8 mobile station MS is paged and the priority subscriber identifier data, e.g. the identifier
5 transmitted from gateway mobile services switching centre GMSC above in message 5, is connected to the speech connection set-up message which is to be sent upon call set-up. On the basis of the identifier data mobile station MS for example bypasses the manufacturer-specific call barring possibly set at the mobile station. If mobile station MS enables the selection of different ringing
10 tones for an incoming call, then the above described identifier data can be utilized when selecting the ringing tone.

The functionality of the present invention can also be implemented as a combination of the secondary and the third embodiments described above. In this case a possible incoming call barring is bypassed in home location register HLR, in visitor location register VLR and in mobile station MS on
15 the basis of the priority subscriber identifier data connected to the call set-up signalling.

The drawings and the attached description are only meant for illustrating the idea of the invention. The details of the call set-up of the invention
20 may vary within the scope of the claims. Even though the invention has above been described mainly in connection with an incoming call, the described functionality can be used in other forms of telecommunication.

CLAIMS

1. A call set-up method in a mobile communications system, in which method a called mobile station is checked upon routing an incoming call to see if incoming call barring is activated, **characterized** by steps of
5 checking whether the call set-up signalling contain a priority call identifier,

bypassing the checking of the incoming call barring or a possible incoming call barring on the basis of said identifier upon routing of the priority call, and

10 connecting a call to a called mobile station (MS).

2. A method as claimed in claim 1, **characterized** by, in order to bypass the incoming call barring,

attaching the priority call identifier to a routing information inquiry message (1), and

15 bypassing the incoming call barring in a home location register (HLR) on the basis of the identifier upon routing of the priority call.

3. A method as claimed in claim 1 or 2, **characterized** by, in order to bypass the incoming call barring,

attaching the priority call identifier to a call routing message (5)

20 attaching the priority call identifier to a subscriber data inquiry message (6), and

bypassing the incoming call barring in a visitor location register (VLR) on the basis of said identifier upon routing of the priority call.

4. A method as claimed in claims 1, 2 or 3, **characterized**
25 by, in order to bypass the incoming call barring,

attaching the priority call identifier to a call set-up message (5)

attaching the priority call identifier to speech connection set-up message (8), and

30 bypassing the incoming call barring in a mobile station (MS) on the basis of said identifier upon routing of the priority call.

5. A method as claimed in claim 4, **characterized** by, in order to connect a call to a called mobile station,

selecting a mobile station alarm signal on the basis of said identifier.

6. A method as claimed in any one of claims 1-5, **characterized**
35 **ized** by recognizing the priority call on the basis of subscriber A's subscriber class.

7. A method as claimed in any one of claims 1-5, **characterized** by recognizing the priority call on the basis of subscriber A's number.

8. A method as claimed in any one of claims 1-7, **characterized** by comparing, in order to recognize the priority call, said identifier with
5 a predefined identifier list.

9. A mobile communications system comprising a first subscriber register (HLR) for permanent storage of subscriber data and a second subscriber register (VLR) for temporary storage of subscriber data, in which subscriber data incoming call barring is set, **characterized** by the mobile
10 communications system being arranged

to attach a priority call identifier to call set-up signalling,

to bypass the incoming call barring on the basis of said identifier upon routing of the priority call, and

to connect the call to the called mobile station (MS).

15 10. A mobile communications system as claimed in claim 9, **characterized** by the home location register (HLR) of the mobile communications system being arranged to bypass the incoming call barring on the basis of said identifier upon routing of the priority call.

11. A mobile communications system as claimed in claim 9 or 10,
20 **characterized** by the visitor location register (VLR) being arranged to bypass the incoming call barring on the basis of the identifier upon routing of the priority call.

12. A mobile communications system as claimed in any one of claims 9-11, **characterized** by the incoming call barring being set at a
25 mobile station and by the mobile station (MS) being arranged to bypass the incoming call barring on the basis of the identifier upon routing of the priority call.

Fig. 1

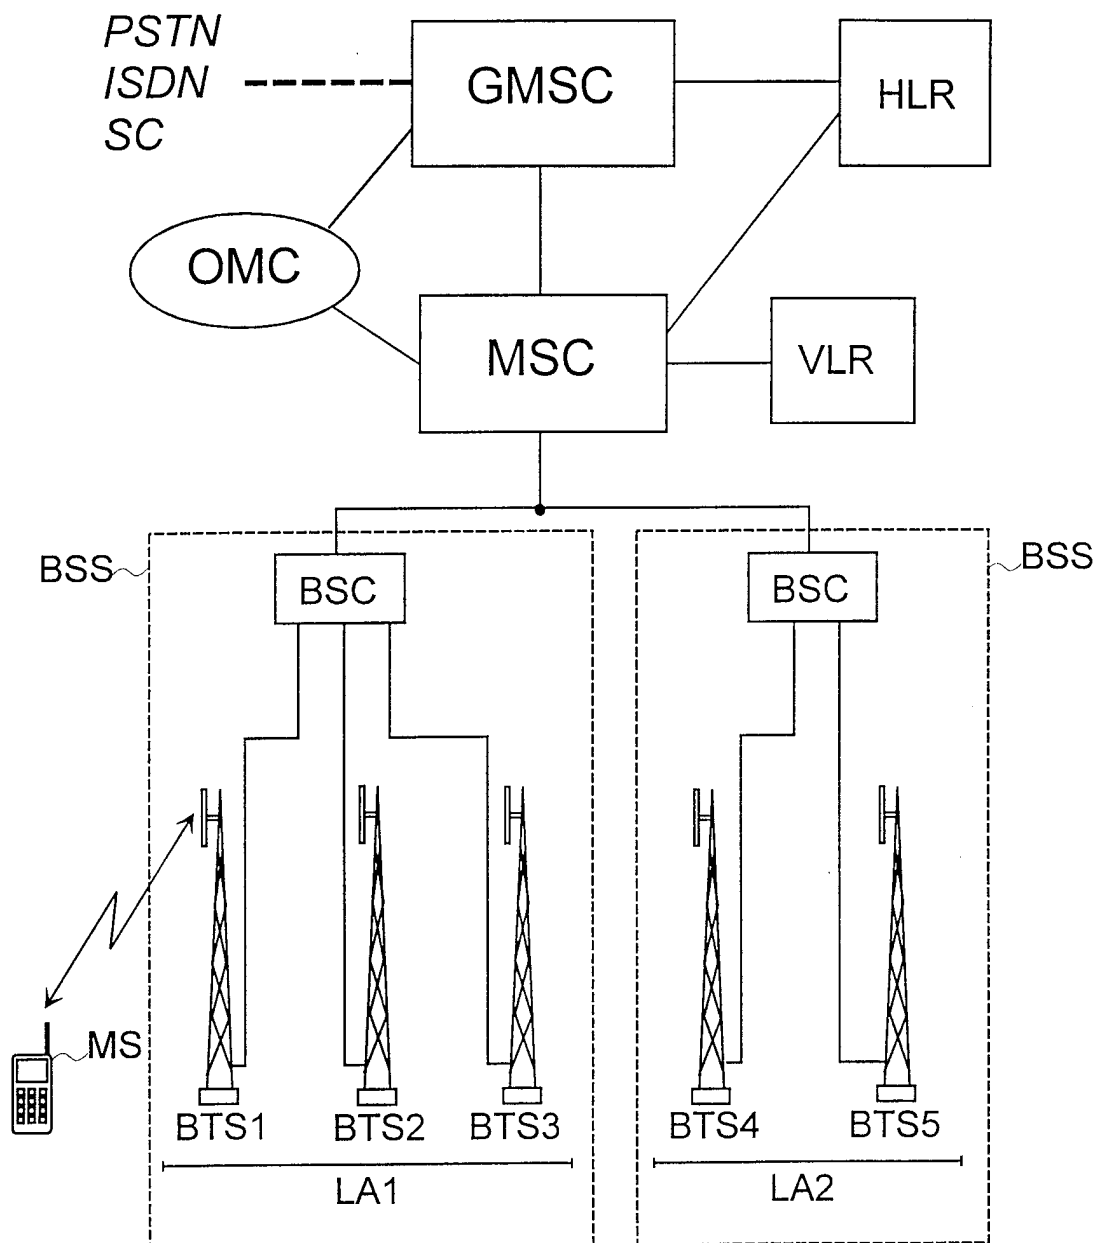


Fig. 2


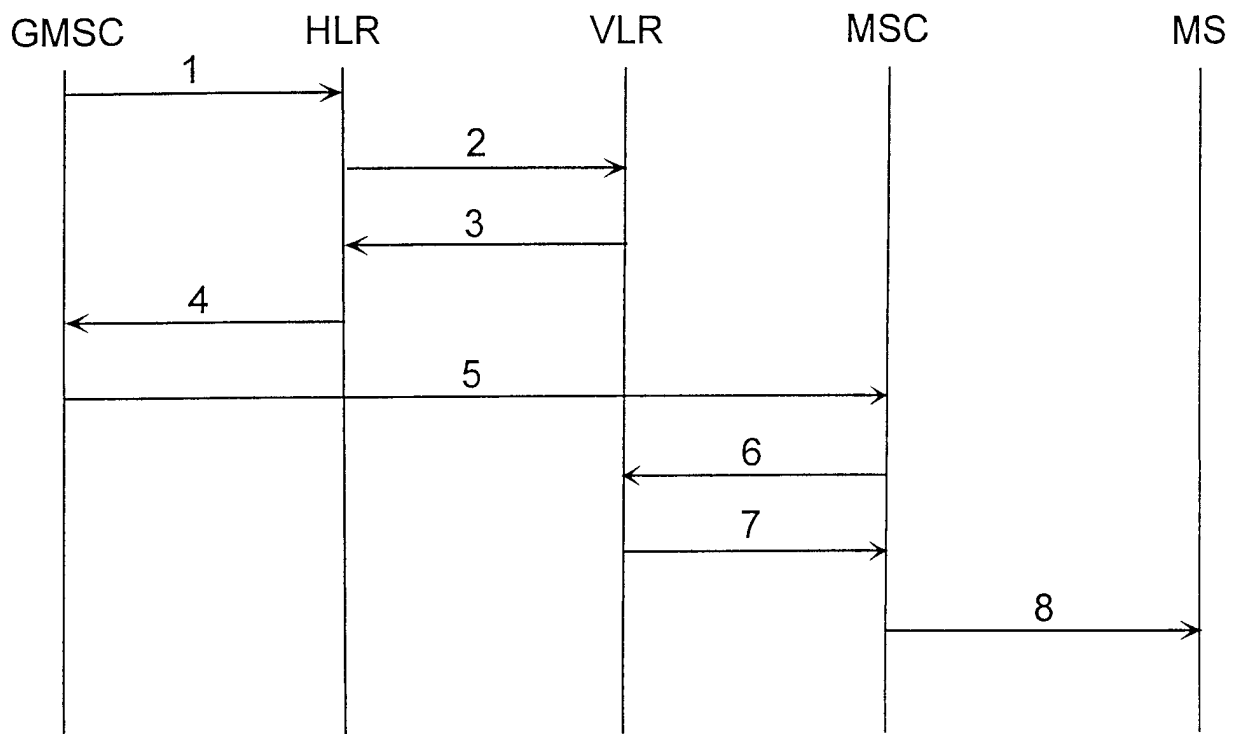


Fig. 3

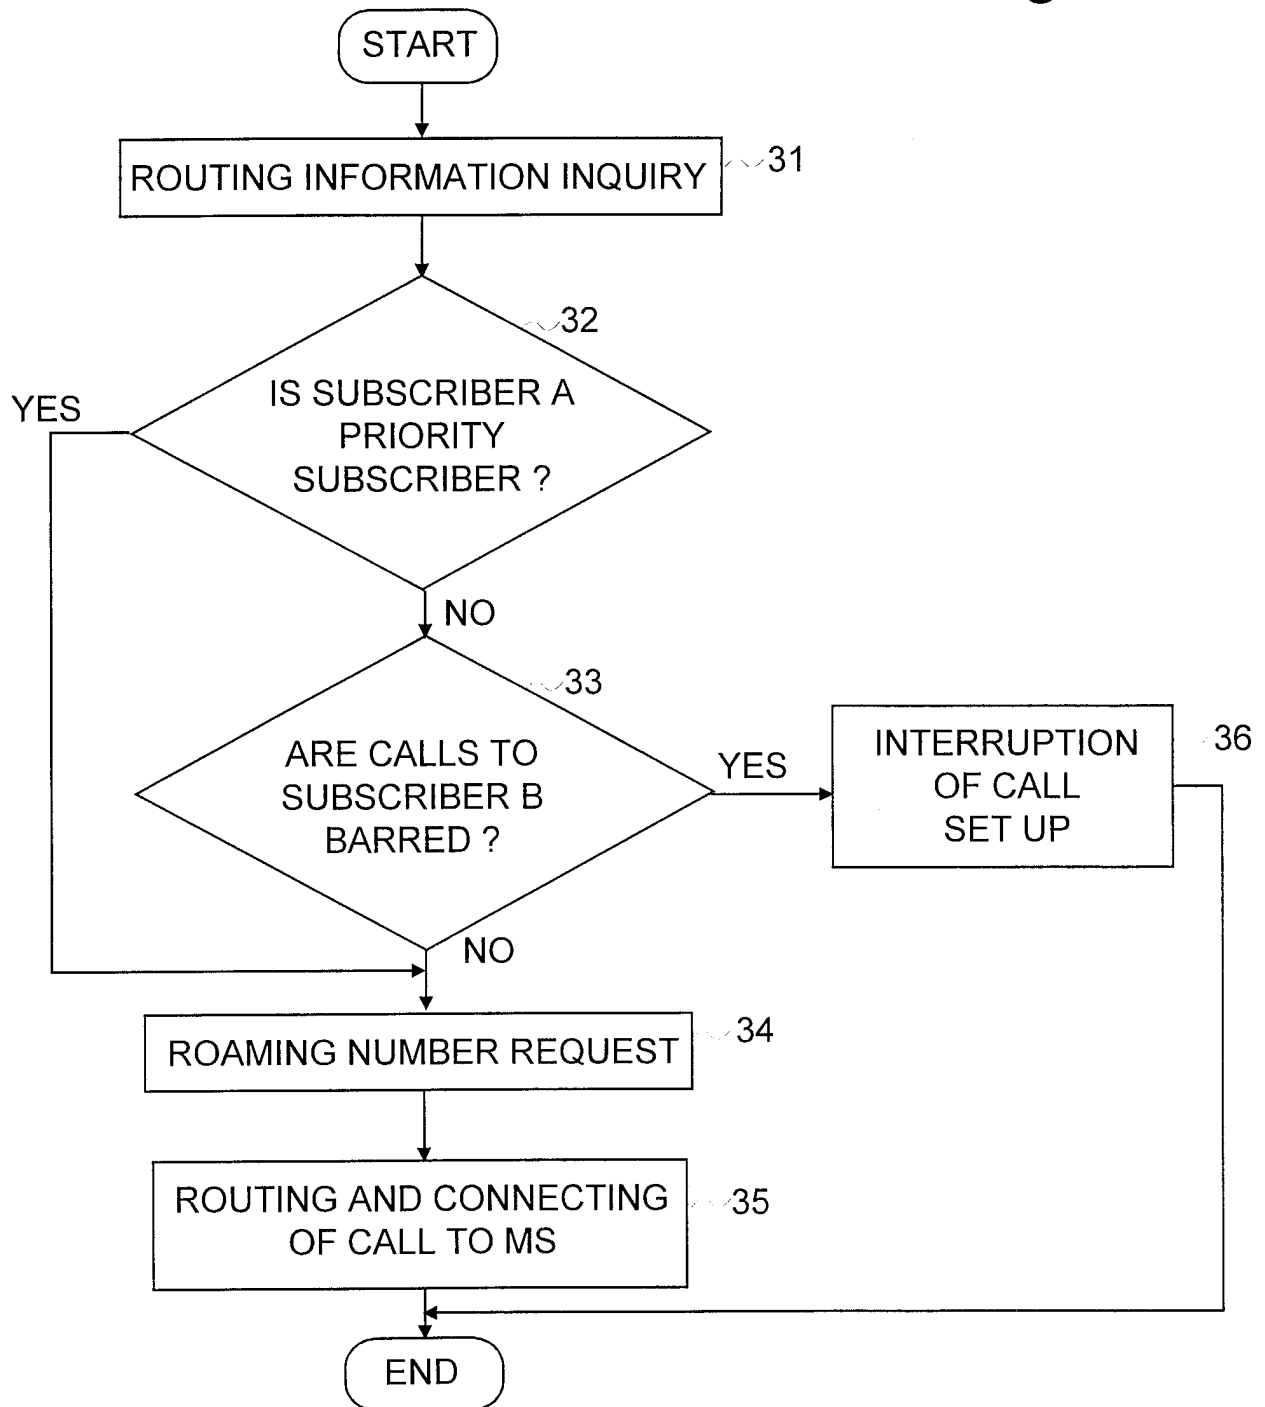

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00758

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9505721 A1 (NOKIA TELECOMMUNICATIONS OY), 23 February 1995 (23.02.95), page 4, line 4 - page 7, line 1, abstract --	1-12
X	WO 9528792 A1 (BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY), 26 October 1995 (26.10.95), page 8, line 35 - page 9, line 13, abstract --	1
A	EP 0600401 A1 (ALCATEL SEL AKTIENGESSELLSCHAFT), 8 June 1994 (08.06.94), abstract --	1,7-10

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

29 April 1998

Date of mailing of the international search report

30 -04- 1998

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Peter Hedman
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00758

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4953202 A (TERENCE J. NEWELL), 28 August 1990 (28.08.90), column 2, line 44 - column 4, line 36 -- -----	1,7-10

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/04/98

International application No.

PCT/FI 97/00758

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9505721 A1	23/02/95	AU 674781 B AU 7461594 A CN 1113406 A EP 0664069 A FI 95428 B,C FI 933576 A JP 8502639 T US 5634197 A	09/01/97 14/03/95 13/12/95 26/07/95 13/10/95 13/02/95 19/03/96 27/05/97
WO 9528792 A1	26/10/95	AU 2146395 A CA 2187454 A CN 1146261 A EP 0755602 A JP 9512146 T US 5583923 A	10/11/95 26/10/95 26/03/97 29/01/97 02/12/97 10/12/96
EP 0600401 A1	08/06/94	DE 4240479 A	09/06/94
US 4953202 A	28/08/90	AU 6127586 A DE 3684127 A EP 0228439 A,B IN 166329 A WO 8700376 A	30/01/87 09/04/92 15/07/87 14/04/90 15/01/87