



(86) Date de dépôt PCT/PCT Filing Date: 2005/07/12
(87) Date publication PCT/PCT Publication Date: 2006/04/13
(45) Date de délivrance/Issue Date: 2011/11/08
(85) Entrée phase nationale/National Entry: 2007/04/02
(86) N° demande PCT/PCT Application No.: CA 2005/001075
(87) N° publication PCT/PCT Publication No.: 2006/037206
(30) Priorité/Priority: 2004/10/07 (US10/960,527)

(51) Cl.Int./Int.Cl. *B03D 1/02* (2006.01),
B03D 1/01 (2006.01), *B03D 1/012* (2006.01)

(72) Inventeurs/Inventors:
DAI, ZONGFU, CA;
GARRITSEN, JULIE-ANN ARLENE, CA;
WELLS, PETER FREDERIC, CA;
XU, MANQIU, CA

(73) Propriétaire/Owner:
CVRD INCO LIMITED, CA

(74) Agent: SMART & BIGGAR

(54) Titre : DEPRESSION DES ARSENIURES DANS LA FLOTTATION DE PLUSIEURS MINERAUX SULFURES
(54) Title: ARSENIDE DEPRESSION IN FLOTATION OF MULTI-SULFIDE MINERALS

(57) **Abrégé/Abstract:**

A mineral separation process includes wet-grinding the ore to liberation of minerals, oxidizing the slurry using air, hydrogen peroxide or other oxidants and floating the valuable minerals at a pH between about 9.0 and 10.0 with a xanthate as collector, and a combination of a polyamine and a sulfur containing species as depressants for arsenide minerals. This depressant suite effectively depresses the flotation of arsenide minerals with no effect on the flotation of the valuable minerals.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 April 2006 (13.04.2006)

PCT

(10) International Publication Number
WO 2006/037206 A1

(51) International Patent Classification⁷: **B03D 1/02**,
1/01, 1/012

(21) International Application Number:
PCT/CA2005/001075

(22) International Filing Date: 12 July 2005 (12.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/960,527 7 October 2004 (07.10.2004) US

(71) Applicant (for all designated States except US): **INCO LIMITED** [CA/CA]; 145 King Street West, Suite 1500, Toronto, Ontario M5H 4B7 (CA).

(72) Inventors: **DAI, Zongfu**; 5464 Whitehorn Avenue, Mississauga, Ontario L5V 1V5 (CA). **GARRITSEN, Julie-Ann Arlene**; 1275 Northside Road, Burlington, Ontario L7M 1H8 (CA). **WELLS, Peter Frederic**; 424 Fourth Line, Oakville, Ontario L6L 5A4 (CA). **XU, Man-qiu**; 5186 Parkplace Circle, Mississauga, Ontario L5V 2M2 (CA).

(74) Agents: **SMART & BIGGAR** et al.; P.O. Box 2999, Station D, 900 - 55 Metcalfe Street, Ottawa, Ontario K1P 5Y6 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ARSENIDE DEPRESSION IN FLOTATION OF MULTI-SULFIDE MINERALS

(57) Abstract: A mineral separation process includes wet-grinding the ore to liberation of minerals, oxidizing the slurry using air, hydrogen peroxide or other oxidants and floating the valuable minerals at a pH between about 9.0 and 10.0 with a xanthate as collector, and a combination of a polyamine and a sulfur containing species as depressants for arsenide minerals. This depressant suite effectively depresses the flotation of arsenide minerals with no effect on the flotation of the valuable minerals.

WO 2006/037206 A1

ARSENIDE DEPRESSION IN FLOTATION OF MULTI-SULFIDE MINERALS

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates generally to the field of mineral separation and in particular to a flotation process for depressing arsenic minerals using the synergistic combination of a polyamine, a sulfur containing species, and oxidation.

The production of most metals proceeds in two steps. First, a metal compound is concentrated from an ore, which is mostly an oxide or a sulfide. Second, the metal concentrate is smelted and refined.

The first step in producing metals is breaking apart the ore by crushing and grinding, and separating particles of metal minerals from the gangue. Gangue is a general term for valueless minerals which are mined together with the valuable minerals.

The separation of a metal mineral from the gangue is most commonly achieved by a process called flotation. The mineral particles are suspended in a fluid in a tank under agitation. Air is forced or sucked into the suspension and broken into air bubbles. The valuable metal mineral particles become attached to the air bubbles and float (hence the name "flotation") to the surface, forming a froth, which can be skimmed off. The gangue particles are not attached to the air bubbles and are discharged at the bottom of the tank.

Complete selectivity with respect to the separation of the individual minerals is impossible to achieve and often impure concentrates are produced.

It is known to add other chemical reagents to improve the selectivity of the separation process. One class of such reagents are the so-called depressing agents known to reduce the flotation rate of gangue minerals. Depressants affect the flotation process by

rendering the unwanted mineral hydrophilic (i.e. water wettable), thus reducing the possibility of the unwanted mineral being floated simultaneously with those substances which are to be concentrated in the froth.

5 **[007]** The concentrates need further processing or refinement in subsequent treatment steps to extract metals by high temperatures or chemical processes. Roasting, converting and smelting remove iron, sulfur and other impurities. The ore is heated in oxygen or air. The sulfur combines with oxygen and is blown off as gas. The remaining
10 metal oxide must be further refined and purified.

[008] Arsenic containing minerals are sometimes found in close association with base and precious metal minerals and, as a result, the co-mining of arsenic with metal minerals is inevitable. Mines may produce tailings with high residual arsenic concentrations due to the
15 presence of arsenic in the ore. Mining of arsenic-bearing ores with the consequent oxidation of sulfides and release of metals and metalloids produces considerable contamination potential. Arsenic can be a by-product of smelters and coal or waste combustion.

[009] If arsenic minerals are floated with metal minerals into the
20 concentrates, they will be carried over to the subsequent pyrometallurgical processes. This creates two issues: smelters may constitute a major source of arsenic emissions from operations which pyrometallurgically treat sulfide concentrates containing arsenic. This is a major environmental concern. The other is the detrimental effect
25 of arsenic on the metallurgical performance of the pyrometallurgical processes (Jackson, Nesbitt, Scaini, Dugal and Bancroft, Gersdorffite (NiAsS) chemical state properties and reactivity toward air and aerated, distilled water, American Mineralogist, vol. 88, pp. 890-900, 2003). It is often important that arsenic minerals are depressed during
30 flotation of metal minerals so that the former are not carried over to

the pyrometallurgical processes. This requires effective arsenic depressants to be added during flotation.

[0010]

Nickel mining is particularly affected by high arsenic content. Nickel occurs in a number of minerals; the most economically important being pentlandite (nickel-iron sulfide) while violarite, millerite and garnierite (nickel-magnesium silicate) are also of importance. Pentlandite almost always occurs with much larger quantities of pyrrhotite (Fe_7S_8) which may contain a small fraction (up to 1%) of nickel but every effort is made to reject this mineral to tailings. Nickel is obtained commercially from pentlandite of the Sudbury region in Ontario, which produces about 30% of the world's supply of nickel. In Sudbury, nickel and copper sulfide minerals are concentrated by the flotation process into a Cu-Ni bulk concentrate, then smelted and converted to give sulfur dioxide, fayalite (iron silicate) slag and a Cu-Ni matte. The two metals are then separated from each other using the matte separation process. Mineral separation of Ni-Cu ores from the Sudbury region is discussed in greater detail in U.S. Patent 5,411,148.

[0011]

Arsenic occurs in various mineral forms, such as arsenides in sulfide minerals and as arsenate. One of the most common arsenic containing minerals is arsenopyrite (FeAsS). In the weathering of sulfides, arsenic can be oxidized to arsenite and arsenate. Arsenic oxide is also formed as a by-product of copper, lead and nickel smelting. The toxic nature of arsenic and its compounds presents a large concern for the environment. It has been found that certain ore bodies in the mines of the Sudbury region have arsenic content up to 200 times the normal content. Blending the ore into the feed to the mill has, at times, resulted in an increase in arsenic content of the Cu-Ni bulk concentrate to a level that significantly affects smelters and, more importantly, the efficiency of Cu-Ni separation in the matte separation plant. In the Sudbury region, the arsenic mainly occurs in

61790-1883

4

a sulfide mineral with nickel called gersdorffite (NiAsS), with a small amount being in the form of cobaltite (CoAsS).

[0012]

It is known in the prior art to use oxidation in combination with a magnesium chloride ($\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$), ammonium chloride (NH_4Cl) and ammonium hydroxide (NH_4OH) reagent (MAA) as a depressant for arsenic-containing minerals during flotation of base and precious metal sulfides (Abeidu and Almahdy, Magnesia Mixture as a Regulator in the Separation of Pyrite from Chalcopyrite and Arsenopyrite, International Journal of Mineral Processing, vol. 6, pp. 285-302, 1980; Yen and Tajadod, Selective Flotation of Enargite and Chalcopyrite, Flotation Kinetics and Modelling, pp. B8a49-B8a55, 2000; Tapley and Yan, The Selective Flotation of Arsenopyrite from Pyrite, Minerals Engineering, vol. 16, pp. 1217-1220, 2003). However in the case of ores containing pyrrhotite as a gangue sulfide, the oxidation step results in the activation of pyrrhotite flotation and consequently a low grade concentrate of the valuable metal.

[0013]

Depression of pyrrhotite during the flotation of Ni/Cu minerals has been achieved by using polyamines such as ethylene diamine (EDA), diethylenetetramine (DETA) and triethylenetetramine (TETA) as described in U.S. Patent 5,074,993, or in combination with sodium sulfite or other sulfoxy species with sulfur valence less than 6 as described in U.S. Patent 5,411,148.

[0014]

WO 98/08585 teaches that TETA may be used against a large array of minerals including arsenides in a leaching process. A two-component, aqueous chemical leaching solution is taught, comprising any suitable oxidizing agent such as hydrogen peroxide, and any suitable chelating agent such as TETA. However, the use of TETA in a process of flotation and depression of NiAsS is not disclosed.

[0015]

U.S. Patent 4,681,675 discloses flotation utilizing 3-hydroxytrimethylene sulfides as depressants for iron, nickel, copper,

lead, and/or zinc minerals, such as niccolite (NiAs) and tennantite ((Cu,Fe)₁₂As₄S₁₃).

[0016] U.S. Patent 2,805,936 teaches autoclave leaching of non-ferrous metals, particularly nickel and arsenic using nitric acid.

5 **[0017]** There is a general need in the field of metal recovery for depressing arsenic content. There is also a particular need in the fields of nickel and copper mining for a process of depressing pyrrhotite and arsenic while producing a high grade concentrate of the desired valuable nickel and copper metal such as pentlandite (FeNiS) and chalcopyrite (CuFeS₂).

10

SUMMARY OF THE INVENTION

[0018] It is an object of the present invention to provide a depressing agent for depressing unwanted arsenic in a variety of ores.

15 **[0019]** It is a further object of the present invention to provide a depressing agent for depressing pyrrhotite and arsenic in nickel and copper mining in particular.

[0020] Accordingly, a polyamine-sodium sulfite combination can be used not only to depress pyrrhotite but also to depress arsenic minerals, and this effect is more pronounced if the pulp is oxidized prior to the addition of the polyamine-sodium sulfite reagent combination.

20

[0021] The process for depressing arsenic in general, and depressing pyrrhotite and arsenic minerals particularly in nickel and copper mining includes the steps of wet-grinding the ore to liberation of minerals, oxidizing the slurry using an oxidant, and floating the valuable minerals at a pH between about 9.0 and 10.0 with a collector, and the combination of polyamine and a sulfur containing species as depressants for arsenide minerals. This depressant suite effectively depresses the flotation of arsenide minerals with minimal effect on the

25

30

61790-1883

6

valuable minerals. The polyamine is preferably TETA. The oxidant is preferably air or hydrogen peroxide. The sulfur containing species is preferably sodium sulfite. The collector is preferably a xanthate.

[0021.1]

5 Thus, according to one aspect of the present invention, there is provided a flotation process for selectively recovering valuable metals while rejecting arsenide minerals from an ore containing both said valuable metals and arsenide minerals comprising the steps of: wet-grinding the ore into a slurry; adjusting the pH of the slurry to a
10 preset value by the addition of reagents; oxidizing the slurry by providing an oxidizing environment to the slurry; adding a reagent suite of a polyamine and a sulfur-containing species to the slurry for depressing flotation of arsenide minerals; readjusting the pH of the slurry to the preset value by the addition of reagents; adding a collector and a frother at effective dosages to the slurry to float
15 valuable minerals to be recovered; and subjecting the slurry containing the collector and frother to flotation to float and selectively recover the valuable metal while rejecting the depressed arsenide minerals.

[0021.2]

20 According to another aspect of the present invention, there is provided a flotation process for selectively recovering high grade nickel and copper metal concentrates while rejecting arsenide minerals from nickel-copper ore comprising the steps of: wet-grinding the nickel-copper ore into a slurry; adjusting the pH of the slurry to a preset value with the addition of reagents; oxidizing the
25 slurry by providing an oxidizing environment to the slurry; adding a reagent suite of a polyamine and a sulfite to the slurry for depressing flotation of arsenide minerals; readjusting the pH of the slurry to the preset value with the addition of reagents; adding a collector and a frother at effective dosages to the slurry to float the nickel and
30 copper metals to be recovered; and subjecting the slurry containing the collector and frother to floatation to selectively recover high

61790-1883

6a

grade nickel and cooper metal concentrates while rejecting the depressed arsenide minerals.

[0022] The various features of novelty which characterize the invention, are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, its operating advantages and specific objects attained by its uses, reference is made to the accompanying drawings and descriptive matter in which a preferred embodiment of the invention is illustrated.

10

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] In the drawings:

[0024] Fig. 1a is a flow diagram of the general steps for mineral recovery;

[0025] Fig. 1b is a flow diagram of the steps for recovering final nickel and copper bulk concentrate;

15 [0026] Fig. 2a is a graph plotting the effect of the TETA/sulfite reagent combination on arsenic recovery against pentlandite recovery during flotation of a Sudbury area ore;

[0027] Fig. 2b is a graph plotting the effect of MAA on arsenic recovery against pentlandite recovery during flotation of a Sudbury area ore;

20 [0028] Fig. 2c is a graph plotting arsenic recovery against pentlandite recovery during flotation of a Sudbury area ore when both TETA/sulfite and MAA are added;

[0029] Fig. 3a is a graph plotting the effect of the TETA/sulfite reagent combination on pyrrhotite recovery against pentlandite recovery during flotation of a Sudbury area ore;

25

[0030] Fig. 3b is a graph plotting the effect of MAA on pyrrhotite recovery against pentlandite recovery during flotation of

- a Sudbury area ore;
- [0031] Fig. 3c is a graph plotting pyrrhotite recovery against pentlandite recovery during flotation of a Sudbury area ore when both TETA/sulfite and MAA are added;
- 5 [0032] Fig. 4a is a graph plotting the effect of the TETA/sulfite reagent combination on nickel grade against pentlandite recovery during flotation of a Sudbury area ore;
- [0033] Fig. 4b is a graph plotting the effect of MAA on nickel grade against pentlandite recovery during flotation of a Sudbury area ore; and
- 10 [0034] Fig. 4c is a graph plotting nickel grade against pentlandite recovery during flotation of a Sudbury area ore when both TETA/sulfite and MAA are added.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0035] A preferred embodiment of the process of the present invention for depressing arsenide in ore comprises the following steps. The preposition "about" before one or more values shall be applicable to each value unless indicated to the contrary.

[0036] The first step comprises wet-grinding ore to liberation of minerals thus producing a slurry. The temperature of the slurry is preferably between about 5° and 35° C. The slurry contains about 20% to 45% solids by weight.

25 [0037] The second step comprises adjusting the slurry pH using a pH regulator. The pH is preferably between about 9.0 and 10.0. The pH regulator is preferably lime.

[0038] The third step comprises oxidizing the slurry using an oxidant. The oxidant is preferably air or hydrogen peroxide.

30 [0039] The fourth step comprises conditioning the slurry with a

61790-1883

8

polyamine and sulfur containing species combination as depressants for arsenide minerals. The polyamine is preferably TETA. The sulfur containing species is preferably sodium sulfite.

[0040]

5

The final step comprises adding a collector in an effective dosage and a frother in an effective dosage to the slurry to float the valuable minerals. The collector is preferably a xanthate such as for example potassium amyl xanthate. The frother is preferably polypropylene glycol methyl ether such as Dowfroth® 250C commercially available from Dow Chemical Co.

10 **[0041]**

15

An effective dosage of collector is determined on a case-by-case basis, and understood by those skilled in the art to be a function of the amount of material to be floated and the fineness of grind. The dosage should be higher if the amount of target/valuable minerals contained in the ore is higher. The dosage should be higher if the grinding sizes are smaller. A normal range would be a minimum of about 10 g/tonne of ore to perhaps about 125 g/tonne of ore in cases where a substantial portion of the feed mass is to be recovered into the concentrate.

[0042]

20

An effective dosage of frother is also determined on a case-by-case basis and is understood by one skilled in the art to be a function of the pH and ionic strength of the aqueous phase, and the mass of material to be recovered by flotation. Typical levels would be between about 10 and 60 grams/tonne.

[0043]

25

The ratio of the polyamine to sulfur containing species ranges from about 1:1 to 1:8, and most preferably from about 1:1 to 1:4.

[0044]

30

Although the polyamine of the present invention is preferably TETA, it can be any other suitable polyamine containing -N-C-C-N- configuration such as ethylene diamine (EDA), 1,3-diaminopropane (DAP), (2-aminoethyl)-2-aminoethanol (AEAE), histidine, or polyethylenepolyamines such as diethylenetetramine (DETA) and

triethylenetetramine (TETA). The polyamine can also be any other polyethylenepolyamine in which the number of ethyleneamine units is equal to or greater than that in diethylenetriamine.

[0045]

Suitable sulfur containing species include thiosulfate, sulfides including sodium sulfide, ammonium sulfide, barium sulfide, hydrosulfides and polysulfides, sulfites including metabisulfites and hydrosulfites such as sodium metabisulfite and sodium hydrosulfite, dithionates and tetrathionates, calcium polysulfide and finally, sulfur dioxide and selected mixtures of the above. The cationic part, if any, of the above compounds may consist of but is not limited to hydrogen, sodium, potassium, ammonium, calcium, and barium. These are cited here only as examples since the success of the current process is not limited to these specific citations which are merely intended to serve for the purposes of process demonstration.

[0046]

The calcium polysulfide used in the current invention may be freshly prepared as follows. Elemental sulfur is added to a container having sufficient amount of water which is saturated with lime ($\text{Ca}(\text{OH})_2$) present in excess amount. The contents are stirred for an extended period at room temperature for the dissolution of sulfur in the highly alkaline medium. The period of preparation may be shortened by heating the contents. After the color of the solution turns to deep yellow, the excess solids may be filtered off, if desired, prior to the direct addition of the solution into the flotation cell in an effective dosage. For use in the bench scale tests, the preparation of this solution may be carried out in a 1 liter flask while bubbling nitrogen gas through it.

[0047]

The sulfur-containing reagents, if desired, may be added directly into the flotation cell in solid or gas form to exploit their full strength. The dosages required range from about 0.05 to 3.00 kg/tonne depending on the feed to be treated. In addition to sodium

61790-1883

10

sulfide, the use of barium sulfide (black ash) or ammonium sulfide produces the required conditioning effect on pyrrhotite. These sulfides are used in combination with various sulfites (e.g. sodium metabisulfite). In using some of these sulfites or sulfur dioxide, the pH of pulp decreases. The pH may drop to a value as low as about 6.5 to 7. In the preferred embodiment of the invention, the flotation pH should be between about 9 and 10 obtained by subsequent or simultaneous addition of an alkali.

[0048]

Although the preferred oxidant of the present invention is air or hydrogen peroxide, other suitable oxidants may include permanganate, oxygen or any other oxidants having the same or higher oxidation potential than air.

[0049]

In addition to xanthates, the collector of the present invention may be phosphine-based compounds or dithiophosphonates, alkylidiphosphates, thionocarbamates, thiourea or any other conventional sulfhydryl collectors.

[0050]

The steps for physically recovering a final concentrate of minerals in general are shown in Fig. 1a. First, the ore is ground in step 10. In step 20, magnetic separation diverts magnetic minerals producing magnetic concentrate and non-magnetic tails. Rougher concentrate is produced from rougher flotation in step 30. In step 40, scavenger flotation produces scavenger concentrate and rock tails. The scavenger concentrate is combined with the magnetic concentrate in step 50. The combination of the scavenger and magnetic concentrates is reground in step 60. Cleaner flotation produces cleaner concentrate and sulfur-rich tails. In step 80, the rougher concentrate produced from step 30 and the cleaner concentrate produced in step 70 are combined to produce the final concentrate recovered.

[0051]

In another embodiment of the invention concerning nickel and

copper recovery in particular, the depressant of the present invention effectively depresses the flotation of both arsenide minerals and pyrrhotite with minimal effect on chalcopyrite or pentlandite flotation. The process for depressing includes the steps of wet-grinding the ore into a slurry which typically contains pentlandite, chalcopyrite, pyrrhotite, gersdorffite, cobaltite, niccolite, and siliceous gangue materials, adjusting the pH of the slurry from about 9 to 10, providing an oxidizing environment to the slurry, adding a reagent suite such as TETA and sodium sulfite, and adding a collector and a frother at appropriate dosages to the slurry to float the copper sulfide and nickel sulfide minerals. The ratio of TETA to sodium sulfite by weight is most preferably between 1:2 and 1:4 by mass.

[0052] As a result of the process, arsenide minerals such as gersdorffite, niccolite, and cobaltite are depressed and useful nickel and copper metals in pentlandite and chalcopyrite are recovered.

[0053] The steps for physically recovering final nickel and copper bulk concentrate are shown in Fig. 1b. In step 110, the ore is ground. In step 120, magnetic separation diverts monoclinic pyrrhotite and produces magnetic concentrate and non-magnetic tails. In step 130, rougher flotation produces rougher concentrates. Scavenger flotation produces scavenger concentrate and rock tails in step 140. The scavenger concentrate is combined with magnetic concentrate in step 150. In step 160, the combination of the scavenger and magnetic concentrates is reground. Cleaner flotation produces cleaner concentrate and pyrrhotite tails in step 170. Finally, in step 180, the rougher concentrate and cleaner concentrate are combined as final copper nickel bulk concentrate.

[0054] An example of the superior results obtained with the synergistic oxidation/TETA/sodium sulfite preferred combination is shown below. A typical high arsenic nickel-copper ore from the Sudbury basin

containing 1.2% Cu, 2.4% Ni, 16.6% S and 0.06% As was ground to a P_{80} of 106 microns at 65% solids with the pulp adjusted to pH 9.5 with lime. The pulp was then diluted to 40% solids in a 2.2 liter laboratory Denver flotation cell while maintaining pH 9.5 with lime. A magnetic separation to reject part of the pyrrhotite was conducted before the slurry was oxidized for 30 minutes with air. TETA and sodium sulfite were then added prior to addition of potassium amyl xanthate and Dowfroth® 250C for flotation of a rougher concentrate. A scavenger concentrate was then collected at pH 9.5 using additional xanthate and frother. The scavenger concentrate and magnetic concentrate were combined and reground to 85% passing 38 microns and cleaned in a 1.1 liter Denver cell using the reagent combinations according to Table 1 below. The rougher concentrates and cleaner concentrates were combined as the final Cu-Ni bulk concentrate.

61790-1883

Table 1

Description	Rougher		Cleaner	
	Aeration (min)	TETA/sulfite (g/t)	Aeration (min)	TETA/sulfite (g/t) MAA (g/t)
◇ Baseline (no aeration, TETA/sulfite or MAA)	0	0	0	0
◆ Aeration/TETA/sulfite in rougher only	30	150/300	0	0
△ Aeration/TETA/sulfite in rougher, TETA/sulfite in cleaner	30	150/300	0	100/200
▲ Aeration/TETA/sulfite in rougher, Aeration/TETA/sulfite in cleaner	30	150/300	30	100/200
○ Aeration/TETA/sulfite in rougher, MAA in cleaner	30	150/300	0	0
● Aeration/TETA/sulfite in rougher, Aeration/MAA in cleaner	30	150/300	30	0
□ Aeration/TETA/sulfite in rougher, TETA/sulfite+MAA	30	150/300	0	100/200
■ Aeration/TETA/sulfite in rougher, Aeration/TETA/sulfite+MAA in cleaner	30	150/300	30	100/200

[0055]

5

10

The plotted lines in Figs. 2a-2c are identified in the description section of Table 1. As shown in Figs. 2a-2c, both the MAA and TETA/sulfite reagent combinations give good depression of arsenic minerals after pulp oxidation. Fig. 2a shows that aeration prior to TETA/sulfite addition enhances the effectiveness of this reagent combination on arsenic depression. Fig. 2b shows that aeration prior to MAA addition enhances its effectiveness on arsenic depression. A comparison of the graph in Fig. 2c with Fig. 2a and Fig. 2b indicates that combined use of these two reagent suites does not generate better metallurgical results than when either reagent suite is used alone.

[0056]

15

20

The plotted lines in Figs. 3a-3c are identified in the description section of Table 1. Figs. 3a-3c show that TETA/sulfite has strong depression on pyrrhotite flotation, but addition of MAA slightly promoted pyrrhotite flotation. Fig. 3a shows that aeration prior to TETA/sulfite addition enhances the effectiveness of this reagent combination on pyrrhotite depression. Fig. 3b shows that addition of MAA promotes pyrrhotite flotation. A comparison of the graph in Fig. 3c with Fig. 3a indicates that the effectiveness of TETA/sulfite on pyrrhotite depression remains the same whether MAA is added or not.

[0057]

25

The plotted lines in Figs. 4a-4c are identified in the description section of Table 1. The nickel grade/pentlandite recovery relationship, which would be indicative of the concentrate grade obtainable, is clearly much better for the TETA/sulfite combination than for MAA as shown in Figs. 4a-4c. Fig. 4a shows that due to the depression of pyrrhotite flotation by

5

TETA/sulfite, nickel grade is increased compared to the baseline. Since MAA slightly promotes pyrrhotite flotation, the final nickel grade is lower than the baseline in Fig. 4b. A comparison of the graph in Fig. 4c with Fig. 4a indicates that the effectiveness of TETA/sulfite combination on pyrrhotite depression and thus on nickel grade remains the same whether MAA is added or not.

[0058]

10

While a specific embodiment of the invention has been shown and described in detail to illustrate the application of the principles of the invention, it will be understood that the invention may be embodied otherwise without departing from such principles.

61790-1883

16

CLAIMS:

1. A flotation process for selectively recovering valuable metals while rejecting arsenide minerals from an ore containing both said valuable metals and arsenide minerals comprising the steps of:

5 wet-grinding the ore into a slurry;

adjusting the pH of the slurry to a preset value by the addition of reagents;

oxidizing the slurry by providing an oxidizing environment to the slurry;

10 adding a reagent suite of a polyamine and a sulfur-containing species to the slurry for depressing flotation of arsenide minerals;

readjusting the pH of the slurry to the preset value by the addition of reagents;

15 adding a collector and a frother at effective dosages to the slurry to float said valuable metals to be recovered; and

subjecting the slurry containing the collector and frother to flotation to float and selectively recover said valuable metals while rejecting the depressed arsenide minerals.

2. The process according to claim 1, wherein the preset value of the pH
20 of the slurry is about 9.0 to 10.0.

3. The process according to claim 1, wherein the pH of the slurry is adjusted by the addition of lime.

4. The process according to claim 1, wherein the oxidizing environment is created by utilizing an oxidant selected from at least one of the group consisting
25 of aeration, the addition of hydrogen peroxide, and the addition of permanganate ion.

61790-1883

17

5. The process according to claim 1, wherein said polyamine is selected from at least one of the group consisting of ethylene diamine, 1,3-diaminopropane, (2-aminoethyl)-2-aminoethanol, histidine, diethylenetetramine, triethylenetetramine, and any other polyethylenepolyamines in which the number
5 of ethyleneamine units is equal to or greater than that in diethylenetriamine.
6. The process according to claim 1, wherein said sulfur containing species is selected from at least one of the group consisting of thiosulfate, sulfides, hydrosulfides, polysulfides, sulfites, metabisulfites, hydrosulfites, dithionates, tetrathionates, sulfur dioxide, and mixtures thereof, wherein a cationic
10 part of said sulfur containing species consists of hydrogen, sodium, potassium, ammonium, calcium, and barium.
7. The process according to claim 1, wherein the polyamine and sulfur containing species are provided in a ratio ranging from about 1:1 to 1:8.
8. The process according to claim 1, wherein the polyamine and sulfur
15 containing species are provided in a ratio ranging from about 1:1 to 1:4.
9. The process according to claim 1, wherein the collector is selected from at least one or more of the group consisting of xanthates, phosphine-based compounds, dithiophosphonates, alkylidiphosphates, thionocarbamates, thiourea and other conventional sulfhydryl collectors.
- 20 10. The process according to claim 1, wherein the frother is polypropylene glycol methyl ether.
11. The process according to claim 1, wherein the slurry contains about 20% to 45% solids by weight.
12. The process according to claim 1, wherein the slurry has a
25 temperature between about 5°C and 35°C.
13. A flotation process for selectively recovering high grade nickel and copper metal concentrates while rejecting arsenide minerals from nickel-copper ore comprising the steps of:

61790-1883

18

wet-grinding the nickel-copper ore into a slurry;

adjusting the pH of the slurry to a preset value with the addition of reagents;

5 oxidizing the slurry by providing an oxidizing environment to the slurry;

adding a reagent suite of a polyamine and a sulfite to the slurry for depressing flotation of arsenide minerals;

readjusting the pH of the slurry to the preset value with the addition of reagents;

10 adding a collector and a frother at effective dosages to the slurry to float the nickel and copper metals to be recovered; and

subjecting the slurry containing the collector and frother to floatation to selectively recover high grade nickel and copper metal concentrates while rejecting the depressed arsenide minerals.

15 14. The process according to claim 13 wherein the slurry includes pentlandite, chalcopyrite, pyrrhotite, gersdorffite, cobaltite, niccolite and siliceous gangue minerals.

15. The process according to claim 13, wherein the arsenide minerals to be depressed are gersdorffite, niccolite and cobaltite.

20 16. The process according to claim 13, wherein the preset value of the pH of the slurry is about 9.0 to 10.0.

17. The process according to claim 13, wherein the pH of the slurry is adjusted by the addition of lime.

25 18. The process according to claim 13, wherein the oxidizing environment is created by utilizing an oxidant selected from at least one of the group consisting of aeration, the addition of hydrogen peroxide, and the addition of permanganate ions.

61790-1883

19

19. The process according to claim 13, wherein the reagent suite for depressing arsenide minerals is an effective ratio of triethylenetetramine to sodium sulfite.

20. The process according to claim 19, wherein the triethylenetetramine
5 to sodium sulfite ratio is about 1:2 by weight.

21. The process according to claim 13, wherein potassium amyl xanthate is added as the collector.

22. The process according to claim 13, wherein the frother is a polypropylene glycol methyl ether.

10 23. The process according to claim 13, wherein an effective dosage of the collector is provided and determined by a pentlandite, chalcopyrite and pyrrhotite content in the nickel-copper ore.

24. The process according to claim 13, wherein an effective dosage of the frother is provided to produce a Cu-Ni bulk concentrate of high grades at
15 maximal copper and nickel recovery.


25. The process according to claim 13, wherein froth is generated by rising air bubbles through an introduction of air to the slurry.

26. The process according to claim 13 wherein the slurry contains about 40% solids by weight.

20 27. The process according to claim 13, wherein the slurry has a temperature of about 23°C.


1/5

Fig. 1a

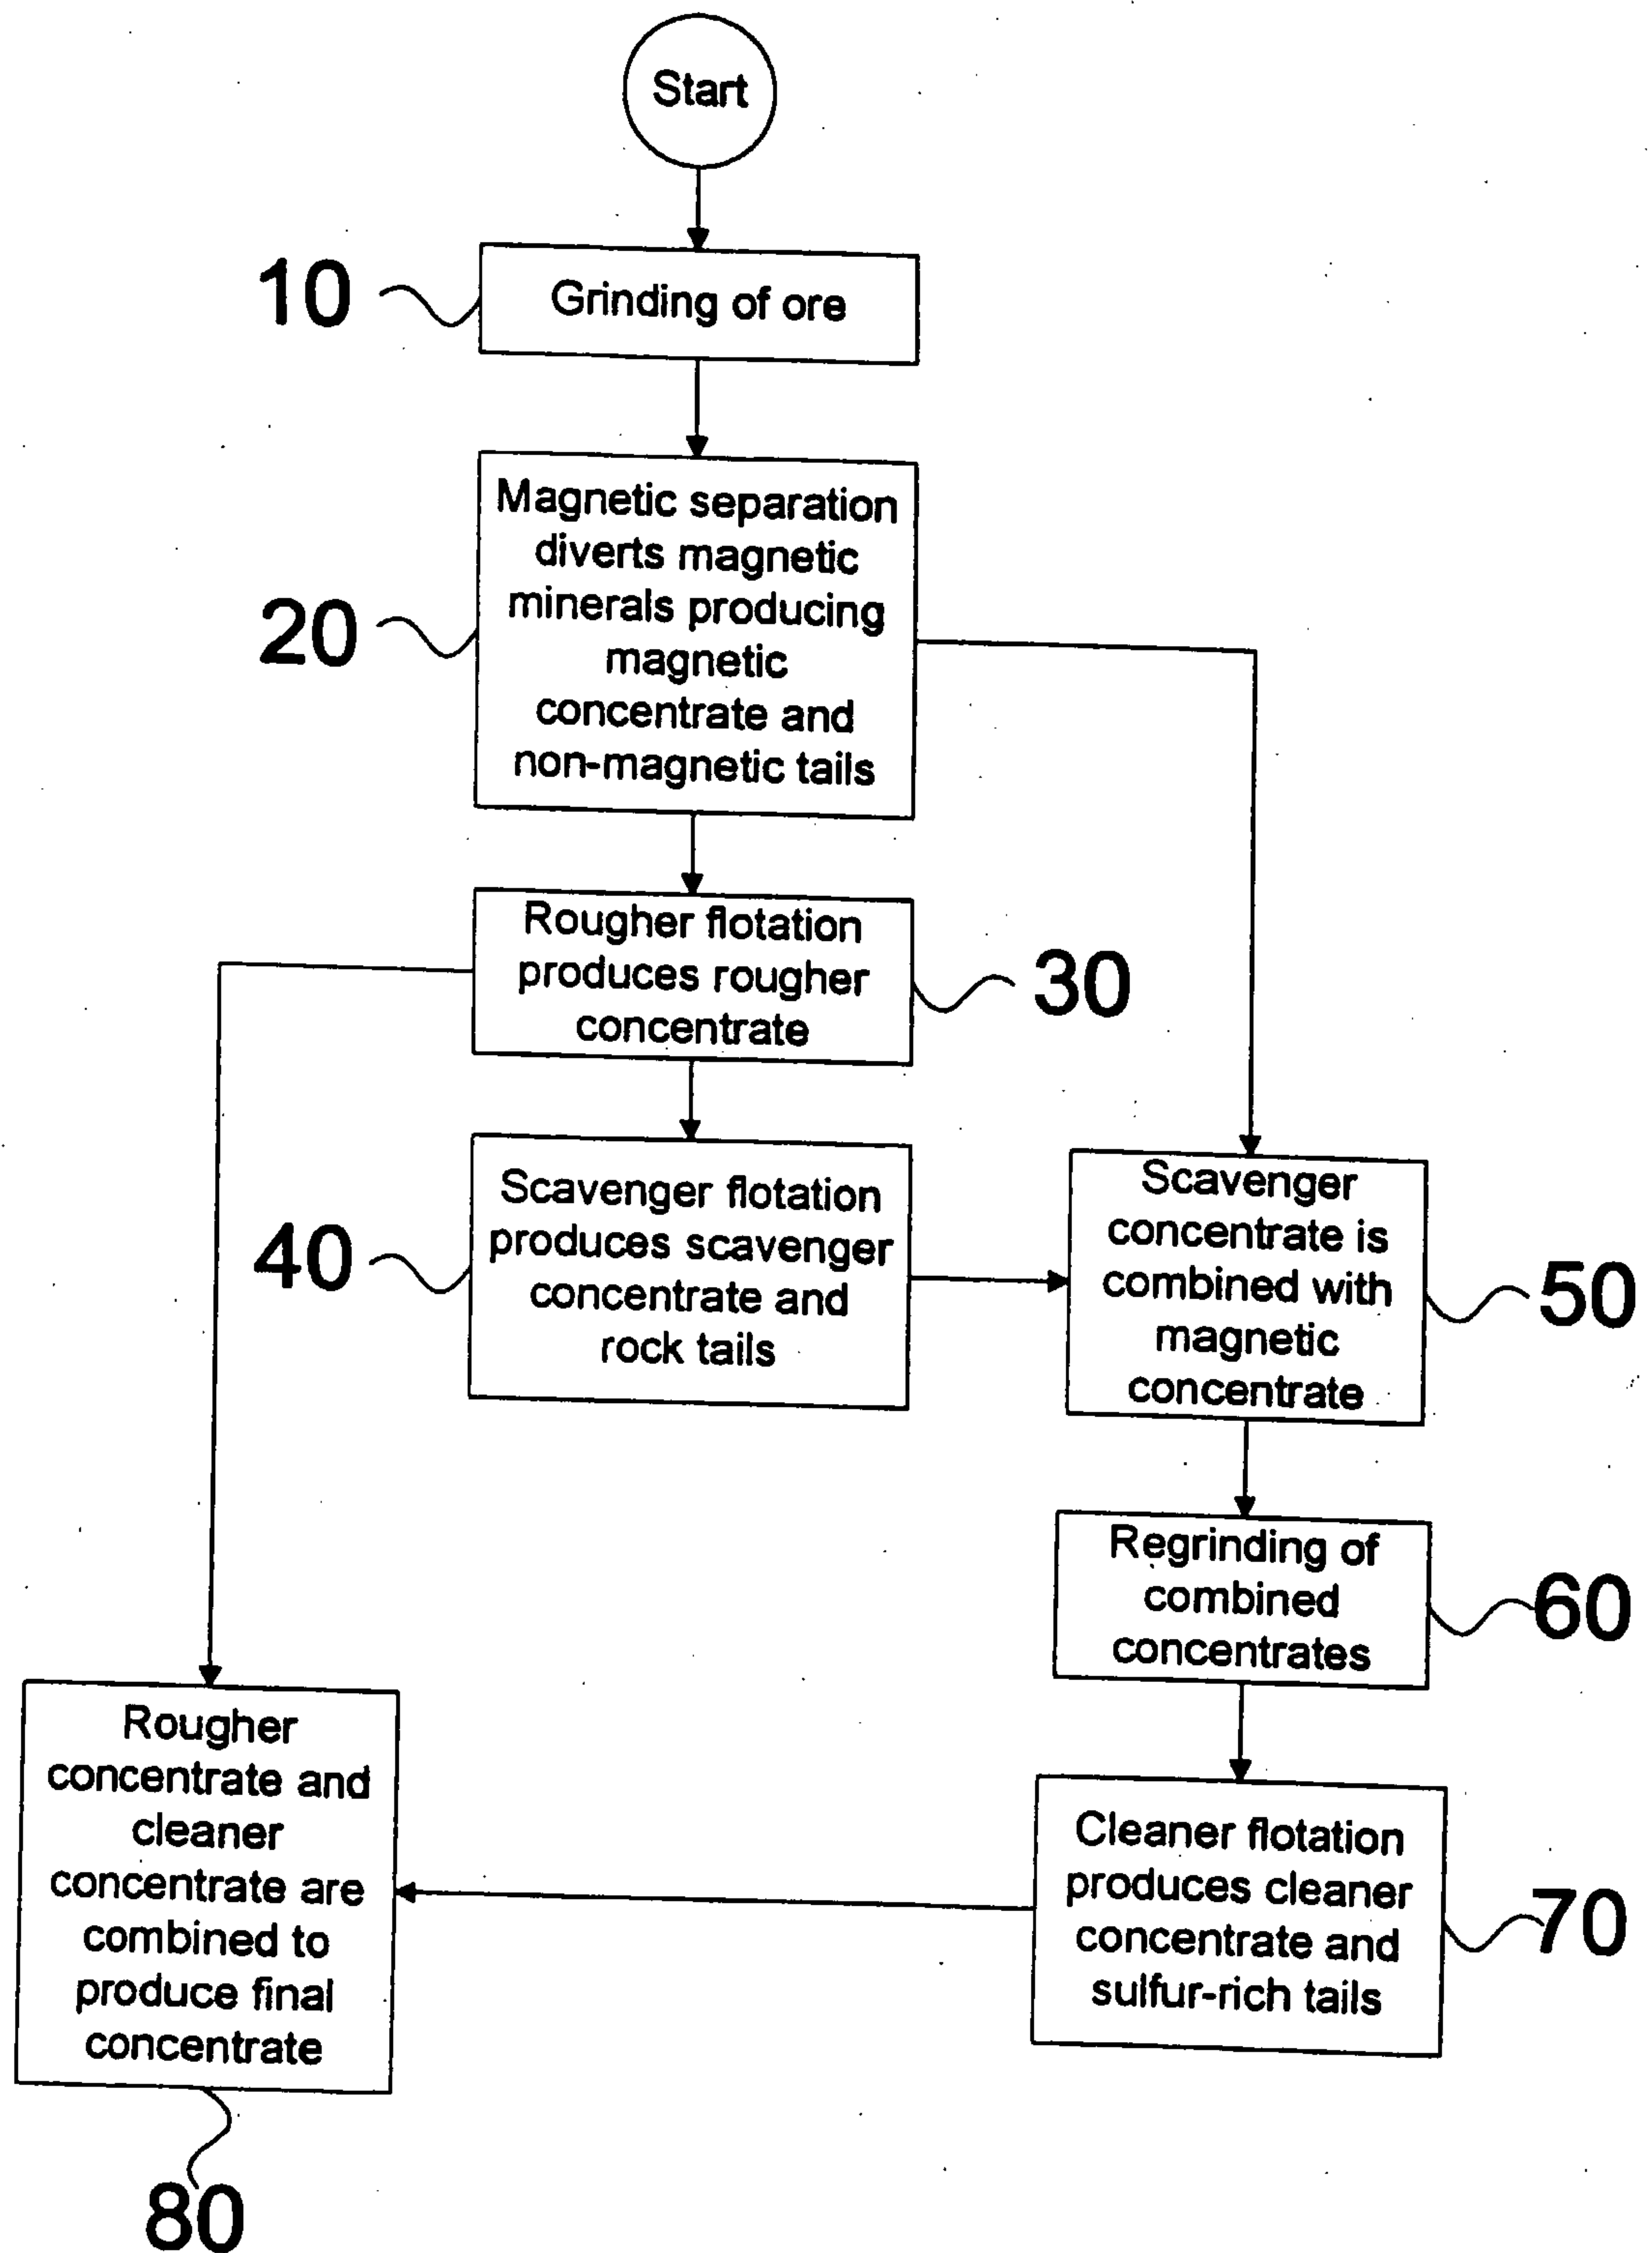

2/5

Fig. 1b

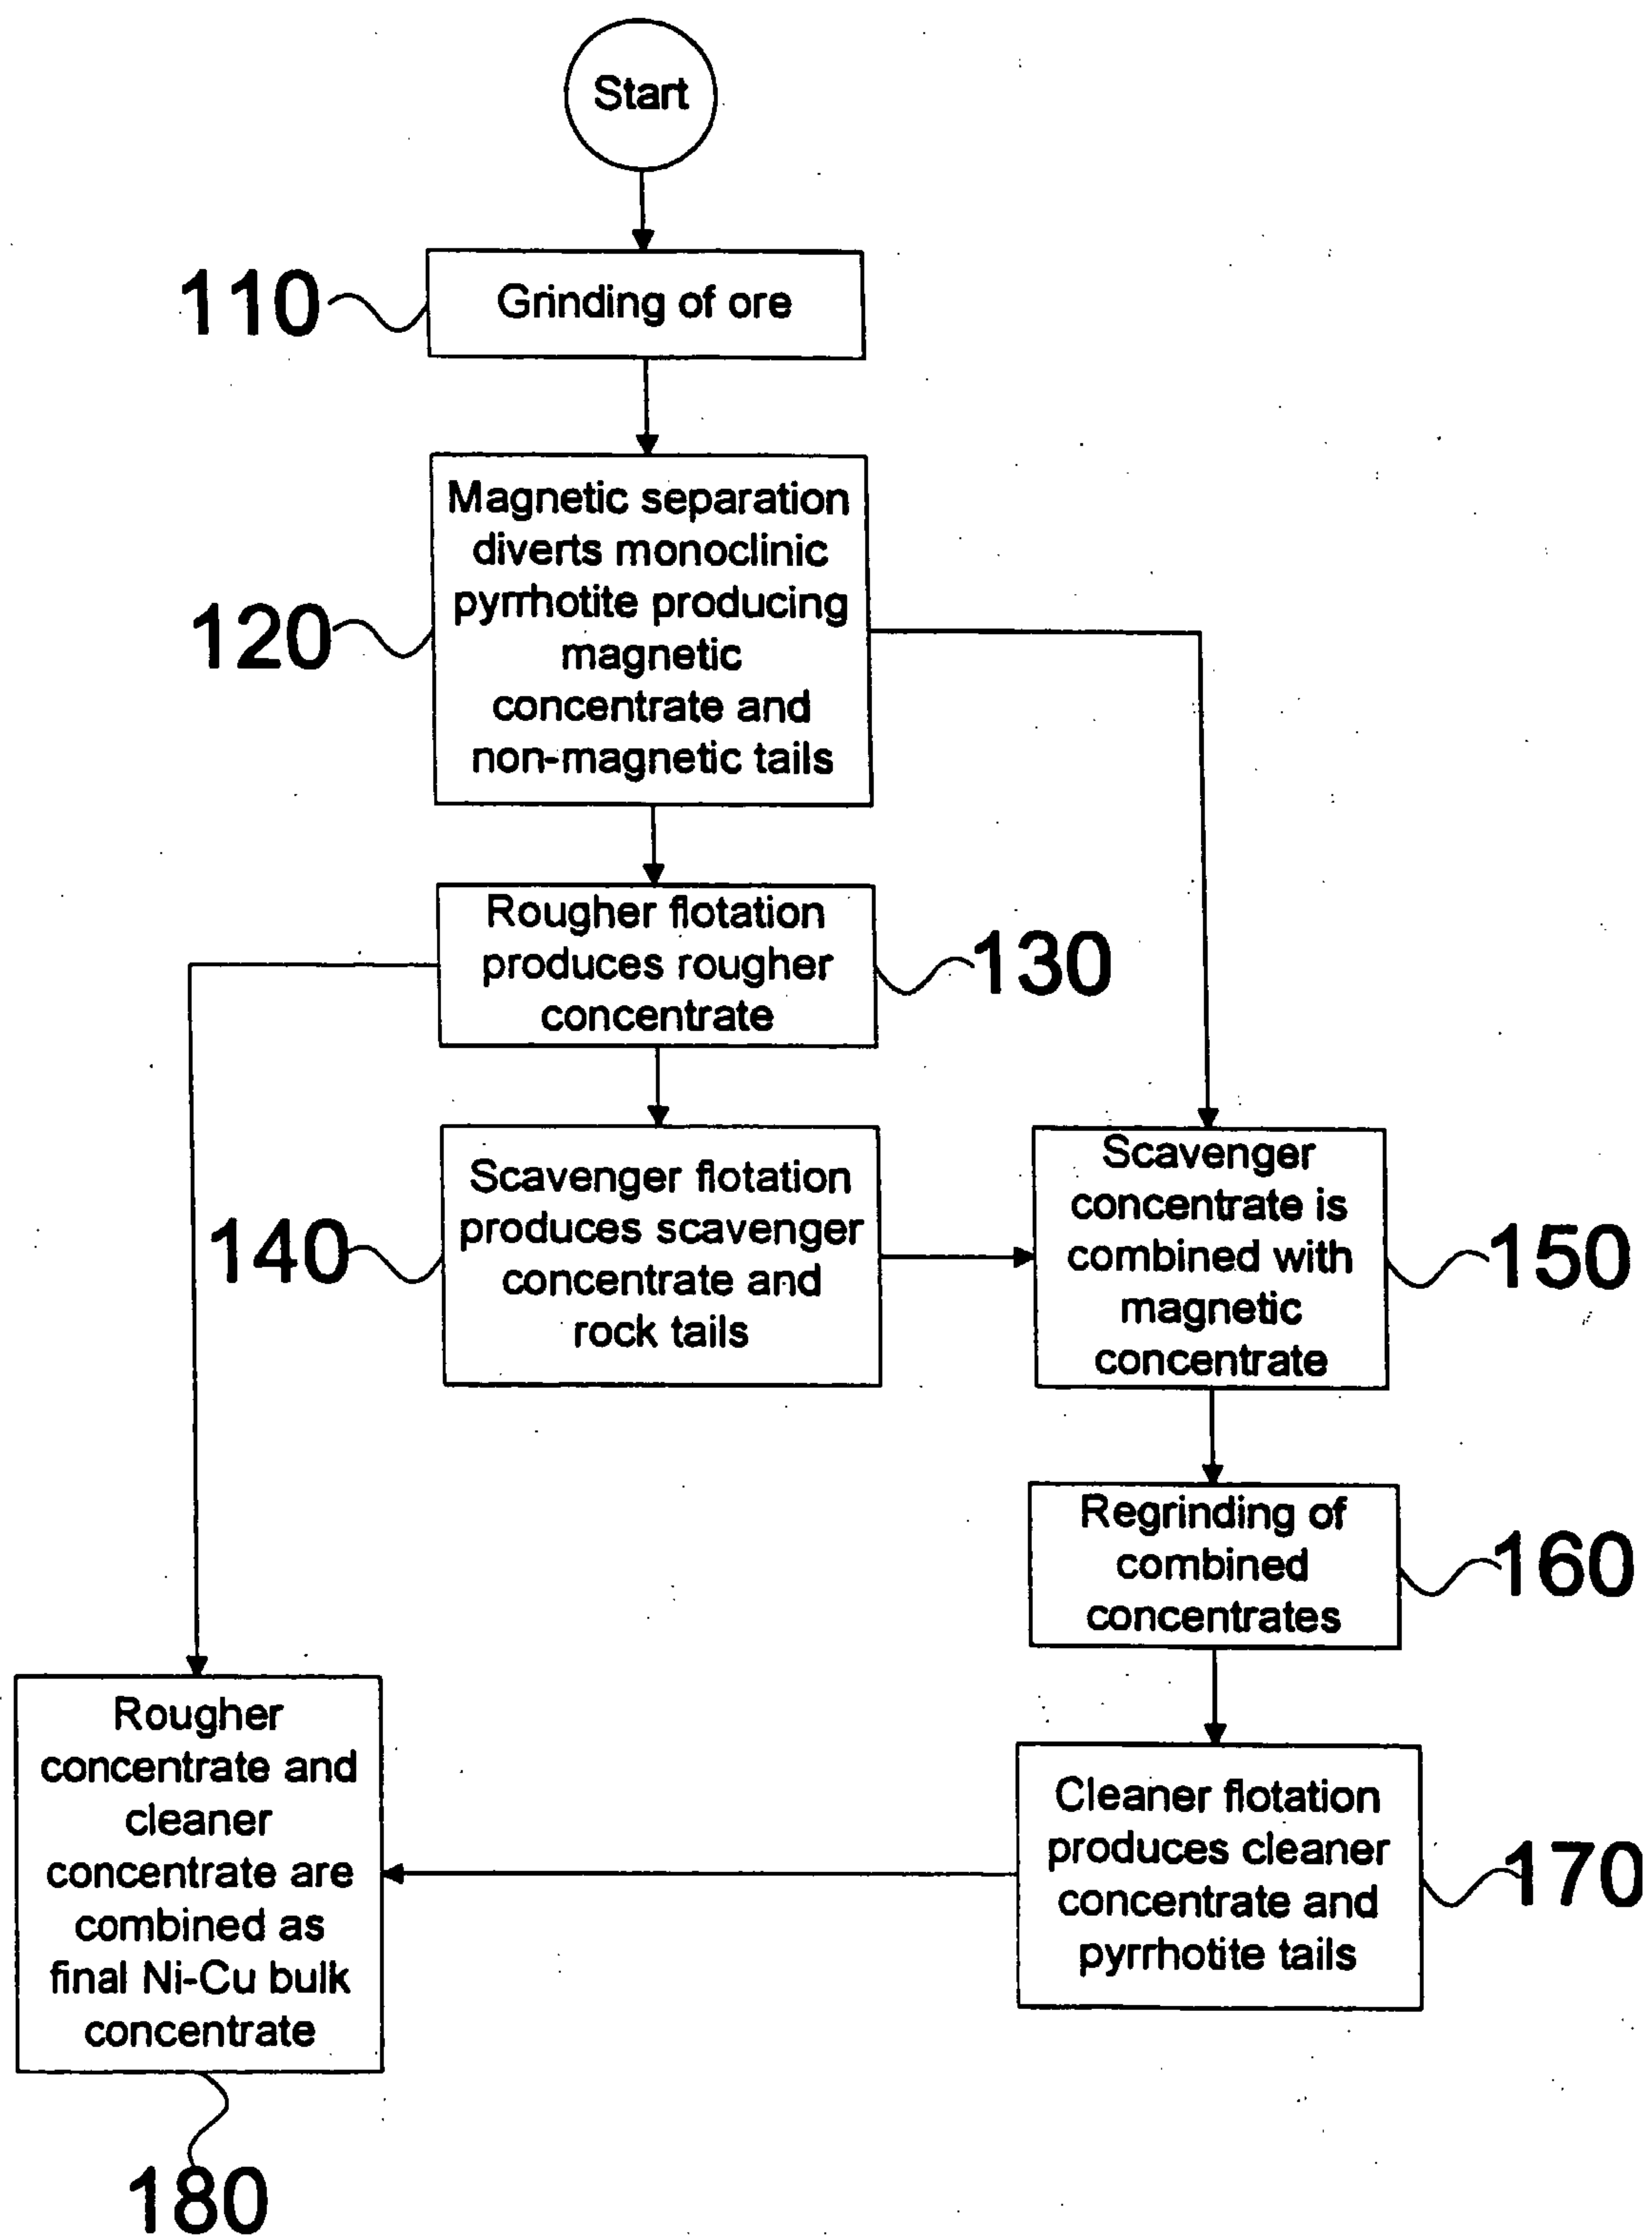

3/5

Fig. 2a

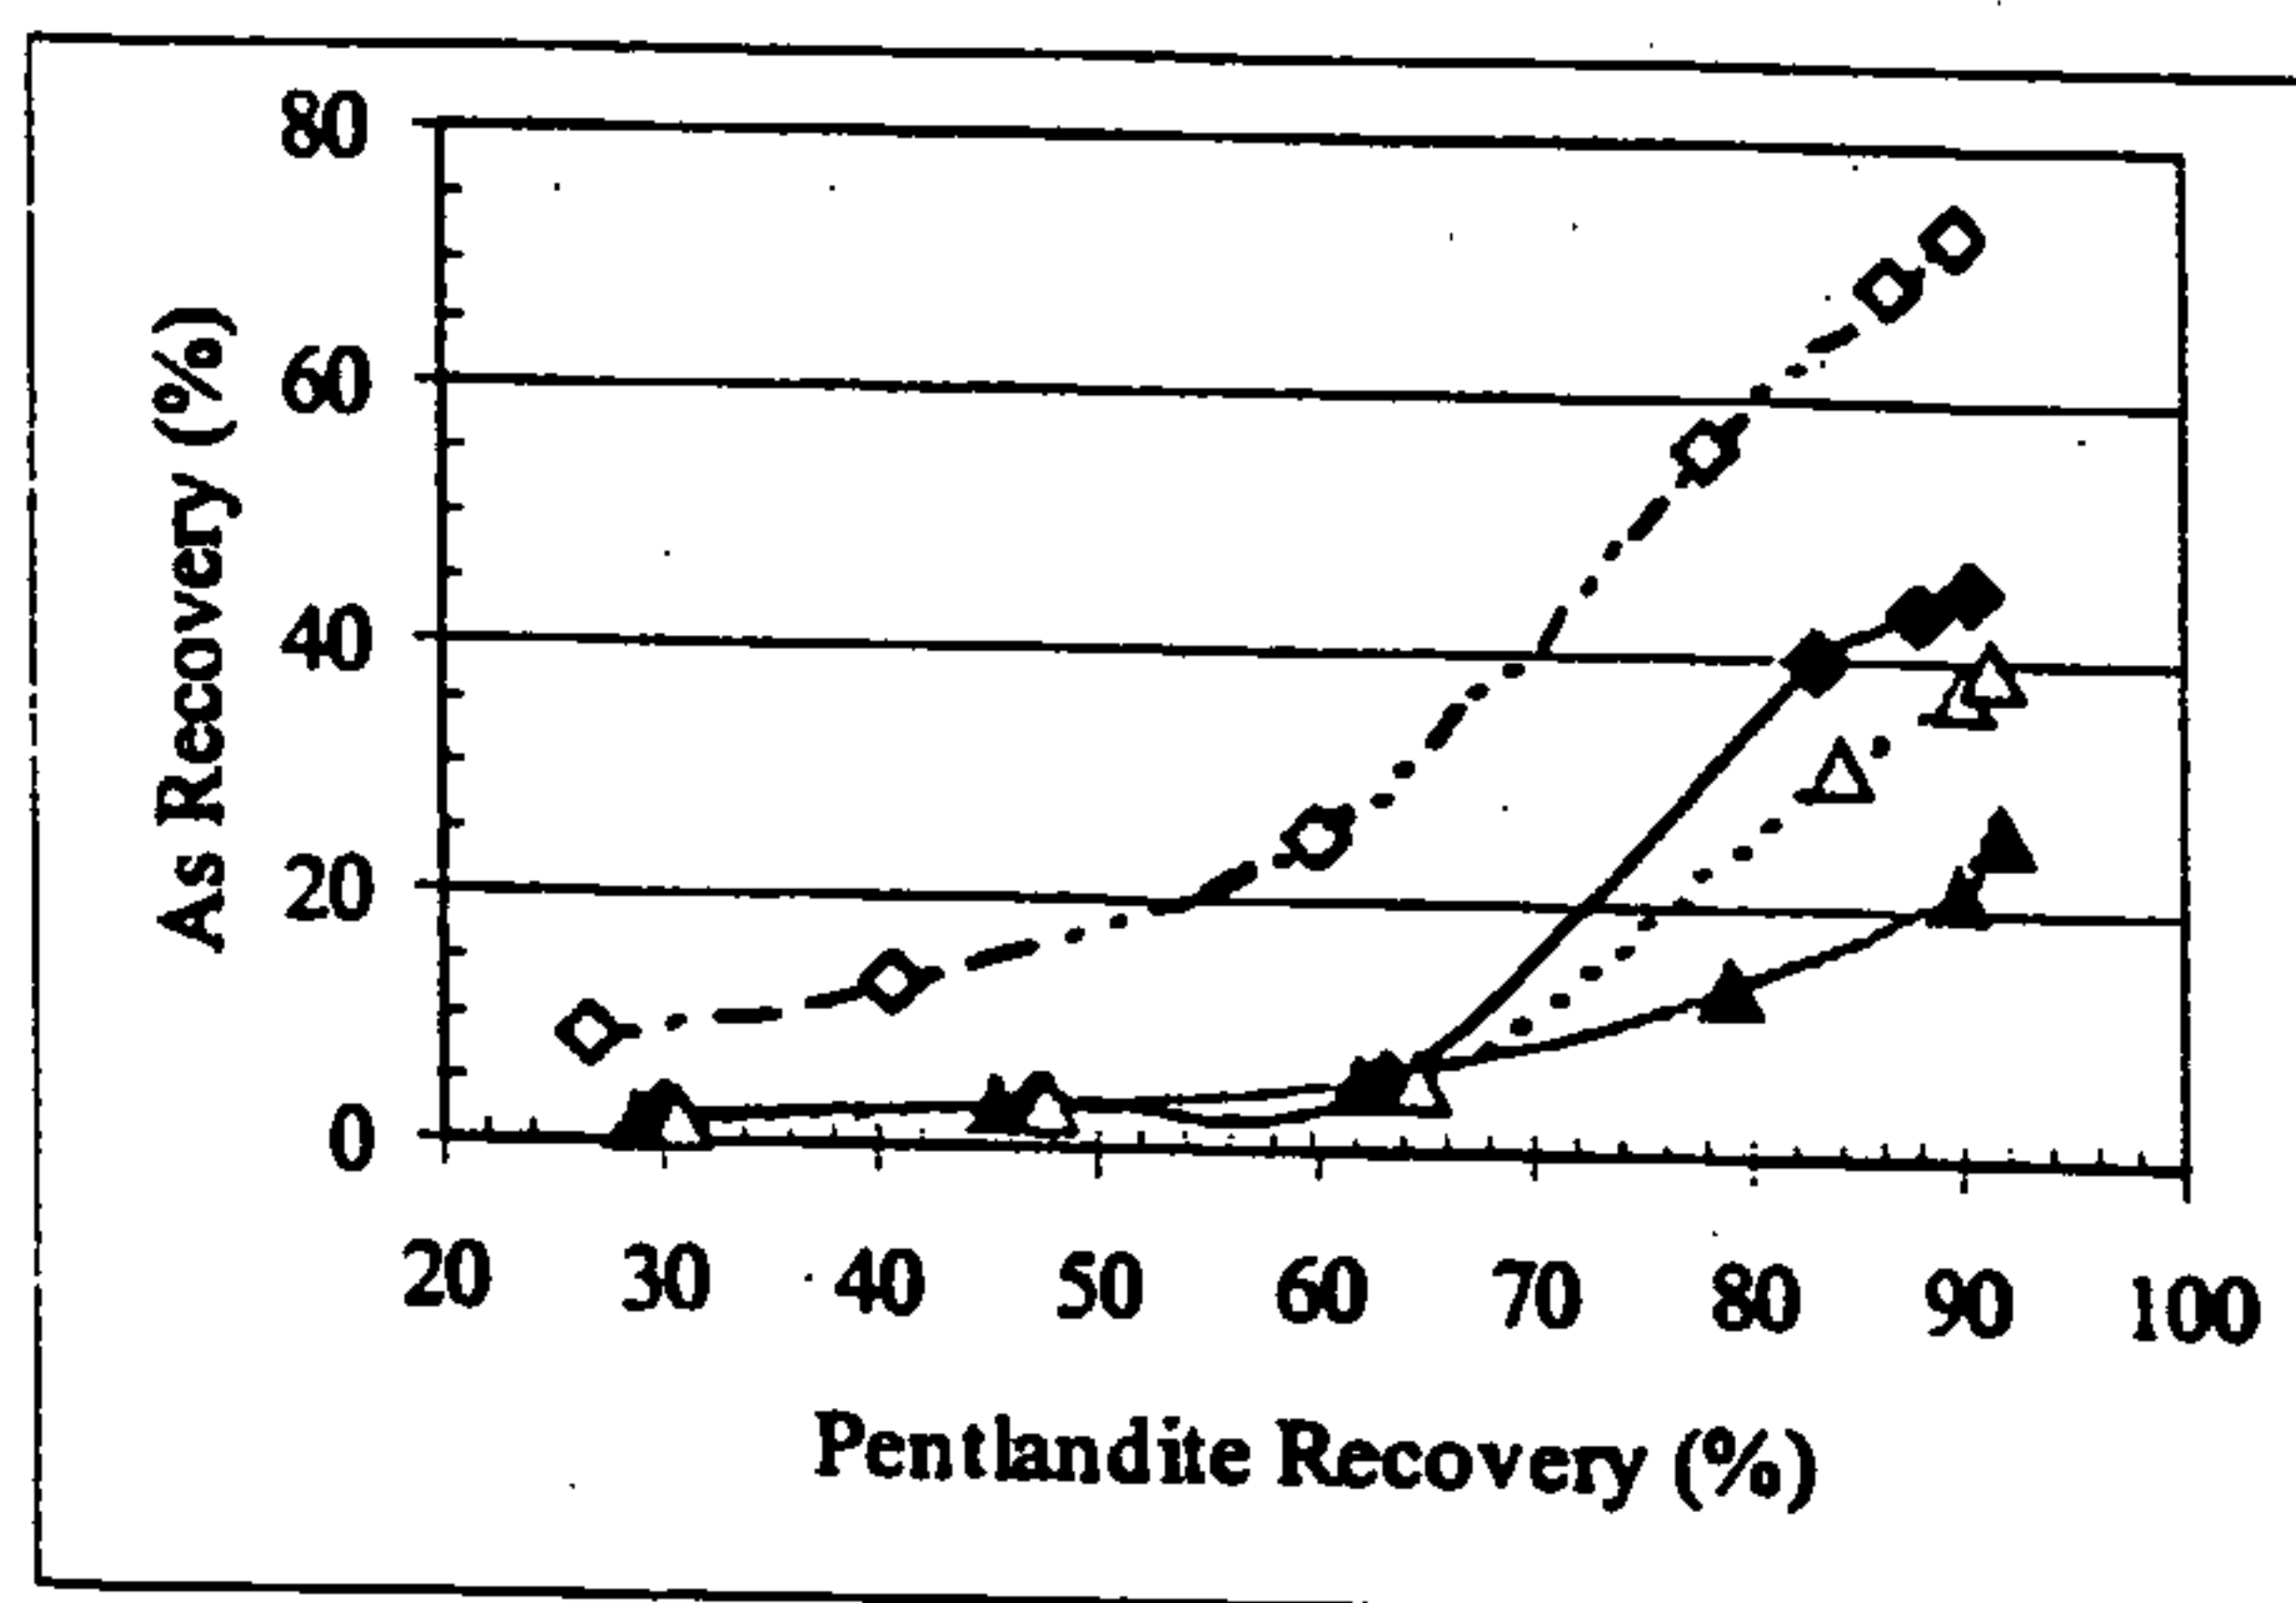


Fig. 2b


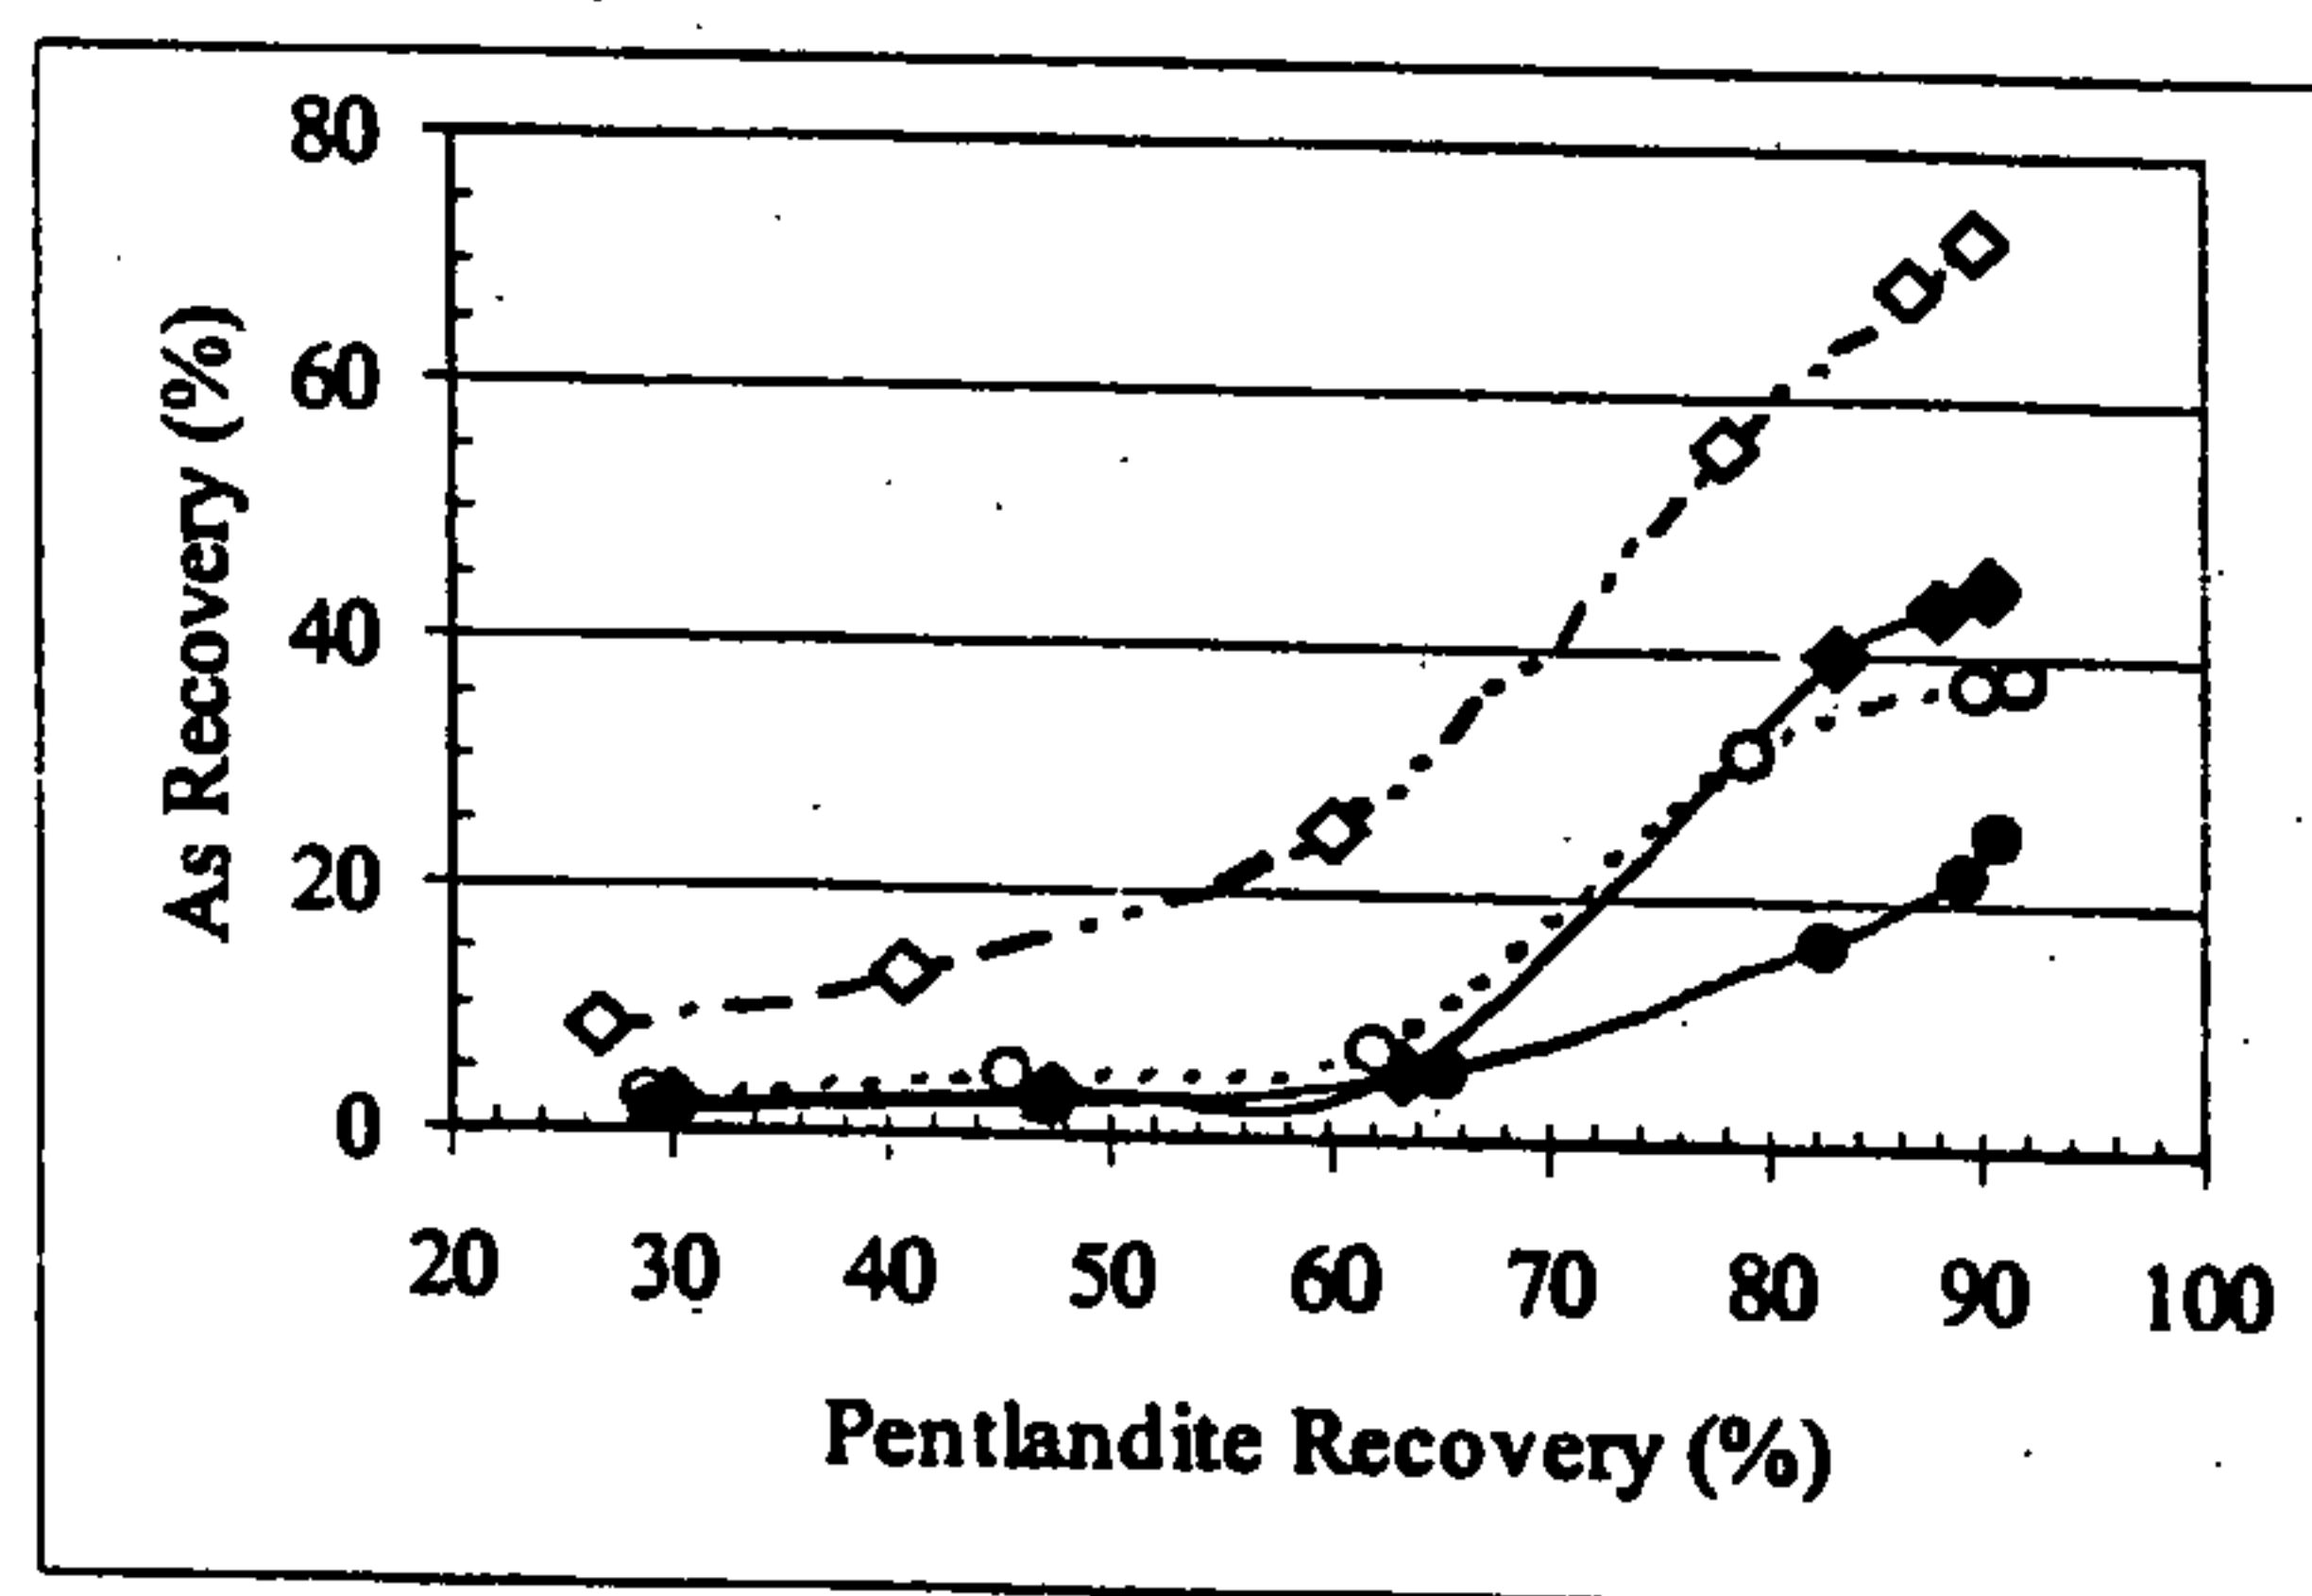


Fig. 2c

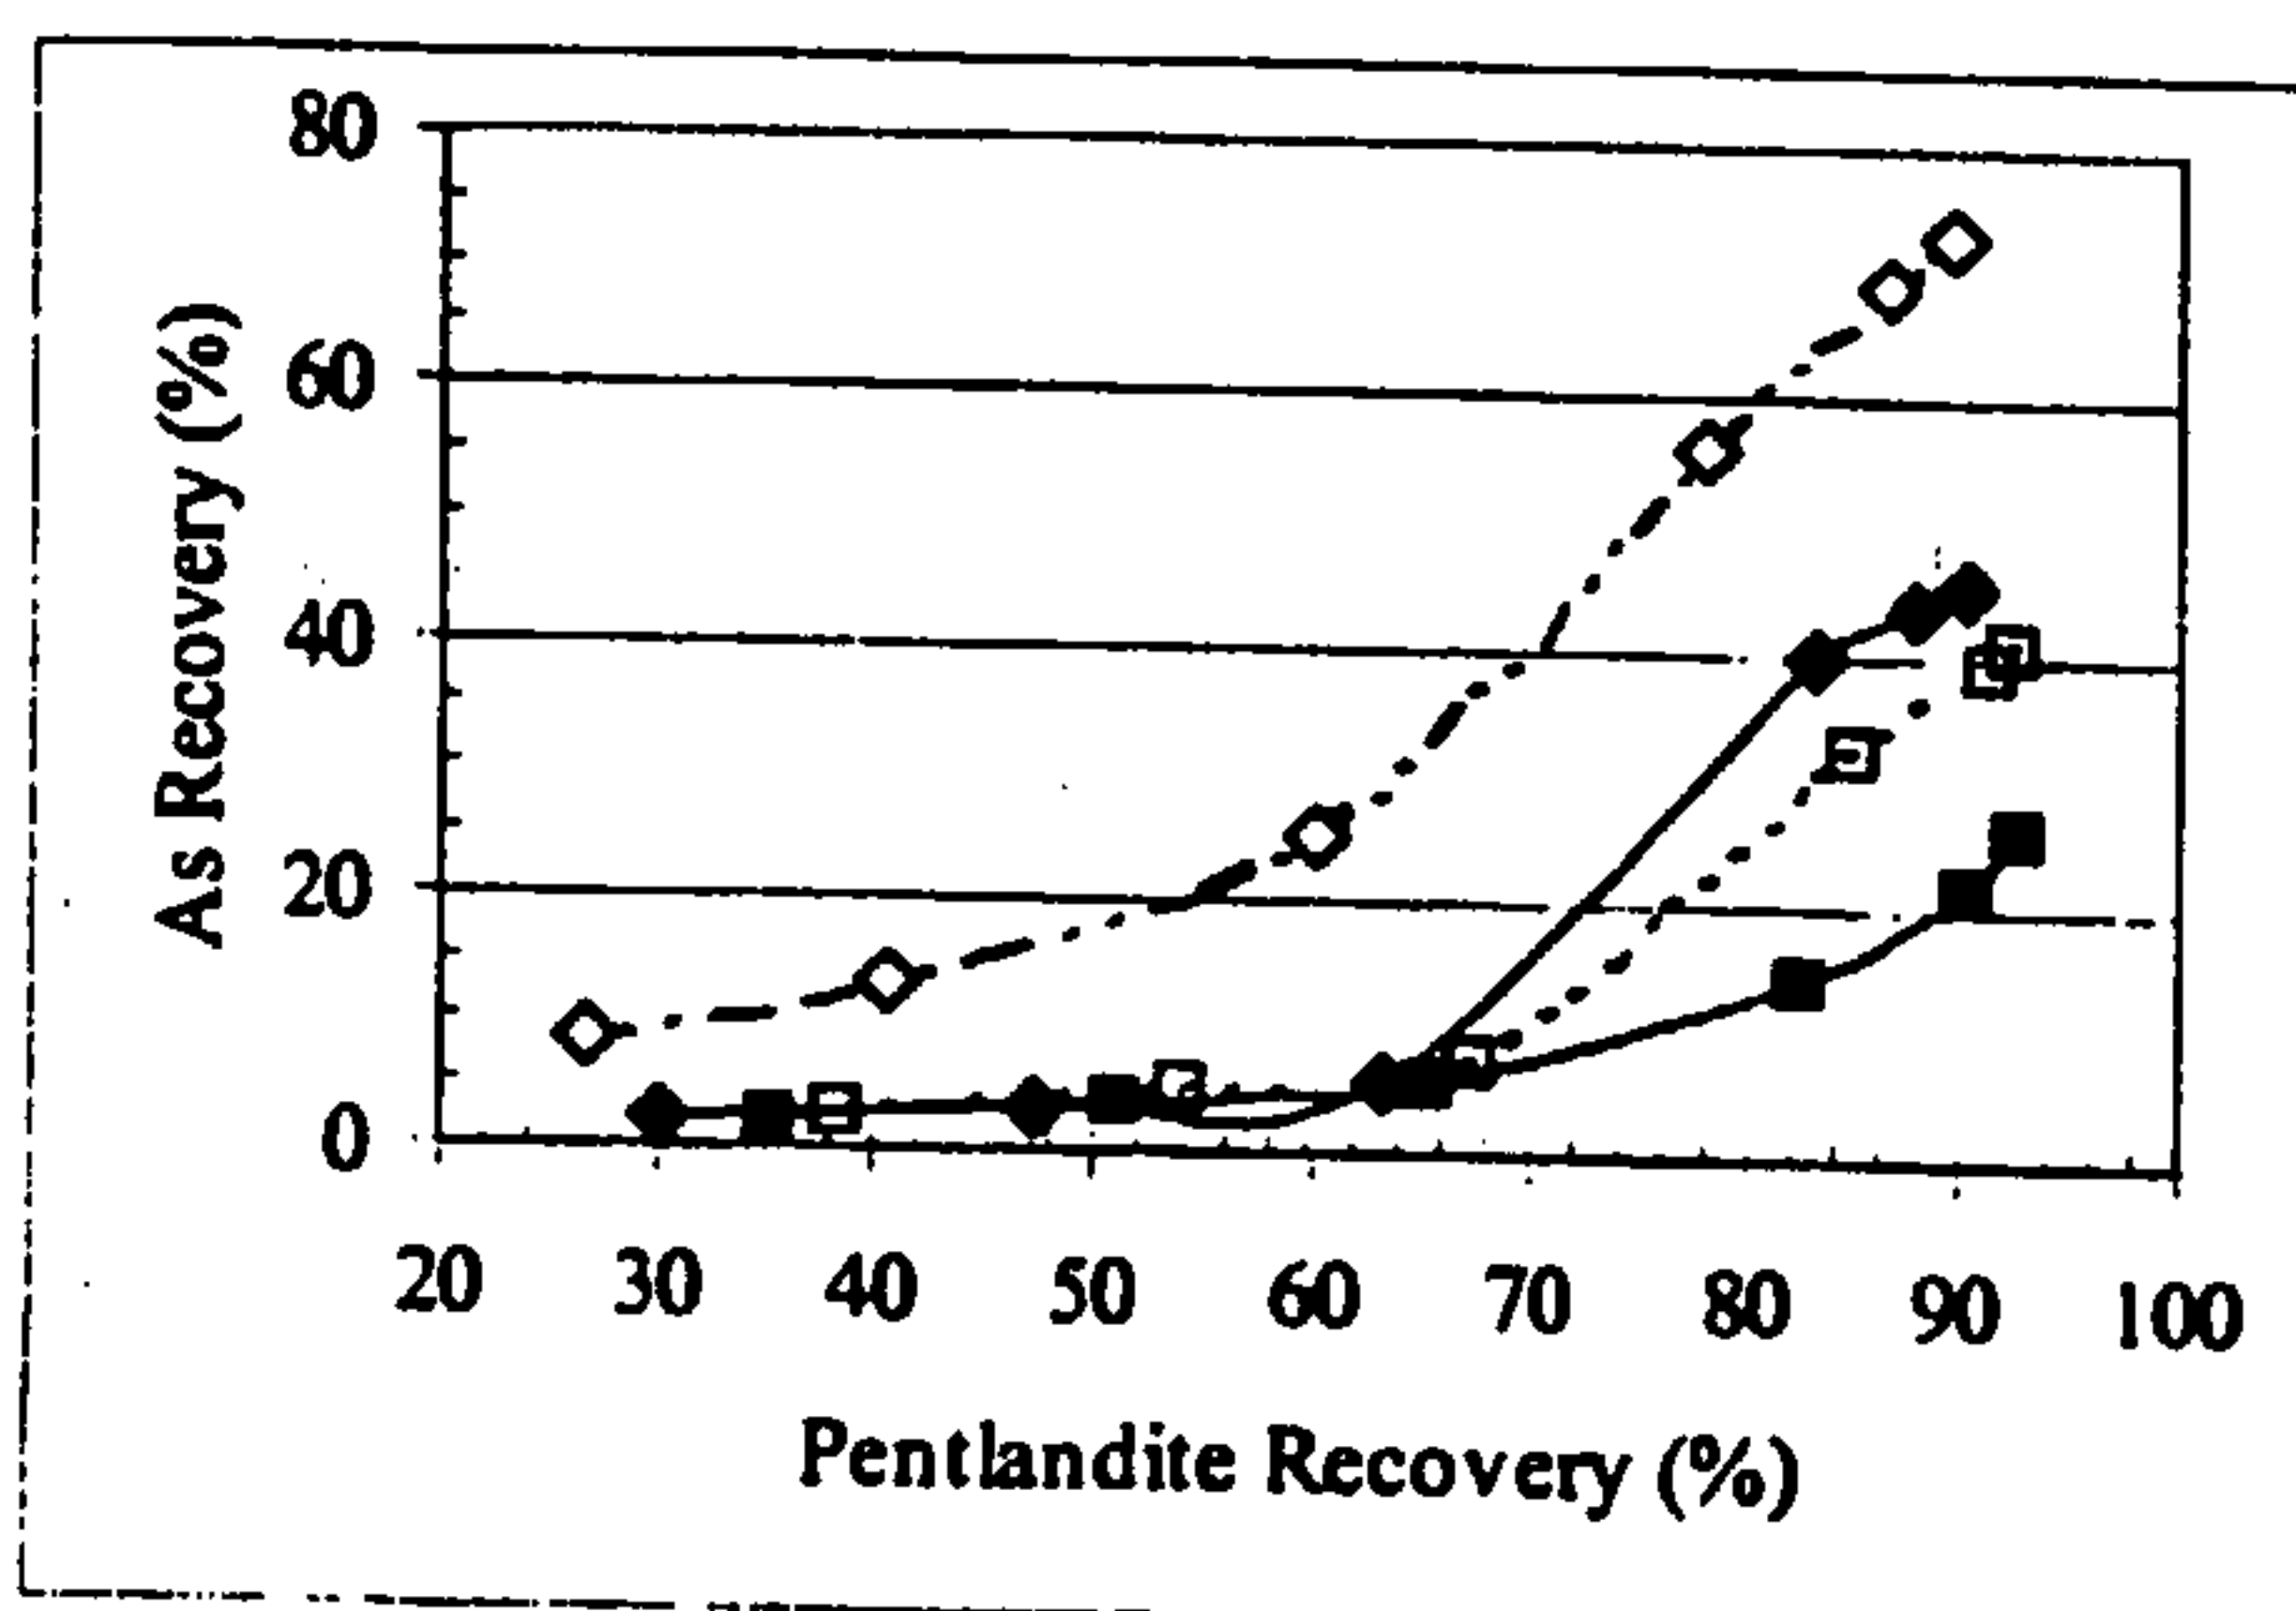

4/5

Fig. 3a

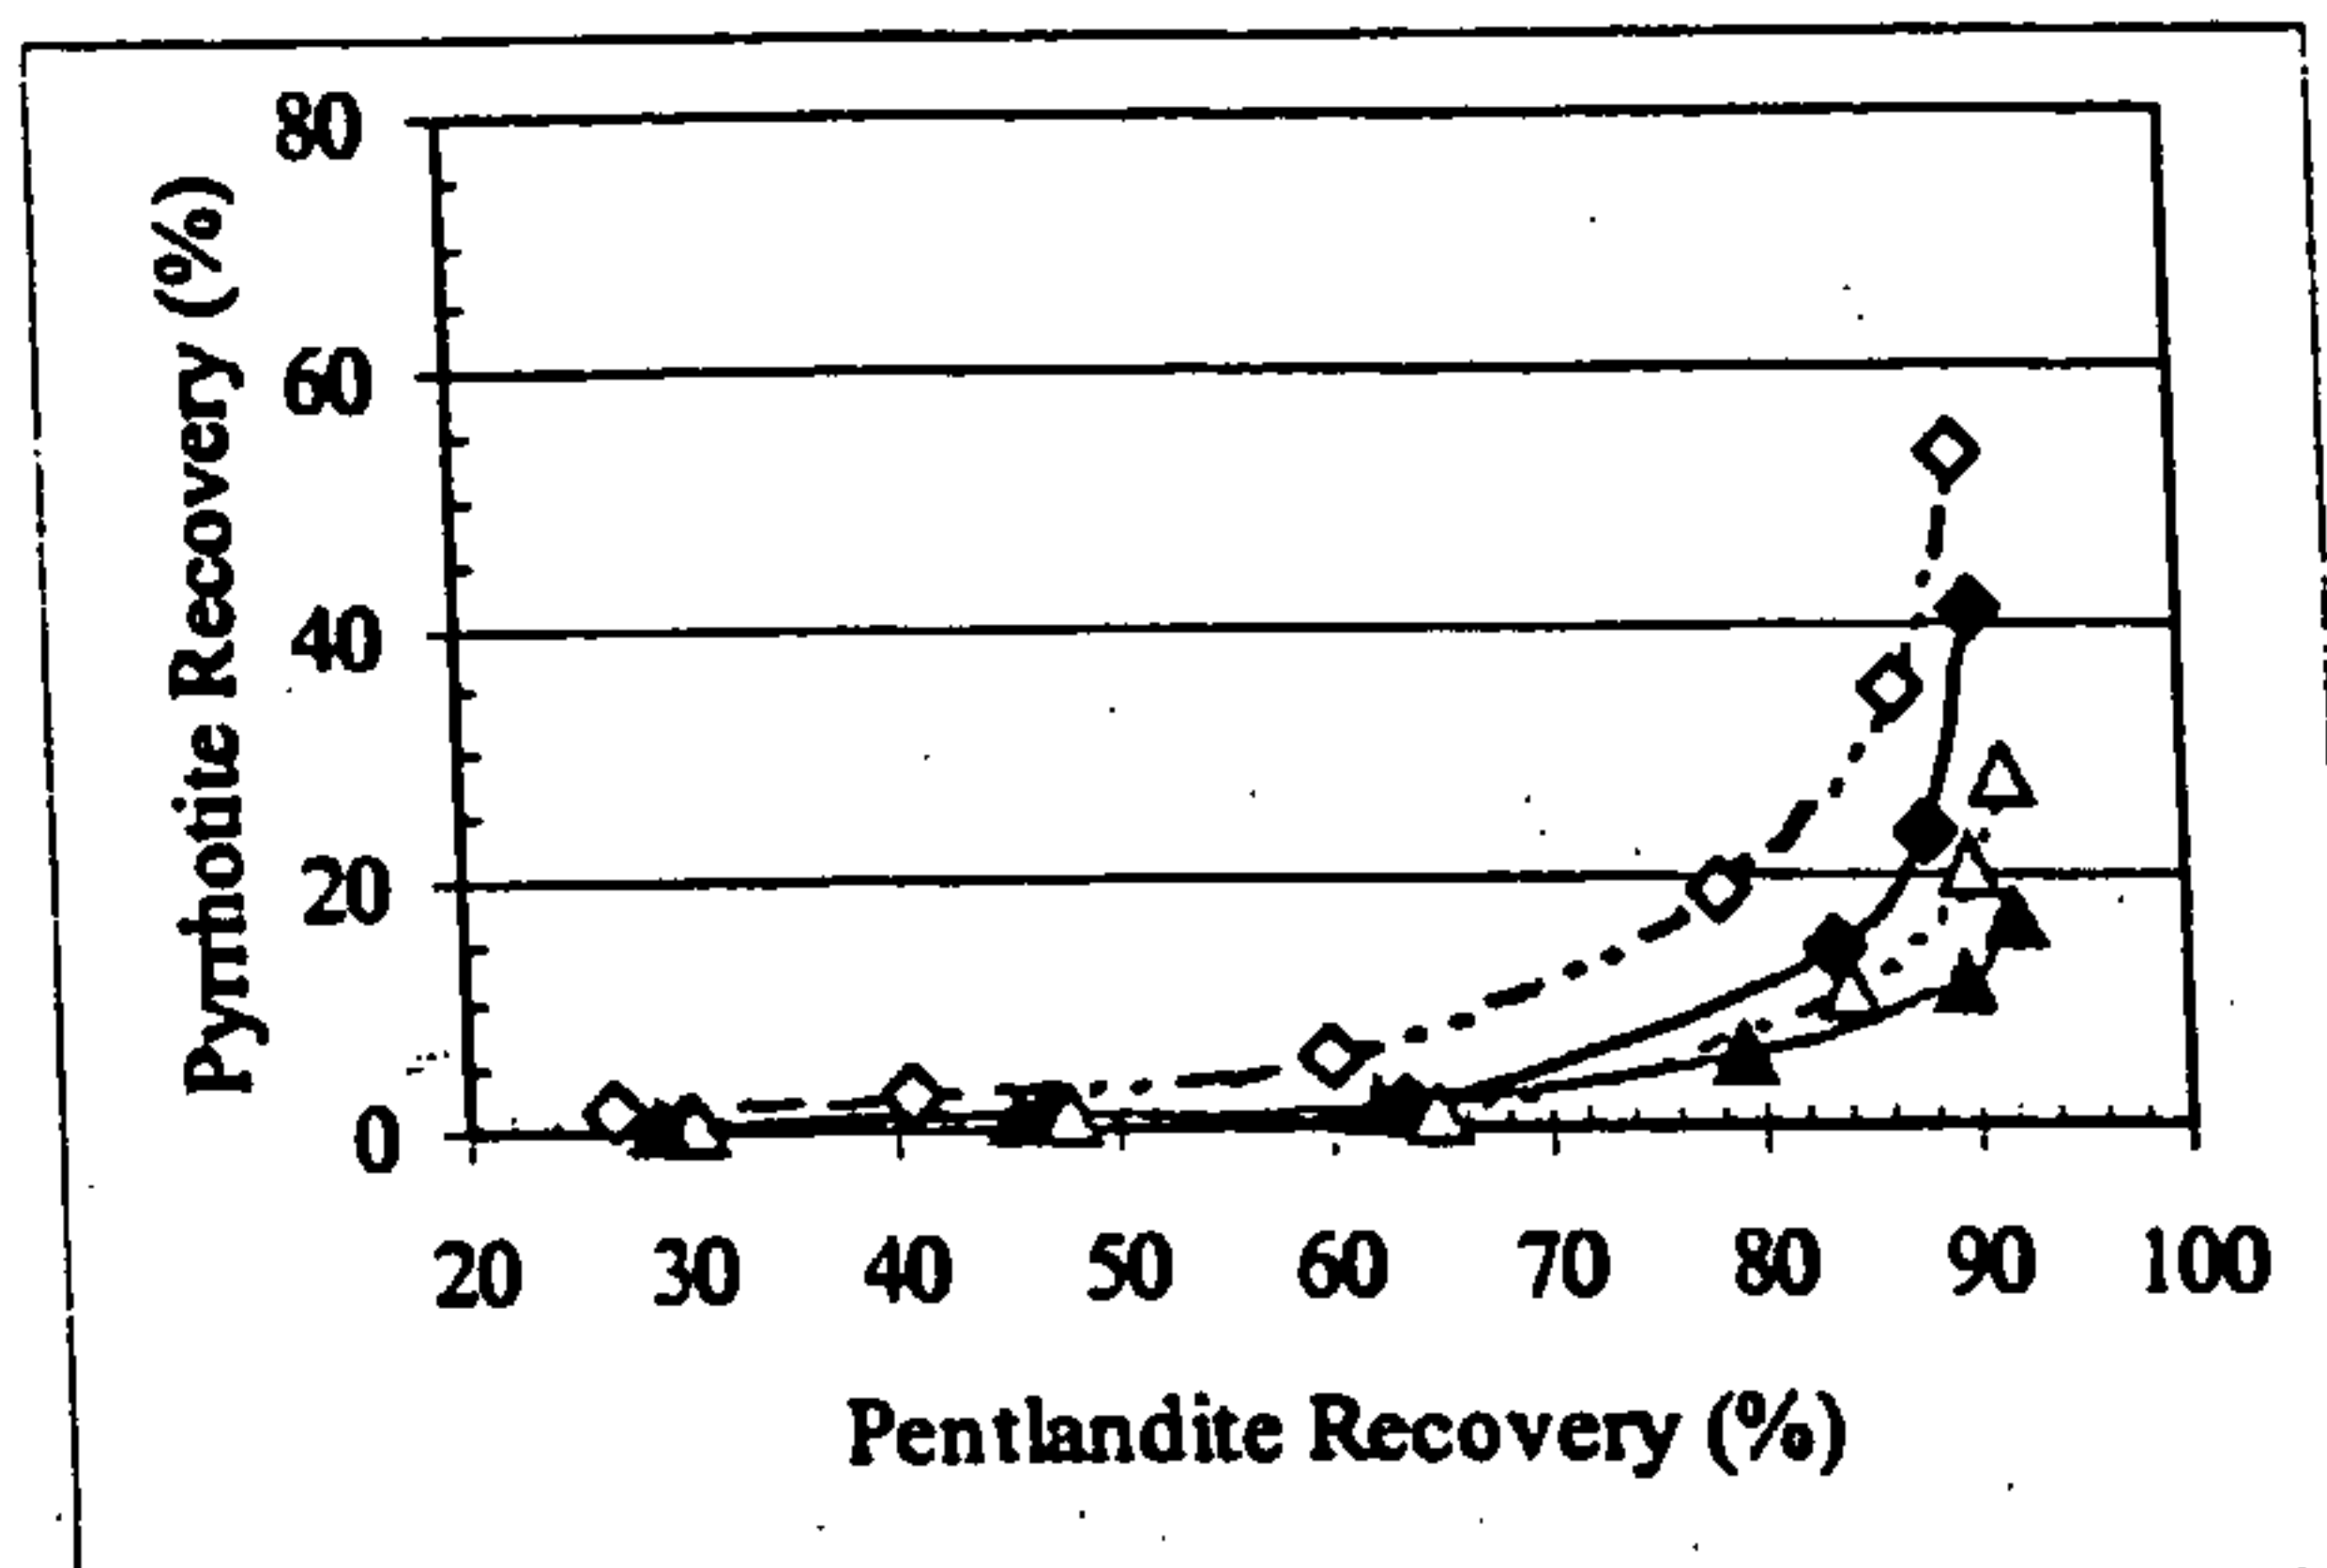


Fig. 3b


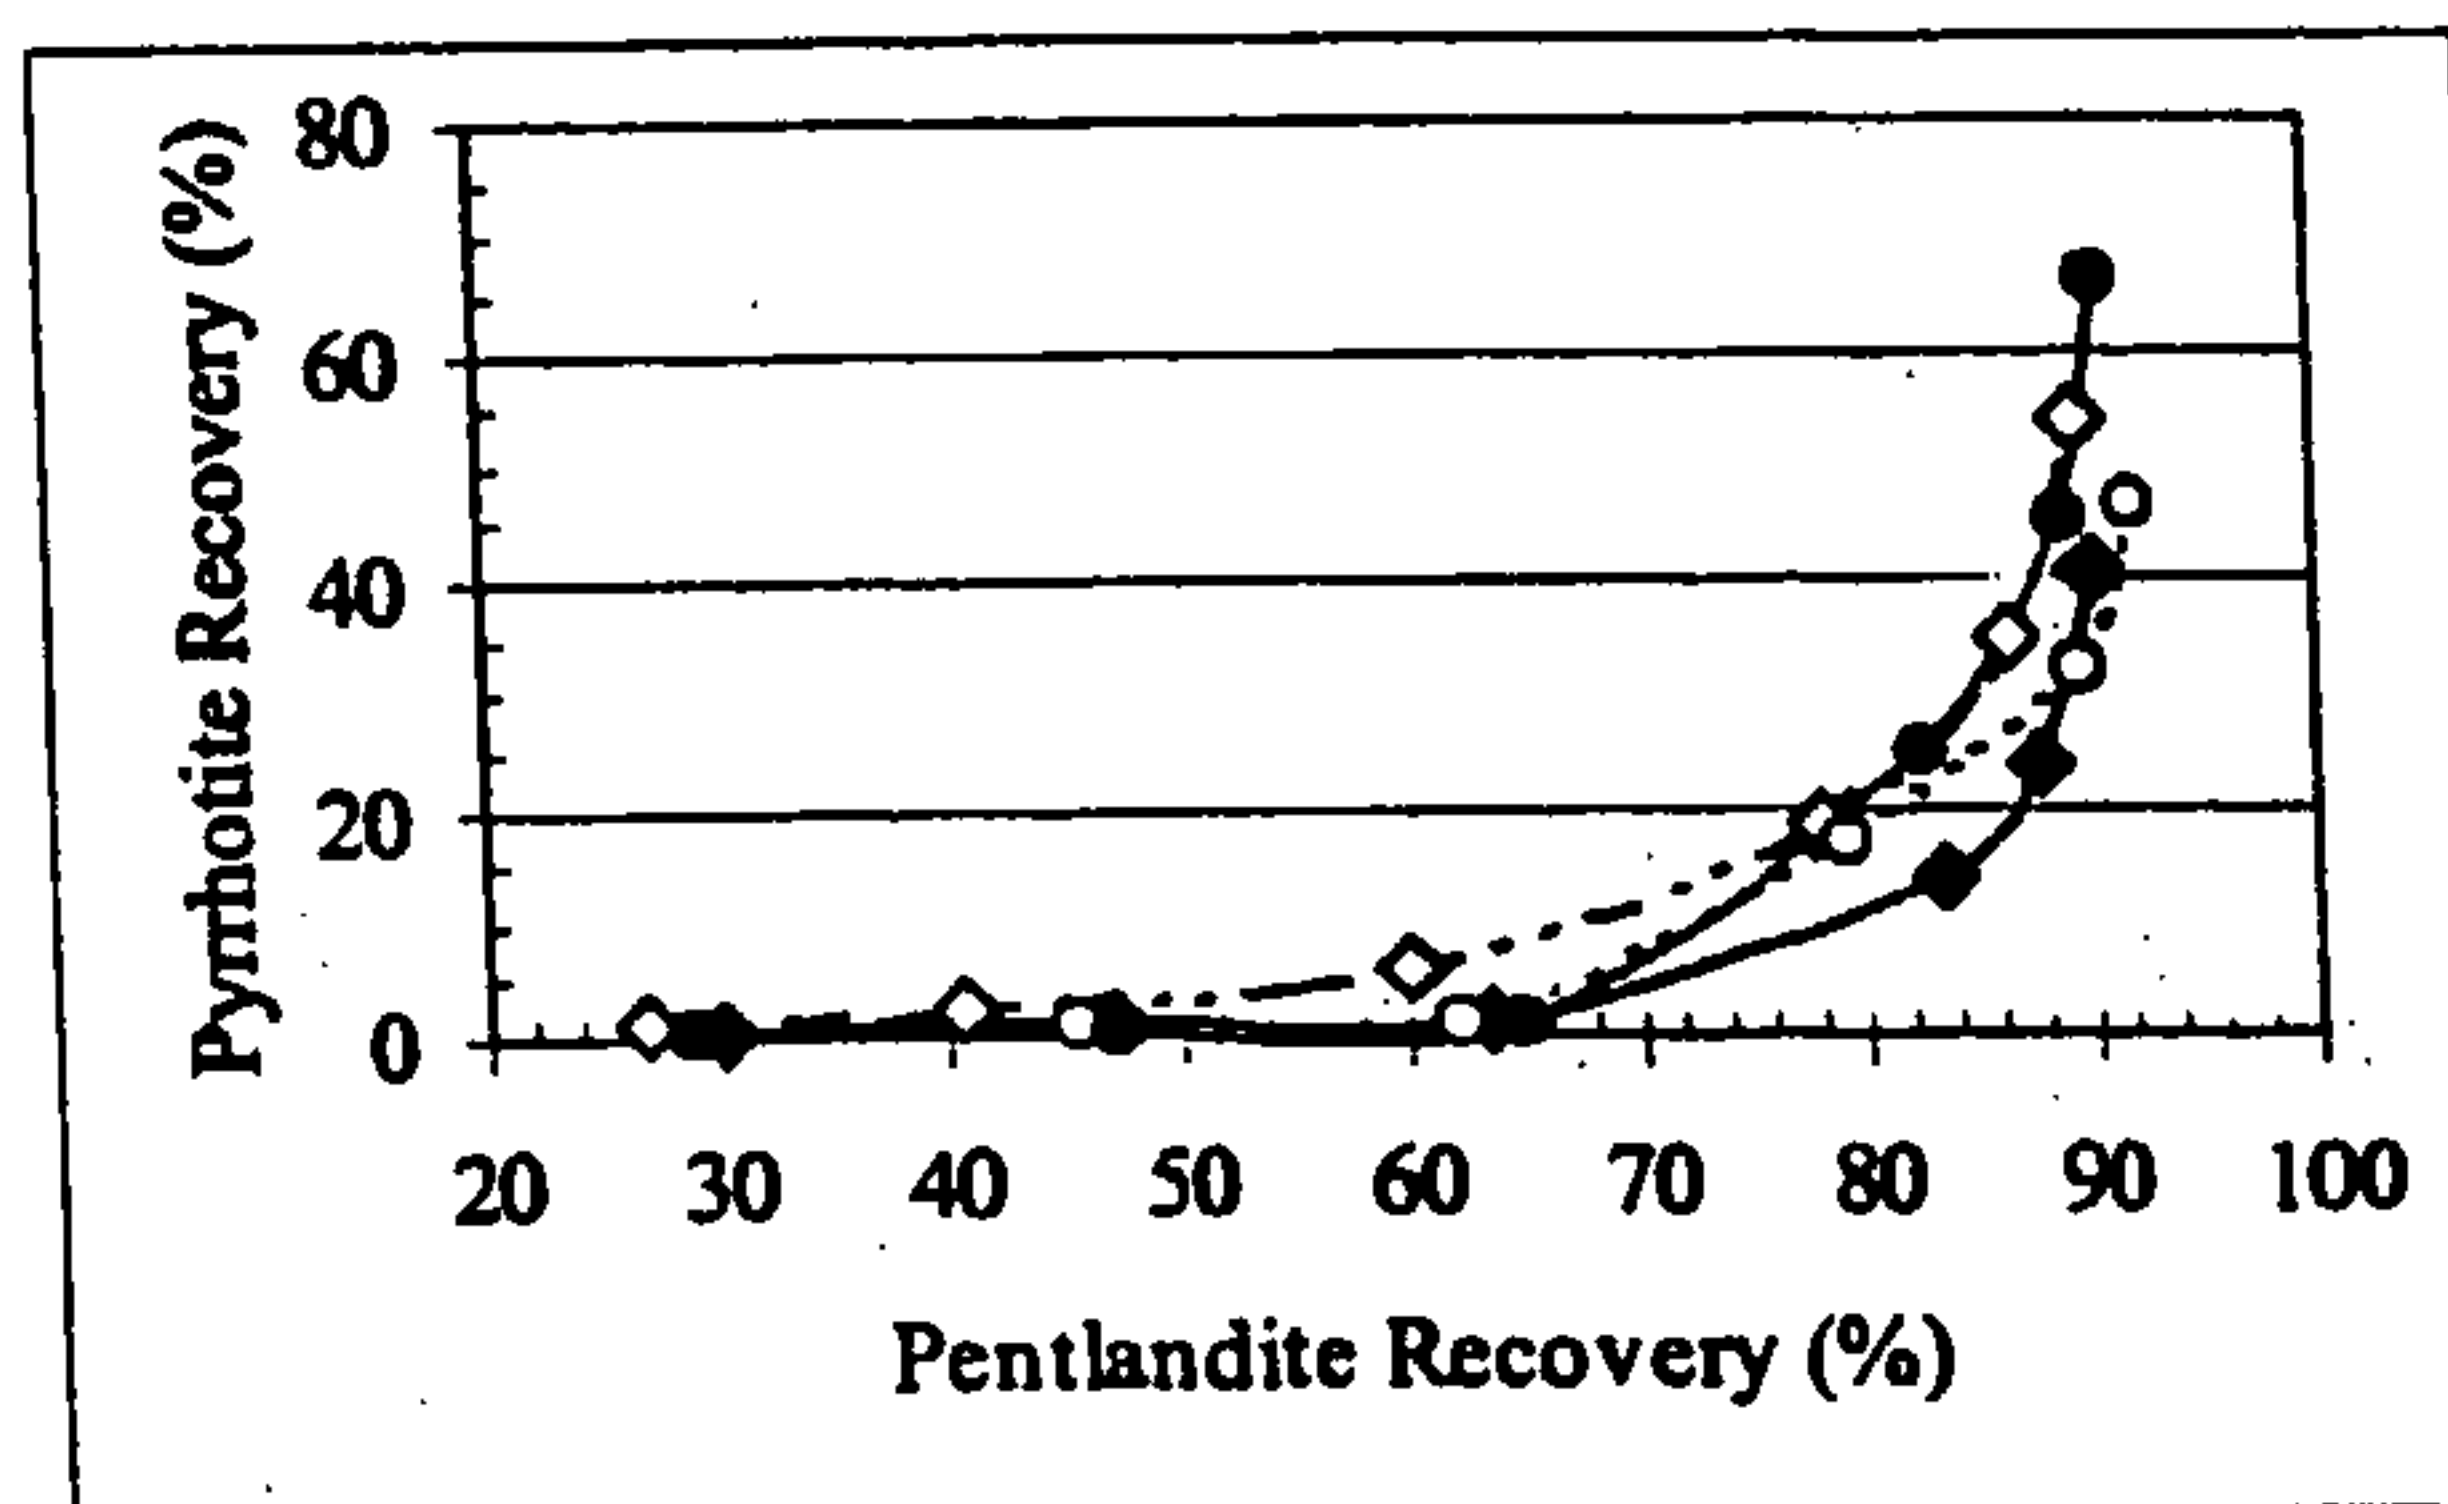


Fig. 3c

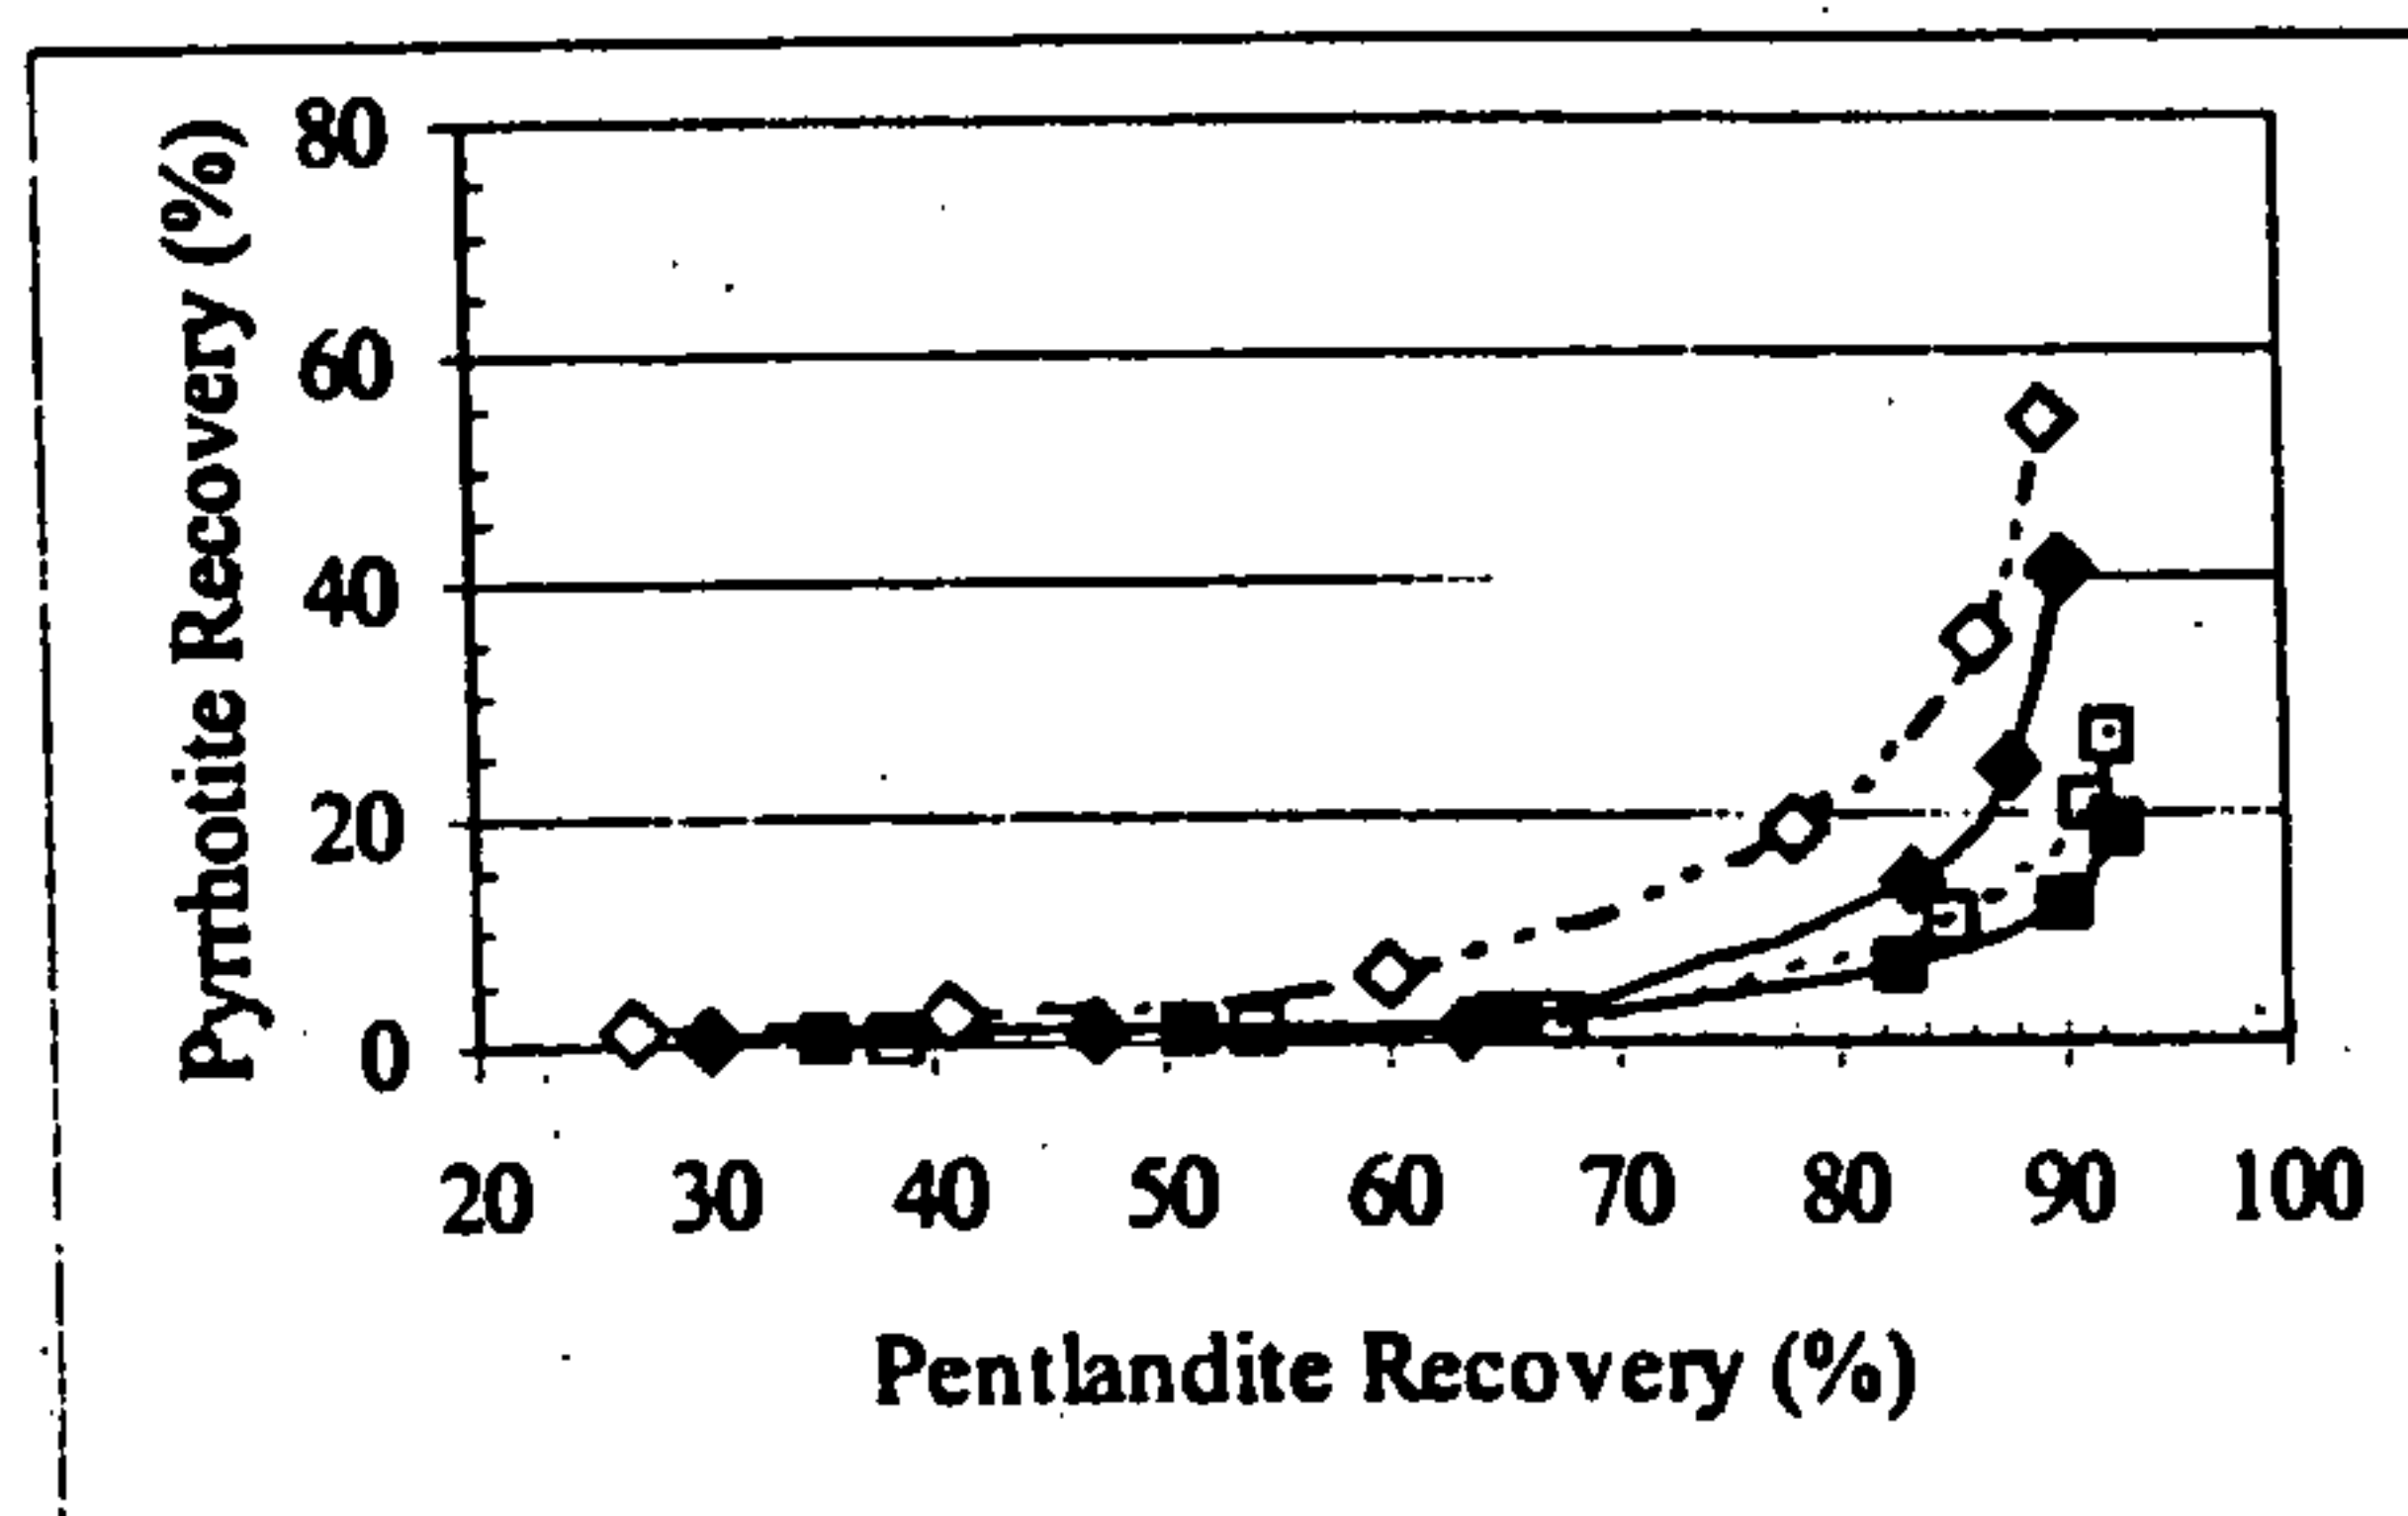

5/5

Fig. 4a

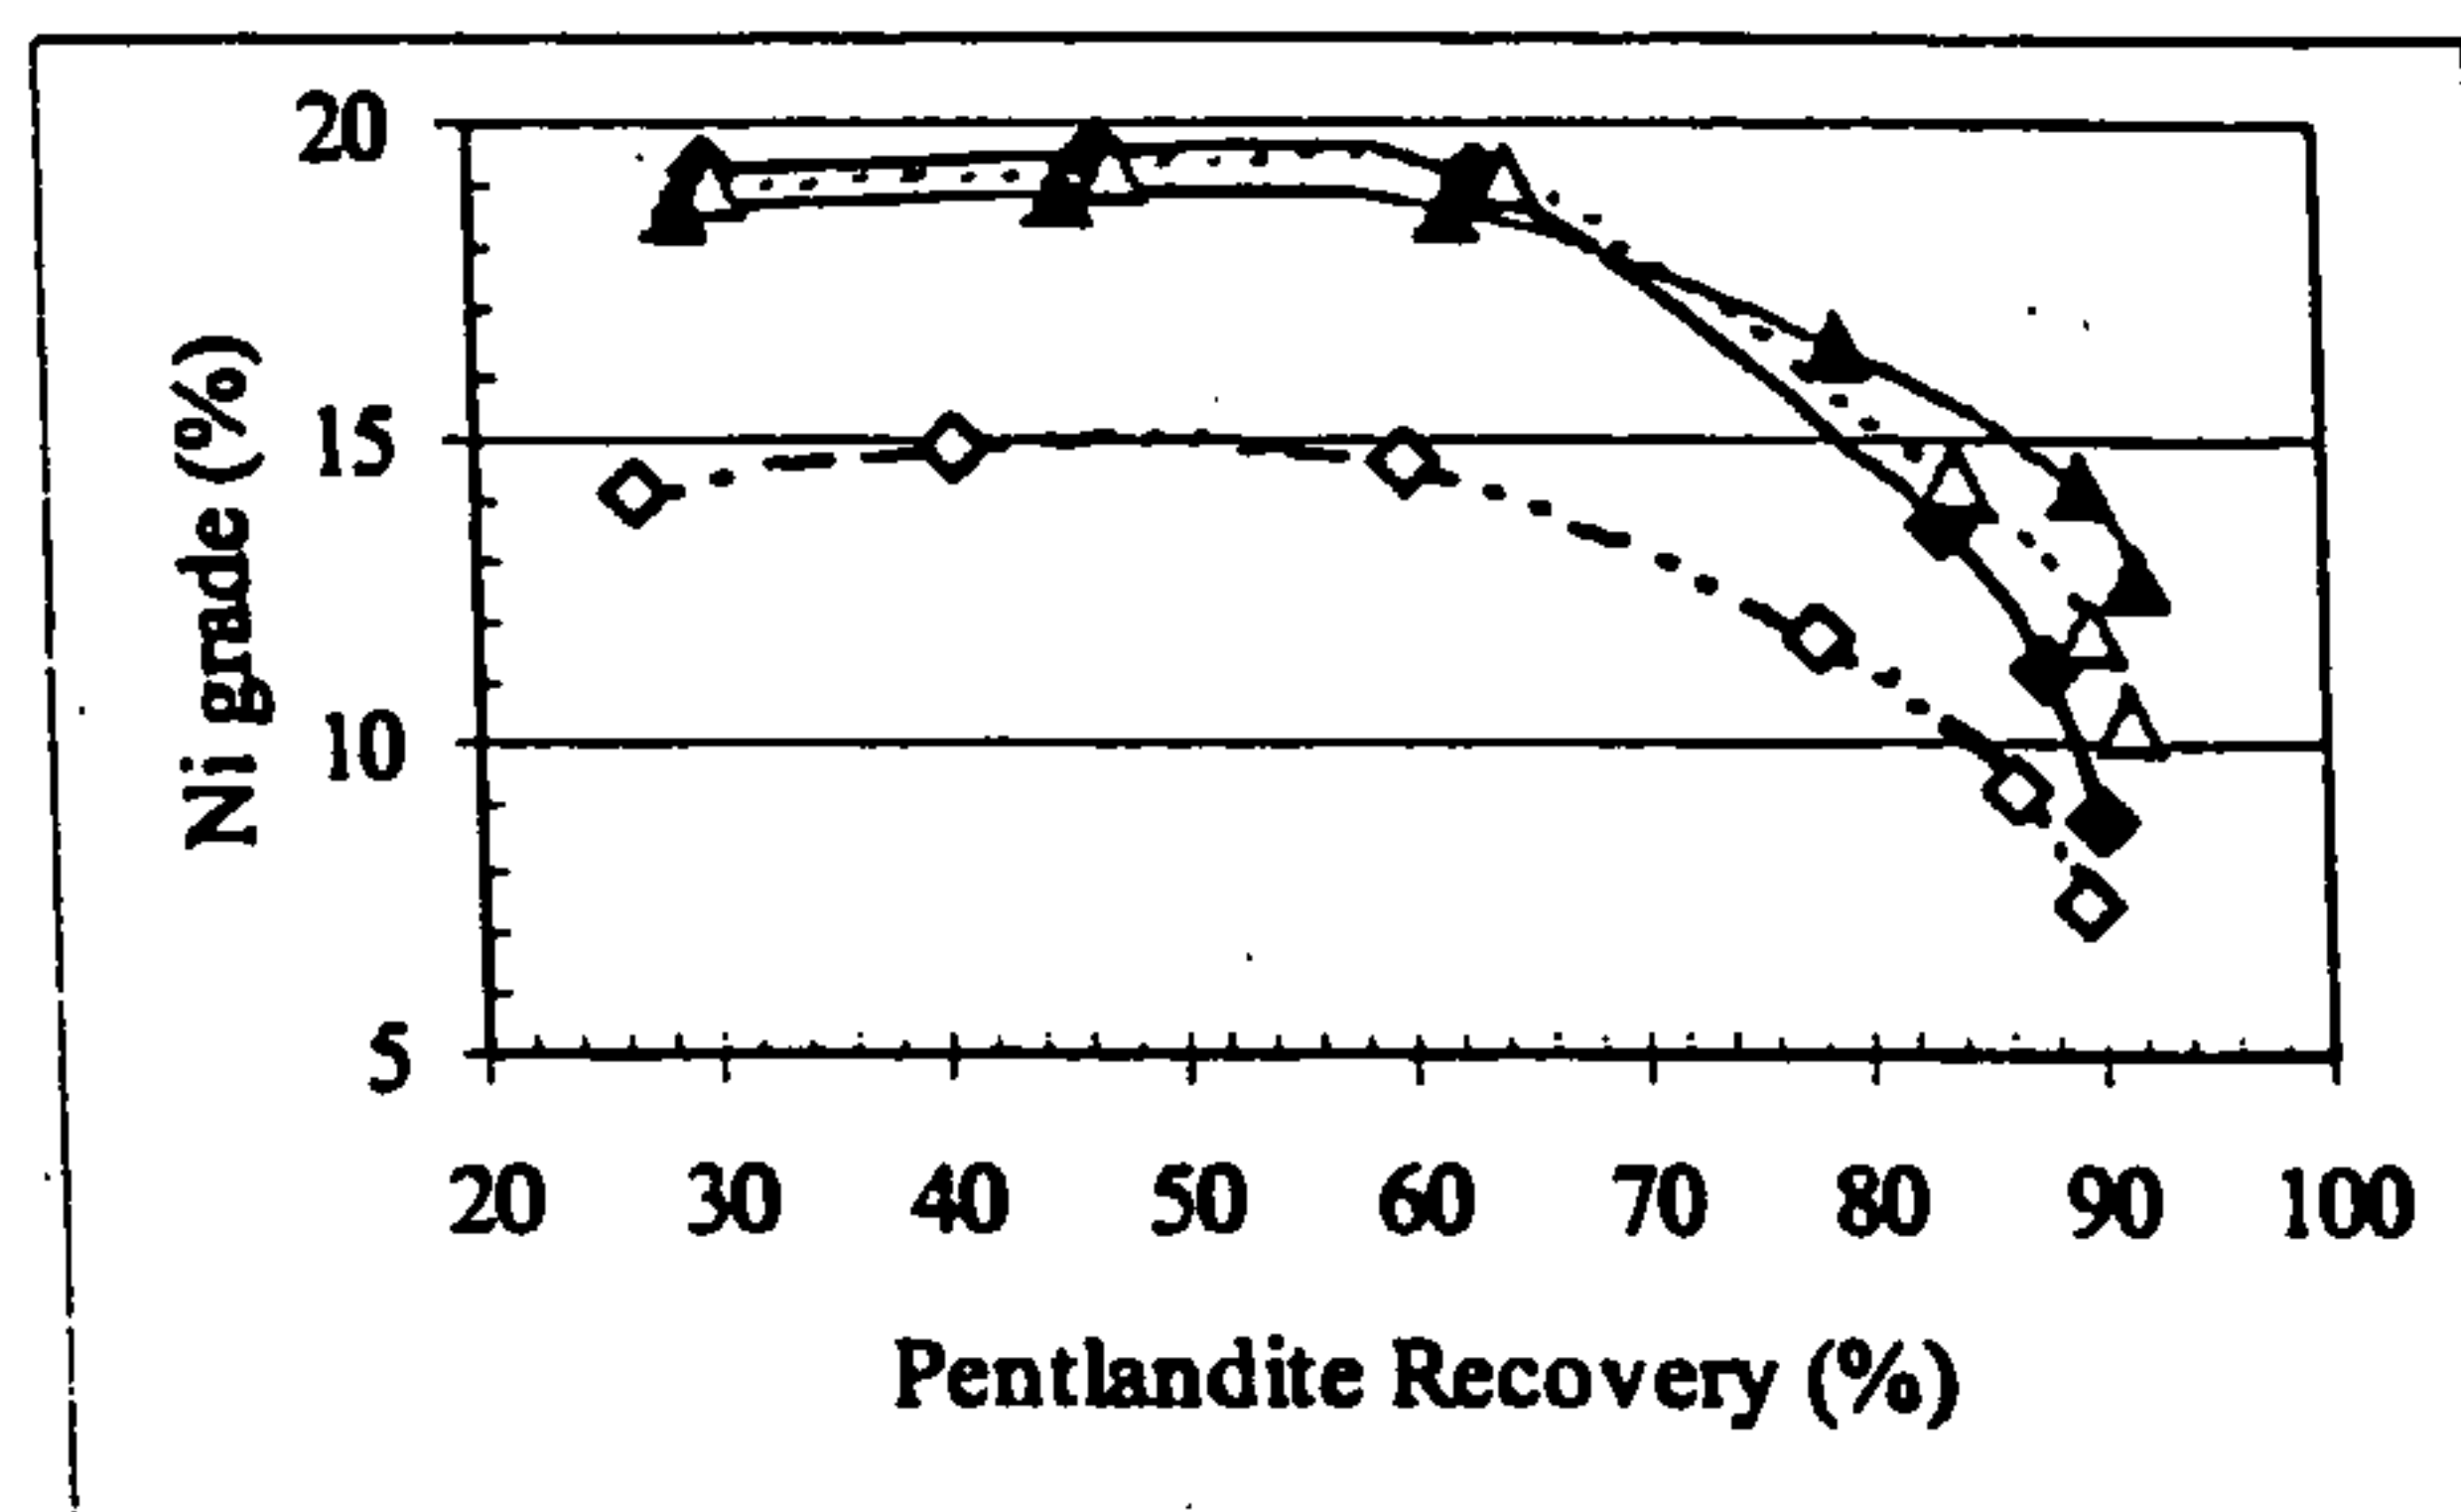


Fig. 4b

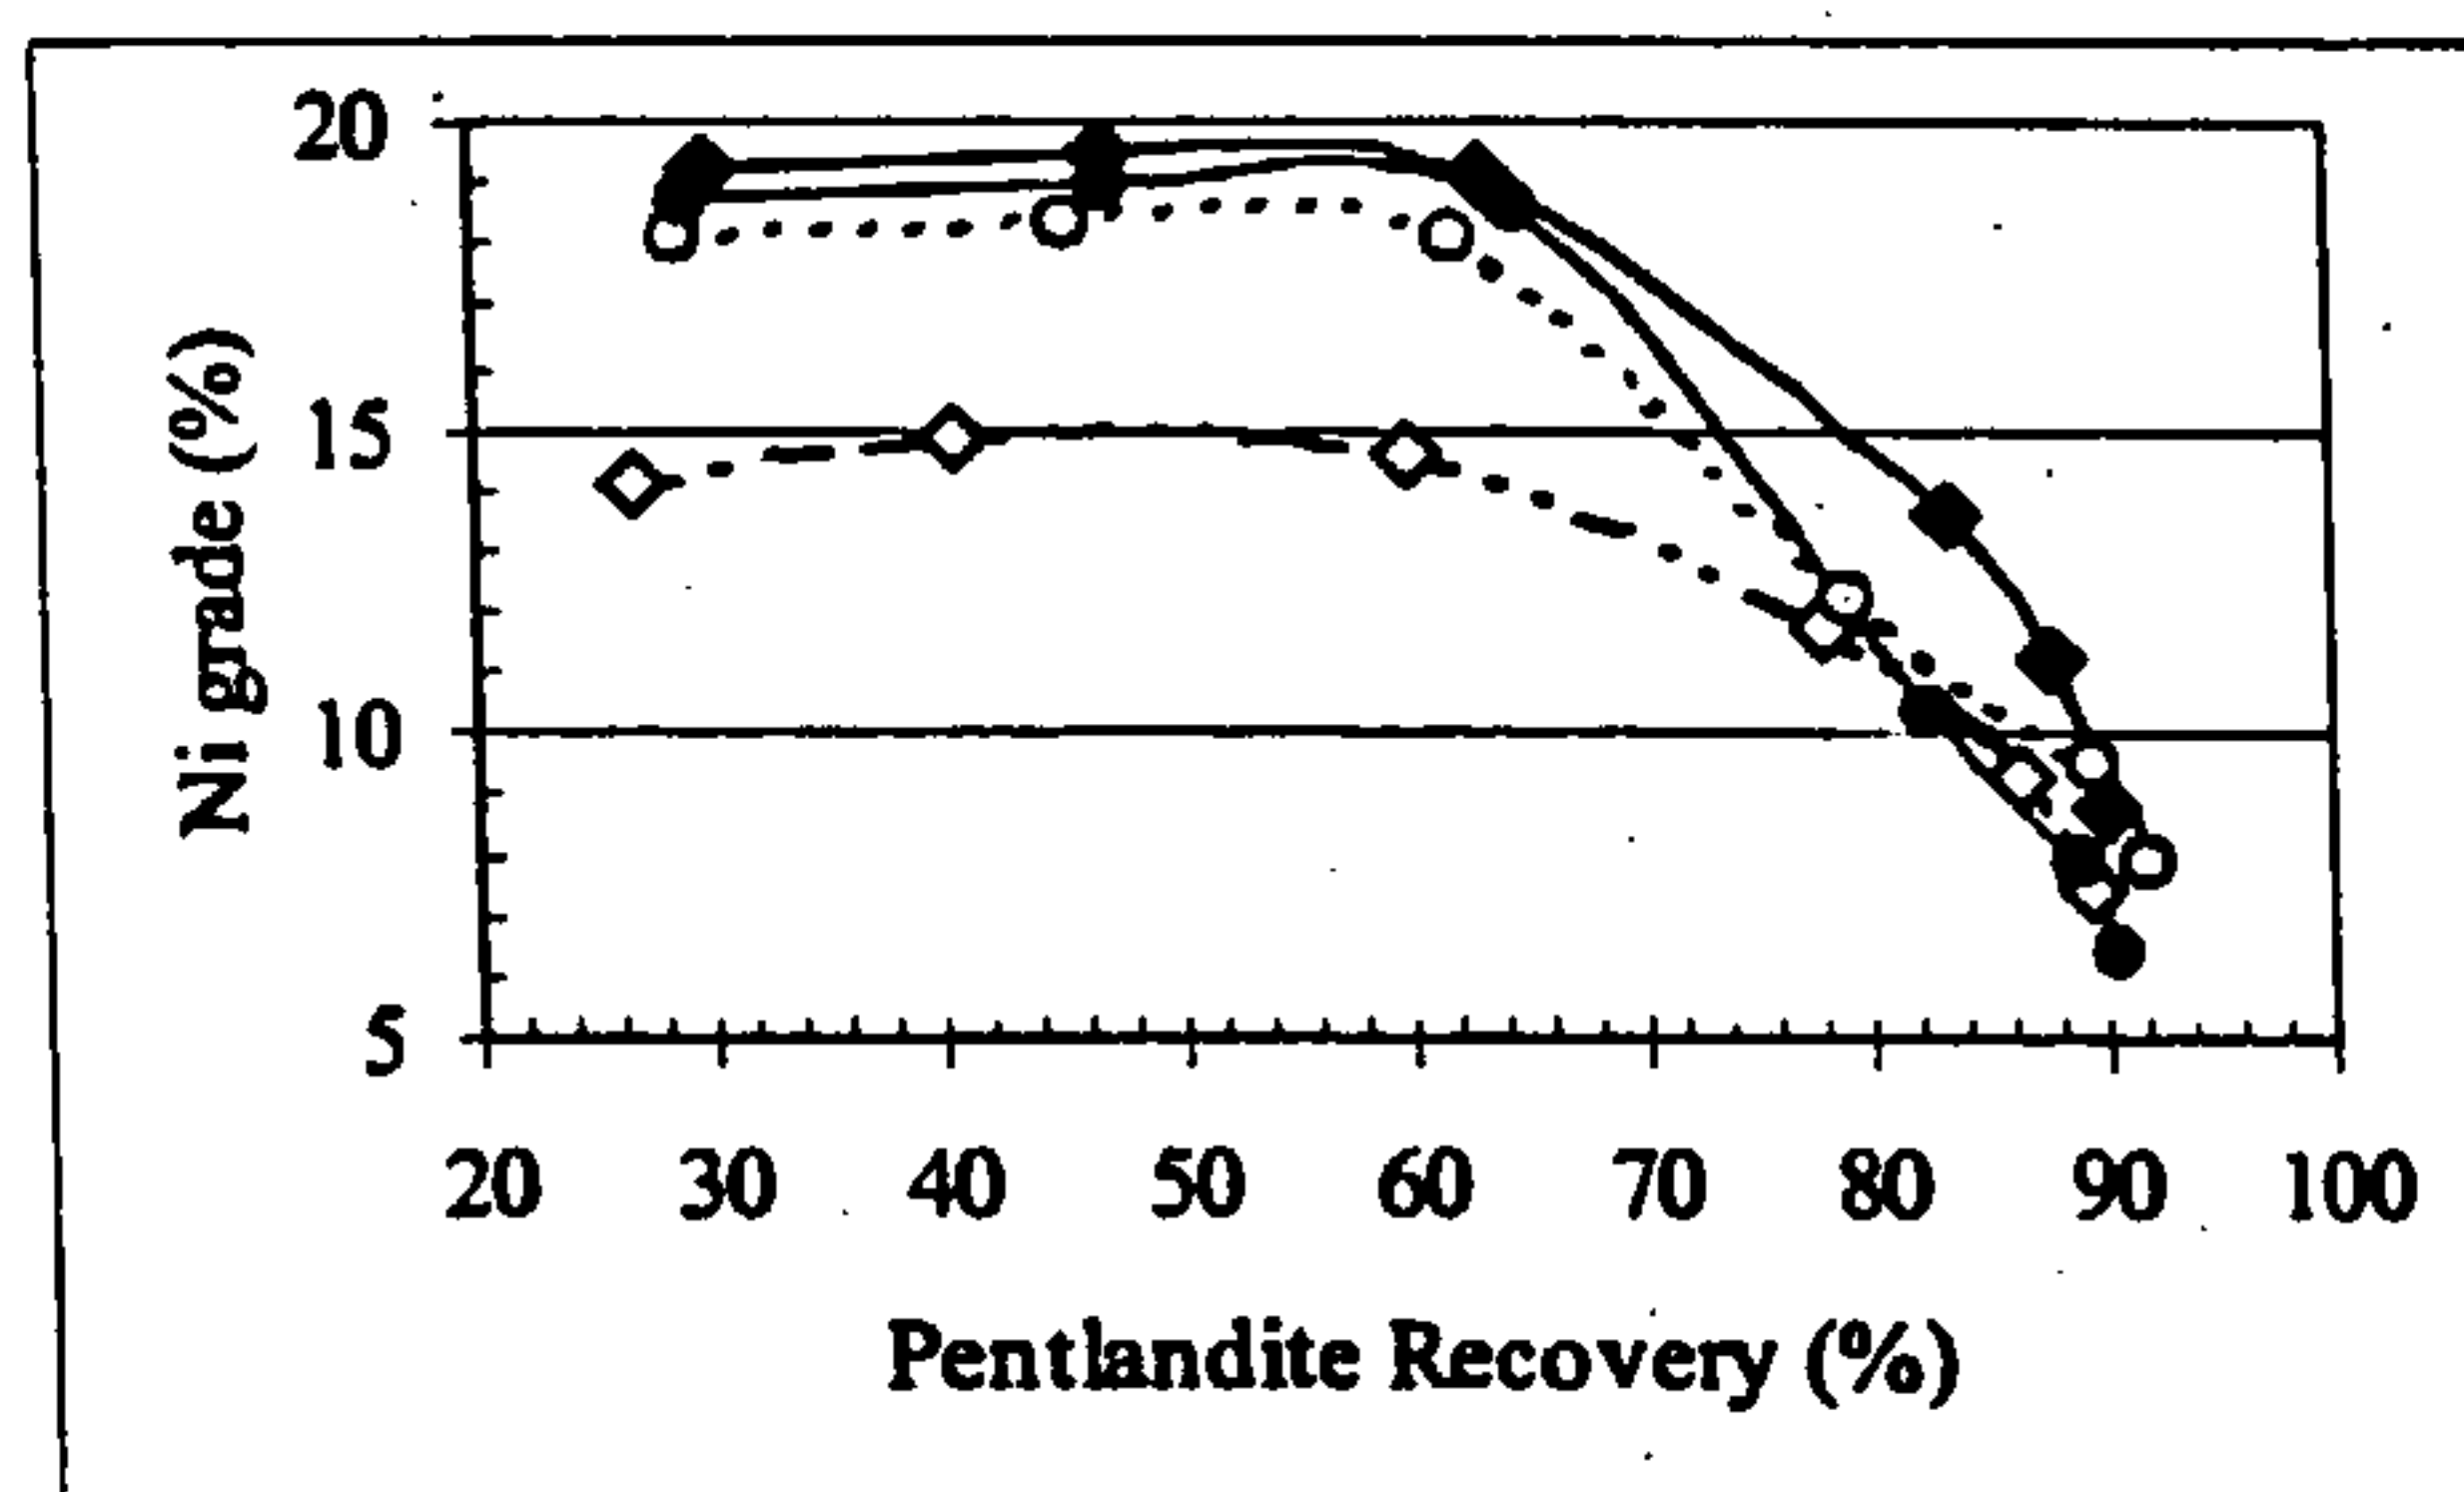


Fig. 4c

