

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2012 (29.03.2012)

(10) International Publication Number
WO 2012/040382 A2

- (51) **International Patent Classification:**
F01M 11/03 (2006.01) *BOW 29/07* (2006.01)
F01M 1/10 (2006.01) *BOID 35/30* (2006.01)
- (21) **International Application Number:**
PCT/US201 1/052637
- (22) **International Filing Date:**
21 September 2011 (21.09.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/385,099 21 September 2010 (21.09.2010) US
- (71) **Applicant (for all designated States except US):** LIFE-
TIME OIL FILTER, INC. [US/US]; 2405 14th Avenue,
Albany, OR 97322 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** HUBBARD, Christo-
pher, M. [US/US]; 10799 Southview Ridge Lane SE, Jef-
ferson, Oregon 97352 (US).
- (74) **Agents:** ENG, Peter, U. P. et al; Wilson Sonsini
Goodrich & Rosati, 650 Page Mill Road, Palo Alto, CA
94304-1050 (US).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))



WO 2012/040382 A2

(54) **Title:** OIL FILTER

(57) **Abstract:** An oil filter assembly is disclosed for a machine, such as an internal combustion engine, that has an oil output port and an oil input port. A mounting plate may be fixed with an outer enclosure and may be adapted for securing to the machine. The mounting plate may be further adapted to conduct oil from the machine into a peripheral portion of the outer enclosure, and then returning oil from a central portion of the outer enclosure back to the machine. Oil may pass from the peripheral portion to the central portion through a primary filter having a first porosity. A pressure-actuated valve may be fixed fluidly between the peripheral portion and central portion of the outer enclosure. Oil may pass through the pressure-actuated valve only when an oil pressure differential between the peripheral portion and the central portion of the outer enclosure exceeds a predetermined threshold pressure. A secondary filter may have a second porosity greater than the first porosity, and may be fixed fluidly between the pressure-actuated valve and the central portion of the outer enclosure.

OIL FILTER

CROSS-REFERENCE

[0001] This application claims the benefit of U.S. Provisional Application No. 61/385,099, filed September 21, 2010, which application is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] This invention relates to filters, and more particularly to an improved engine oil filter assembly that may also translate into a fuel filter, transmission filter, $\frac{3}{4}$ 0 filter, hydraulic fluid filter, medical, dental, gas, or deep fry oil filter.

BACKGROUND OF THE INVENTION

[0003] Conventional oil filters for vehicle engines, such as automotive internal combustion engines, typically include a filter media and a bypass valve that is actuated when the filter media becomes dirty and substantially plugged. For example, U.S. Patent No. 5,066,391 to Faria on Nov. 19, 1991, which is hereby incorporated by reference, teaches such a device. One drawback with such devices is that once the bypass valve is opened, particulate debris that would normally be captured by the filter media is able to traverse the valve and re-enter the engine, leading to engine wear and eventual damage. However, forcing oil through a filter media has the drawback that once the filter media becomes plugged with particulate matter, not enough oil can get through the filter to effectively cool and lubricate the engine, leading to much sooner engine damage than if even dirty oil were allowed to circulate. Another drawback of such devices is that particulate matter, once captured on a leading side of the filter media, can be dislodged from the filter to return back to the engine once the bypass valve opens, since flow of the oil at that point changes from through the filter media to across the filter media.

[0004] Other such filters are disclosed in U.S. Patent No. 5,711,872 to Jones et al. on Jan. 27, 1998; U.S. Patent No. 6,068,762 to Stone et al. on May 20, 2000; U.S. Patent No. 6,540,914 to Smith on April 1, 2003; and U.S. Patent No. 7,413,089 to Tidwell on Aug. 19, 2008, which are hereby incorporated by reference in their entirety. These devices suffer many of the same drawbacks as the Faria device.

[0005] Therefore, there is a need for a device that overcomes the drawbacks associated with the prior art.

SUMMARY OF THE INVENTION

[0006] The invention provides an oil filter assembly for a machine, such as an internal combustion engine, or any other device that has an oil output port and an oil input port. A mounting plate may be fixed with an outer enclosure, such as with a first set of cooperative threads, and may be adapted for securing to the machine, such as with a second set of cooperative threads. The mounting plate may be further adapted to conduct oil from the oil output port of the machine into a peripheral portion of the outer enclosure, and then returning oil from a central portion of the outer enclosure into the oil input port of the machine.

[0007] A primary filter has a first porosity. Oil may pass through the primary filter to move from a first portion (e.g., peripheral portion) to a second portion (e.g., central portion) of the outer enclosure. A pressure-actuated valve is fixed fluidly between the peripheral portion and central portion of the outer enclosure. Oil may pass through the pressure-actuated valve only when an oil pressure differential between the peripheral portion and the central portion of the outer enclosure exceeds a predetermined threshold pressure, such as when the primary filter **50** becomes dirty. A secondary filter may have a second porosity greater than the first porosity, and may be fixed fluidly between the pressure-actuated valve and the central portion of the outer enclosure.

[0008] As such, as oil traverses the oil filter assembly from the oil output port of the machine to the oil input port of the machine, the oil passes through either the primary filter or, if the predetermined pressure threshold **P_t** has been reached, either the primary filter or the secondary filter. When the primary filter becomes dirty, such as after a predetermined number of machine operating hours, for example, the oil filter assembly may be disassembled and each component washed, preferably in a standard dishwasher or the like by means of simple hot water and dish soap. By alternative means a parts washer may also be used.

[0009] The invention includes a filter device that opens the bypass pressure-actuated valve once the primary filter becomes plugged or the fluids viscosity becomes less significant by means of temperatures or choice and additionally the pressure difference (PSID) would increase by other forces, but additionally continues to filter the oil through the secondary more porous filter. The present device is easily installed, serviced and cleaned. Place fingers in cooling groves carefully and unscrew the cooling cover and set down then unscrew the media from the mounting plate and inspect for debris on the main filter. Next remove the secondary filter located on the bottom of the main filter using the supplied Lifetime Oil Filter® Wrench, or any other wrench or similar tool. Carefully unscrew and remove. Using the same LOF wrench or other tool, unscrew the

secondary filter until it comes apart make sure to not lose the sphere, springs, seals or secondary media. Drain any engine oil left in the filters media back into cooling cover.

[0010] The filters media can be cleaned at home using hot tap water and plain old dish washing soap in conjunction with a non scratching sponge or brush. In commercial applications a parts washing system will also achieve excellent results. Dry the filter media with a synthetic cloth or a household hair dryer. Other apparatuses such as in a conventional household dishwasher will perform also. Reassemble the clean parts the opposite way they were taken apart. Once the secondary media is reinstalled properly carefully screw the main media section of the filter onto the mounting plate until firm then $\frac{1}{4}$ turn more make sure the filtered bypass unit is screwed into the main filter bottom. Carefully lift the cooling cover, place fingers into grooves. Slowly screw on the filter to the mounting plate. This process is to restore the effectiveness of the primary filter, and is made of durable materials that can last potentially longer than the vehicle or machine to which it is installed. The present invention further cools the oil as it passes therethrough. Other features and advantages of the present invention will become apparent from the following more detailed description, taken in conjunction with the accompanying drawings, which illustrate, by way of example, the principles of the invention.

[0011] Preferably, the filter device could open a bypass valve once the primary filter becomes plugged, but would additionally filter the oil through a secondary more porous filter. Furthermore, the filter may be easily cleaned to restore the effectiveness of the primary filter, and would be made of durable materials that would last potentially longer than the machine to which it is fixed. Such a device could further provide for cooling of the oil as it passes therethrough.

[0012] Other goals and advantages of the invention will be further appreciated and understood when considered in conjunction with the following description and accompanying drawings. While the following description may contain specific details describing particular embodiments of the invention, this should not be construed as limitations to the scope of the invention but rather as an exemplification of preferable embodiments. For each aspect of the invention, many variations are possible as suggested herein that are known to those of ordinary skill in the art. A variety of changes and modifications can be made within the scope of the invention without departing from the spirit thereof.

INCORPORATION BY REFERENCE

[0013] All publications, patents, and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication, patent, or patent application was specifically and individually indicated to be incorporated by reference.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The novel features of the invention are set forth with particularity in the appended claims. A better understanding of the features and advantages of the present invention will be obtained by reference to the following detailed description that sets forth illustrative embodiments, in which the principles of the invention are utilized, and the accompanying drawings of which:

[0015] FIG. 1A is a cross-sectional view of the invention, illustrating a flow of oil through a primary filter within an outer enclosure of the invention;

[0016] FIG. 1B is a cross-sectional view of the invention of FIG. 1A, wherein a pressure differential between peripheral and central portions of the enclosure exceeds a threshold pressure to open a pressure-actuated valve of the invention, illustrating a flow of oil through both the primary filter and a secondary filter;

[0017] FIG. 2 is a side elevational view of a mounting plate of the invention;

[0018] FIG. 3 is a cross-sectional view of the mounting plate, taken generally along lines 3—3 of FIG. 4;

[0019] FIG. 4 is a bottom plan view thereof;

[0020] FIG. 5 is a top plan view thereof;

[0021] FIG. 6 is a bottom plan view of the invention;

[0022] FIG. 7 is an exploded perspective view of a secondary filter assembly of the invention;

[0023] FIG. 8 is a partially exploded view of the primary filter of the invention; and

[0024] FIG. 9 is a pressure diagram showing a pressure within the enclosure over time, as the primary and secondary filters become dirty and clogged.

[0025] FIG. 10A shows a top view of a tool that can be used to assemble and/or disassemble an oil filter.

[0026] FIG. 10B shows a side view of a tool that can be used to assemble and/or disassemble an oil filter.

[0027] FIG. 10C shows a bottom view of a tool that can be used to assemble and/or disassemble an oil filter.

[0028] FIG. 10D shows additional views of a tool that can be used to assemble and/or disassemble an oil filter.

[0029] FIG. 11 shows how a tool can be used to unscrew a primary filter assembly from a cover.

[0030] FIG. 12 shows how a tool can be used to separate a mounting plate from a primary filter assembly.

[0031] FIG. 13 shows how a tool can be used to separate a secondary filter valve seat from a secondary filter housing.

[0032] FIG. 14 shows an example of a valve sphere and a valve seat.

[0033] FIG. 15 shows that a spring and secondary filter can be removed from a primary assembly.

[0034] FIG. 16 shows how a tool can be used to remove a secondary media filter housing.

[0035] FIG. 17 shows an example of how filters can be washed.

[0036] FIG. 18 shows an example of how filters can be dried.

[0037] FIG. 19 shows how a secondary filter housing assembly can be reassembled.

[0038] FIG. 20 shows how a tool can be used to reassemble the secondary filter into the primary filter assembly.

[0039] FIG. 21 shows how a valve seat can be reassembled with the secondary assembly.

[0040] FIG. 22 shows how a tool can be used to reassemble a mounting plate with a primary filter assembly.

[0041] FIG. 23 shows how a tool can be used to reassemble a primary filter assembly with a cooling cover.

DETAILED DESCRIPTION OF THE INVENTION

[0042] Illustrative embodiments of the invention are described below. The following explanation provides specific details for a thorough understanding of and enabling description for these embodiments. One skilled in the art will understand that the invention may be practiced without such details. In other instances, well-known structures and functions have not been shown or described in detail to avoid unnecessarily obscuring the description of the embodiments.

[0043] Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise," "comprising," and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to." Words using the singular or plural number also include the plural or singular number respectively. Additionally, the words "herein," "above," "below" and words of similar import, when used in this application, shall refer to this application as a whole and not to any particular portions of this application. When the claims use the word "or" in reference to a list of two or more items, that word covers all of the following interpretations of the word: any of the

items in the list, all of the items in the list and any combination of the items in the list. The words "oil" or "oils," when used the description and the claims, shall refer to any fluid, such as liquid, gel, or gas, to be filtered, and are not necessarily limited to engine or machine lubricating fluids.

[0044] The invention provides oil filter assemblies and associated systems and methods, such as an internal combustion engine, or any other device that has an oil output port and an oil input port. Various aspects of the invention described herein may be applied to any of the particular applications set forth below or for any other types of filters. The invention may be applied as a standalone system or method, or as part of an integrated machine package, such as an engine. It shall be understood that different aspects of the invention can be appreciated individually, collectively, or in combination with each other.

[0045] FIGS. 1A and 1B illustrate an oil filter assembly **10** for a machine **20**, such as an internal combustion engine, that has an oil output port **21** and an oil input port **22**. A mounting plate **30** (e.g., FIGS. 2—5) may be fixed with an outer enclosure **40**, such as with a first set of cooperative threads **90**, and is adapted for securing to the machine **20**, such as with a second set of cooperative threads **100**. In alternate embodiments, a mounting plate may be removably fastened to a machine or filter assembly using any fastening mechanism, which may include those listed further below. In some embodiments, the mounting plate **30** is further adapted to conduct oil from the oil output port **21** of the machine **20** into a peripheral portion **48** of the outer enclosure **40** (FIG. 1A), and then return oil from a central portion **45** (FIGS. 1A and 1B) of the outer enclosure **40** into the oil input port **22** of the machine **20**.

[0046] In some embodiments, an oil output port may surround an oil input port. In alternate embodiments, the oil input port may surround the oil output port or be adjacent to the oil output port. In some embodiments, the oil output port may be in fluid communication with a peripheral portion of a filter assembly outer enclosure and the oil input port may be in fluid communication with a central portion of the filter assembly outer enclosure. Alternatively, the oil output port may be in fluid communication with a central portion of a filter assembly outer enclosure and the oil input port may be in fluid communication with a peripheral portion of the filter assembly outer enclosure. For example, oil may enter through a central portion and pass through a filter and be returned to a machine via the peripheral portion.

[0047] Oil may be received in a first region of the filter assembly from the oil output port, and may be provided from a second region of the filter assembly to the oil input port. The first and second region may be in fluid communication via one or more filter. For example, the first and second regions may be in fluid communication through one or more primary filter. In some

embodiments, one or more secondary filter may be provided. The first and second region may be in fluid communication through the one or more secondary filter at limited times. For example, one or more valve may be provided that may have a closed position wherein the first and second region are not in fluid communication via the secondary filter, and an open position wherein the first and second region are in fluid communication via the secondary filter. The second region may be concentrically positioned within the first region, the first region may be concentrically positioned within the second region, or first and second regions may be adjacent to one another.

[0048] In some embodiments, the outer enclosure and a primary filter may have a cylindrical configuration. The primary filter may be configured in a concentric manner within the outer enclosure. In alternate embodiments, the outer enclosure and primary filter may have any other shape, such as a prism or tube with a circular, elliptical, triangular, quadrilateral, pentagonal, hexagonal, octagonal, or any other shape cross section. The primary filter may be provided at a concentric location within the outer enclosure. Alternatively, it may be within any portion of the outer enclosure and may separate a first and second region of the oil filter assembly in any manner.

[0049] In one embodiment, the enclosure **40** includes a plurality of cooling fins **150** (FIG. 6) protruding radially therefrom. Any other shaped surface feature may be provided that may assist with cooling the enclosure. The shaped surface feature may increase the surface area of the outer enclosure. The shaped surface feature may include fins, which may be aligned radially, in a spiraling pattern, as circles, in a random manner, or any other distribution, or any other protrusion, bumps, ridges, grooves, channels, or holes. The cooling fins and/or other shaped surface features may be integrally formed on the enclosure surface. Alternatively, they may be provided as separate pieces. The cooling fins and/or any other shaped surface features may or may not be removable from the enclosure surface. In some embodiments, cooling may occur passively. In alternate embodiments, a fluid flow may be actively provided over the shaped surface features. The shaped surface features may assist with cooling the enclosure and/or the oil contained within.

[0050] Further, the mounting plate **30** may include several Viton or similar seals **99** (FIGS. 3—5), as is known in the art. Such seals may enable the mounting plate to form a fluid tight seal between the filter assembly and the machine.

[0051] A primary filter **50** may have a first porosity P_i , preferably less than 125 microns. In one embodiment, the first porosity P_1 is about 5 microns. Alternatively, the first porosity may be less than, greater than, or be about 200 microns, 150 microns, 125 microns, 100 microns, 80 microns,

60 microns, 50 microns, 40 microns, 30 microns, 20 microns, 10 microns, 5 microns, or 1 micron. Oil may pass through the primary filter **50** to move from the peripheral portion **48** to the central portion **45** of the outer enclosure **40**. Oil may pass through the primary filter to move from a first region to a second region, where one or more region is peripheral and one or more region is central, or the regions are adjacent to one another.

[0052] In one embodiment, the primary filter **50** is sandwiched between two semi-rigid protective grids **80** (FIG. 8) each made from a durable, dishwasher safe material such as, or the like a semi-rigid titanium mesh, a metallic stainless mesh, a hybrid ceramic material, Nitronic 60, glass, stainless steel or aluminum alloy, micro glass, synthetic or carbon fibers on the order of 100 nanometers both with polymerization and electrospinning. Protective grids **80** help maintain the shape of the primary and secondary filter while in use within the enclosure **40**. In alternate embodiments, the protective layers need not be grids, but may have any other shape that may lend structural support to the filter while allowing oil to pass through. The protective layers may have one or more holes, openings, channels, or pathways that may allow oil to pass through. One, two, three, four or more protective layers may be provided.

[0053] A pressure-actuated valve **70** is fixed fluidly between the peripheral portion **48** and central portion **45** of the outer enclosure **40**. Oil may pass through the pressure-actuated valve **70** only when an oil pressure differential between the peripheral portion **48** and the central portion **45** of the outer enclosure **40** exceeds a predetermined threshold pressure P_t , such as when the primary filter **50** becomes dirty or clogged with debris or the viscosity is changed (FIG. 9). In some embodiments, P_t may be about 14 psid. In other embodiments, P_t may fall within about 10 psid to 20 psid, e.g., 10 psid, 11 psid, 12 psid, 13 psid, 13.5 psid, 13.8 psid, 14 psid, 14.2 psid, 14.5 psid, 15 psid, 16 psid, 17 psid, 18 psid, 19 psid, or 20 psid.

[0054] FIG. 9 shows that pressure may vary over time. For example, pressure may gradually increase as the primary filter becomes more clogged. At some point a threshold pressure P_t may be met and may increase. In some embodiments, the pressure may increase at a lower rate over the threshold pressure as oil may flow through a secondary filter. The secondary filter may have a greater porosity than the primary filter, which may cause the lower rate of pressure increase. The pressure may be a pressure differential between a first and second region of the oil filter assembly. The pressure may be a pressure difference across a filter. Alternatively, the pressure may be a pressure value within a region, such as the first or second region, of the oil filter assembly.

[0055] In one embodiment the pressure-actuated valve **70** is a ball valve that includes a ball **110** biased in a closed position **130** with a spring **120**. The ball **110** may be urged into an open

position **140** when the threshold pressure P_1 is exceeded. When the ball is urged into an open position, fluid may be allowed to flow through a secondary filter. When the ball is in a closed position, fluid is not allowed to flow through the secondary filter. Preferably the ball **110** and other components are durable and easily cleaned, such as titanium, tungsten, titanium Nitronic **60**, ceramics, glass, stainless steel or aluminum alloy, rubber, copper, platinum, magnesium, gold, or iron, in billet, bar, round, cast, extruded or machined formed. Preferably, the ball and other components may be dishwasher safe.

[0056] Any additional type of bypass valve may be provided in alternate embodiments of the invention. The bypass valve may be any pressure-actuated valve. In some embodiments the bypass valve may have one or more component that may react to a pressure difference between a first and second region of the filter assembly. For example, when the pressure within a first region (e.g., a peripheral region) of the filter assembly, or when the pressure difference between the first and second regions of the filter assembly reach a threshold pressure, the component may be actuated to an open position, which may allow fluid flow through the bypass valve. The valve may be able to return to a closed position after being actuated to an open position. In some embodiments, the valve may return to a closed position when the pressure value or pressure differential falls below the threshold value. Alternatively, the valve may remain in an open position once opened. The component may be actuated directly by the pressure. Alternatively the pressure may be determined by a sensor and the component may be actuated in response to the pressure reading.

[0057] Any other valve configuration known in the art may be used. In some embodiments, the valve may have a binary open and closed position. Alternatively, the valve may have a range of positions that may control the amount of flow. The valves may be adjusted based on pressure. Examples of valves that may be incorporated into the oil filter assembly may include, but are not limited to, ball valves, butterfly valves, choke valves, check valves, diaphragm valves, ceramic disc valves, gate valves, knife valves, needle valves, piston valves, pinch valves, plug valves, spool valves, thermal expansion valves, or poppet valve.

[0058] A secondary filter **60** has a second porosity P_2 , P_2 preferably being greater than P_1 , and is fixed fluidly between the pressure-actuated valve **70** and the central portion **45** of the outer enclosure **40** (FIGS. 1B and 7). Preferably P_2 is greater than about 125 microns. In one embodiment P_2 may be about 25 microns. In some instances, the second porosity may be greater than, less than, or be about 10 microns, 15 microns, 20 microns, 25 microns, 30 microns, 50 microns, 75 microns, 100 microns, 125 microns, 150 microns, 200 microns, 250 microns, or 300 microns. P_2 may be greater than P_1 by any amount. For example, P_2 may be greater than P_1 by

more than, less than, or about 1%, 5%, 10%, 20%, 30%, 50%, 75%, 100%, 200% or any other value. In alternate embodiments, P_2 may be less than or equal to P_i .

[0059] In one embodiment, the primary filter **50** is substantially cylindrical and includes an end cap **160** (e.g., FIG. 8) that has a threaded aperture **165** for mounting thereto a secondary filter assembly **170** (e.g., FIG. 7). The secondary filter assembly **170** may include a secondary filter housing **180** that at least partially encloses the secondary filter **60** and fixes the secondary filter **60** and the pressure-actuated valve **70** to the end cap **160** with a ball seat and seal plate **190**. The secondary filter housing and/or other components of the secondary filter assembly may be formed of a dishwasher safe material. The secondary filter housing may have one or more opening that may allow fluid to flow between a first and second region, such as a periphery and central region. In some embodiments, the secondary filter housing may be a protective grid.

[0060] As such, in some embodiments, as oil traverses the oil filter assembly **10** from the oil output port **21** of the machine **20** to the oil input port **22** of the machine **20**, the oil must pass through either the primary filter **50** or, if the predetermined pressure threshold P_t has been reached, the primary filter **50** and/or the secondary filter **60**. With the cooling fins **150** of the enclosure **40**, the oil is cooled as it passes through the peripheral portion **48** of the enclosure **40**.

[0061] When the primary filter **50** becomes dirty, such as after a predetermined number of machine operating hours, for example, the oil filter assembly **10** may be disassembled and each component washed, preferably in a standard dishwasher or the like by means of simple hot water and dish soap. By alternative means a parts washer may also be used. As such, the primary and secondary filters **50**, **60** are preferably made from a material that is dishwasher safe, corrosion resistant, and durable, such as a titanium mesh, a metallic stainless mesh, a hybrid ceramic material, Nitronic **60**, glass, stainless steel, aluminum alloy, micro glass, copper, platinum, magnesium, gold, or iron, synthetic or carbon fibers on the order of 100 nanometers with polymerization and electrospinning.

[0062] In some embodiments, the oil filter assembly may be washed after a predetermined amount of time or number of cycles. In other embodiments, the oil filter assembly may be washed after a predetermined pressure within the first region or pressure difference between the first region and the second region. The predetermined pressure may indicate that the secondary filter is clogging up.

[0063] Preferably, the oil filter assembly and/or components of the oil filter assembly may be disassembled from the machine. For example, oil filter assembly may be detached from a mounting plate. Optionally, a mounting plate may be detached from the machine. Filters may or

may not be removed from protective grids, and secondary filter assemblies may be removed from primary filter assemblies. Valve components may also be disassembled.

[0064] In one example, a user's fingers may be placed in cooling groves, and the user may carefully and unscrew the cooling cover and set it down. The user may then unscrew the media from the mounting plate and inspect for debris on the main filter. Next, the user may remove the secondary filter located on the bottom of the main filter using a supplied Lifetime Oil Filter® Wrench, or any other wrench or similar tool. The user may carefully unscrew and remove. Using the same supplied wrench or other tool, the user may unscrew the secondary filter until it comes apart make sure to not lose the sphere, springs, seals or secondary media. The user may drain any engine oil left in the filters media back into the cooling cover.

[0065] In some embodiments, all of the components may be washed by a washing apparatus, such as a dishwasher. In some embodiments, one or more component may be swapped or replaced. After washing, the components may be reassembled into an oil filter assembly and attached to the mounting plate and/or machine.

[0066] In one example, the filters media can be cleaned at home using hot tap water and dish washing soap in conjunction with a non scratching sponge or brush. In commercial applications a parts washing system may also achieve excellent results. After washing, the filter media may be dried. In some examples, the filter media may be dried with a synthetic cloth or a household hair dryer. Other apparatuses such as in a conventional household dishwasher may also perform.

[0067] The clean parts may be reassembled the opposite way/order they were taken apart. Once the secondary media is reinstalled properly, the main media section of the filter may be screwed or reattached in any other manner onto the mounting plate until firm. Then a quarter turn more may be applied to make sure the filtered bypass unit is screwed into the main filter bottom. The cooling cover may be lifted, and fingers may be placed into grooves. The filter may be slowly screwed or otherwise reattached to the mounting plate. This process may restore the effectiveness of the primary filter. The primary filter may be made of durable materials that can last potentially longer than the vehicle or machine to which it is installed.

[0068] Any of these components may be detached and/or reattached in any manner including, but not limited to, screwing, twisting, slide and locking, clamps, adhesives, snap-fits, or press-fits. Inner components may be removed from an outer enclosure.

[0069] Components of the air filter assembly may be washed any number of times. Components may be designed to withstand one or more, five or more, ten or more, twenty or more, fifty or more, a hundred or more, or a thousand or more wash cycles. Some components or may or may not have a longer life than other components.

[0070] A primary and secondary filter may be provided in accordance with an embodiment of the invention. In alternate embodiments, one or more primary filter and one or more secondary filter may be provided. In some embodiments, any number of filters may be layered on top of one another. Multiple filters may contact one another, gaps may be provided between filters, or protective grids may be provided between filters. Furthermore, additional levels of filters may be provided. For example one or more tertiary filter may be provided with a third porosity. In some embodiments, the third porosity may be greater than the first porosity and/or the second porosity. The tertiary filter may be accessed when the secondary filter is clogged or dirty. One or more valve may be provided that may allow fluid to flow through the tertiary filter when the pressure differential across the tertiary filter reaches a predetermined threshold.

[0071] While a particular form of the invention has been illustrated and described, it will be apparent that various modifications can be made without departing from the spirit and scope of the invention. For example, a ball valve is illustrated as the pressure-actuated valve **70** in the drawings, but a pin-valve or other equivalent pressure-actuated valve **70** may also be used including Globe, Gate and Butterfly. Accordingly, it is not intended that the invention be limited, except as by the appended claims.

[0072] The oil filter assembly may have any use or application, which may include an engine oil filter, a fuel filter, transmission filter, H₂O filter, hydraulic fluid filter, medical, dental, gas, or deep fry oil filter. In some examples, the oil filter assembly may be used for internal combustion engines, or other engines for any type of vehicle, automobile, aircraft, or space exploration.

[0073] FIG. 10A shows a top view of a tool that can be used to assemble and/or disassemble an oil filter. The tool may be a wrench. In some embodiments, the tool may be a specialized wrench, such as a LOF wrench. The tool may be specially designed to interface with one or more components of an oil filter. The tool may or may not be integrally formed from a single piece. The tool may or may not have movable components. Any measurements are provided by way of example only and will not limit the design of the tool. In some embodiments, the tool may or may not be proportional to the measurements provided.

[0074] FIG. 10B shows a side view of a tool that can be used to assemble and/or disassemble an oil filter. The tool may have one or more section that may be useful for assembling and/or disassembling an oil filter. In some embodiments, a particular section may be used to assemble and/or disassemble a particular portion of the oil filter. The particular section of the tool may be fitted to the particular portion of the oil filter.

[0075] For example, a tool may have a central portion **1000**. The tool may have one or more side portions **1010a**, **1010b**. In some embodiments, the tool may have one or more rear portions

1020. In some embodiments, the central portion, side portions and rear portions may interface with different sections of the oil filter. The various portions need not be adjustable. In some embodiments, the tool portions may be sized or shaped to grip or fit a particular portion of an oil filter. In some embodiments, portions of a wrench (such as a central portion, side portion or rear portion) may be used to screw and/or unscrew portions of the oil filter. In some embodiments, the same tool may be used to assemble and/or disassemble the oil filter. Alternatively, multiple tools may be used to assemble and/or disassemble the oil filter. FIG. 10C shows a bottom view of a tool that can be used to assemble and/or disassemble an oil filter.

[0076] FIG. 10D shows additional views of a tool that can be used to assemble and/or disassemble an oil filter. The tool may have one or more central portion **1050**, side portion **1060a**, **1060b** or rear portion **1070**. In some embodiments, a side-rear portion **1080** may be provided. A side portion may be contoured so that a user can comfortably grip the tool. In some embodiments, a user may grip one, two or more side portions to apply torque to a portion of the tool.

[0077] FIGs. 11-23 provide an example of how an oil filter may be disassembled, cleaned, and reassembled. One or more of the steps may be provided in other orders or may be optional. Additional or alternate steps may be provided. Although some steps are illustrated using a tool, a tool may not be required (e.g., hand tightening or loosening may be used), or a different tool from the one illustrated may be used. Any embodiments of an oil filter described herein may be assembled and/or disassembled as illustrated.

[0078] FIG. 11 shows how a tool **1100** can be used to unscrew a primary filter assembly **1110** from a cover **1120**. In some embodiments one or more set of threads may be provided on the primary filter assembly and/or cover that may enable them to screw into one another. Alternatively, other surface features may be provided that may enable the primary filter to engage with the cover. The tool may have a central portion **1130** that may interface with the primary filter assembly. The central portion may lock with a portion of the primary filter assembly, and the tool may be turned to unscrew or otherwise detach the primary filter assembly from the cooling cover. In some embodiments, a wrench may be used to unscrew a primary filter media assembly from a cooling cover by turning counter clockwise.

[0079] FIG. 12 shows how a tool **1200** can be used to separate a mounting plate **1210** from a primary filter assembly **1220**. In some embodiments one or more set of threads may be provided on the primary filter assembly and/or mounting plate that may enable them to screw into one another. Alternatively, other surface features may be provided that may enable the primary filter to engage with the mounting plate. In some embodiments, a central portion **1230** of the tool may

interface with the mounting plate. A user may grip the primary filter media assembly by the base and use the tool to unscrew the mounting plate from the primary filter media assembly. Preferably, the user grips the primary filter assembly by the base and not the shark cage, although in alternate embodiments, the user may grip any portion of the filter assembly.

[0080] FIG. 13 shows how a tool **1300** can be used to separate a secondary filter valve seat **1310** from a secondary filter housing **1320**. In some embodiments one or more set of threads may be provided on the secondary filter assembly and/or seat valve may enable them to screw into one another. Alternatively, other surface features may be provided that may enable the secondary filter to engage with the seat valve. In some embodiments, a rear portion **1330** of the tool (such as a wrench) may be used to interface with the valve seat. For example, the rear portion of the tool may lock in with a central portion **1340** of the valve seat. A valve sphere **1350** may be provided in the valve seat. The valve seat or assembly may be different based on the type of valve used.

[0081] FIG. 14 shows an example of a valve sphere **1400** and a valve seat **1410**. The valve sphere may rest in the valve seat. In some embodiments, the valve sphere may be sitting freely in the valve seat, so the valve seat may be removed with caution to avoid losing the sphere. As previously mentioned, other valve configurations may be used or provided, and may have different components or configurations.

[0082] FIG. 15 shows that a spring **1500** and secondary filter **1510** can be removed from a primary assembly **1520**. After the valve seat has been removed, the spring and secondary filter media may simply slip out of the primary filter media assembly.

[0083] FIG. 16 shows how a tool **1600** can be used to remove a secondary media filter housing **1620**. The secondary media filter housing may be removed from a primary filter media **1610**. In some embodiments one or more set of threads may be provided on the secondary filter housing and/or primary media filter may enable them to screw into one another. Alternatively, other surface features may be provided that may enable the secondary filter housing to engage with the primary media filter. In some embodiments, a side rear portion **1630** of the tool may be used to interface with the secondary media filter. The secondary media filter housing may be unscrewed from the primary media filter using a side rear portion of the wrench.

[0084] FIG. 17 shows an example of how filters can be washed. For example, filters media can be cleaned using hot tap water and dish washing soap. For example, water may be provided from a faucet or other directed source of water. In commercial applications, a parts washing system may also achieve excellent results. In some embodiments, a dishwashing machine may be used. A primary filter media **1700** may have contaminates that may accumulate on the

outside of the filter media, so it may be rinsed from inside out. For example, the flow of water may be directed from the inside of the filter outwards. A secondary filter media **1710** may collect contaminants, so it may be rinsed from outside in. For example, the flow of water may be directed from the outside of the filter inwards.

[0085] FIG. 18 shows an example of how filters can be dried. The filter media may be dried using a synthetic cloth or household hair dryer. Preferably, paper towels or cloth that would easily tear or could leave paper or cloth residue in the oil filter, will not be used. In some embodiments, the filters may be air dried, blow dried, heated, wiped dry, or may be dried using any other techniques.

[0086] FIG. 19 shows how a secondary filter housing assembly can be reassembled. A spring **1900** may be fitted within a secondary media filter **1910**, which may be fitted within a secondary media filter housing **1920**. The spring may slide into the secondary media filter, which may slide into the secondary media filter housing. When reassembling the secondary media filter assembly, the user may make sure that the spring is seated properly on a spring post.

[0087] FIG. 20 shows how a tool **2000** can be used to reassemble the secondary filter **2010** into the primary filter assembly **2020**. In some embodiments, a side-rear portion **2030** of the tool can be used to screw the secondary filter assembly into the primary filter assembly. The reassembled secondary filter media assembly may be screwed back into the primary filter media assembly by turning clockwise, and may be tightened using the tool (e.g., LOF wrench).

[0088] FIG. 21 shows how a valve seat **2100** can be reassembled with the secondary assembly **2110**. A tool **2120** may be used to screw the valve seat into the secondary media assembly. While reattaching the valve seat, a user may make sure that the valve sphere **2140** is seated in the valve seat. The valve seat may be tightened using a rear portion **2130** of the tool (e.g., turning clockwise).

[0089] FIG. 22 shows how a tool **2200** can be used to reassemble a mounting plate **2210** with a primary filter assembly **2220**. In some embodiments, a central portion **2230** of the tool may be used to interface with the mounting plate, and screw the mounting plate onto the primary filter assembly. The mounting plate may be screwed back onto the primary filter assembly (turning clockwise). The primary mounting plate may be tightened using a tool (e.g., LOF wrench).

[0090] If the mounting plate is still fastened to an engine or other machine, the primary filter may be grasped by the base and screwed to the mounting plate. Preferably, a user will grasp the primary filter by the base and not grip the filter by the shark cage. In alternate embodiments, the user may grasp the primary filter anywhere. In some embodiments, the primary filter may be screwed to the mounting plate by turning clockwise. The primary filter may be screwed to the

mounting plate to be hand tight. In other embodiments, the tool may or may not be able to interface with the base of the primary filter to tighten it onto the mounting plate. Then a user may continue by screwing a cooling cover over the primary filter media and only the mounting plate. There may be resistance as the mounting plate seal may contact the inside of the cooling cover. The user may continue to screw the cooling cover until the cooling cover top contacts the mounting plate. In some embodiments, the cooling cover may be hand tightened to the mounting plate. In other embodiments, a tool may be used to tighten the cooling cover to the mounting plate.

[0091] FIG. 23 shows how a tool **2300** can be used to reassemble a primary filter assembly **2310** with a cooling cover **2320**. In some embodiments, a central portion **2330** of the tool may be used to screw the primary filter assembly into the cooling cover. The primary filter media may be screwed back into the cooling cover. Then it may be tightened using the tool (e.g., wrench) by turning clockwise.

[0092] The teachings provided herein can be applied to other systems, not necessarily the system described herein. The elements and acts of the various embodiments described above can be combined to provide further embodiments. All of the above patents and applications and other references, including any that may be listed in accompanying filing papers, are incorporated herein by reference. Aspects of the invention can be modified, if necessary, to employ the systems, functions, and concepts of the various references described above to provide yet further embodiments of the invention.

[0093] These and other changes can be made to the invention in light of the above Detailed Description. While the above description details certain embodiments of the invention and describes the best mode contemplated, no matter how detailed the above appears in text, the invention can be practiced in many ways. Details of the system may vary considerably in its implementation details, while still being encompassed by the invention disclosed herein.

[0094] Particular terminology used when describing certain features or aspects of the invention should not be taken to imply that the terminology is being redefined herein to be restricted to any specific characteristics, features, or aspects of the invention with which that terminology is associated. In general, the terms used in the following claims should not be construed to limit the invention to the specific embodiments disclosed in the specification, unless the above Detailed Description section explicitly defines such terms. Accordingly, the actual scope of the invention encompasses not only the disclosed embodiments, but also all equivalent ways of practicing or implementing the invention.

[0095] The above detailed description of the embodiments of the invention is not intended to be exhaustive or to limit the invention to the precise form disclosed above or to the particular field of usage mentioned in this disclosure. While specific embodiments of, and examples for, the invention are described above for illustrative purposes, various equivalent modifications are possible within the scope of the invention, as those skilled in the relevant art will recognize. Also, the teachings of the invention provided herein can be applied to other systems, not necessarily the system described above. The elements and acts of the various embodiments described above can be combined to provide further embodiments.

[0096] All of the above patents and applications and other references, including any that may be listed in accompanying filing papers, are incorporated herein by reference. Aspects of the invention can be modified, if necessary, to employ the systems, functions, and concepts of the various references described above to provide yet further embodiments of the invention.

[0097] Changes can be made to the invention in light of the above "Detailed Description." While the above description details certain embodiments of the invention and describes the best mode contemplated, no matter how detailed the above appears in text, the invention can be practiced in many ways. Therefore, implementation details may vary considerably while still being encompassed by the invention disclosed herein. As noted above, particular terminology used when describing certain features or aspects of the invention should not be taken to imply that the terminology is being redefined herein to be restricted to any specific characteristics, features, or aspects of the invention with which that terminology is associated.

[0098] In general, the terms used in the following claims should not be construed to limit the invention to the specific embodiments disclosed in the specification, unless the above Detailed Description section explicitly defines such terms. Accordingly, the actual scope of the invention encompasses not only the disclosed embodiments, but also all equivalent ways of practicing or implementing the invention under the claims.

[0099] While certain aspects of the invention are presented below in certain claim forms, the inventor contemplates the various aspects of the invention in any number of claim forms. Accordingly, the inventor reserves the right to add additional claims after filing the application to pursue such additional claim forms for other aspects of the invention. While preferred embodiments of the present invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It

is intended that the following claims define the scope of the invention and that methods and structures within the scope of these claims and their equivalents be covered thereby.

CLAIMS

WHAT IS CLAIMED IS:

1. An oil filter assembly comprising:
 - an outer enclosure, enclosing:
 - a first region,
 - a second region,
 - a primary filter having a first porosity, and
 - a secondary filter having a second porosity wherein the first region and the second region are in fluid communication through the primary filter; and
 - a bypass valve having (a) a closed position wherein the first region and the second region are not in fluid communication via the secondary filter, and (b) an open position wherein the first region and the second region are in fluid communication via the secondary filter.
2. The oil filter assembly of claim 1 wherein the second porosity is greater than the first porosity.
3. The oil filter assembly of claim 1 wherein the bypass valve is configured to be in the open position when the pressure difference between the first region and the second region exceeds a predetermined pressure threshold.
4. The oil filter assembly of claim 1 wherein the primary and secondary filters are each made from a titanium mesh, a metallic stainless mesh, a hybrid ceramic material, Nitronic 60, glass Stainless Steel or aluminum alloy, Micro Glass, Synthetic or Carbon fibers on the order of 100 Nanometers with polymerization and electrospinning.
5. The oil filter assembly of claim 1 wherein the primary filter has a porosity of less than about 125 microns.
6. The oil filter assembly of claim 1 wherein the secondary filter has a porosity of greater than about 45 microns.
7. The oil filter assembly of claim 1 wherein the primary filter is sandwiched between two semi-rigid protective grids.
8. The oil filter assembly of claim 1 further comprising a mounting plate that is fixed to the outer enclosure with a first set of cooperative threads.
9. The oil filter assembly of claim 8 wherein the mounting plate is secured to a machine with a second set of cooperative threads.
10. The oil filter assembly of claim 1 wherein the bypass valve includes a ball valve biased in a closed position with a spring.

11. The oil filter assembly of claim 1 wherein the outer enclosure further includes a plurality of cooling fins protruding radially therefrom.
12. The oil filter assembly of claim 1 wherein the primary filter is substantially cylindrical and includes an end cap with a threaded aperture for mounting thereto a secondary filter assembly that includes a secondary filter housing that at least partially encloses the secondary filter and fixes the secondary filter and the pressure-actuated valve to the end cap with a ball seat and seal plate.
13. The oil filter assembly of claim 7, wherein the primary filter, the secondary filter, and the protective grids are dishwasher safe.
14. A method of filtering oil in a machine comprising the steps of:
 - a) receiving a flow of oil within a first region;
 - b) filtering the oil from the first region through a primary filter having a first porosity to a second region;
 - c) allowing at least a portion of the oil to flow through a secondary filter having a second porosity greater than the first porosity if a threshold pressure difference between the first region and the second region is achieved.
15. The method of claim 14 further comprising cooling the oil within the first region.
16. The method of claim 14 further including the steps:
 - d) repeating steps a) to c) a plurality of times;
 - e) removing the primary filter from fluid communication with the machine;
 - f) cleaning the filter;
 - g) reestablishing the primary filter in liquid communication with the machine; and
 - h) repeating from step a.
17. The method of claim 16 wherein the primary filter is removed after repeating steps a) to c) a predetermined number of times.
18. The method of claim 16 wherein the primary filter is removed after a predetermined pressure difference between the first region and the second region.

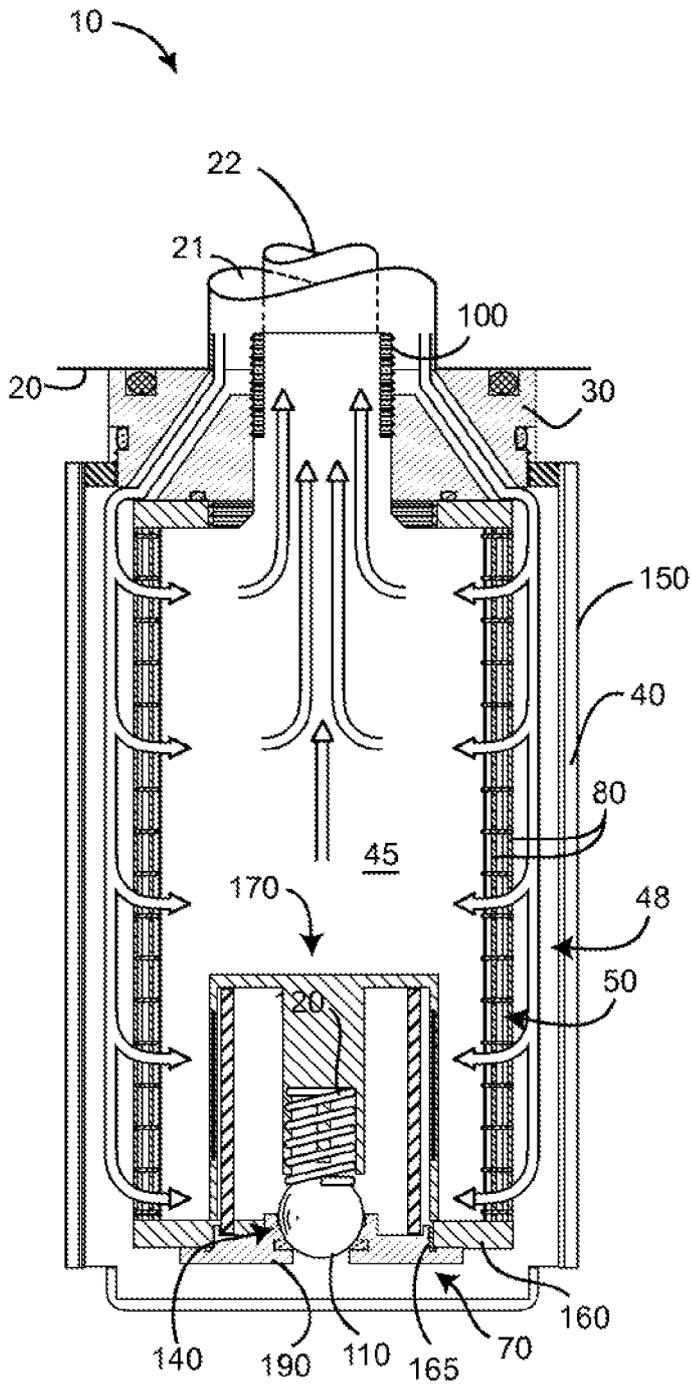


FIG. 1A

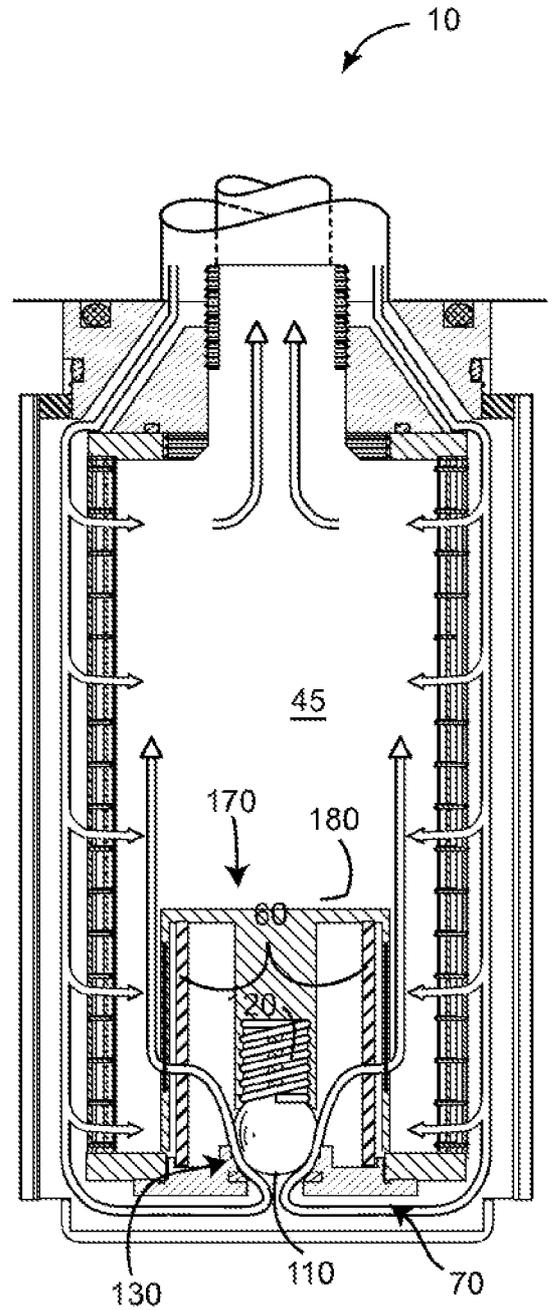


FIG. 1B

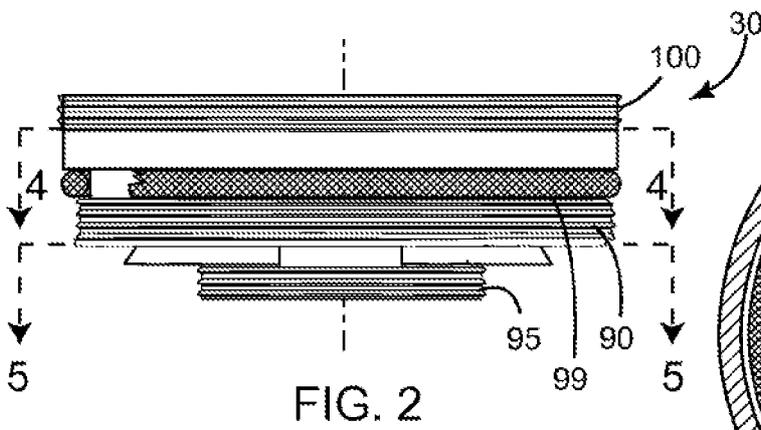


FIG. 2

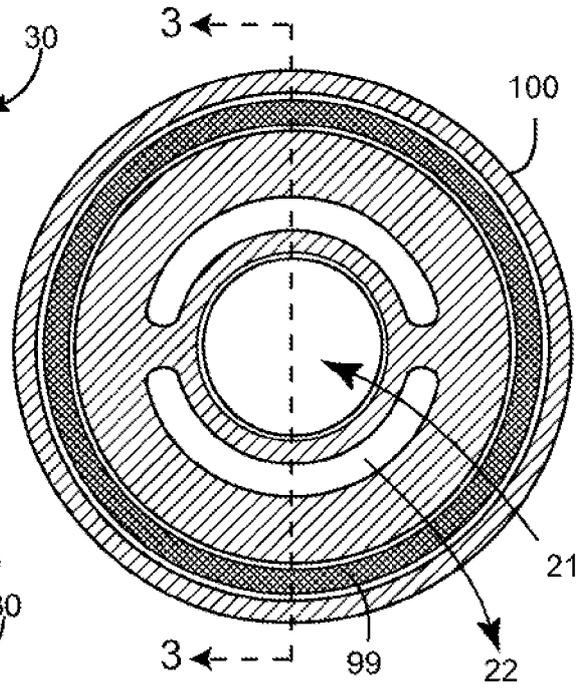


FIG. 4

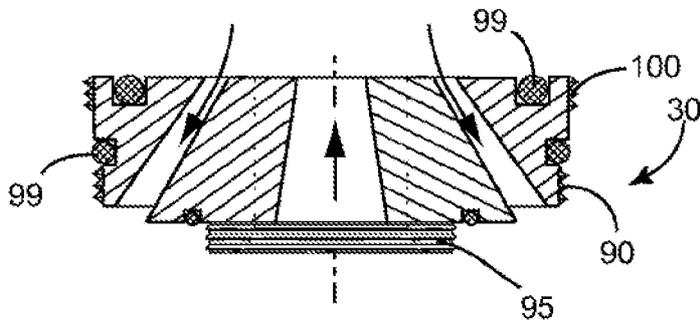


FIG. 3

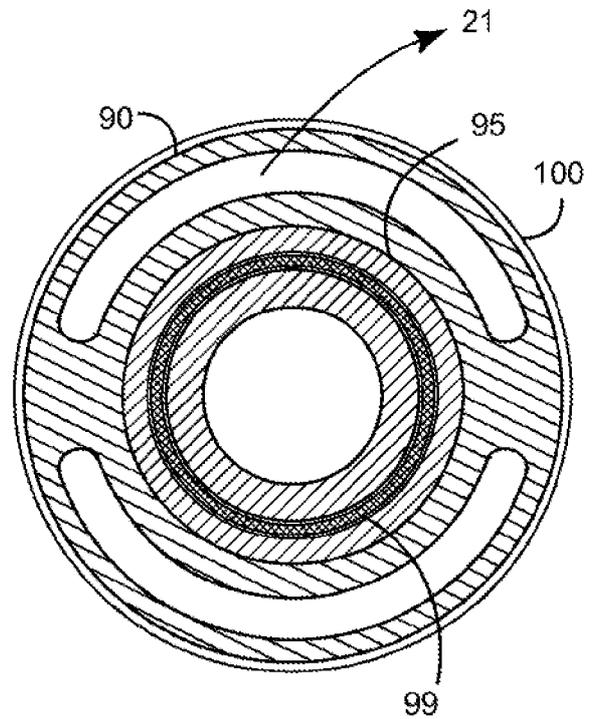


FIG. 5

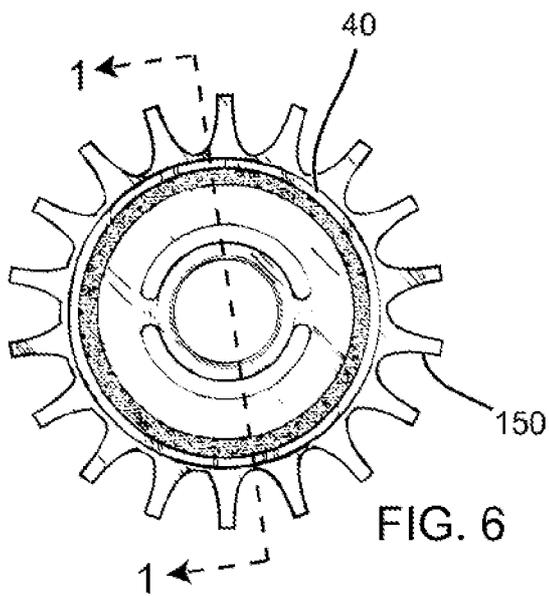


FIG. 6

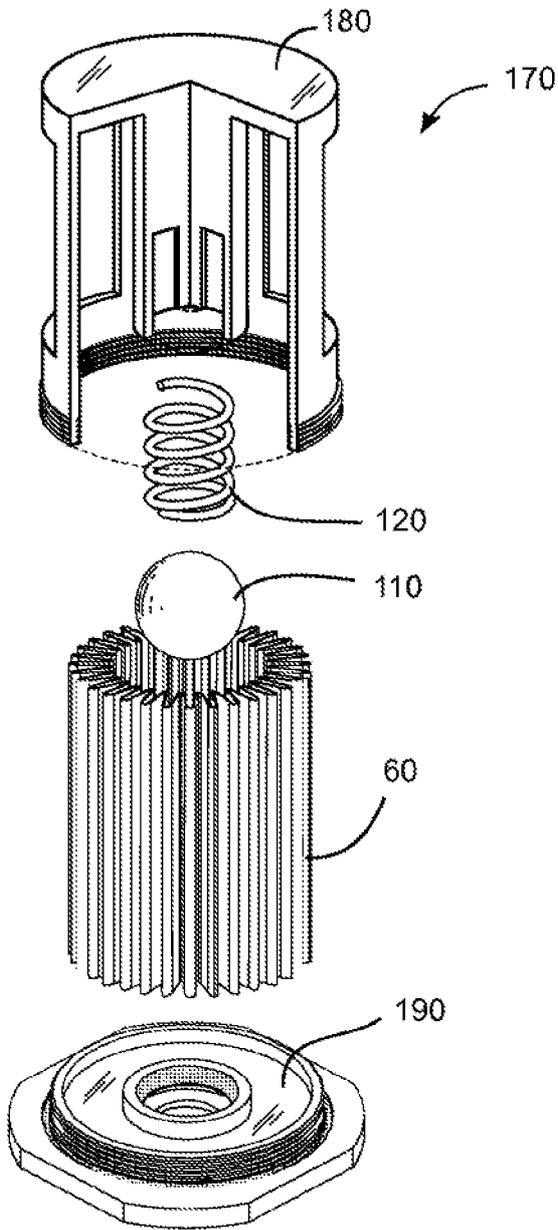


FIG. 7

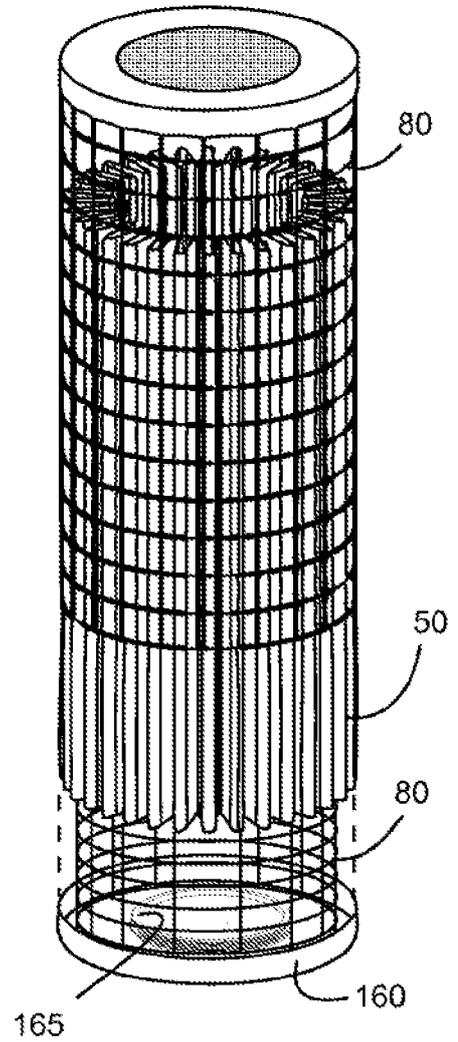


FIG. 8

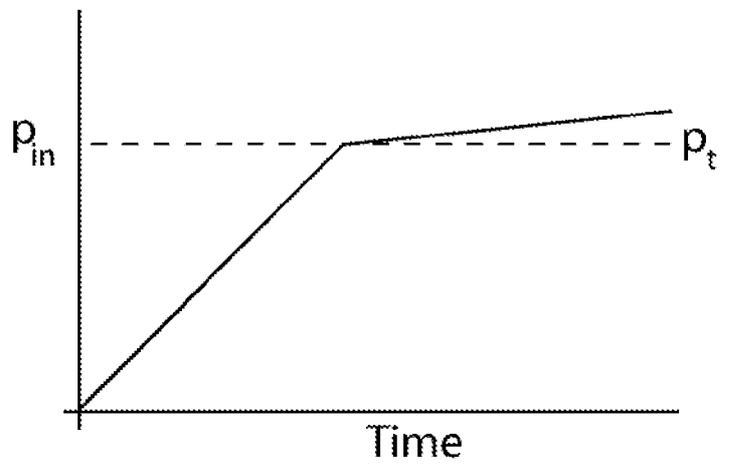


FIG. 9

4/12


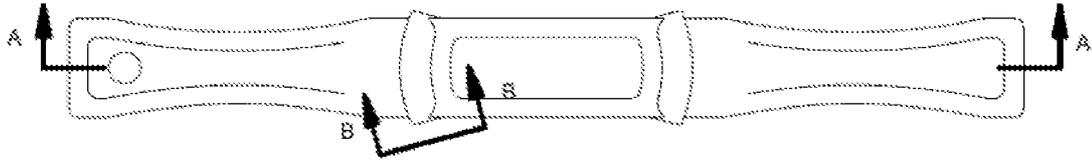


FIG. 10A

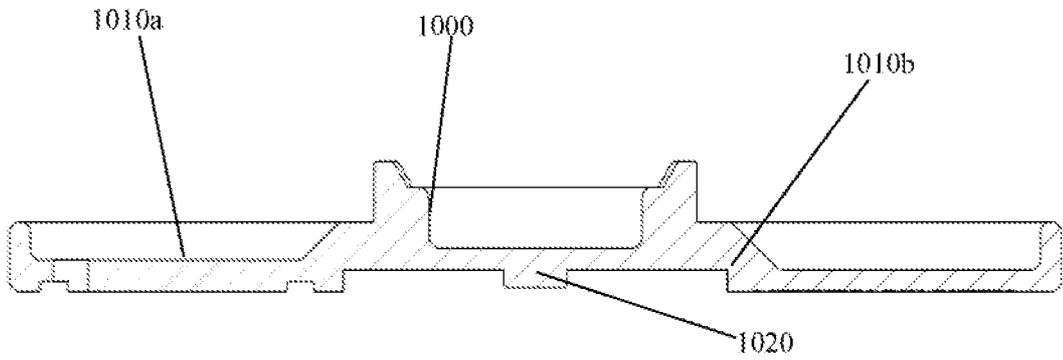

SECTION A-A

FIG. 10B

5/12

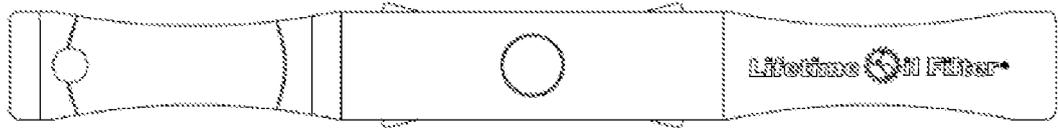


FIG. 10C

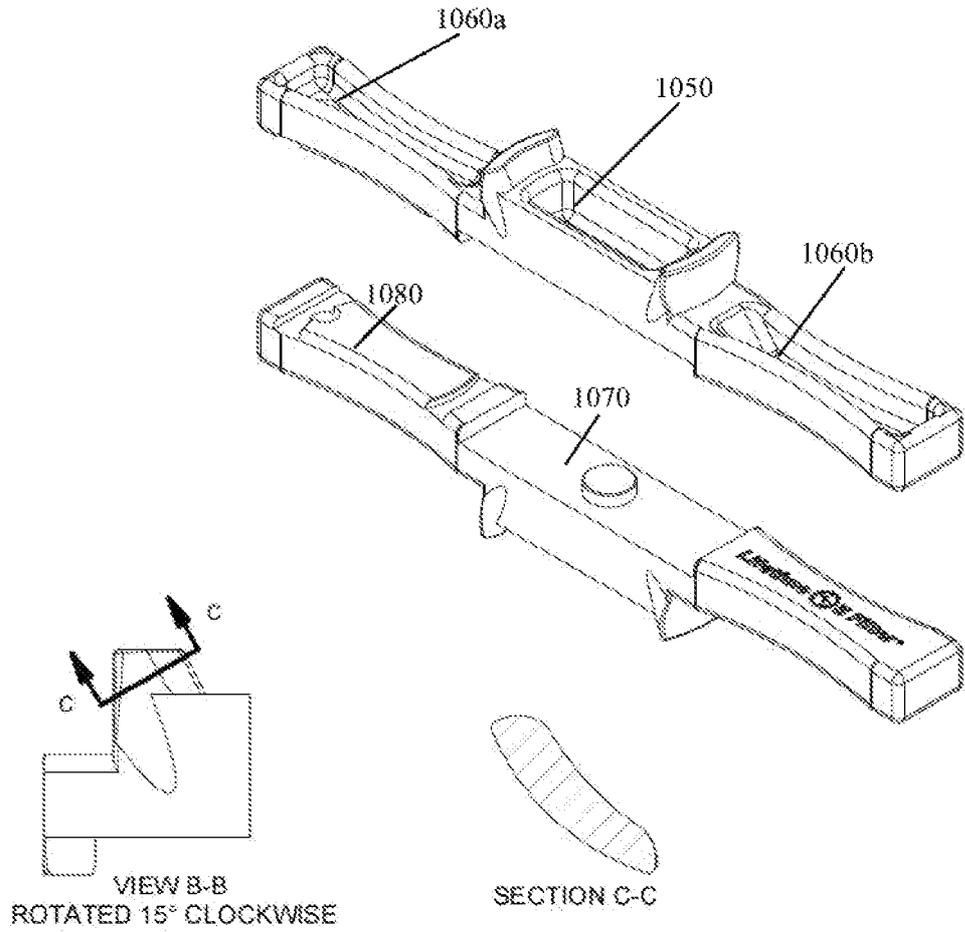


FIG. 10D

6/12

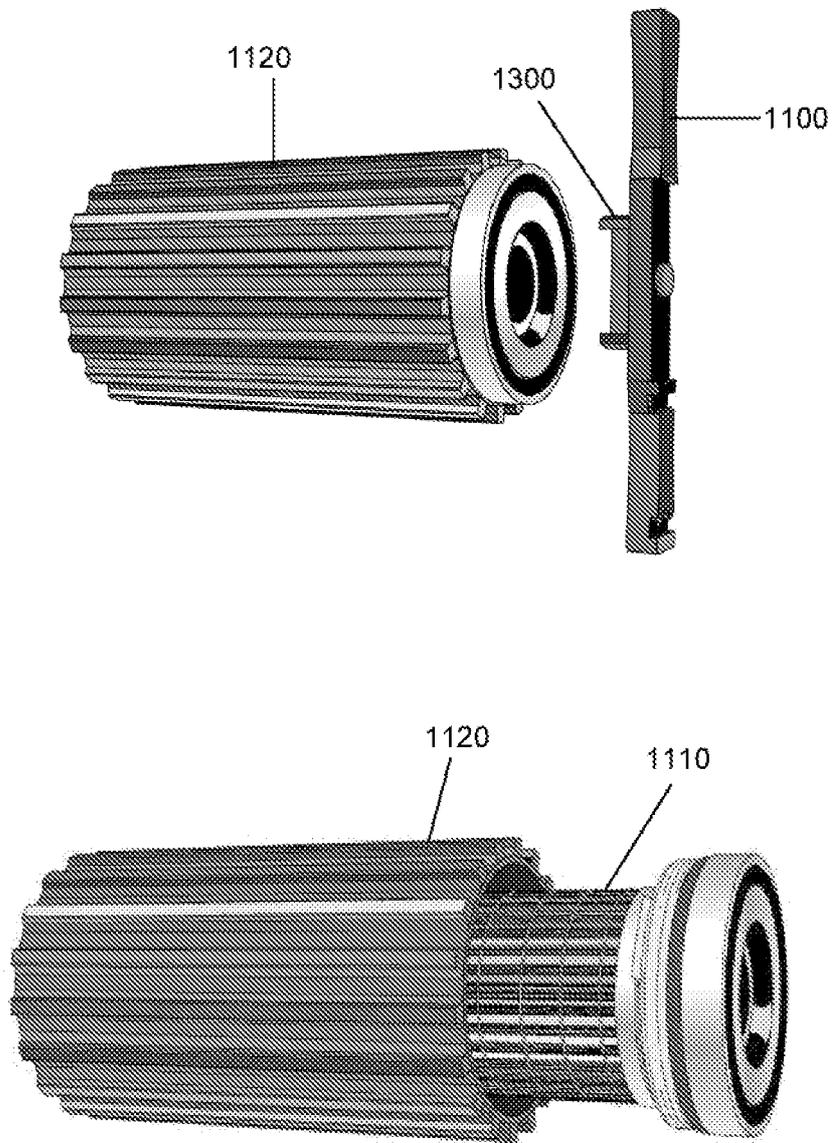


FIG. 11

7/12

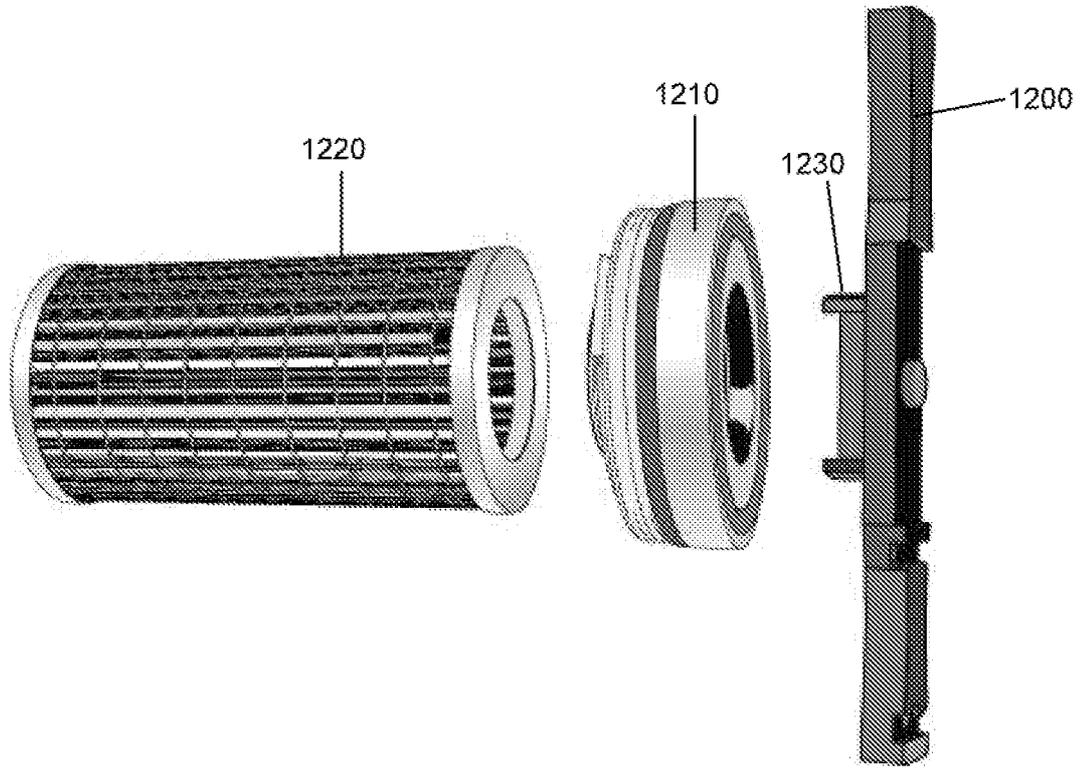


FIG. 12

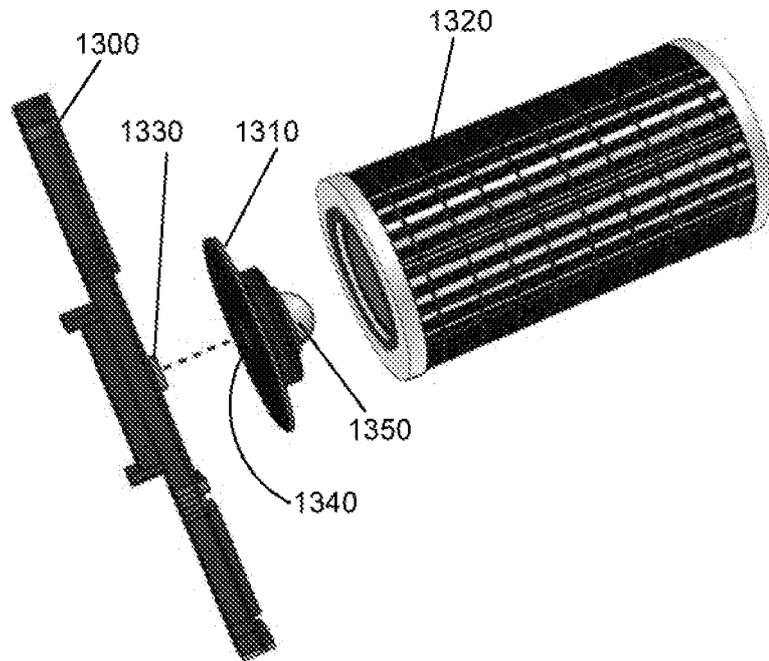


FIG. 13

8/12

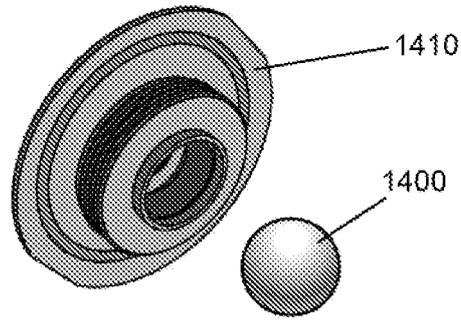


FIG. 14

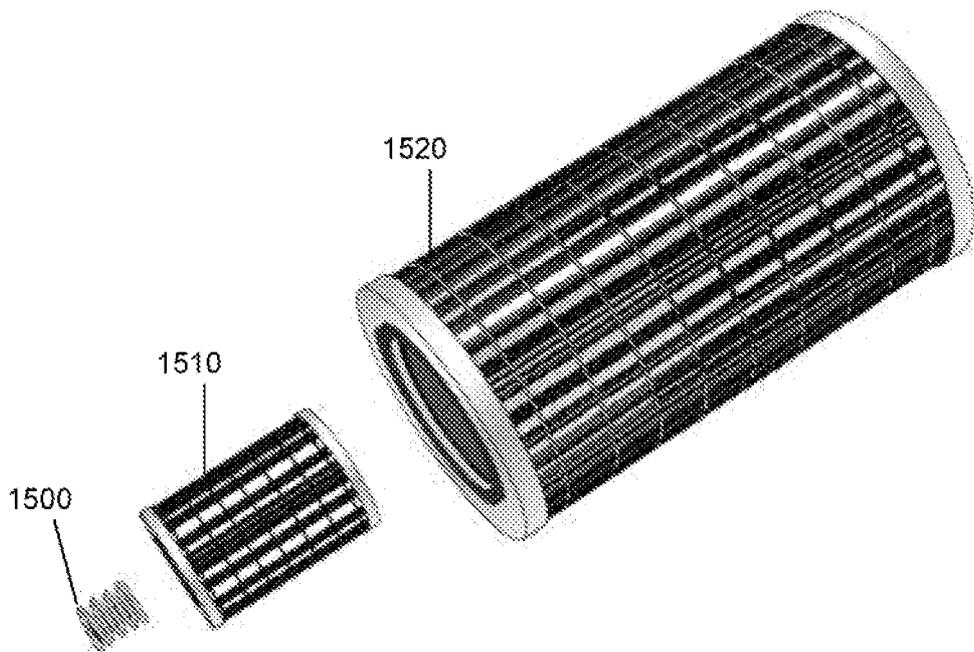


FIG. 15

9/12

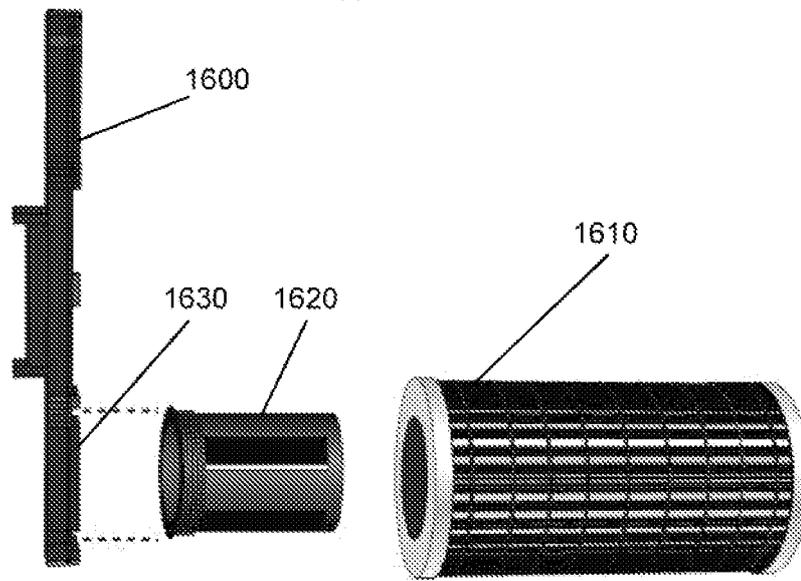


FIG. 16

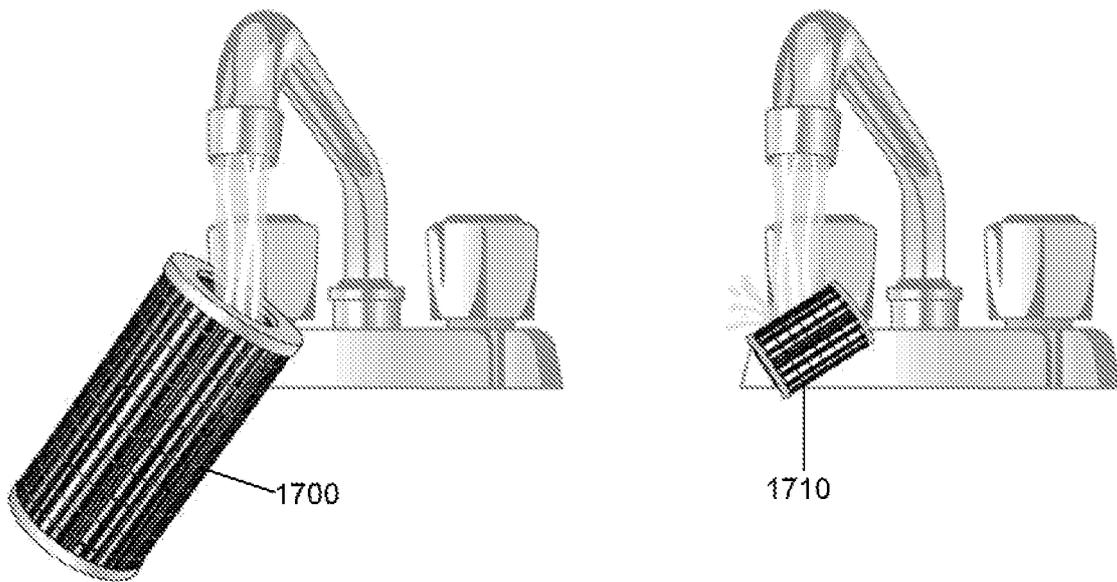


FIG. 17

10/12

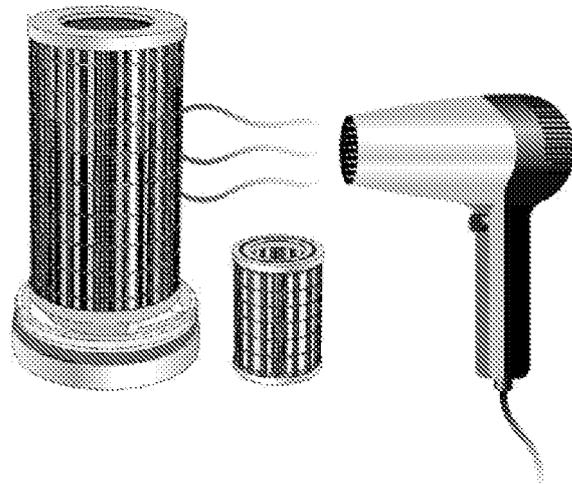


FIG. 18

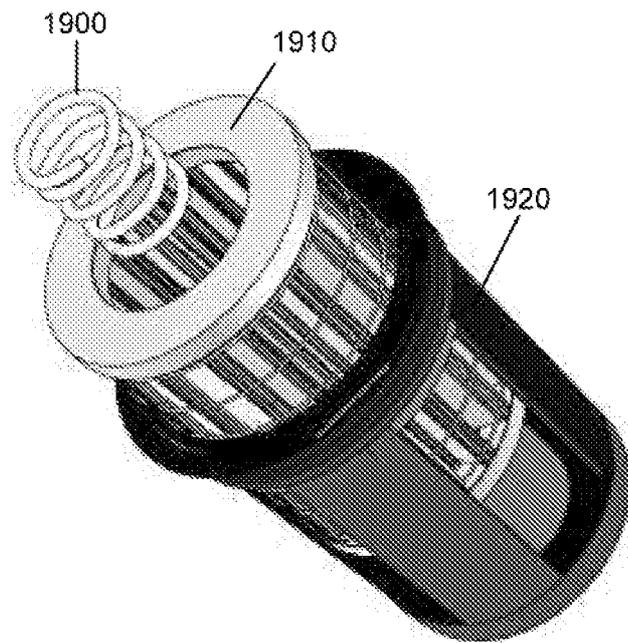


FIG. 19

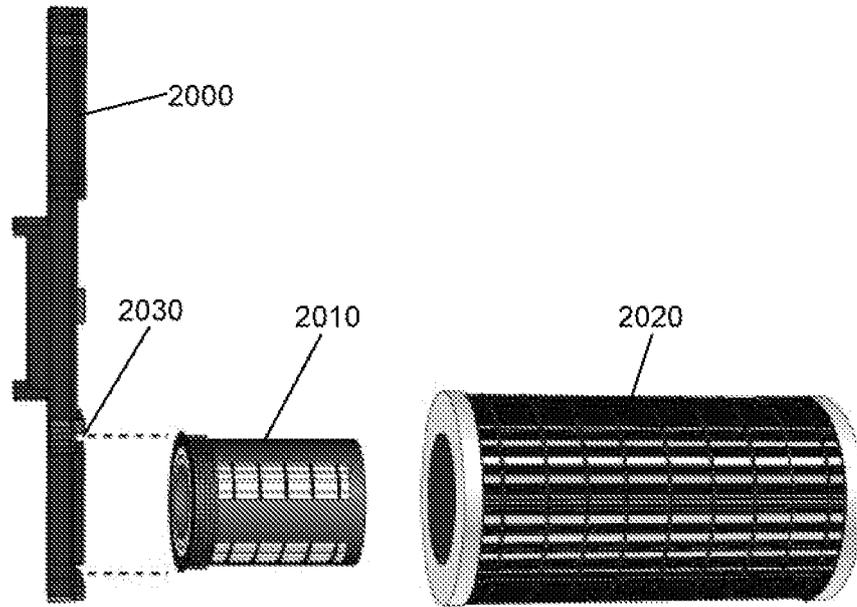


FIG. 20

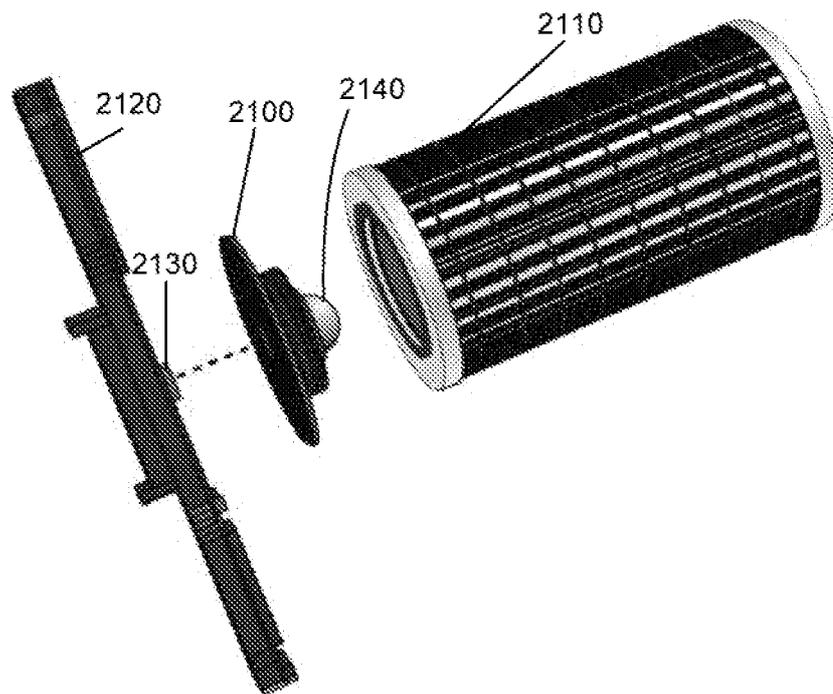


FIG. 21

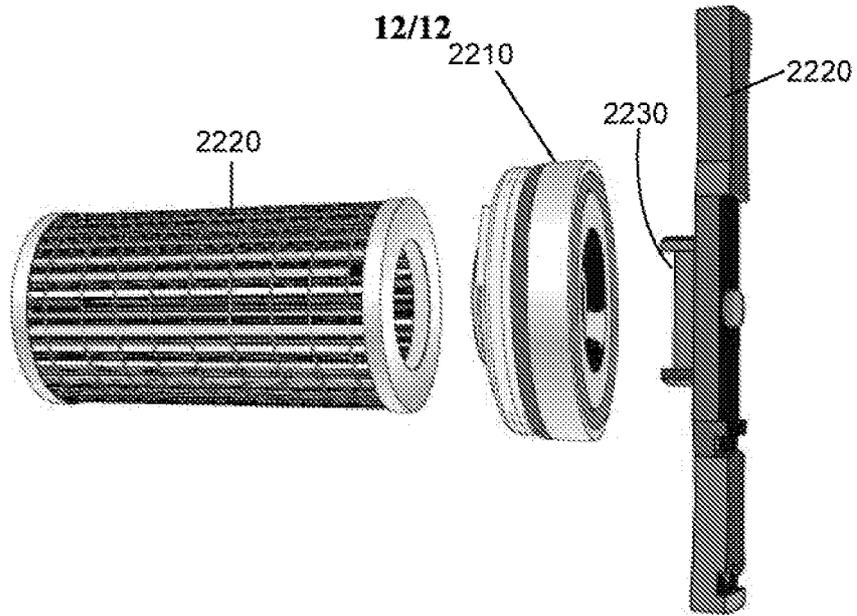


FIG. 22

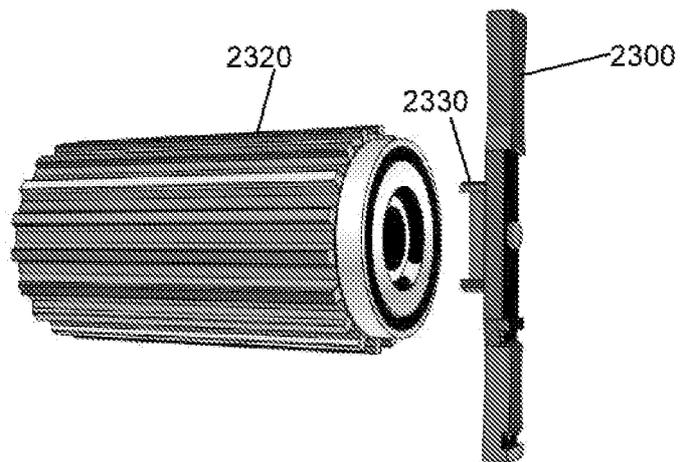
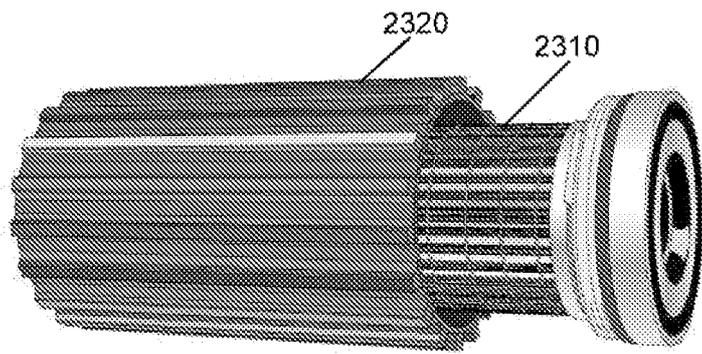


FIG. 23