

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization

International Bureau

(43) International Publication Date
04 October 2018 (04.10.2018)



(10) International Publication Number
WO 2018/178672 A1

(51) International Patent Classification:

C10L 1/19 (2006.01) C10L 10/04 (2006.01)
C10L 10/02 (2006.01) C10L 10/06 (2006.01)

(21) International Application Number:

PCT/GB2018/050825

(22) International Filing Date:

28 March 2018 (28.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1705088.1 30 March 2017 (30.03.2017) GB

(71) Applicant: **INNOSPEC LIMITED** [GB/GB]; Innospec Manufacturing Park, Oil Sites Road, Ellesmere Port Cheshire CH65 4EY (GB).

(72) Inventors: **ROSS, Alan Norman**; 6 Weston Park, Standish Lower Ground, Wigan WN6 8LE (GB). **ROBERTS, Martin**; 47 Carr Lane, Tarleton, Preston Lancashire PR4 6BS (GB).

(74) Agent: **APPLEYARD LEES IP LLP**; 15 Clare Road, Halifax Yorkshire HX1 2HY (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND USE TO PREVENT DEPOSITS IN ENGINE

(57) Abstract: A gasoline fuel composition comprising as an additive an ester compound which is the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and an alcohol or formula H-(OR)_n-OR¹, wherein R is an optionally substituted alkylene group; R¹ is hydrogen or an optionally substituted hydrocarbyl group, and n is 0 or a positive integer; wherein n is not 0 when R¹ is hydrogen.



WO 2018/178672 A1

METHOD AND USE TO PREVENT DEPOSITS IN ENGINE

This present invention relates to fuel compositions, methods and uses relating thereto. In particular, the invention relates to ester additives for fuel used in spark ignition engines.

5

With over a hundred years of development the spark ignition (SI) engine has become a highly tuned piece of engineering. As the SI engine has become more highly tuned it has become more sensitive to variations in its construction. The construction of such engines can change with use as deposits build up on certain components and through wear of other components.

10 These changes in construction may not only change parameters such as power output and overall efficiency; they can also significantly alter the pollutant emissions produced. To try and minimise these time-related changes to an engine's construction fuel additives have been developed to minimise wear and deposit build-up phenomena. Examples include anti valve seat recession additives to reduce wear and detergents to reduce deposit build-up.

15

As engine technology has evolved so have the demands put upon fuel additive packages. Early gasoline detergents were formulated to overcome the problem of deposit build-up on carburettors. In a carburettor a partial vacuum in part of the engine intake system is used to draw fuel into the induction system. To provide better control of the fuel air mixture carburettors were replaced with fuel injection equipment where a pressure above atmospheric pressure was used to force the fuel into the intake system and to induce better atomisation of the fuel.

20

As a replacement for carburettors so called throttle body injectors were used with just a single injector taking the place of the carburettor. The position of a throttle body injector was thus very similar to that of the carburettor and the temperature regime was thus similar.

25

To obtain greater control over the fuel delivery into the engine cylinders there was a move to using individual fuel injectors for each cylinder. These injectors were thus placed in the individual inlet ports for each cylinder; this configuration thus became known as port fuel injection or PFI. Because the fuel injector was now placed closer to the combustion chamber it tended to get hotter. Also, as it was closer to the engine inlet port it was more likely to be subjected to exhaust gases passing back into the inlet system during the initial part of the inlet valve opening event. This made the injector more prone to deposit build up and thus increased the demands on the fuel additive required to minimise this deposit build-up.

30

35

The systems so far outlined were designed to provide an air fuel mixture that was approximately stoichiometric. The engine power was determined by the amount of

stoichiometric mixture provided to the cylinder. This was controlled by restricting the flow of mixture into the cylinders, known as throttling. This inevitably incurred pumping losses thus reducing the efficiency of the overall system.

5 To overcome this problem engine designers have developed injection systems where the fuel is injected directly into the cylinder. Such engines are alternatively known as direct injection spark ignition (DISI), direct injection gasoline (DIG), gasoline direct injection (GDI) etc. Injecting directly into the combustion chamber allows for some degree of stratification of the charge thus allowing an overall lean mixture whilst having a local rich or stoichiometric mixture
10 to facilitate reliable combustion. This injection strategy however means that the fuel injector is subjected to higher temperatures and pressures. This increases the likelihood of forming deposits from the high temperature degradation of the fuel. The fact that the injector is in the combustion chamber also exposes the injector to combustion gases which may contain partially oxidised fuel and or soot particles which may accumulate, increasing the level of
15 deposits. The ability to provide good atomisation of fuel and precise control of fuel flow rates and injection duration are critical to the optimum performance of these engine designs. The radically different operating environment of the fuel injector poses a whole new set of design constraints on the development of an effective fuel additive package. Mixture stratification can also result in combustion occurring in local rich regions leading to the formation of soot
20 particles which can increase combustion chamber deposits. Because liquid fuel is injected into the combustion chamber there is a greater risk of liquid impingement on the combustion chamber surfaces, particularly the piston crown. Liquid fuel on the combustion chamber surfaces can undergo thermal decomposition leading to gum formation and thus increase the rate of build-up of combustion chamber deposits.

25 An additional problem arising from injecting the fuel directly into the combustion chamber is that fuel impingement on the inlet valves is significantly reduced. The use of fuel containing detergents was relied upon to remove the deposits that build up on the inlet valve tulip as a result of lubricating oil passing down the valve stem and from combustion gases passing back
30 into the inlet system during the initial part of the inlet valve opening event. In a direct injection engine the only possibility for fuel to impinge on the inlet valve tulip is from early injection and late inlet valve closing. This therefore makes it extremely difficult for a fuel borne detergent to have a significant effect on inlet valve deposits.

35 Effective control of deposits in a direct injection spark ignition gasoline engine is, therefore, a challenging task. Knowledge gained in using additives in other contexts, for example in gasoline engines using carburettors or in gasoline engines using an individual, common, fuel injector, or fuel injectors in the inlet port of each cylinder, or in diesel engines, appear to be of

little assistance in achieving effective control of deposits in a direct injection spark ignition gasoline engine.

5 The particular difficulties in achieving effective control of deposits in a direct injection spark ignition gasoline engine are known in the art. For example they are explained in WO 01/42399, US 7112230, US 7491248 and WO 03/78553.

10 Even though fuel compositions and additives have been proposed for controlling deposits in each of the regimes described above, such difficulties show that there is a continuing need for fuel compositions which are effective in either or both of direct injection spark ignition gasoline engines and/or spark ignition gasoline engines without direct injection.

15 Many different types of compounds are known in the art for use as detergent additives in fuel oil compositions, for the control of deposits in engines. Examples of common detergents include hydrocarbyl-substituted amines, hydrocarbyl substituted succinimides, Mannich reaction products, polyether amines and quaternary ammonium salts. All of these known detergents are nitrogen-containing compounds.

20 The present invention relates in particular to detergent compounds for gasoline fuel that don't contain nitrogen. Such compounds are much less commonly used as detergents.

25 According to a first aspect of the present invention there is provided a gasoline fuel composition comprising as an additive an ester compound which is the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and an alcohol of formula $H-(OR)_n-OR^1$, wherein R is an optionally substituted alkylene group, R^1 is hydrogen or an optionally substituted hydrocarbyl group and n is 0 or a positive integer; provided n is not 0 when R^1 is hydrogen.

30 According to a second aspect of the present invention there is provided a method of combatting deposits in a spark ignition engine, the method comprising combusting in the engine a gasoline composition comprising as an additive an ester compound which is the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and an alcohol of formula $H-(OR)_n-OR^1$, wherein R is an optionally substituted alkylene group; R^1 is hydrogen or an optionally substituted hydrocarbyl group; and n is 0 or positive integer provided 35 n is not 0 when R^1 is hydrogen.

According to a third aspect of the present invention there is provided the use of an ester compound as a detergent additive in a gasoline composition in a spark ignition engine; wherein the ester compound is the reaction product of an optionally substituted polycarboxylic

acid or an anhydride thereof and an alcohol of formula $H-(OR)_n-OR^1$, wherein R is an optionally substituted alkylene group; R^1 is hydrogen or an optionally substituted hydrocarbyl group; and n is 0 or a positive integer; provided n is not 0 when R^1 is hydrogen.

- 5 The method of the second aspect preferably involves combusting in the engine a composition of the first aspect.

Preferred features of the first, second and third aspects of the invention will now be described. Any feature of any aspect may be combined with any feature of any other aspect as
10 appropriate.

The present invention relates to a composition, a method and a use involving a fuel additive. This additive is the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and an alcohol of formula $H-(OR)_n-OR^1$. The additive may be referred to
15 herein as "the additive of the present invention" or as "the ester additive".

The ester additive may comprise a single compound. In some embodiments mixtures containing more than one ester additive may be used. References herein to "an additive" of the invention or "the additive" include mixtures comprising two or more such compounds.
20

The additive of the present invention is prepared from an optionally substituted polycarboxylic acid or anhydride thereof. In some embodiments the polycarboxylic acid or anhydride is unsubstituted. In preferred embodiments the additive is prepared from a hydrocarbyl substituted polycarboxylic acid or an anhydride thereof.
25

As used herein, the term "hydrocarbyl substituent" or "hydrocarbyl group" is used in its ordinary sense, which is well-known to those skilled in the art. Specifically, it refers to a group having a carbon atom directly attached to the remainder of the molecule and having predominantly hydrocarbon character. Examples of hydrocarbyl groups include:
30

(i) hydrocarbon groups, that is, aliphatic (which may be saturated or unsaturated, linear or branched, e.g., alkyl or alkenyl), alicyclic (e.g., cycloalkyl, cycloalkenyl) substituents, and aromatic (including aliphatic- and alicyclic-substituted aromatic) substituents, as well as cyclic substituents wherein the ring is completed through another portion of the molecule (e.g., two
35 substituents together form a ring);

(ii) substituted hydrocarbon groups, that is, substituents containing non-hydrocarbon groups which, in the context of this invention, do not alter the predominantly hydrocarbon nature of the

substituent (e.g., halo (e.g. chloro, fluoro or bromo), hydroxy, alkoxy (e.g. C₁ to C₄ alkoxy), keto, acyl, cyano, mercapto, amino, amido, nitro, nitroso, sulfoxy, nitril and carboxy);

(iii) hetero substituents, that is, substituents which, while having a predominantly hydrocarbon character, in the context of this invention, contain other than carbon in a ring or chain otherwise composed of carbon atoms. Heteroatoms include sulphur, oxygen, nitrogen, and encompass substituents as pyridyl, furyl, thienyl and imidazolyl. In general, no more than two, preferably no more than one, non-hydrocarbon substituent will be present for every ten carbon atoms in the hydrocarbyl group; typically, there will be no non-hydrocarbon substituents in the hydrocarbyl group.

In this specification, unless otherwise stated references to optionally substituted alkyl groups may include aryl-substituted alkyl groups and references to optionally-substituted aryl groups may include alkyl-substituted or alkenyl-substituted aryl groups.

The additive of the present invention is the reaction product of an optionally substituted polycarboxylic acid or anhydride thereof. Suitable polycarboxylic acids include pyromellitic acid, maleic acid, fumaric acid, oxalic acid, malonic acid, pimelic acid, suberic acid, glutaric acid, adipic acid, phthalic acid, succinic acid, citric acid, azelaic acid, sebacic acid and dimerised fatty acids.

In one embodiment the additive of the present invention is the reaction product of an optionally substituted polycarboxylic acid or anhydride thereof selected from pyromellitic acid, malonic acid, sebacic acid and succinic acid. Suitably the additive is an optionally substituted succinic acid or an anhydride thereof.

Preferred acids are dicarboxylic acids. Thus preferably the ester additive of the invention is the reaction product of a hydrocarbyl substituted dicarboxylic acid or hydrocarbyl substituted anhydride thereof and a polyhydric alcohol of formula H-(OR)_n-OR¹.

Suitable dicarboxylic acids include maleic acid, glutaric acid, fumaric acid, oxalic acid, malonic acid, pimelic acid, suberic acid, adipic acid, phthalic acid, succinic acid, azelaic acid, sebacic acid and dimerised fatty acids.



In some embodiments the ester is prepared from a dimerised fatty acid. Such compounds are formed from the dimerization of unsaturated fatty acids, for example unsaturated fatty acids having 6 to 50, suitably 8 to 40, preferably 10 to 36, for example 10 to 20 carbon atoms, or 16 to 20 carbon atoms.

Such dimerised fatty acids may have 12 to 100 carbon atoms, preferably 16 to 72 carbon atoms such as 20 to 40 carbon atoms for example 32 to 40 carbon atoms.

These compounds are well known in the art, particularly for their use as corrosion inhibitors.

- 5 Particularly preferred dimerised fatty acids are mixtures of C36 dimer acids such as those prepared by dimerising oleic acid, linoleic acid and mixtures comprising oleic and linoleic acid, for example, tall oil fatty acids.


- 10 In some embodiments the additive is prepared from phthalic acid or an anhydride thereof, having the formula (A1) or (A2):



- 15 wherein each of R^w , R^x , R^y and R^z is independently hydrogen or an optionally substituted hydrocarbyl group.

- 20 Preferably each is hydrogen or an optionally substituted alkyl or alkenyl group. Preferably three of R^w , R^x , R^y and R^z are hydrogen and the other is an optionally substituted C_1 to C_{500} alkyl or alkenyl group, preferably a C_2 to C_{100} alkyl or alkenyl group, preferably a C_6 to C_{50} alkyl or alkenyl group, preferably a C_8 to C_{40} alkyl or alkenyl group, more preferably a C_{10} to C_{36} alkyl or alkenyl group, preferably a C_{12} to C_{22} alkyl or alkenyl group, suitably a C_{16} to C_{28} alkyl or alkenyl group, for example a C_{20} to C_{24} alkyl or alkenyl group. The alkyl or alkenyl group may be straight chain or branched. Preferably R^w , R^x and R^z are hydrogen and R^y is an
- 25 optionally substituted alkyl or alkenyl group.

Preferably the additive of the present invention is the reaction product of an alcohol of formula $H-(OR)_n-OR^1$ and an optionally substituted succinic acid or anhydride thereof of formula (A3) or (A4):

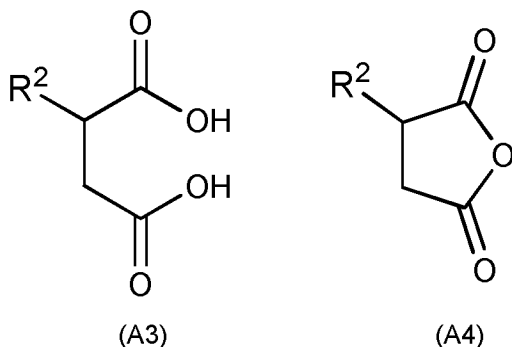

wherein R^2 is hydrogen or an optionally substituted hydrocarbyl group. Preferably R^2 is an
 5 optionally substituted alkyl or alkenyl group.

In some embodiments R^2 is an optionally substituted C_1 to C_{500} alkyl or alkenyl group,
 preferably a C_2 to C_{100} alkyl or alkenyl group, preferably a C_6 to C_{50} alkyl or alkenyl group,
 preferably a C_8 to C_{40} alkyl or alkenyl group, more preferably a C_{10} to C_{38} alkyl or alkenyl
 10 group, preferably a C_{16} to C_{36} alkyl or alkenyl group, suitably a C_{18} to C_{32} alkyl or alkenyl group.

R^2 may be substituted with one or more groups selected from halo (e.g. chloro, fluoro or
 bromo), nitro, hydroxy, mercapto, sulfoxy, amino, nitril, acyl, carboxy, alkyl (e.g. C_1 to C_4
 alkyl), alkoxy (e.g. C_1 to C_4 alkoxy), amido, keto, sulfoxy and cyano.
 15

Preferably R^2 is an unsubstituted alkyl or alkenyl group. The substituted succinic acid or
 anhydrides may suitably be prepared by reacting maleic anhydride with an alkene.

In some embodiments the R^2 has a molecular weight of from 100 to 5000, preferably from 300
 20 to 4000, suitably from 450 to 2500, for example from 500 to 2000 or from 600 to 1500.

In some embodiments the substituted succinic acid or anhydride thereof may comprise a
 mixture of compounds including groups R^2 of different lengths. In such embodiments any
 reference to the molecular weight of the group R^2 relates to the number average molecular
 25 weight for the mixture.

In some embodiments R^2 is a polyisobutenyl group, preferably having a number average
 molecular weight of from 100 to 5000, preferably from 200 to 2400, suitably from 220 to 1400.

30 In some embodiments R^2 is a polyisobutenyl group having a number average molecular
 weight of from 400 to 700.

In some embodiments R^2 is a polyisobutenyl group having a number average molecular weight of from 180 to 400.

5 In some embodiments R^2 is a polyisobutenyl group having a number average molecular weight of from 800 to 1200.

10 In some embodiments R^2 is an alkyl or alkenyl group having 6 to 40 carbon atoms, preferably 10 to 38 carbon atoms, more preferably 16 to 36 carbon atoms, suitably 18 to 26 carbon atoms, for example 20 to 24 carbon atoms.

In some embodiments R^2 may be the residue of an internal olefin. In such embodiments the compound of formula (A3) or (A4) is suitably obtained by the reaction of maleic acid with an internal olefin.

15 An internal olefin as used herein means any olefin containing predominantly a non-alpha double bond that is a beta or higher olefin. Preferably such materials are substantially completely beta or higher olefins, for example containing less than 10% by weight alpha olefin, more preferably less than 5% by weight or less than 2% by weight. Typical internal olefins include Neodene 1518IO available from Shell.

20 Internal olefins are sometimes known as isomerised olefins and can be prepared from alpha olefins by a process of isomerisation known in the art, or are available from other sources. The fact that they are also known as internal olefins reflects that they do not necessarily have to be prepared by isomerisation.

25 In some preferred embodiments the additive of the present invention is the reaction product of a succinic acid or anhydride having a C_{10} to C_{30} , preferably a C_{20} to C_{24} alkyl or alkenyl group and an alcohol of formula $H-(OR)_n-OR^1$.

30 In some preferred embodiments the additive of the present invention is the reaction product of a succinic acid or anhydride having polyisobutenyl substituent having a number average molecular weight of from 700 to 1300 and an alcohol of formula $H-(OR)_n-OR^1$.

The compound of formula $H(OR)_nOR^1$ may take a number of forms.

35 In some embodiments n is 1 and R^1 is hydrogen. In such embodiments the ester additive of the invention is prepared from a diol. As R may be substituted, the alcohol may be a polyol.

In some embodiments in which n is greater than 1 and R^1 is hydrogen, the ester may be prepared from a polyalkylene glycol.

5 In embodiments in which R^1 is hydrogen each alcohol molecule $H-(OR)_n-OH$ can react with one or two acid or anhydride molecules.

For example in some embodiments the alcohol of formula $H-(OR)_n-OH$ is reacted with at approximately 2 molar equivalents of polycarboxylic acid. Such additive products contain the residues of two acid moieties per molecule. The two acid moieties may be the same or
10 different. In some embodiments both acid moieties are the same. In some embodiments the two acid moieties are different.

In some embodiments an additive of the present invention may be prepared from the reaction of a polyhydric alcohol of formula $H-(OR)_n-OH$ with approximately one equivalent of a first
15 polycarboxylic acid or anhydride thereof and one equivalent of a second polycarboxylic acid or anhydride thereof.

For example an additive of the present invention may be prepared from the reaction of a polyhydric alcohol of formula $H-(OR)_n-OH$ with approximately one equivalent of a succinic acid
20 or anhydride substituted with an alkyl or alkenyl group having 6 to 36 carbon atoms and one equivalent of a succinic acid or anhydride substituted with a polyisobutenyl group having a number average molecular weight of from 200 to 1300.

In embodiments in which n is 1 or more and R^1 is not hydrogen the ester additive is suitably
25 prepared from a glycol ether or a polyglycol ether.

In some embodiments n is 0 and the additive of the invention may be formed from an alcohol of formula R^1OH .

30 In such embodiments R^1 is suitably an optionally substituted alkyl, alkenyl or aryl group, preferably having from 1 to 60, preferably from 10 to 40 carbon atoms. Preferably R^1 is an optionally substituted alkyl group.

In some preferred embodiments R^1 is an unsubstituted alkyl group. The alkyl group may be
35 straight chained or branched. In some embodiments R^1 is an optionally substituted alkyl group having 4 to 40, preferably 6 to 30, more preferably 10 to 20 carbon atoms.

In some embodiments n is 0 and the alcohol is a C_6 to C_{36} , preferably a C_{10} to C_{30} , more preferably a C_{10} to C_{20} optionally substituted alcohol.

One preferred alcohol is tetradecanol.

Suitable alcohols of formula R^1OH for use herein include benzyl alcohol, tetradecanol, butanol,
5 2-butanol, isobutanol, octanol, 2-ethylhexanol, hexanol, cyclohexanol, cyclooctanol, 2-propylheptanol, isopropanol and 2-ethyl-1-butanol.

In some embodiments n is not 0 and the ester additive may suitably be formed from an alcohol
10 of formula $HO(RO)_nR^1$.

R^1 is hydrogen or an optionally substituted hydrocarbyl group.

When R^1 is hydrogen the ester additive of the invention may be prepared from an alkylene
15 glycol or a polyalkylene glycol.

When R^1 is not hydrogen, component (a) may be reacted with an alkylene glycol or
polyalkylene glycol which is subsequently reacted to form an ether or a compound of formula
 $HO(RO)_nR^1$ may be reacted with component (a).

20 R is an optionally substituted alkylene group.

In some embodiments the alcohol of formula $H-(OR)_n-OR^1$ has more than 2 hydroxy groups
and the group R is a hydroxyl substituted alkylene group. Such a group may have 1, 2 or
25 more hydroxyl groups.

For example in some embodiments in which n is 1 the alcohol $H-(OR)_n-OR^1$ may be glycerol,
penterithritol or trimethylolpropane.

Preferably R is an unsubstituted alkylene group.

30 Preferably R is an optionally substituted alkylene group having 1 to 50 carbon atoms,
preferably 1 to 40 carbon atoms, preferably 1 to 30 carbon atoms, more preferably 1 to 20
carbon atoms, suitably 1 to 10 carbon atoms, for example 2 to 6 or 2 to 4 carbon atoms.

35 Preferably R is an unsubstituted alkylene group having 1 to 50 carbon atoms, preferably 1 to
20, more preferably 1 to 10, suitably 2 to 6, for example 2 to 4 carbon atoms. R may be
straight chained or branched.

Suitably R may be an ethylene, propylene, butylene, pentylene, or hexylene group. When R has more than 2 carbon atoms any isomer may be present. Preferably R is an ethylene or a propylene group, most preferably a propylene group.

- 5 In some embodiments in which n is 1, R may be a group of formula $(\text{CH}_2)_x$ wherein x is from 2 to 12, preferably from 2 to 6.

In some embodiments in which n is 1, R is a straight chain or branched alkylene group and the alcohol is selected from ethylene glycol, propylene glycol, 1,3-propanediol, 1,2-butanediol, 1,3-
10 butanediol, 1,4-butanediol, 1,6-hexanediol and neopentyl glycol.

In some preferred embodiments R is preferably $\text{CR}^a\text{R}^b\text{CR}^c\text{R}^d$ and the alcohol has the formula $\text{H}-(\text{OCR}^a\text{R}^b\text{CR}^c\text{R}^d)_n\text{OH}$ wherein each of R^a , R^b , R^c and R^d is independently hydrogen or an optionally substituted alkyl group. Preferably each R^a , R^b , R^c and R^d is independently selected
15 from hydrogen or an optionally substituted alkyl group having 1 to 20, preferably 1 to 12, more preferably 1 to 4, for example 1 to 2 carbon atoms.

Preferably each of R^a , R^b , R^c and R^d is independently selected from hydrogen and an unsubstituted alkyl group, preferably having 1 to 20 carbon atoms, suitably 1 to 12 carbon
20 atoms, preferably 1 to 4 atoms, for example 1 or 2 carbon atoms. Preferably at least two of R^a , R^b , R^c and R^d is hydrogen, more preferably at least three of R^a , R^b , R^c and R^d is hydrogen.

In some embodiments R^a , R^b , R^c and R^d are all hydrogen and R is an ethylene group CH_2CH_2 .

- 25 In some embodiments three of R^a , R^b , R^c , and R^d is hydrogen and the other is an unsubstituted alkyl group having 1 to 12, preferably 1 to 4, suitably 1 to 2, and most preferably 1 carbon atoms.

In some embodiments polyhydric alcohols used to prepare the additive of the present invention
30 are prepared from epoxides, preferably terminal epoxides.

R may comprise a mixture of isomers. For example when R is propylene, the polyhydric alcohol may include moieties $-\text{CH}_2\text{CH}(\text{CH}_3)-$ and $-\text{CH}(\text{CH}_3)\text{CH}_2-$ in any order within the chain.

- 35 R may comprise a mixture of different groups for example ethylene, propylene or butylene units. Block copolymer units are preferred in such embodiments.

R is preferably an ethylene, propylene or butylene group. R may be an n-propylene or n-butylene group or an isopropylene or isobutylene group. For example R may be $-\text{CH}_2\text{CH}_2-$, $-\text{CH}_2\text{CH}(\text{CH}_3)-$, $-\text{CH}_2\text{C}(\text{CH}_3)_2-$, $-\text{CH}(\text{CH}_3)\text{CH}(\text{CH}_3)-$ or $-\text{CH}_2\text{CH}(\text{CH}_2\text{CH}_3)-$.

- 5 Preferably R is ethylene or propylene. More preferably R is $-\text{CH}_2\text{CH}_2-$ or $-\text{CH}(\text{CH}_3)\text{CH}_2-$. Most preferably R is $-\text{CH}(\text{CH}_3)\text{CH}_2-$.

In some embodiments n is at least 1. Preferably n is from 1 to 100, preferably from 1 to 50, more preferably from 1 to 30, more preferably from 1 to 24, preferably from 1 to 20, suitably
10 from 1 to 16, preferably from 1 to 14.

In some embodiments n is from 4 to 10, for example from 6 to 8.

In some embodiments n is from 1 to 6, suitably from 2 to 5, for example 3 or 4.
15

In some embodiments n is from 8 to 16, for example from 11 to 14.

In some embodiments n is from 18 to 26, suitably from 20 to 24, for example 22 to 23.

- 20 In embodiments in which n is more than 1 the ester additive may be prepared from a polyhydric alcohol or an ether thereof.

In some embodiments the polyhydric alcohol may be a polypropylene glycol having a number average molecular weight of 425.

25

In some embodiments the polyhydric alcohol may be selected from triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol and tripropylene glycol.

In some embodiments the polyhydric alcohol is selected from ethylene glycol, propylene glycol
30 and oligomers or polymers thereof.

In some embodiments the polyhydric alcohol may be a polypropylene glycol having a number average molecular weight of 725.

- 35 The skilled person will appreciate that commercial sources of alcohols of formula $\text{H}(\text{OR})_n\text{-OH}$ will often contain mixtures of compounds, for example in which n may be between 6 and 10.

Commercial sources of substituted succinic acids and anhydrides may also contain mixtures of compounds, for example including different compounds with substituents having 20 to 24 carbon atoms.

5 In some preferred embodiments R^1 is hydrogen.

In some embodiments R^1 is not hydrogen, n is not 0 and the additive of the invention is prepared from an ether of a polyhydric alcohol, for example an ether of a polyethylene glycol, a polypropylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol or tripropylene glycol.

In some embodiments in which n is not 0, R^1 is an optionally substituted alkyl, alkenyl or aryl group, suitably an optionally substituted alkyl or alkenyl group. Preferably R^1 has from 4 to 50 carbon atoms, preferably 4 to 40 carbon atoms, more preferably from 10 to 30 carbon atoms.

15 R^1 may be straight chain or branched. Preferably R^1 is straight chain.

In some embodiments R^1 is a substituted alkyl or alkenyl group, suitably a substituted alkyl group. Suitable substituents are hydroxy and ester groups. In some embodiments R^1 is a 2-hydroxy alkyl, alkenyl or aryl group.

20 Suitably R^1 is an unsubstituted alkyl or alkenyl group. Preferably R^1 is an alkyl group, preferably an unsubstituted alkyl group.


Suitably R^1 is selected from hydrogen, and an alkyl group having from 1 to 40, preferably 6 to 30, more preferably 10 to 20 carbon atoms.

The ester additive of the present invention is the reaction product of a hydrocarbyl substituted polycarboxylic acid or an anhydride thereof and an alcohol of formula $H-(OR)_n-OR^1$ wherein R is an optionally substituted alkylene group, R^1 is hydrogen or an optionally substituted hydrocarbyl, and n is 0 or a positive integer; provided n is not 0 when R^1 is hydrogen.


In some embodiments the acid/anhydride and the alcohol are reacted in a molar ratio of from 10:1 to 1:10, preferably from 5:1 to 1:5, more preferably from 2:1 to 1:2, for example from 1.5:1 to 1:1.5.

35 Suitably the acid/anhydride and the alcohol are reacted in an approximately 1:1 molar ratio, for example from 1.2:1 to 1:1.2.

In some preferred embodiments the ester additive is the reaction product of a substituted succinic acid or succinic anhydride. In such embodiments, the additive preferably includes compounds having the formula (C1) or (C2):

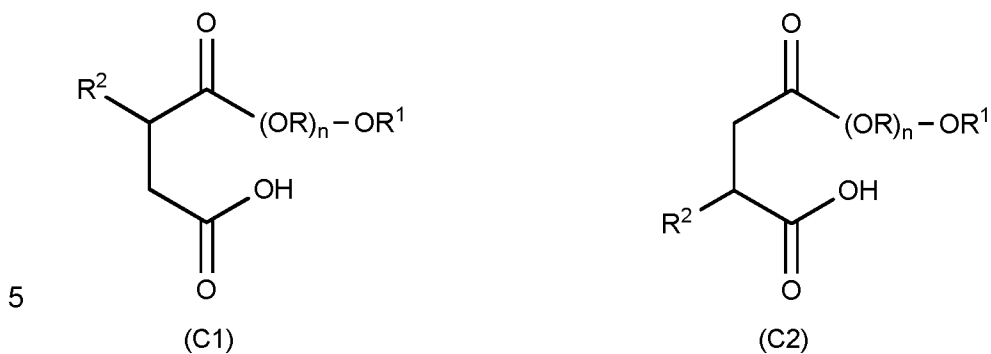


The additive may also include oligomers or polymers having a structure of formula (D):

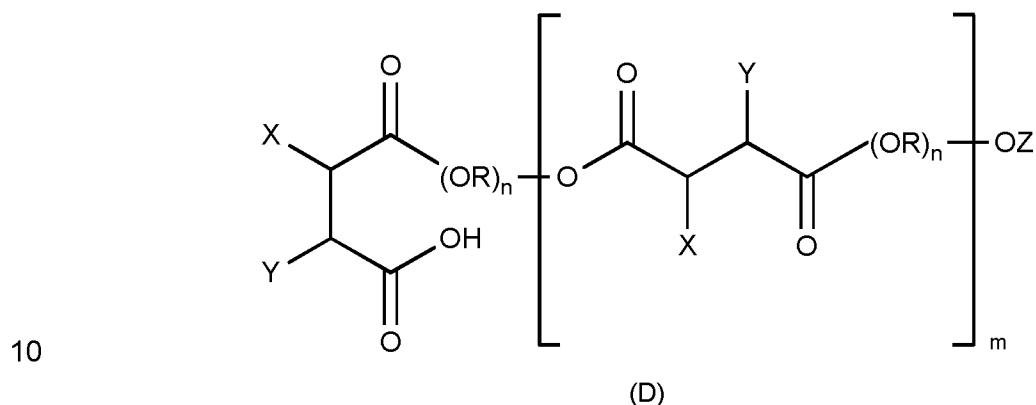

wherein m is at least 1 and one of each X and Y is R² and the other is hydrogen, and Z is hydrogen or COCHXCHYCOOH.

15

In some embodiments in which R¹ is hydrogen the acid/anhydride are reacted with the alcohol in an approximate 2:1 molar ratio and the additive includes compounds of formula (E1), (E2) or (E3):

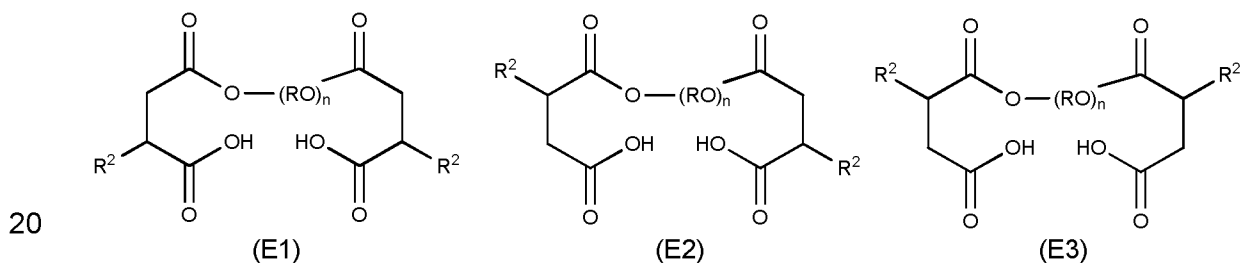

and mixtures and/or isomers thereof.

In some embodiments each acid residue in formulae (E1), (E2) or (E3) is the same. In some
5 embodiments the acid residues are different.

Suitably the ester additive of the present invention is the reaction product of an optionally
substituted polycarboxylic acid or anhydride thereof, preferably a hydrocarbyl substituted
succinic acid or anhydride thereof, and an alcohol selected from:

10

(a) an alcohol of formula HOR^1 wherein R^1 is a C_1 to C_{40} optionally substituted
hydrocarbyl group, preferably a C_1 to C_{36} alkyl or alkenyl group, preferably a C_6 to C_{30}
alkyl or alkenyl group, more preferably a C_{10} to C_{20} alkyl group;

15

(b) an alcohol of formula $\text{HO}(\text{RO})_n\text{H}$ wherein R is a C_1 to C_6 alkylene group, preferably
ethylene or propylene; n is from 1 to 40, preferably from 1 to 30; and the
acid/anhydride and alcohol are reacted in a molar ratio of from 1.25:1 to 1:1.25, for
example about 1:1;

20

(c) an alcohol of formula $\text{HO}(\text{RO})_n\text{H}$ wherein R is a C_1 to C_6 alkylene group, preferably
ethylene or propylene; n is from 1 to 40, preferably from 1 to 30; and the
acid/anhydride and alcohol are reacted in a molar ratio of from 2.2:1 to 1.8:1, for
example about 2:1; and

25

(d) an alcohol ether of formula $\text{H}(\text{OR})_n\text{OR}^1$ wherein R is a C_1 to C_6 alkylene group,
preferably ethylene or propylene; n is from 1 to 40, preferably from 1 to 30; and R^1 is a
 C_1 to C_{40} optionally substituted hydrocarbyl group, preferably a C_1 to C_{36} alkyl or
alkenyl group, preferably a C_6 to C_{30} alkyl or alkenyl group, more preferably a C_{10} to
 C_{20} alkyl group.

In some embodiments the ester additive of the present invention is the reaction product of an
optionally substituted polycarboxylic acid or anhydride thereof selected from pyromellitic acid,
30 malonic acid, sebacic acid and succinic acid; and an alcohol of formula $\text{H}-(\text{OR})_n-\text{OR}^1$, the
alcohol being selected from:

- ethylene glycol, propylene glycol and oligomers or polymers thereof; alkanediols having 1 to 12, preferably 3 to 6 carbon atoms, sugar alcohols or ethers thereof; and
- alkanols having 1 to 30, preferably 6 to 25 carbon atoms.

35

In some embodiments the ester additive of the present invention is the reaction product of an
optionally substituted polycarboxylic acid or anhydride thereof selected from pyromellitic acid
and succinic acid; and an alcohol of formula $\text{H}-(\text{OR})_n-\text{OR}^1$ wherein the alcohol is selected from:

- ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, trehalose, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, neopentyl glycol and a polyethylene or polypropylene glycol having a number average molecular weight of 300 to 1200; or a C1 to C30 ether thereof; and
- 5 - benzyl alcohol, tetradecanol, butanol, 2-butanol, isobutanol, octanol, 2-ethylhexanol, hexanol, cyclohexanol, cyclooctanol, 2-propylheptanol, 2-ethyl-1-butanol and isopropanol.

In some embodiments the ester additive of the present invention is the reaction product of a succinic acid or anhydride of formula (A3) or (A4) and an alcohol of formula $H-(OR)_n-OR^1$; wherein R^2 is an alkyl or alkenyl group having 6 to 36 carbon atoms or a polyisobutenyl group having a number average molecular weight of from 200 to 1300; wherein the alcohol of formula $H-(OR)_n-OR^1$ is selected from:

10

- ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, trehalose, sorbitol, glycerol, pentaerythritol, trimethylolpropane, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, neopentyl glycol and a polyethylene or polypropylene glycol having a number average molecular weight of 300 to 1200; or a C6 to C24 ether thereof; and
- 15
- benzyl alcohol, tetradecanol, butanol, 2-butanol, isobutanol, octanol, 2-ethylhexanol, hexanol, cyclohexanol, cyclooctanol, 2-propylheptanol, 2-ethyl-1-butanol and isopropanol.
- 20

In some embodiments the ester additive of the invention is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and a polypropylene glycol (or a C_1 to C_{36} alkyl ether thereof) having a number average molecular weight of 300 to 800.

25

In some embodiments the ester additive of the invention is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and a polyhydric alcohol (or a C_1 to C_{36} alkyl ether thereof) selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol and tetrapropylene glycol.

30

In some embodiments the ester additive of the invention is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and a polyhydric alcohol (or a C_1 to C_{36} alkyl ether thereof) selected from glycerol, pentaerythritol and trimethylolpropane.

35

In some embodiments the ester additive of the invention is the reaction product of a succinic acid or anhydride thereof having an alkyl or alkenyl substituent having 6 to 36 carbon atoms

and a polyethylene glycol (or a C₁ to C₃₆ alkyl ether thereof) having a number average molecular weight of 200 to 800.

5 In some especially preferred embodiments the ester additive of the present invention is the reaction product of a succinic acid or anhydride having an alkyl or alkenyl substituent having 6 to 36 carbon atoms and a polyethylene or polypropylene glycol (or a C₁ to C₃₆ alkyl ether thereof) having 4 to 16, preferably 6 to 8 alkoxy groups.

10 In some embodiments component (c) is the reaction product of a succinic acid or anhydride having a C₃ to C₃₆, preferably a C₁₀ to C₃₀, more preferably a C₂₀ to C₂₄ alkyl or alkenyl substituent and an alcohol of formula R⁵OH wherein R⁵ is a C₆ to C₃₀, preferably a C₁₀ to C₂₀ alkyl group.

15 In some embodiments the ester additive of the invention is the reaction product of a polyisobutenyl substituted succinic acid or anhydride thereof having a PIB substituent with a number average molecular weight of 200 to 2500 and a polypropylene glycol (or a C₁ to C₃₆ alkyl ether thereof) having a number average molecular weight of 300 to 800.

20 In some embodiments the ester additive of the invention is the reaction product of a polyisobutenyl substituted succinic acid or anhydride thereof having a PIB substituent with a number average molecular weight of 200 to 2500 and a polyhydric alcohol (or a C₁ to C₃₆ alkyl ether thereof) selected from ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol and tetrapropylene glycol.

25 In some embodiments the ester additive of the invention is the reaction product of a polyisobutenyl substituted succinic acid or anhydride thereof having a PIB substituent with a number average molecular weight of 200 to 2500 and a polyhydric alcohol (or a C₁ to C₃₆ alkyl ether thereof) selected from glycerol, pentaerythritol and trimethylpropane.

30 In some embodiments the ester additive of the invention is a the reaction product of polyisobutenyl substituted succinic acid or anhydride thereof having a PIB substituent with a number average molecular weight of 200 to 2500 and a polyethylene glycol (or a C₁ to C₃₆ alkyl ether thereof) having a number average molecular weight of 200 to 800.

35 In some embodiments the ester additive of the invention is the reaction product of a polyisobutenyl substituted succinic acid or anhydride thereof having a PIB substituent with a number average molecular weight of 200 to 2500 a polyethylene or polypropylene glycol (or a C₁ to C₃₆ alkyl ether thereof) having 4 to 16, preferably 6 to 8 alkoxy groups.

In some especially preferred embodiments the ester additive of the present invention is the reaction product of a succinic acid or anhydride of formula (A3) or (A4) and an alcohol of formula $H-(OR)_n-OR^1$; wherein R^2 is a polyisobutenyl group having a number average molecular weight of from 700 to 1300; wherein the alcohol of formula $H-(OR)_n-OR^1$ is selected from:

- butanediols, tripropylene glycol and polypropylene glycols having a number average molecular weight of from 300 to 600; and
- tetradecanol, butanol and 2-ethylhexanol.

10 The gasoline compositions of the present invention may contain a mixture of different ester additives.

They may include a mixture of additives from classes (a), (b), (c) and (d) above and/or mixtures within the same class.

15

The first aspect of the present invention relates to a gasoline fuel composition.

By the term "gasoline", it is meant a liquid fuel for use with spark ignition engines (typically or preferably containing primarily or only C4-C12 hydrocarbons) and satisfying international gasoline specifications, such as ASTM D-439 and EN228. The term includes blends of distillate hydrocarbon fuels with oxygenated components such as alcohols or ethers for example methanol, ethanol, butanol, methyl t-butyl ether (MTBE), ethyl t-butyl ether (ETBE), as well as the distillate fuels themselves.

25 Suitably the ester additive is present in the gasoline composition in an amount of at least 0.1ppm, preferably at least 1 ppm, more preferably at least 5 ppm, suitably at least 10 ppm, preferably at least 20 ppm, for example at least 30ppm or at least 50 ppm.

Suitably the ester additive is present in the gasoline composition in an amount of less than 10000 ppm, preferably less than 1000 ppm, preferably less than 500 ppm, preferably less than 300 ppm, for example less than 250 ppm.

In some embodiments the ester additive is present in the gasoline fuel composition in an amount of suitably less than 200 ppm, for example less than 150 ppm.

35

Suitably the ester additive is present in the gasoline in an amount of from 80 to 130 ppm.

In this specification any reference to ppm is to parts per million by weight.

The gasoline compositions of the present invention may comprise a mixture of two or more ester additives. In such embodiments the above amounts refer to the total amounts of all such additives present in the composition.

- 5 For avoidance of doubt mixtures of ester additive compounds that may be present include mixtures formed by reacting a mixture of different alcohols with a polycarboxylic acid and/or mixtures formed by reacting an alcohol with a mixture of polycarboxylic acids and/or compounds formed by reacting a mixture of alcohols with a mixture of carboxylic acids. Such mixtures may also include mixtures of initially pure fully formed ester compounds.

10

The use of mixtures may arise due to the availability of starting materials or a particular mixture may be deliberately selected to use in order to achieve a benefit. For example, a particular mixture may lead to improvements in handling, a general improvement in performance or a synergistic improvement in performance.

15

In some preferred embodiments, the esters additives may be used without additional components. In other preferred embodiments, the ester additive (i) is used with one or more additional components (ii) selected from:

- a) carrier oils
- 20 b) acylated nitrogen compounds which are the reaction product of a carboxylic acid-derived acylating agent and an amine
- c) hydrocarbyl-substituted amines wherein the hydrocarbyl substituent is substantially aliphatic and contains at least 8 carbon atoms
- d) mannich base additives comprising nitrogen-containing condensates of a phenol,
- 25 e) aromatic esters of a polyalkylphenoxyalkanol
- f) quaternary ammonium salts.

Preferably the ratio of the ester additive (i) to additional components (ii) when present, is 1:100
30 to 100:1, preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1 preferably 1:5 to 5:1.

Preferably the ratio of the ester additive (i) to carrier oil a) when present, is 1:100 to 100:1,
preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1
35 preferably 1:5 to 5:1, preferably 1:2 to 2:1.

Preferably the ratio of the ester additive (i) to acylated nitrogen additive b) 1:100 to 100:1,
preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1
preferably 1:5 to 5:1, preferably 1:2 to 2:1.

Preferably the ratio of the ester additive (i) to hydrocarbyl substituted amine c) 1:100 to 100:1, preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1 preferably 1:5 to 5:1, preferably 1:2 to 2:1.

5

Preferably the ratio of the ester additive (i) to mannich base additives d) when present, is 1:100 to 100:1, preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1 preferably 1:5 to 5:1, preferably 1:2 to 2:1.

10 Preferably the ratio of the ester additive (i) to aromatic ester e) 1:100 to 100:1, preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1 preferably 1:5 to 5:1, preferably 1:2 to 2:1.

15 Preferably the ratio of the ester additive (i) to quaternary ammonium salt f) 1:100 to 100:1, preferably 1:50:50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1 preferably 1:5 to 5:1, preferably 1:2 to 2:1.

20 Preferably the ratio of the total of the quaternary ammonium salt additive (i) and components b), c), d) and e) to carrier oil a) when present, is 1:100 to 100:1, preferably 1:50 : 50:1, preferably 1:15 to 20:1 preferably 1:15 to 10:1 preferably 1:10 to 10:1 preferably 1:5 to 5:1, preferably 1:2 to 2:1.

All ratios are weight ratios on an active basis. The total amount of compound(s) (i) and each compound a) – f) specified in the respective definition is to be taken into account.

25

a) Carrier Oil

The carrier oil may have any suitable molecular weight. A preferred molecular weight is in the range 500 to 5000.

30 In one embodiment the carrier oil may comprise an oil of lubricating viscosity. The oil of lubricating viscosity includes natural or synthetic oils of lubricating viscosity, oil derived from hydrocracking, hydrogenation, hydrofinishing, unrefined, refined and re-refined oils, or mixtures thereof. In one embodiment, the oil of lubricating viscosity is a carrier fluid for the dispersant and/or other performance additives.

35

Natural oils include animal oils, vegetable oils, mineral oils or mixtures thereof. Synthetic oils include a hydrocarbon oil, a silicon-based oil, a liquid ester of phosphorus-containing acid. Synthetic oils may be produced by Fischer-Tropsch reactions and typically may be hydroisomerised Fischer-Tropsch hydrocarbons or waxes.

Oils of lubricating viscosity may also be defined as specified in the American Petroleum Institute (API) Base Oil Interchangeability Guidelines. In one embodiment the oil of lubricating viscosity comprises an API Group I, II, III, IV, V or mixtures thereof, and in another
5 embodiment API Group I, II, III or mixtures thereof.

In another embodiment the carrier oil may comprise a polyether carrier oil.

In a preferred aspect the polyether carrier oil is a mono end-capped polyalkylene glycol.
10 Preferably the end cap is a group consisting of or containing a hydrocarbyl group having up to 30 carbon atoms. More preferably the end cap is or comprises an alkyl group having from 4 to 20 carbon atoms or from 12 to 18 carbon atoms.

The alkyl group may be branched or straight chain. Preferably it is a straight chain group.
15


Further hydrocarbyl end capping groups include alkyl-substituted phenyl, especially where the alkyl substituent(s) is or are alkyl groups of 4 to 20 carbon atoms, preferably 8 to 12, preferably straight chain.

20 The hydrocarbyl end capping group may be attached to the polyether via a linker group. Suitable end cap linker groups include an ether oxygen atom (-O-), an amine group (-NH-), an amide group (-CONH-), or a carbonyl group -(C=O)-.

Such end capped polyalkyleneglycols are obtainable by the polymerisation of C₂-C₆ alkylene
25 oxides either as homopolymers or copolymers containing 4-100 repeat units. Copolymers may be random copolymers or block copolymers.

In a preferred aspect the polyether carrier oil is a mono end-capped polypropylene glycol.

30 In a preferred embodiment the carrier oil is a polyalkyleneglycol monoether of the formula:

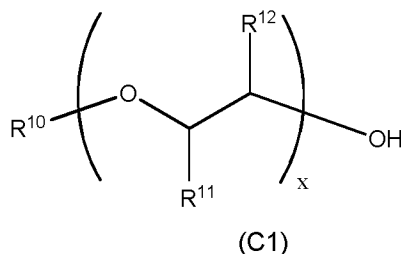

where R^{10} is a hydrocarbyl group having from 1 to 30 carbon atoms; R^{11} and R^{12} are each independently hydrogen or lower alkyl having from about 1 to about 6 carbon atoms and each R^{11} and R^{12} is independently selected in each $--O--CHR^{11}-CHR^{12}--$ unit; and x is an integer of from 5 to 100, preferably 10 to 50, preferably 10 to 30, preferably 10-25, more preferably 12 to 25, more preferably 12 to 20.


In a preferred embodiment R^{10} is a straight chain C_1-C_{30} alkyl, preferably C_4-C_{20} alkyl, preferably C_8-C_{18} alkyl, and more preferably $C_{12}-C_{18}$ alkyl or C_8-C_{14} alkyl.

10 In another preferred embodiment R^{10} is an alkylphenyl group preferably an alkylphenyl group, wherein the alkyl moiety is a straight or branched chain alkyl of from about 1 to about 24 carbon atoms.

Preferably, one of R^{11} and R^{12} is lower alkyl of 1 to 4 carbon atoms, and the other is hydrogen.

15 More preferably, one of R^{11} and R^{12} is methyl or ethyl, and the other is hydrogen.

In a preferred embodiment the carrier oil is a polypropyleneglycol monoether of the formula:

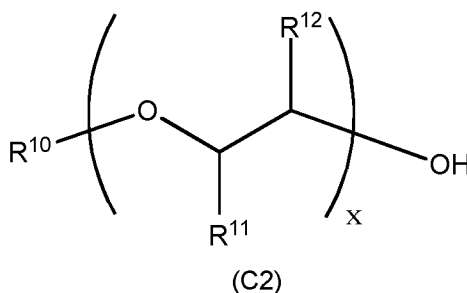


20

where R^{10} , R^{11} , R^{12} and x are as defined for (C1) above, and in each repeat unit one of R^{11} and R^{12} are hydrogen and the other is methyl.

25 Such alkyl polypropyleneglycol monoethers are obtainable by the polymerisation of propylene oxide using an aliphatic alcohol, preferably a straight chain primary alcohol of up to 20 carbon atoms, as an initiator. If desired a proportion of the propyleneoxy units, for example up to 50% of the propyleneoxy units by weight, may be replaced by units derived from other C_2-C_6 alkylene oxides, e.g. ethylene oxide or isobutylene oxide, and are to be included within the

30 term "polypropyleneglycol". Alternatively, the initiator may be a phenol, alkyl phenol, a hydrocarbyl amine or amide, containing 1-30 carbon atoms, preferably a saturated aliphatic or aromatic hydrocarbyl group such as alkyl, phenyl or phenalkyl etc. Preferred initiators include long chain alkanols giving rise to the long chain polypropyleneglycol monoalkyl ethers.

In a further aspect the polyalkyleneglycol may be an ester. In this aspect the carrier oil may be a polypropyleneglycol monoester of the formula

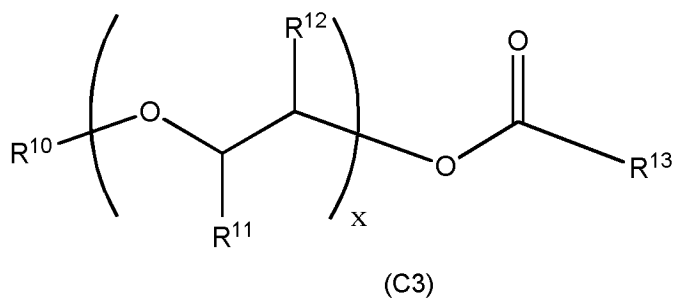

where R^{10} , R^{11} , R^{12} and x are as defined for (C1) above and R^{13} is a C_1 - C_{30} hydrocarbyl group, preferably an aliphatic hydrocarbyl group, and more preferably C_1 - C_{10} alkyl.


10 In another embodiment a polyetheramine may be present.

It is known to those skilled in the art that the class of compounds known as polyetheramines function as deposit control additives. It is common for polyetheramines to be used as detergents and/or as carrier oils. For the purpose of this specification polyetheramines are classed herein as carrier oils.

15

Suitable hydrocarbyl-substituted polyoxyalkylene amines or polyetheramines employed in the present invention are described in the literature (for example US 6217624 and US 4288612) and have the general formula:

20

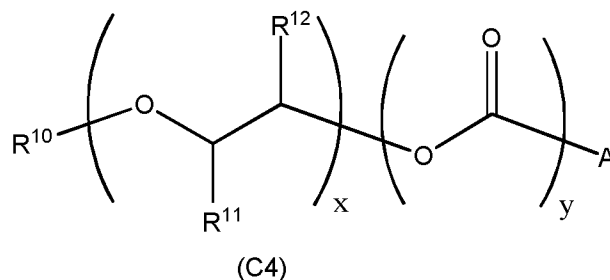

or a fuel-soluble salt thereof; R^{10} , R^{11} , R^{12} and x are as defined for (C1) above; A is amino, N-alkyl amino having about 1 to about 20 carbon atoms in the alkyl group, N,N-dialkyl amino having about 1 to about 20 carbon atoms in each alkyl group, or a polyamine moiety having about 2 to about 12 amine nitrogen atoms and about 2 to about 40 carbon atoms; and y is 0 or 1.

25

In general, A is amino; N-alkyl amino having from about 1 to about 20 carbon atoms in the alkyl group, preferably about 1 to about 6 carbon atoms, more preferably about 1 to about 4 carbon atoms; N,N-dialkyl amino having from about 1 to about 20 carbon atoms in each alkyl group, preferably about 1 to about 6 carbon atoms, more preferably about 1 to about 4 carbon atoms; or a polyamine moiety having from about 2 to about 12 amine nitrogen atoms and from about 2 to about 40 carbon atoms, preferably about 2 to 12 amine nitrogen atoms and about 2 to 24 carbon atoms. More preferably, A is amino or a polyamine moiety derived from a (poly)alkylene polyamine, including alkylene diamine. Most preferably, A is amino or a polyamine moiety derived from ethylene diamine or diethylene triamine.

5

The polyetheramines will generally have a molecular weight in the range from about 600 to about 10,000.

Fuel-soluble salts of the compounds of formula I can be readily prepared for those compounds containing an amino or substituted amino group and such salts are contemplated to be useful for preventing or controlling engine deposits. Suitable salts include, for example, those obtained by protonating the amino moiety with a strong organic acid, such as an alkyl- or arylsulfonic acid. Preferred salts are derived from toluenesulfonic acid and methanesulfonic acid.

10

Other suitable polyetheramines are those taught in US 5089029 and US 5112364.

b) Acylated nitrogen compounds which are the reaction product of a carboxylic acid-derived acylating agent and an amine

15

The carboxylic derived acylating agent may be a hydrocarbyl substituted acylating agent as described for the quaternary ammonium salt(s) (i).

Amines useful for reaction with these acylating agents include the following four categories:

20

(1) (Poly)alkylene polyamines of the general formula:



wherein each R^{14} is independently selected from a hydrogen atom, a hydrocarbyl group or a hydroxy-substituted hydrocarbyl group containing up to about 30 carbon atoms, with proviso that at least one R^{14} is a hydrogen atom, n is a whole number from 1 to 10 and U is a C1-18 alkylene group. Preferably each R^{14} is independently selected from hydrogen, methyl, ethyl,

25

30

35

propyl, isopropyl, butyl and isomers thereof. Most preferably each R¹⁴ is ethyl or hydrogen. U is preferably a C1-4 alkylene group, most preferably ethylene.

Specific examples of (poly)alkylene polyamines (1) include ethylenediamine,
 5 diethylenetriamine, triethylenetetramine, tetraethylenepentamine, tri(tri-methylene)tetramine, pentaethylenehexamine, hexaethylene-heptamine, 1,2-propylenediamine, and other commercially available materials which comprise complex mixtures of polyamines. For example, higher ethylene polyamines optionally containing all or some of the above in addition to higher boiling fractions containing 8 or more nitrogen atoms etc.

10

Specific examples of (poly)alkylene polyamines (1) which are hydroxyalkyl-substituted polyamines include N-(2-hydroxyethyl) ethylene diamine, N,N' -bis(2-hydroxyethyl) ethylene diamine, N-(3-hydroxybutyl) tetramethylene diamine, etc.

15 (2) Heterocyclic substituted polyamines

Suitable compounds of this type include hydroxyalkyl-substituted polyamines wherein the polyamines are as described above and the heterocyclic substituent is selected from nitrogen-containing aliphatic and aromatic heterocycles, for example piperazines, imidazolines,
 20 pyrimidines, morpholines, etc.

Specific examples of the heterocyclic-substituted polyamines (2) are N-2-aminoethyl piperazine, N-2 and N-3 amino propyl morpholine, N-3(dimethyl amino) propyl piperazine, 2-heptyl-3-(2-aminopropyl) imidazoline, 1,4-bis (2-aminoethyl) piperazine, 1-(2-hydroxy ethyl)
 25 piperazine, and 2-heptadecyl-1-(2-hydroxyethyl)-imidazoline, etc.

(3) Aromatic polyamines of the general formula:



30

wherein Ar is an aromatic nucleus of 6 to 20 carbon atoms, each R¹⁵ is as defined above and y is from 2 to 8.

Specific examples of the aromatic polyamines (3) are the various isomeric phenylene
 35 diamines, the various isomeric naphthalene diamines, etc.

(4) The amine reactant may alternatively be a compound of general formula R¹⁶R¹⁷NH where each of R¹⁶ and R¹⁷ independently represents a hydrocarbyl group (as defined herein), preferably a hydrocarbon group (as defined herein), or a hydrogen atom.

Preferably at least one of R¹⁶ and R¹⁷ represents a hydrocarbyl group.

Preferably both R¹⁶ and R¹⁷ represent a hydrocarbyl group.

5

Suitable terminal groups of a hydrocarbyl group R¹⁶ and/or R¹⁷ may include -CH₃, =CH₂, -OH, -C(O)OH and derivatives thereof. Suitable derivatives include esters and ethers. Preferably a hydrocarbyl group R¹⁶ and/or R¹⁷ does not contain a terminal amine.

10 A preferred hydrocarbyl group for each of R¹⁶ and R¹⁷ is a group of the formula



wherein R¹⁸ is an alkylene group having from 1 to 10 carbons, preferably from 1 to 5, preferably 1 to 3 carbons, preferably 2 carbons;

wherein R¹⁹ is an alkylene group having from 1 to 10 carbons, preferably from 1 to 5,

15 preferably 1 to 3 carbons, preferably 2 carbons;

wherein p is an integer from 0 to 10;

wherein X is selected from -CH₃, -CH₂=CH₂, -OH, and -C(O)OH.

A preferred hydrocarbyl group for each of R¹⁶ and R¹⁷ is a group of the formula

20 $-(CH_2)_qNH]_p(CH_2)_rX$

wherein p is an integer from 0 to 10, preferably 1 to 10, preferably from 1 to 5, preferably from 1 to 3, preferably 1 or 2;

wherein q is an integer from 1 to 10, preferably 1 to 10, preferably from 1 to 5, preferably from 1 to 3, preferably 1 or 2;

25 wherein r is an integer from 1 to 10, preferably 1 to 10, preferably from 1 to 5, preferably from 1 to 3, preferably 1 or 2; and

wherein X is selected from -CH₃, -CH₂=CH₂, -OH, and -C(O)OH.

Preferably X is -CH₃, or -OH.

30

Further amines which may be used to prepare the acyclated nitrogen compounds (b) include compounds derived from amines selected from ammonia, alkylamines e.g. butylamine, aminoethylethanolamine, aminopropan-2-ol, 5-aminopentan-1-ol, 2-(2-aminoethoxy)ethanol, monoethanolamine, 3-aminopropan-1-ol, 2-((3-aminopropyl)amino)ethanol, dimethylaminopropylamine, and N-(alkoxyalkyl)-alkanediamines including N-(octyloxyethyl)-1,2-diaminoethane and N-(decyloxypropyl)-N-methyl-1,3-diaminopropane.

35

Specific examples of amines which may be used in this invention and having a tertiary amino group can include but are not limited to: N,N-dimethyl-aminopropylamine, N,N-diethyl-

aminopropylamine, N,N-dimethyl- amino ethylamine. The nitrogen or oxygen containing compounds capable of condensing with the acylating agent and further having a tertiary amino group can further include amino alkyl substituted heterocyclic compounds such as 1-(3-aminopropyl)imidazole and 4- (3-aminopropyl)morpholine, 1-(2-aminoethyl)piperidine, 3,3-diamino-N- methyl-di-propylamine, and 3'3'-aminobis(N,N-dimethylpropylamine). Other types of compounds capable of condensing with the acylating agent and having a tertiary amino group include alkanolamines including but not limited to triethanolamine, trimethanolamine, N,N-dimethylaminopropanol, N,N-diethylaminopropanol, N,N- diethylaminobutanol, N,N,N-tris(hydroxyethyl)amine and N,N,N-tris(hydroxymethyl)amine.

10

Many patents have described useful acylated nitrogen compounds including U.S. Pat. Nos. 3,172,892; 3,219,666; 3,272,746; 3,310,492; 3,341,542; 3,444,170; 3,455,831; 3,455,832; 3,576,743; 3,630,904; 3,632,511; 3,804,763, 4,234,435 and US6821307.

15

A preferred acylated nitrogen compound of this class is that made by reacting a poly(isobutene)-substituted succinic acid-derived acylating agent (e.g., anhydride, acid, ester, etc.) wherein the poly(isobutene) substituent has between about 12 to about 200 carbon atoms and the acylating agent has from 1 to 5, preferably from 1 to 3, preferably 1 or 2, succinic-derived acylating groups; with a mixture of ethylene polyamines having 3 to about 9 amino nitrogen atoms, preferably about 3 to about 8 nitrogen atoms, per ethylene polyamine and about 1 to about 8 ethylene groups. These acylated nitrogen compounds are formed by the reaction of a molar ratio of acylating agent : amino compound of from 10:1 to 1:10, preferably from 5:1 to 1:5, more preferably from 2.5:1 to 1:2, more preferably from 2:1 to 1:2 and most preferably from 2:1 to 1:1. In especially preferred embodiments, the acylated nitrogen compounds are formed by the reaction of acylating agent to amino compound in a molar ratio of from 1.8:1 to 1:1.2, preferably from 1.6:1 to 1:1.2, more preferably from 1.4:1 to 1:1.1 and most preferably from 1.2:1 to 1:1. This type of acylated amino compound and the preparation thereof is well known to those skilled in the art and are described in the above-referenced US patents. In other especially preferred embodiments, the acylated nitrogen compounds are formed by the reaction of acylating agent to amino compound in a molar ratio of from 2.5:1 to 1.5:1, preferably from 2.2:1 to 1.8:1.

20

25

30

35

Another type of acylated nitrogen compound belonging to this class is that made by reacting the afore-described alkylene amines with the afore-described substituted succinic acids or anhydrides and aliphatic mono-carboxylic acids having from 2 to about 22 carbon atoms. In these types of acylated nitrogen compounds, the mole ratio of succinic acid to mono-carboxylic acid ranges from about 1:0.1 to about 1:1. Typical of the monocarboxylic acid are formic acid, acetic acid, dodecanoic acid, butanoic acid, oleic acid, stearic acid, the commercial mixture of

stearic acid isomers known as isostearic acid, tolyl acid, etc. Such materials are more fully described in U.S. Pat. Nos. 3,216,936 and 3,250,715.

5 A further type of acylated nitrogen compound belonging to this class is the product of the reaction of a fatty monocarboxylic acid of about 12-30 carbon atoms and the afore-described alkylene amines, typically, ethylene, propylene or trimethylene polyamines containing 2 to 8 amino groups and mixtures thereof. The fatty mono-carboxylic acids are generally mixtures of straight and branched chain fatty carboxylic acids containing 12-30 carbon atoms. Fatty dicarboxylic acids could also be used. A widely used type of acylated nitrogen compound is
10 made by reacting the afore-described alkylene polyamines with a mixture of fatty acids having from 5 to about 30 mole percent straight chain acid and about 70 to about 95 percent mole branched chain fatty acids. Among the commercially available mixtures are those known widely in the trade as isostearic acid. These mixtures are produced as a by-product from the dimerization of unsaturated fatty acids as described in U.S. Pat. Nos. 2,812,342 and
15 3,260,671.

The branched chain fatty acids can also include those in which the branch may not be alkyl in nature, for example phenyl and cyclohexyl stearic acid and the chloro-stearic acids. Branched chain fatty carboxylic acid/alkylene polyamine products have been described extensively in the
20 art. See for example, U.S. Pat. Nos. 3,110,673; 3,251,853; 3,326,801; 3,337,459; 3,405,064; 3,429,674; 3,468,639; 3,857,791. These patents are referenced for their disclosure of fatty acid/polyamine condensates for their use in lubricating oil formulations.

Suitably the molar ratio of the acylating group of an acylating agent defined above and the
25 reacting amine group of said amine is in the range 0.5-5:1, preferably 0.8-2.2:1. At a ratio of 1:1 the reaction product is called mono-PIBSI, and at a ratio of 2:1 it is called bis-PIBSI and requires a polyamine as reactant.

Preferred acylated nitrogen compounds for use herein include: the compound formed by
30 reacting a polyisobutylene succinic anhydride (PIBSA) having a PIB molecular weight of 900 to 1100, for example approximately 1000 with aminoethyl ethanolamine or triethylene tetramine; and the compound formed by reacting a PIBSA having a PIB molecular weight of 650 to 850, for example about 750 with tetraethylene pentamine. In each case the ratio of PIBSA to amine is from 1.5:1 to 0.9:1, preferably from 1.2:1 to 1:1. Other preferred acylated nitrogen
35 compounds for use herein include: the compound formed by reacting a polyisobutylene succinic anhydride (PIBSA) having a PIB molecular weight of 900 to 1100, for example approximately 1000 with tetraethylene pentamine, the ratio of PIBSA to amine being from 2.5:1 to 1.5:1, preferably from 2.2:1 to 1.8:1.

c) Hydrocarbyl-Substituted Amines

Hydrocarbyl-substituted amines suitable for use in the present invention are well known to those skilled in the art and are described in a number of patents. Among these are U.S. Pat. Nos. 3,275,554; 3,438,757; 3,454,555; 3,565,804; 3,755,433 and 3,822,209. These patents
5 describe suitable hydrocarbyl amines for use in the present invention including their method of preparation.

d) Mannich Additives

The Mannich additives comprise nitrogen-containing condensates of a phenol, aldehyde and
10 primary or secondary amine.

Mannich additives can be made by reacting simultaneously or sequentially at least one of each of the following: active hydrogen compound for example a hydrocarbon-substituted phenol (e.g., an alkyl phenol wherein the alkyl group has at least an average of about 8 to 200;
15 preferably at least 12 up to about 200 carbon atoms), having at least one hydrogen atom bonded to an aromatic carbon, with at least one aldehyde or aldehyde-producing material (typically formaldehyde or a precursor thereof) and amine.

Thus the Mannich additives may be the product of a Mannich reaction between:

- 20 (a1) an aldehyde;
(b1) an amine; and
(c1) an optionally substituted phenol.

These compounds may be hereinafter referred to as "the Mannich additives". Thus in some
25 preferred embodiments the present invention provides a gasoline composition comprising a quaternary ammonium salt(s) additive (i) and a Mannich additive.

Any aldehyde may be used as aldehyde component (a1) of the Mannich additive. Preferably the aldehyde component (a1) is an aliphatic aldehyde. Preferably the aldehyde has 1 to 10
30 carbon atoms, preferably 1 to 6 carbon atoms, more preferably 1 to 3 carbon atoms. Most preferably the aldehyde is formaldehyde.

Amine component (b1) may be at least one amino or polyamino compound having at least one NH group. The amino compounds include primary or secondary monoamines having
35 hydrocarbon substituents of 1 to 30 carbon atoms or hydroxyl-substituted hydrocarbon substituents of 1 to about 30 carbon atoms.

In a preferred embodiment, the amine component (b1) is a polyamine.

Polyamines may be selected from any compound including two or more amine groups. Preferably the polyamine is a (poly)alkylene polyamine (by which is meant an alkylene polyamine or a polyalkylene polyamine; including in each case a diamine, within the meaning of "polyamine"). Preferably the polyamine is a (poly)alkylene polyamine in which the alkylene component has 1 to 6, preferably 1 to 4, most preferably 2 to 3 carbon atoms. Most preferably the polyamine is a (poly) ethylene polyamine (that is, an ethylene polyamine or a polyethylene polyamine).

Preferably the polyamine has 2 to 15 nitrogen atoms, preferably 2 to 10 nitrogen atoms, more preferably 2 to 8 nitrogen atoms.

Preferably the polyamine component (b1) includes the moiety $R^{21}R^{22}NCHR^{23}CHR^{24}NR^{25}R^{26}$ wherein each of R^{21} , R^{22} , R^{23} , R^{24} , R^{25} and R^{26} is independently selected from hydrogen, and an optionally substituted alkyl, alkenyl, alkynyl, aryl, alkylaryl or arylalkyl substituent.

Thus the polyamine reactants used to make the Mannich reaction products of the present invention preferably include an optionally substituted ethylene diamine residue.

Preferably at least one of R^{21} and R^{22} is hydrogen. Preferably both of R^{21} and R^{22} are hydrogen.

Preferably at least two of R^{21} , R^{22} , R^{25} and R^{26} are hydrogen.

Preferably at least one of R^{23} and R^{24} is hydrogen. In some preferred embodiments each of R^{23} and R^{24} is hydrogen. In some embodiments R^{23} is hydrogen and R^{24} is alkyl, for example C_1 to C_4 alkyl, especially methyl.

Preferably at least one of R^{25} and R^{26} is an optionally substituted alkyl, alkenyl, alkynyl, aryl, alkylaryl or arylalkyl substituent.

In embodiments in which at least one of R^{21} , R^{22} , R^{23} , R^{24} , R^{25} and R^{26} is not hydrogen, each is independently selected from an optionally substituted alkyl, alkenyl, alkynyl, aryl, alkylaryl or arylalkyl moiety. Preferably each is independently selected from hydrogen and an optionally substituted C(1-6) alkyl moiety.

In particularly preferred compounds each of R^{21} , R^{22} , R^{23} , R^{24} and R^{25} is hydrogen and R^{26} is an optionally substituted alkyl, alkenyl, alkynyl, aryl, alkylaryl or arylalkyl substituent. Preferably R^{26} is an optionally substituted C(1-6) alkyl moiety.

Such an alkyl moiety may be substituted with one or more groups selected from hydroxyl, amino (especially unsubstituted amino; -NH-, -NH₂), sulpho, sulphony, C(1-4) alkoxy, nitro, halo (especially chloro or fluoro) and mercapto.

- 5 There may be one or more heteroatoms incorporated into the alkyl chain, for example O, N or S, to provide an ether, amine or thioether.

Especially preferred substituents R²¹, R²², R²³, R²⁴, R²⁵ or R²⁶ are hydroxy-C(1-4)alkyl and amino-(C(1-4)alkyl, especially HO-CH₂-CH₂- and H₂N-CH₂-CH₂-.

10

Suitably the polyamine includes only amine functionality, or amine and alcohol functionalities.

- The polyamine may, for example, be selected from ethylenediamine, diethylenetriamine, triethylenetetramine, tetraethylenepentamine, pentaethylene-hexamine, 15 hexaethyleneheptamine, heptaethyleneoctamine, propane-1,2-diamine, 2(2-aminoethylamino)ethanol, and N,N'-bis (2-aminoethyl) ethylenediamine (N(CH₂CH₂NH₂)₃). Most preferably the polyamine comprises tetraethylenepentamine or ethylenediamine.

- 20 Commercially available sources of polyamines typically contain mixtures of isomers and/or oligomers, and products prepared from these commercially available mixtures fall within the scope of the present invention.

- The polyamines used to form the Mannich additives of the present invention may be straight 25 chained or branched, and may include cyclic structures.

- In preferred embodiments, the Mannich additives of the present invention are of relatively low 30 molecular weight.

- Preferably molecules of the Mannich additive product have a number average molecular 35 weight of less than 10000, preferably less than 7500, preferably less than 2000, more preferably less than 1500.

- Optionally substituted phenol component (c1) may be substituted with 0 to 4 groups on the 40 aromatic ring (in addition to the phenol OH). For example it may be a tri- or di- substituted phenol. Most preferably component (c1) is a mono-substituted phenol. Substitution may be at 35 the ortho, and/or meta, and/or para position(s).

Each phenol moiety may be ortho, meta or para substituted with the aldehyde/amine residue. Compounds in which the aldehyde residue is ortho or para substituted are most commonly

formed. Mixtures of compounds may result. In preferred embodiments the starting phenol is para substituted and thus the ortho substituted product results.

5 The phenol may be substituted with any common group, for example one or more of an alkyl group, an alkenyl group, an alkyl group, a nitril group, a carboxylic acid, an ester, an ether, an alkoxy group, a halo group, a further hydroxyl group, a mercapto group, an alkyl mercapto group, an alkyl sulphony group, a sulphony group, an aryl group, an arylalkyl group, a substituted or unsubstituted amine group or a nitro group.

10 Preferably the phenol carries one or more optionally substituted alkyl substituents. The alkyl substituent may be optionally substituted with, for example, hydroxyl, halo, (especially chloro and fluoro), alkoxy, alkyl, mercapto, alkyl sulphony, aryl or amino residues. Preferably the alkyl group consists essentially of carbon and hydrogen atoms. The substituted phenol may include
15 a alkenyl or alkynyl residue including one or more double and/or triple bonds. Most preferably the component (c1) is an alkyl substituted phenol group in which the alkyl chain is saturated. The alkyl chain may be linear or branched.

Preferably component (c1) is a monoalkyl phenol, especially a para-substituted monoalkyl phenol.

20

Preferably component (c1) comprises an alkyl substituted phenol in which the phenol carries one or more alkyl chains having a total of less 28 carbon atoms, preferably less than 24 carbon atoms, more preferably less than 20 carbon atoms, preferably less than 18 carbon atoms, preferably less than 16 carbon atoms and most preferably less than 14 carbon atoms.

25

Preferably the or each alkyl substituent of component (c1) has from 4 to 20 carbons atoms, preferably 6 to 18, more preferably 8 to 16, especially 10 to 14 carbon atoms. In a particularly preferred embodiment, component (c1) is a phenol having a C12 alkyl substituent.

30 Preferably the or each substituent of phenol component (c1) has a molecular weight of less than 400, preferably less than 350, preferably less than 300, more preferably less than 250 and most preferably less than 200. The or each substituent of phenol component (c) may suitably have a molecular weight of from 100 to 250, for example 150 to 200.

35 Molecules of component (c1) preferably have a molecular weight on average of less than 1800, preferably less than 800, preferably less than 500, more preferably less than 450, preferably less than 400, preferably less than 350, more preferably less than 325, preferably less than 300 and most preferably less than 275.

Components (a1), (b1) and (c1) may each comprise a mixture of compounds and/or a mixture of isomers.

5 The Mannich additive is preferably the reaction product obtained by reacting components (a1), (b1) and (c1) in a molar ratio of from 5:1:5 to 0.1:1:0.1, more preferably from 3:1:3 to 0.5:1:0.5.

10 To form the Mannich additive of the present invention components (a1) and (b1) are preferably reacted in a molar ratio of from 6:1 to 1:4 (aldehyde:polyamine), preferably from 4:1 to 1:2, more preferably from 3:1 to 1:1.

To form a preferred Mannich additive of the present invention the molar ratio of component (a1) to component (c1) (aldehyde:phenol) in the reaction mixture is preferably from 5:1 to 1:4, preferably from 3:1 to 1:2, for example from 1.5:1 to 1:1.1.

15 Some preferred compounds used in the present invention are typically formed by reacting components (a1), (b1) and (c1) in a molar ratio of 2 parts (a1) to 1 part (b1) \pm 0.2 parts (b1), to 2 parts (c1) \pm 0.4 parts (c1); preferably approximately 2:1:2 (a1 : b1 : c1).


20 Some preferred compounds used in the present invention are typically formed by reacting components (a1), (b1) and (c1) in a molar ratio of 2 parts (a1) to 1 part (b1) \pm 0.2 parts (b1), to 1.5 parts (c1) \pm 0.3 parts (c1); preferably approximately 2:1:1.5 (a1 : b1 : c1).

25 Suitable treat rates of the quaternary ammonium salt(s) additive (i) and when present the Mannich additive will depend on the desired performance and on the type of engine in which they are used. For example different levels of additive may be needed to achieve different levels of performance.

e) Aromatic esters of a polyalkylphenoxyalkanol

30 The aromatic ester component which may be employed additive composition is an aromatic ester of a polyalkylphenoxyalkanol and has the following general formula:

(I)

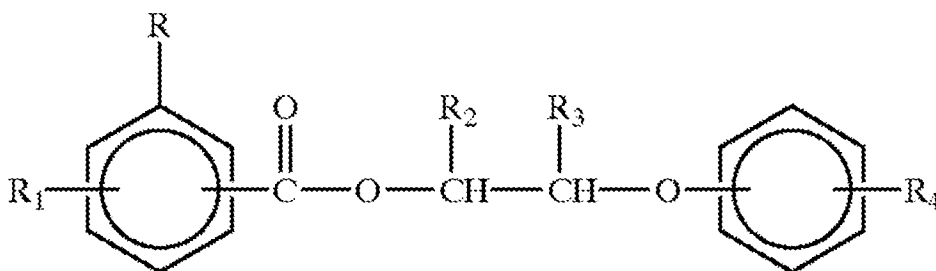

or a fuel-soluble salt(s) thereof wherein R is hydroxy, nitro or $-(CH_2)_x-NR_5R_6$, wherein R_5 and R_6 are independently hydrogen or lower alkyl having 1 to 6 carbon atoms and x is 0 or 1;
 R_1 is hydrogen, hydroxy, nitro or $-NR_7R_8$ wherein R_7 and R_8 are independently hydrogen or
 5 lower alkyl having 1 to 6 carbon atoms;
 R_2 and R_3 are independently hydrogen or lower alkyl having 1 to 6 carbon atoms; and
 R_4 is a polyalkyl group having an average molecular weight in the range of about 450 to 5,000.

The preferred aromatic ester compounds employed in the present invention are those wherein
 10 R is nitro, amino, N-alkylamino, or $-CH_2NH_2$ (aminomethyl). More preferably, R is a nitro, amino or $-CH_2NH_2$ group. Most preferably, R is an amino or $-CH_2NH_2$ group, especially amino. Preferably, R_1 is hydrogen, hydroxy, nitro or amino. More preferably, R_1 is hydrogen or hydroxy. Most preferably, R_1 is hydrogen. Preferably, R_4 is a polyalkyl group having an average molecular weight in the range of about 500 to 3,000, more preferably about 700 to 3,000, and
 15 most preferably about 900 to 2,500. Preferably, the compound has a combination of preferred substituents.

Preferably, one of R_2 and R_3 is hydrogen or lower alkyl of 1 to 4 carbon atoms, and the other is hydrogen. More preferably, one of R_2 and R_3 is hydrogen, methyl or ethyl, and the other is
 20 hydrogen. Most preferably, R_2 is hydrogen, methyl or ethyl, and R_3 is hydrogen.

When R and/or R_1 is an N-alkylamino group, the alkyl group of the N-alkylamino moiety preferably contains 1 to 4 carbon atoms. More preferably, the N-alkylamino is N-methylamino or N-ethylamino.
 25

Similarly, when R and/or R_1 is an N,N-dialkylamino group, each alkyl group of the N,N-dialkylamino moiety preferably contains 1 to 4 carbon atoms. More preferably, each alkyl group is either methyl or ethyl. For example, particularly preferred N,N-dialkylamino groups are N,N-dimethylamino, N-ethyl-N-methylamino and N,N-diethylamino groups.
 30

A further preferred group of compounds are those wherein R is amino, nitro, or $-\text{CH}_2\text{NH}_2$ and R_1 is hydrogen or hydroxy. A particularly preferred group of compounds are those wherein R is amino, R_1 , R_2 and R_3 are hydrogen, and R_4 is a polyalkyl group derived from polyisobutene.

- 5 It is preferred that the R substituent is located at the meta or, more preferably, the para position of the benzoic acid moiety, i.e. para or meta relative to the carbonyloxy group. When R_1 is a substituent other than hydrogen, it is particularly preferred that this R_1 group be in a meta or para position relative to the carbonyloxy group and in an ortho position relative to the R substituent. Further, in general, when R_1 is other than hydrogen, it is preferred that one of R
10 or R_1 is located para to the carbonyloxy group and the other is located meta to the carbonyloxy group. Similarly, it is preferred that the R_4 substituent on the other phenyl ring is located para or meta, more preferably para, relative to the ether linking group.

- The aromatic esters (e) will generally have a molecular weight in the range from about 700 to
15 about 3,500, preferably from about 700 to about 2,500.

- Fuel-soluble salt(s) of the compounds (e) can be readily prepared for those compounds containing an amino or substituted amino group and such salt(s) are contemplated to be useful for preventing or controlling engine deposits. Suitable salt(s) include, for example,
20 those obtained by protonating the amino moiety with a strong organic acid, such as an alkyl- or arylsulfonic acid. Preferred salt(s) are derived from toluenesulfonic acid and methanesulfonic acid.

- When the R or R_1 substituent is a hydroxy group, suitable salt(s) can be obtained by
25 deprotonation of the hydroxy group with a base. Such salt(s) include salt(s) of alkali metals, alkaline earth metals, ammonium and substituted ammonium salt(s). Preferred salt(s) of hydroxy-substituted compounds include alkali metal, alkaline earth metal and substituted ammonium salt(s).

30 f) Quaternary ammonium salt

The quaternary ammonium salt additive is suitably the reaction product of a nitrogen-containing species having at least one tertiary amine group and a quaternising agent.

- 35 The nitrogen containing species may be selected from:

(x) the reaction product of a hydrocarbyl-substituted acylating agent and a compound comprising at least one tertiary amine group and a primary amine, secondary amine or alcohol group;

(y) a Mannich reaction product comprising a tertiary amine group; and

(z) a polyalkylene substituted amine having at least one tertiary amine group.

5

Examples of quaternary ammonium salt and methods for preparing the same are described in the following patents, which are hereby incorporated by reference, US2008/0307698, US2008/0052985, US2008/0113890 and US2013/031827.

10 The preparation of some suitable quaternary ammonium salt additives in which the nitrogen-containing species includes component (x) is described in WO 2006/135881 and WO2011/095819.

15 Component (y) is a Mannich reaction product having a tertiary amine. The preparation of quaternary ammonium salts formed from nitrogen-containing species including component (y) is described in US 2008/0052985.

The preparation of quaternary ammonium salt additives in which the nitrogen-containing species includes component (z) is described for example in US 2008/0113890.

20

To form the quaternary ammonium salt additive (f) the nitrogen-containing species having a tertiary amine group is reacted with a quaternising agent.

The quaternising agent may suitably be selected from esters and non-esters.

25

Preferred quaternising agents for use herein include dimethyl oxalate, methyl 2-nitrobenzoate, methyl salicylate and styrene oxide or propylene oxide optionally in combination with an additional acid.

30 An especially preferred additional quaternary ammonium salt for use herein is formed by reacting methyl salicylate or dimethyl oxalate with the reaction product of a polyisobutylene-substituted succinic anhydride having a PIB number average molecular weight of 700 to 1300 and dimethylaminopropylamine.

35 Other suitable quaternary ammonium salts include quaternised terpolymers, for example as described in US2011/0258917; quaternised copolymers, for example as described in US2011/0315107; and the acid-free quaternised nitrogen compounds disclosed in US2012/0010112.

Further suitable quaternary ammonium compounds for use in the present invention include the quaternary ammonium compounds described in the applicants copending applications WO2011095819, WO2013/017889, WO2015/011506, WO2015/011507, WO2016/016641 and PCT/GB2016/052312.

5

The fuel compositions of the invention may contain, in addition to the ester additive(s)(i) and the gasoline, and the other components (ii) (selected from (a) to (f) described above) when present, unreacted raw materials and other reaction products and any of the other additives conventionally added to gasoline as, for example, other detergents, dispersants, anti-oxidants, 10 anti-icing agents, metal deactivators, lubricity additives, friction modifiers, dehazers, corrosion inhibitors, dyes, markers, octane improvers, anti-valve-seat recession additives, stabilisers, demulsifiers, antifoams, odour masks, conductivity improvers, combustion improvers, etc."

Such further ingredients could in principle be added separately to ester additives (i) but it is 15 preferred for reasons of convenience and consistency of dosing to add them with ester additive(s) (i) and – when present, with further additive components (ii) - in a common additive composition.

Preferably the additives (i) and (ii) (when present) is/are present in the fuel in the fuel storage 20 tank which supplies the engine. Although they could be mixed into the fuel in the storage tank, preferably they are present in bulk fuel which is pumped into the storage tank.

The present invention relates to improving the performance of spark ignition engines by 25 combusting gasoline fuel compositions comprising an ester additive.

25

The ester additives may be added to gasoline fuel at any convenient place in the supply chain. For example, the additives may be added to fuel at the refinery, at a distribution terminal or after the fuel has left the distribution terminal. If the additive is added to the fuel after it has left the distribution terminal, this is termed an aftermarket application. Aftermarket applications 30 include such circumstances as adding the additive to the fuel in the delivery tanker, directly to a customer's bulk storage tank, or directly to the end user's vehicle tank. Aftermarket applications may include supplying the fuel additive in small bottles suitable for direct addition to fuel storage tanks or vehicle tanks.

35 Controlling deposits in the specification is intended to cover one or more of: reducing existing deposits ("clean-up"); reducing deposit formation ("keep-clean"); modifying deposits so as to reduce their negative effects.

It has surprisingly been found that the gasoline compositions used in this invention achieve good control of deposits in spark ignition gasoline engines.

5 It has surprisingly been found that the gasoline compositions used in this invention achieve good control of deposits even in the demanding context of the direct injection spark ignition gasoline engine.

10 This control of deposits may lead to a significant reduction in maintenance costs and/or an increase in power and/or an improvement in fuel economy.

The second aspect of the present invention provides a method of controlling deposits in spark ignition engine. Preferably the engine is a direct injection spark ignition gasoline engine.

15 Suitably the present invention provides a method of controlling deposits in a direct injection spark ignition gasoline engine, the method comprising the method comprising adding into the gasoline to be combusted:

- (i) one or more ester additives of the first aspect and
- (ii) optionally, one or more additional components selected from a) – f) described above.

20 Suitably the present invention provides a method of improving the efficiency of a direct injection spark ignition gasoline engine, the method comprising adding into the gasoline to be combusted:

- (i) one or more ester additives of the first aspect; and
- (ii) optionally, one or more additional components selected from a) – f) described above.

25 Suitably the present invention provides a method of operating a direct injection spark ignition gasoline engine, the method comprising adding into the gasoline to be combusted:

- (i) one or more ester additives of the first aspect; and
- (ii) optionally, one or more additional components selected from a) – f) described above

30 wherein the method provides one or more of:-

- improved fuel economy
- reduced maintenance
- less frequent overhaul or replacement of injectors
- improved driveability
- 35 • improved power
- improved acceleration

Suitably the present invention provides the use of (i) one or more ester additives as defined in the first aspect and, optionally of (ii) one or more additional components selected from a) – f) described above; added into gasoline to control deposits in a direct injection spark ignition gasoline engine.

5

Suitably the present invention provides the use of (i) one or more ester additives as defined in the first aspect and, optionally of (ii) one or more additional components selected from a) – f) described above; added into gasoline to improve efficiency in a direct injection spark ignition gasoline engine.

10

Suitably the present invention provides the use of a gasoline comprising (i) one or more ester additives as defined in the first aspect and, optionally of (ii) one or more additional components selected from a) – f) described above; in a direct injection spark ignition gasoline engine to provide one or more of:-

15

- improved fuel economy
- reduced maintenance
- less frequent overhaul or replacement of injectors
- improved driveability
- improved power

20

- improved acceleration

Any feature of the invention may be combined with any other feature as appropriate.

25

The invention will now be further described with reference to the following non-limiting examples. In the examples which follow the values given in parts per million (ppm) for treat rates denote active agent amount, not the amount of a formulation as added, and containing an active agent. All parts per million are by weight.

Example 1

30

Additive A1, an ester additive of the invention was prepared as follows:

35

A mixture of alkenes having 20 to 24 carbon atoms was heated with 1.2 molar equivalents of maleic anhydride. On completion of the reaction excess maleic anhydride was removed by distillation. The anhydride value of the substituted succinic anhydride product was measured as 2.591 mmolg⁻¹.


This product was then heated with one molar equivalent of polypropylene glycol having a number average molecular weight of 425, and the reaction was monitored by FTIR.

5 Additive A2 was prepared by a method analogous to that used to prepare additive A1 except that a polyisobutene having a number average molecular weight of 1000 was used in place of the mixture of alkenes.

Claims

1. A gasoline fuel composition comprising as an additive an ester compound which is the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and an alcohol or formula $H-(OR)_n-OR^1$, wherein R is an optionally substituted alkylene group; R^1 is hydrogen or an optionally substituted hydrocarbyl group, and n is 0 or a positive integer; wherein n is not 0 when R^1 is hydrogen.
2. A method of combatting deposits in a spark ignition engine, the method comprising combusting in the engine a gasoline composition comprising as an additive the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and a polyhydric alcohol of formula $H-(OR)_n-OR^1$, wherein R is an optionally substituted alkylene group; R^1 is hydrogen or an optionally substituted hydrocarbyl group, and n is 0 or a positive integer, wherein n is not 0 when R^1 is hydrogen.
3. Use of an ester compound as a detergent additive in a gasoline composition in a spark ignition engine; wherein the ester compound is the reaction product of an optionally substituted polycarboxylic acid or an anhydride thereof and a polyhydric alcohol of formula $H-(OR)_n-OR^1$, wherein R is an optionally substituted alkylene group; R^1 is hydrogen or an optionally substituted hydrocarbyl group; and n is 0 or a positive integer; wherein n is not 0 when R^1 is hydrogen.
4. A composition, method or use according to any preceding claim wherein the optionally substituted polycarboxylic acid or anhydride thereof is a hydrocarbyl substituted succinic acid or a hydrocarbyl substituted succinic anhydride.
5. A composition, method or use according to any preceding claim wherein each R is ethylene or propylene, preferably $-CH_2CH_2-$ or $-CH(CH_3)CH_2-$, more preferably $-CH(CH_3)CH_2-$; and n is from 1 to 30.
6. A composition, method or use according to any preceding claim wherein the polycarboxylic acid or anhydride thereof includes an optionally substituted alkyl or alkenyl group having 6 to 100 carbon atoms.
7. A composition, method or use according to any preceding claim wherein the polycarboxylic acid or anhydride is a succinic acid or anhydride thereof having a polyisobutenyl substituent having a number average molecular weight of 100 to 5000.

8. A composition, method or use according to any preceding claim wherein the optionally substituted polycarboxylic acid or hydrocarbyl substituted anhydride and alcohol of formula $H-(OR)_n-OR^1$ are reacted in a ratio of from 1.5:1 to 1:1.5.
- 5 9. A composition, method or use according to any of claims 1 to 7 wherein the optionally substituted polycarboxylic acid or hydrocarbyl substituted anhydride and alcohol of formula $H-(OR)_n-OR^1$ are reacted in a ratio of from 2.5:1 to 1.5:1 and R^1 is hydrogen.
10. A composition, method or use according to any of claims 1 to 8 wherein n is 0 and R^1 is a C₆ to C₃₀ alkyl group.
- 10 11. A composition, method or use according to any of claims 1 to 8 wherein R^1 is hydrogen.
12. A composition, method or use according to any of claims 1 to 8 wherein n is 1 or more and R^1 is a C₄ to C₃₀ alkyl group.
- 15 13. A composition, method or use according to any preceding claim wherein the additive is the reaction product of a succinic acid or anhydride of formula (A3) or (A4):

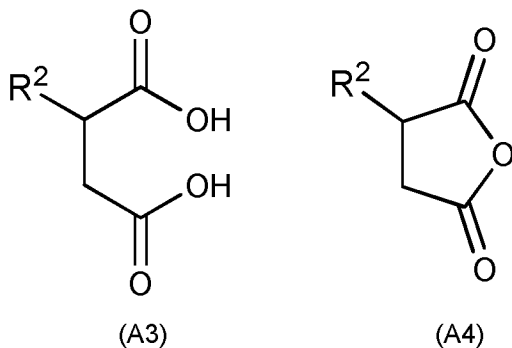

20

and an alcohol of formula $H-(OR)_n-OR^1$; wherein R^2 is an alkyl or alkenyl group having 6 to 36 carbon atoms or a polyisobutenyl group having a number average molecular weight of from 200 to 1300; wherein the alcohol of formula $H-(OR)_n-OR^1$ is selected from:

- 25 - ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, tripropylene glycol, tetrapropylene glycol, trehalose, sorbitol, glycerol, pentaerythritol, trimethylolpropane, 1,3-propanediol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,6-hexanediol, neopentyl glycol and a polyethylene or polypropylene glycol having a number average molecular weight of 300 to 1200; or a C₆ to C₂₄ ether thereof;
- 30 and
- benzyl alcohol, tetradecanol, butanol, 2-butanol, isobutanol, octanol, 2-ethylhexanol, hexanol, cyclohexanol, cyclooctanol, 2-propylheptanol, 2-ethyl-1-butanol and isopropanol.

14. A composition, method or use according to any of claims 1 to 10 or 13 wherein the additive is the reaction product of a succinic acid or anhydride of formula (A3) or (A4) and an alcohol of formula $H-(OR)_n-OR^1$; wherein R^2 is a polyisobutenyl group having a number average molecular weight of from 700 to 1300; wherein the alcohol of formula $H-(OR)_n-OR^1$ is selected from:
- 5
- butanediols, tripropylene glycol and polypropylene glycols having a number average molecular weight of from 300 to 600; and
 - tetradecanol, butanol and 2-ethylhexanol.
- 10
15. A method or use according to any of claims 2 to 12 wherein the engine is a direct injection spark ignition engine.
16. A method or use according to any of claims 2 to 13 which achieves "keep clean" performance.
- 15
17. A method or use according to any of claims 2 to 14 which achieves "clean up" performance.
18. A method or use according to any of claims 2 to 15 wherein the deposits are injector deposits.
- 20
19. A method or use according to claim 16 wherein the deposits are internal injector deposits.
20. A method or use according to any of claims 2 to 17 which combats intake valve deposits.
- 25
21. A composition, method or use according to any preceding claim wherein the gasoline fuel composition comprises one or more further additives selected from:
- a) carrier oils
 - 30 b) acylated nitrogen compounds which are the reaction product of a carboxylic acid-derived acylating agent and an amine
 - c) hydrocarbyl-substituted amines wherein the hydrocarbyl substituent is substantially aliphatic and contains at least 8 carbon atoms
 - d) mannich base additives comprising nitrogen-containing condensates of a phenol,
 - 35 e) aromatic esters of a polyalkylphenoxyalkanol
 - f) quaternary ammonium salts.

22. A composition, method or use according to any preceding claim wherein the gasoline composition comprises a mixture of two or more ester additives.

5 23. A method or use according to any of claims 2 to 20 which achieves an improvement in performance selected from one or more of:

- improved fuel economy
- reduced maintenance
- less frequent overhaul or replacement of injectors
- 10 • improved driveability
- improved power
- improved acceleration

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2018/050825

A. CLASSIFICATION OF SUBJECT MATTER
INV. C10L1/19 C10L10/02 C10L10/04 C10L10/06
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
C10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, INSPEC, WPI Data, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 224 642 B1 (DALY DANIEL T [US] ET AL) 1 May 2001 (2001-05-01) example 2	1,2,4-6, 8,9,11, 13, 16-21,23
X	GB 1 260 500 A (EXXON RESEARCH ENGINEERING CO [US]) 19 January 1972 (1972-01-19) claims 1-8,18; examples 1,2	1-3,8, 16-20,23
X	CA 1 075 000 A (ROHM & HAAS) 8 April 1980 (1980-04-08) claims 1-6,9,12; examples 1-28; tables VI-VII	1-3,5,6, 8-10, 16-23
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 18 May 2018	Date of mailing of the international search report 04/06/2018
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Pöllmann, Klaus
--	---

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2018/050825

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 993 773 A (STROMBERG VERNER L) 25 July 1961 (1961-07-25)	1-6, 8-12, 16-21,23
Y	column 4, line 30 - column 16, line 68; examples I,III,V, Test I,II;III; table 1 -----	7,13-15, 22
Y	EP 3 127 992 A1 (LUBRIZOL CORP [US]) 8 February 2017 (2017-02-08) examples sample 1-7 -----	7,13,14, 22
X	EP 0 491 439 A1 (SHELL INT RESEARCH [NL]) 24 June 1992 (1992-06-24)	1-10,12, 13, 16-20,23
Y	claim 1; examples 1,2,5,7,8 -----	7,13-15, 22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2018/050825

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6224642	B1	01-05-2001	AU 779852 B2 17-02-2005
			CA 2392357 A1 31-05-2001
			EP 1244763 A1 02-10-2002
			JP 2003514978 A 22-04-2003
			US 6224642 B1 01-05-2001
			WO 0138462 A1 31-05-2001
GB 1260500	A	19-01-1972	NONE
CA 1075000	A	08-04-1980	CA 1075000 A 08-04-1980
			IT 1048213 B 20-11-1980
			JP S526705 A 19-01-1977
			JP S6019351 B2 15-05-1985
US 2993773	A	25-07-1961	NONE
EP 3127992	A1	08-02-2017	AU 2009302649 A1 15-04-2010
			AU 2016204848 A1 28-07-2016
			AU 2017251765 A1 16-11-2017
			CA 2739432 A1 15-04-2010
			CN 102239238 A 09-11-2011
			CN 106753620 A 31-05-2017
			DK 2385977 T3 17-10-2016
			EP 2385977 A1 16-11-2011
			EP 3127992 A1 08-02-2017
			JP 6046347 B2 14-12-2016
			JP 2012505291 A 01-03-2012
			JP 2013234336 A 21-11-2013
			JP 2015147942 A 20-08-2015
			JP 2017101259 A 08-06-2017
			KR 20110069846 A 23-06-2011
			PL 2385977 T3 28-02-2017
			SG 194415 A1 29-11-2013
			US 2011219674 A1 15-09-2011
			WO 2010042378 A1 15-04-2010
EP 0491439	A1	24-06-1992	AU 643347 B2 11-11-1993
			BR 9105409 A 25-08-1992
			CA 2057705 A1 19-06-1992
			CN 1062752 A 15-07-1992
			DE 69101966 D1 16-06-1994
			DE 69101966 T2 01-09-1994
			EP 0491439 A1 24-06-1992
			ES 2055520 T3 16-08-1994
			HU 210915 B 28-09-1995
			JP H04296393 A 20-10-1992
			RU 2036953 C1 09-06-1995
			ZA 9109836 B 30-09-1992