

639643
AUSTRALIA

CONVENTION

Patents Act 1990

REQUEST FOR A STANDARD PATENT

AND NOTICE OF ENTITLEMENT

The Applicant identified below requests the grant of a patent to the nominated person identified below for an invention described in the accompanying standard complete patent specification.

[70,71]Applicant and Nominated Person:

General Motors Corporation
3044 West Grand Boulevard, Detroit, Michigan, 48202, UNITED STATES OF AMERICA

[54]Invention Title:

CONTROL APPARATUS FOR AN AUTOMATIC TRANSMISSION

[72]Actual Inventors:

William Joseph Vukovich
Walter Joseph Ortmann

[74]Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
367 Collins Street
Melbourne 3000 AUSTRALIA

[31,33,32,

Details of basic application(s):-

755,957

UNITED STATES OF AMERICA

US

6 September 1991

Applicant states the following:

1. The nominated person is the assignee of the actual inventor(s)
2. The nominated person is
~~the applicant~~
- the assignee of the applicant
~~authorised to make this application by the applicant~~
of the basic application.
3. The basic application(s) was/were the first made in a convention country in respect of the invention.

The nominated person is not an opponent or eligible person described in Section 33-36 of the Act.

6 August 1992

General Motors Corporation
By PHILLIPS ORMONDE & FITZPATRICK
Patent Attorneys
By

Our Ref : 300370

David B Fitzpatrick

5999q



AU9220829

(12) PATENT ABRIDGMENT (11) Document No. AU-B-20829/92
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 639643

- (54) Title
CONTROL APPARATUS FOR AN AUTOMATIC TRANSMISSION
- (51)⁵ International Patent Classification(s)
F16H 061/18
- (21) Application No. : **20829/92** (22) Application Date : **06.08.92**
- (30) Priority Data
- (31) Number (32) Date (33) Country
755957 06.09.91 US UNITED STATES OF AMERICA
- (43) Publication Date : **22.04.93**
- (44) Publication Date of Accepted Application : **29.07.93**
- (71) Applicant(s)
GENERAL MOTORS CORPORATION
- (72) Inventor(s)
WILLIAM JOSEPH VUKOVICH; WALTER JOSEPH ORTMANN
- (74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK , 367 Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents
US 4846022
US 4763545
US 4501175
- (57) Claim

1. Control apparatus for an automatic transmission of a motor vehicle including a range selector adapted to be manipulated by a vehicle operator for initiating a shift to a desired speed range of the automatic transmission and a manual valve which is displaced in relation to the range selector manipulation to direct a supplied fluid pressure to various fluid operated elements of the automatic transmission for effecting a shift to the desired speed range, the control apparatus comprising electro-hydraulic valve means selectively actuatable to interrupt the supply of fluid pressure to the manual valve; and control means for defining a vehicle operating condition to be satisfied at the initiation of shifting to the desired speed range, and for actuating the electro-hydraulic valve means if the vehicle operating condition is not satisfied at the time of the range selector manipulation.

AUSTRALIA 639643
Patents Act

COMPLETE SPECIFICATION
(ORIGINAL)

Application Number:	Class	Int. Class
Lodged:		

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

Name of Applicant:

General Motors Corporation

Actual Inventor(s) :

William Joseph Vukovich
Walter Joseph Ortmann

Address for Service:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Invention Title:

CONTROL APPARATUS FOR AN AUTOMATIC TRANSMISSION

Our Ref : 300370
POF Code: 1221/1695

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

CONTROL APPARATUS FOR AN AUTOMATIC TRANSMISSION

This invention relates to shift interlock controls for motor vehicle automatic transmissions, and more particularly, to a control apparatus utilizing electro-hydraulic control elements.

5 In certain automotive automatic transmission installations, manufacturers have provided shift interlock devices which prevent the operator from moving the transmission range selector in certain ways. For example, some devices prevent
10 the selector from being moved out of the Park position unless the pedal which operates the service brakes is depressed. Others prevent the selector from being moved to the Reverse position unless the vehicle is stopped. Such devices are typically
15 electro-mechanical in nature, and require substantial modification of the conventional range selector. Moreover, there has been no provision of a mechanism for overriding the interlock in the event of a failure of the interlock device.

20 Control apparatus in accordance with the present invention for an automatic transmission of a motor vehicle including a range selector adapted to be manipulated by a vehicle operator for initiating a shift to a desired speed range of the automatic
25 transmission and a manual valve which is displaced in relation to the range selector manipulation to direct a supplied fluid pressure to various fluid operated elements of the automatic transmission for effecting a shift to the desired speed range, comprises
30 electro-hydraulic valve means selectively actuatable to interrupt the supply of fluid pressure to the manual valve; and control means for defining a vehicle operating condition to be satisfied at the initiation

of shifting to the desired speed range, and for actuating the electro-hydraulic valve means if the vehicle operating condition is not satisfied at the time of the range selector manipulation.

5 The present invention is directed to an improved shift interlock mechanism for an automatic transmission, including electro-hydraulic elements internal to the automatic transmission which are operable to inhibit the supply of fluid pressure for
10 engaging the forward and reverse speed ranges of the automatic transmission. The electro-hydraulic elements are activated in response to various operating parameters of the vehicle, including range selector position, depression of the service brake
15 pedal and vehicle speed. The mechanism does not interfere with movement of the transmission range selector, and may include a mechanical link for overriding the interlock function when the range selector is moved to a LO forward range, thereby
20 providing an override in the event of a failure of the electro-hydraulic elements.

The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

25 Figure 1 is a schematic diagram of a vehicle powertrain including an automatic transmission and a (computer-based) control unit for activating the electro-hydraulic interlock mechanism of this invention;

30 Figure 2 is a hydraulic diagram of the electro-hydraulic interlock mechanism of this invention; and

 Figures 3, 4 and 5 are flow diagrams representative of computer program instructions
35 executed by the (computer-based) control unit of

Figure 1 in controlling the operation of the electro-hydraulic interlock mechanism of Figure 2.

Referring to Figure 1, the reference numeral 10 generally designates a motor vehicle powertrain including an internal combustion engine 12 connected to drive the drive wheels of a vehicle (not shown) through an automatic (shift power) transmission 14. The automatic transmission 14 embodies a number of conventional elements, including a fluidic torque converter for receiving engine torque, gearset elements, and a number of fluid operated torque transmitting devices through which the engine torque is transmitted to the drive wheels of the vehicle.

The reference numeral 16 designates a fluid supply circuit internal to the automatic transmission 14 for developing fluid pressure for engaging the various torque transmitting devices of the automatic transmission. The fluid supply circuit 16 receives control inputs from a range selector 18 via mechanical linkage 20, and from a (computer-based) control unit 22 via line 24. The range selector 18 is manipulated by the operator of the vehicle for initiating a shift to a desired speed range of the automatic transmission 14. In the illustrated embodiment, the automatic transmission 14 provides four forward speed ratios, and the ranges include Park, Reverse, Neutral, Drive, D3, D2 and LO. As described below, the development of forward and reverse operating pressures within automatic transmission 14 is normally controlled by the range selector 18, and the control unit 22 is operative under certain conditions to inhibit the development of such operating pressures. The fluid supply circuit 16 is described below in detail in reference

to Figure 2.

The control unit 22 operates in response to a number of vehicle operating parameters including the velocity of transmission output shaft 28, the position of range selector 18, and a service brake indicator (BR). Various transducers including the range selector transducer 26 and the output speed transducer 30 are depicted in Figure 1. The control of fluid supply circuit 16 is disclosed in detail below in reference to the flow diagrams of Figures 3-5.

Referring to Figure 2, the fluid supply circuit 16 comprises a shift interlock valve 40, a shift interlock solenoid 42, and a number of conventional elements including a variable capacity pump 44, a pressure regulator valve 46 and a manual valve 48. The pump 44 supplies fluid pressure from reservoir 50 to pressure regulator valve 46 via lines 52 and 54. Pressure regulator valve 46 regulates the fluid pressure in lines 52, 53 and 54, referred to as LINE pressure, by controlling the pump capacity via line 56. The control is influenced by the net force of spring 58, modulator pressure (MOD) in line 60, PRN pressure in line 62, and orificed LINE pressure in line 64, the MOD and PRN pressures being applied to small pilot areas 61 and 63, respectively.

The PRN pressure is developed by manual valve 48 as described below, and is normally present when the operator selects the Park, Neutral or Reverse ranges of automatic transmission 14. The modulator (MOD) pressure is typically developed as a function of engine output torque so that the LINE pressure varies accordingly. A second regulated pressure is directed to the torque converter (not shown) via converter feed (CF) line 66. The LINE

pressure is also directed to converter feed line 66 via orifice 68.

5 The LINE pressure in line 53 is supplied to the various torque transmitting devices of automatic transmission 14 via manual valve 48, which selectively distributes fluid pressure among the supply lines designated as REV, PRN, PRND4D3D2, D4, D3, D2 and LO. The distribution of fluid pressure is determined by the range selector 18, which is
10 mechanically coupled to manual valve 48 for effecting linear displacement of the same. A detent mechanism 70 defines predefined positions for each range. The supply lines REV, D4, D3, D2 and LO each receive LINE pressure only when the corresponding range is
15 selected. As noted above with respect to pressure regulator valve 46, the supply line PRN receives LINE pressure when the Park, Reverse or Neutral ranges are selected. The supply line PRND4D3D2 receives LINE pressure except when the LO range is selected. Any
20 supply line not receiving LINE pressure is exhausted via line 72. In Figure 2, the manual valve is illustrated in the Neutral position. In this case, LINE pressure is supplied to the PRN and PRND4D3D2 supply lines, and the supply lines REV, D4, D3, D2
25 and LO are exhausted.

Shift interlock valve 40 and shift interlock solenoid 42 are two-state devices, and each is illustrated in its default (normal) state. The default state of shift interlock solenoid 42 is
30 ensured by the force of spring 82. The default state of shift interlock valve 40 is ensured by the combined forces of spring 74 and LINE pressure which is applied to the small pilot area 76.

In the default state, orificed LINE
35 pressure in line 78 is exhausted via shift interlock

solenoid 42 and orifice 80, and shift interlock valve 40 provides a direct path through which LINE pressure in line 53 is supplied to manual valve 48. In the active state, the control unit 22 energizes shift interlock solenoid 42 via line 24 to shift the valve upward as viewed in Figure 2. This blocks the exhaust path so that the orificed LINE pressure in line 78 overcomes the combined bias force of spring 74 and the bias pressure applied to pilot area 76 of shift interlock valve 40. In this state, the shift interlock valve 40 shifts leftward as viewed in Figure 2 to block the supply of LINE pressure to manual valve 48, and to exhaust the residual fluid in the supply lines via exhaust port 84. When the shift interlock solenoid 42 is no longer energized, the shift interlock valve 40 and shift interlock solenoid 42 revert to their default state, re-directing LINE pressure to manual valve 48. The control logic employed by control unit 22 concerning the energization of shift interlock solenoid 42 is described below in reference to the flow diagrams of Figures 3-5.

According to another aspect of this invention, the fluid supply circuit 16 includes a mechanism 90 for mechanically overriding the shift interlock function of shift interlock valve 40 and shift interlock solenoid 42 in the event of a fault condition which maintains shift interlock valve 40 in its active state. In the illustrated embodiment, the mechanism 90 comprises a simple lever 92 pivoted about the point 94. One end of lever 92 is connected to manual valve 48 via input link 96, and the other end of lever 92 is connected to output link 98. The output link 98 is adapted to engage a bias land 100 formed on the shift interlock valve 40 when the

manual valve 48 is shifted to the LO position, mechanically forcing the shift interlock valve 40 to the illustrated default position. Thus, if a fault condition causes the shift interlock valve 40 to
5 interrupt the supply of LINE pressure to manual valve 48, the operator of the vehicle may override shift interlock valve 40 by moving the range selector 18 to the LO position.

The control logic employed by control unit
10 22 in controlling the energization of shift interlock solenoid 42 is represented by the flow diagrams of Figures 3-5. The various instructions and decisions set forth therein represent computer program instructions executed by the (computer-based) control
15 unit 22. In the illustrated embodiment, the program is part of an overall transmission control program executed by the control unit 22; entry to and exit from the interlock program are indicated by the ENTER and RETURN blocks in Figures 3 and 5, respectively.

20 In the illustrated embodiment, the interlock control logic performs two primary functions: energizing the shift interlock solenoid 42 (1) when the range selector 18 is in Park or Neutral to prevent engagement of a forward or reverse speed
25 range, and (2) when the range selector 18 is moved to the Reverse position to prevent an ill-advised shift to Reverse. The Park/Neutral (P/N) logic is depicted in Figure 3, and the Reverse Lock-out (RL) logic is depicted in Figure 4. Figure 5 depicts logic for
30 sounding an audible alarm (not shown).

If the range selector 18 is in Park or Neutral, as determined by the decision block 110 of Figure 3, the blocks 112-122 are executed to determine if a shift interlock should be initiated,
35 as indicated by the status of the PNFLG flag. The

shift interlock solenoid 42 is energized and the PNFLG flag set by blocks 120 and 122 if decision blocks 112 and 114 determine that the vehicle speed (VS) is less than a reference (KSPDLOCK) and the service brake pedal is not depressed. The shift interlock solenoid 42 is deenergized and the PNFLG flag cleared by blocks 116 and 118 if decision blocks 112 and 114 determine that the vehicle speed (VS) is greater than or equal to the reference speed KSPDLOCK or the service brake pedal is depressed.

The reverse lock-out logic (RL) of Figure 4 is executed whenever the range selector is in a position other than Park or Neutral, unless the PNFLG flag is set, as determined by blocks 110 and 130. The blocks 132-146 are executed to determine if a reverse lock-out should be initiated, as indicated by the status of the RVFLG flag. If the range selector 18 is moved to the Reverse position prior to the RVFLG flag being set (as determined at blocks 132 and 138), the shift interlock solenoid 42 will be energized by block 142 to lock-out the Reverse range if the vehicle speed (VS) is greater than or equal to a reference speed KREVLOCK (as determined at block 140). If the vehicle speed VS is less than the reference KREVLOCK, the shift interlock solenoid 42 is deenergized and the RVFLG flag set by blocks 144 and 146. Thereafter, the status of the RVFLG flag will prevent the energization of shift interlock solenoid 42 when the vehicle speed falls below the reference speed KREVLOCK. When the range selector 18 is moved out of the Reverse position, the shift interlock solenoid 42 is deenergized and the RVFLG flag cleared by blocks 134 and 136 to reset the reverse lock-out logic.

Referring to the alarm logic of Figure 5,

the blocks 150-154 sound the audible alarm whenever the range selector 18 is in a position other than Park or Neutral and the shift interlock solenoid 42 is energized. Otherwise, the block 156 is executed
5 to turn off the alarm.

While this invention has been described in reference to the illustrated embodiment, it is expected that various modifications will occur to those skilled in the art. For example, many of the
10 fluid pressure supply elements described in reference to Figure 2 are purely illustrative and not required to practice the subject invention.

~~Claims~~ The claims defining the invention are as follows:

1. Control apparatus for an automatic transmission of a motor vehicle including a range selector adapted to be manipulated by a vehicle operator for initiating a shift to a desired speed
5 range of the automatic transmission and a manual valve which is displaced in relation to the range selector manipulation to direct a supplied fluid pressure to various fluid operated elements of the automatic transmission for effecting a shift to the
10 desired speed range, the control apparatus comprising electro-hydraulic valve means selectively actuatable to interrupt the supply of fluid pressure to the manual valve; and control means for defining a vehicle operating condition to be satisfied at the initiation
15 of shifting to the desired speed range, and for actuating the electro-hydraulic valve means if the vehicle operating condition is not satisfied at the time of the range selector manipulation.

2. Control apparatus as claimed in Claim
20 1, including means for biasing the electro-hydraulic valve means to a default state in which the supply of fluid pressure to the manual valve is maintained, the electro-hydraulic valve means being biased to an active state when actuated to interrupt the supply of
25 fluid pressure to the manual valve.

3. Control apparatus as claimed in Claim 1 or Claim 2, in which the range selector is positionable to select a specified forward speed range of the automatic transmission, wherein the
30 control apparatus includes means coupled to the manual valve for mechanically biasing the electro-hydraulic valve means to the default state when the operator manipulates the range selector to select the specified forward speed range.

4. Control apparatus as claimed in any one
of Claims 1 to 3, wherein the electro-hydraulic valve
means comprises interlock valve means connected in a
fluid path between a source of fluid pressure and the
5 manual valve, and having a first state in which the
fluid pressure is supplied to the manual valve via
the fluid path and a second state in which the supply
of fluid pressure to the manual valve is interrupted;
and solenoid means electrically actuable to
10 selectively switch the interlock valve means between
the first and second states; and wherein the control
means can actuate the solenoid valve means to inhibit
operator initiated shifting to the desired speed
range if the vehicle operating condition is not
15 satisfied at the time of the range selector
manipulation.

5. Control apparatus as claimed in Claim
4, wherein the interlock valve means is normally
biased to the first state, and the solenoid means is
20 effective when actuated by the control means to bias
the interlock valve means to the second state.

DATED: 4th August, 1992

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

GENERAL MOTORS CORPORATION

David B Fitzpatrick

CONTROL APPARATUS FOR AN AUTOMATIC TRANSMISSION

Abstract

A shift interlock mechanism for an automatic transmission includes electro-hydraulic elements (40,42) internal to the transmission which are able to inhibit the supply of fluid pressure for engaging the forward and reverse speed ranges of the transmission. The electro-hydraulic elements are activated in response to various operating parameters of the vehicle, including range selector position, engine throttle position, depression of the service brake pedal, vehicle speed, etc. The mechanism does not interfere with movement of the transmission range selector, and includes a mechanical link (90) for overriding the interlock function when the range selector is moved to a LO forward range, thereby providing an override in the event of a failure of the electro-hydraulic elements.

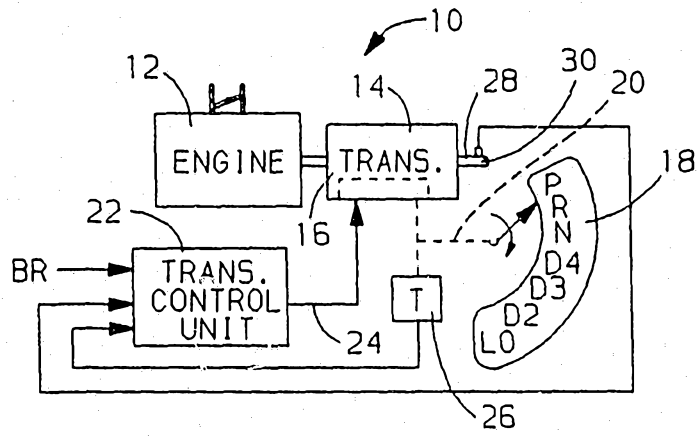


FIG. 1

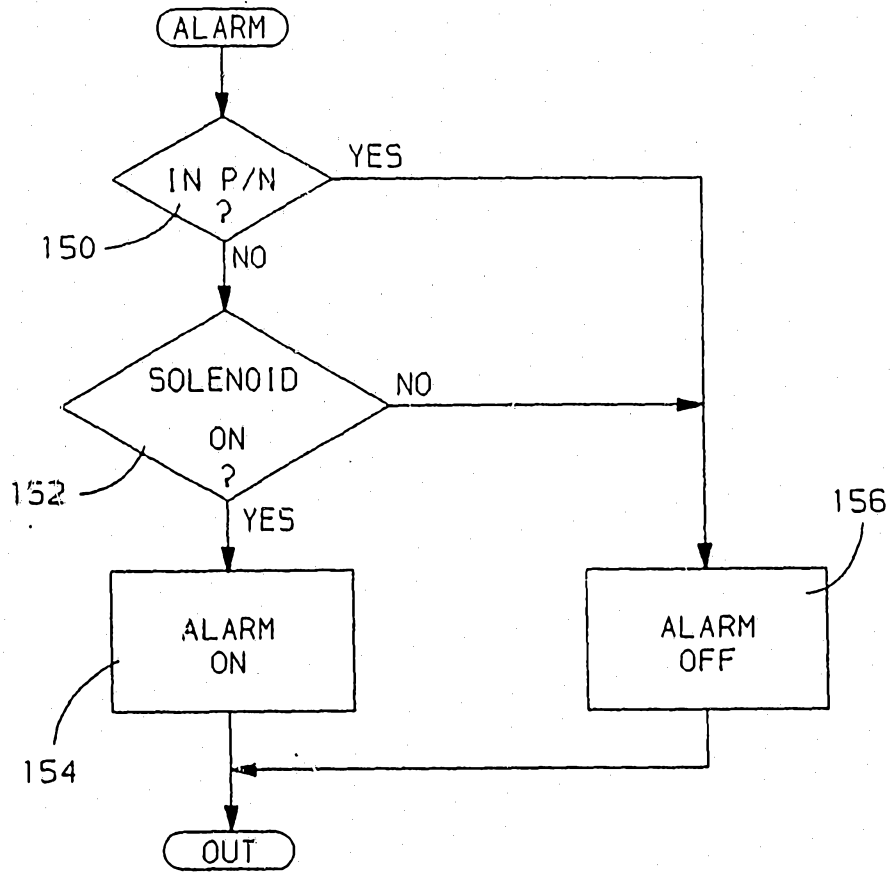
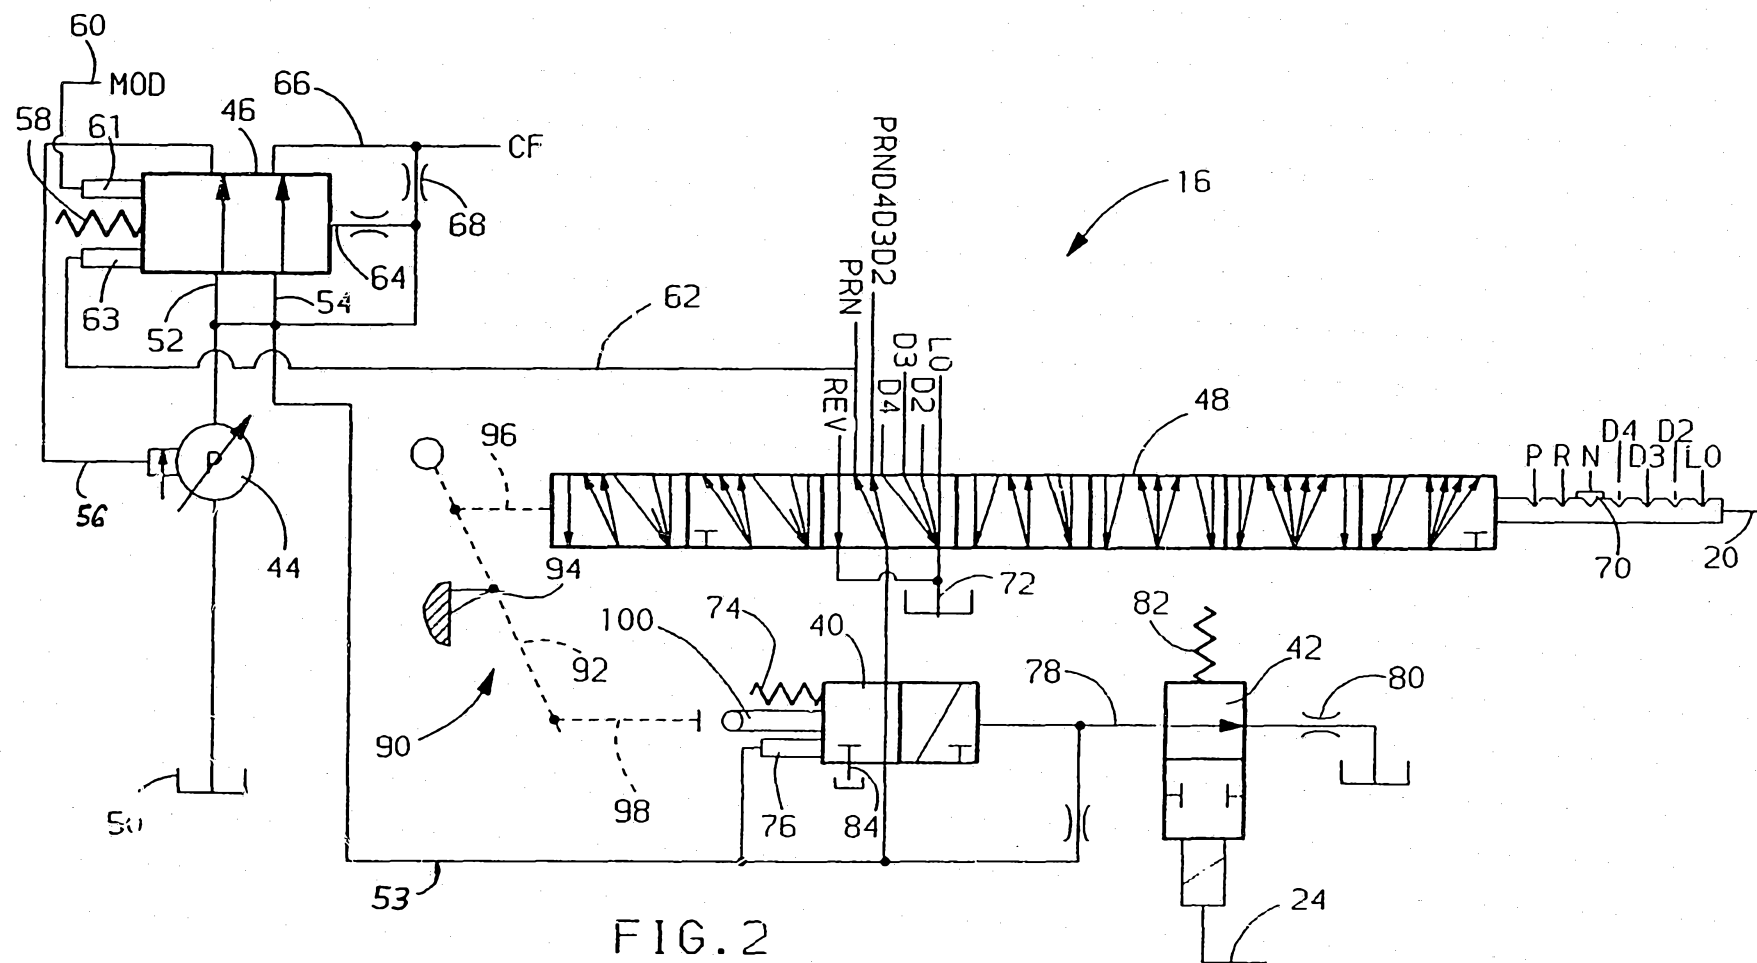


FIG. 5



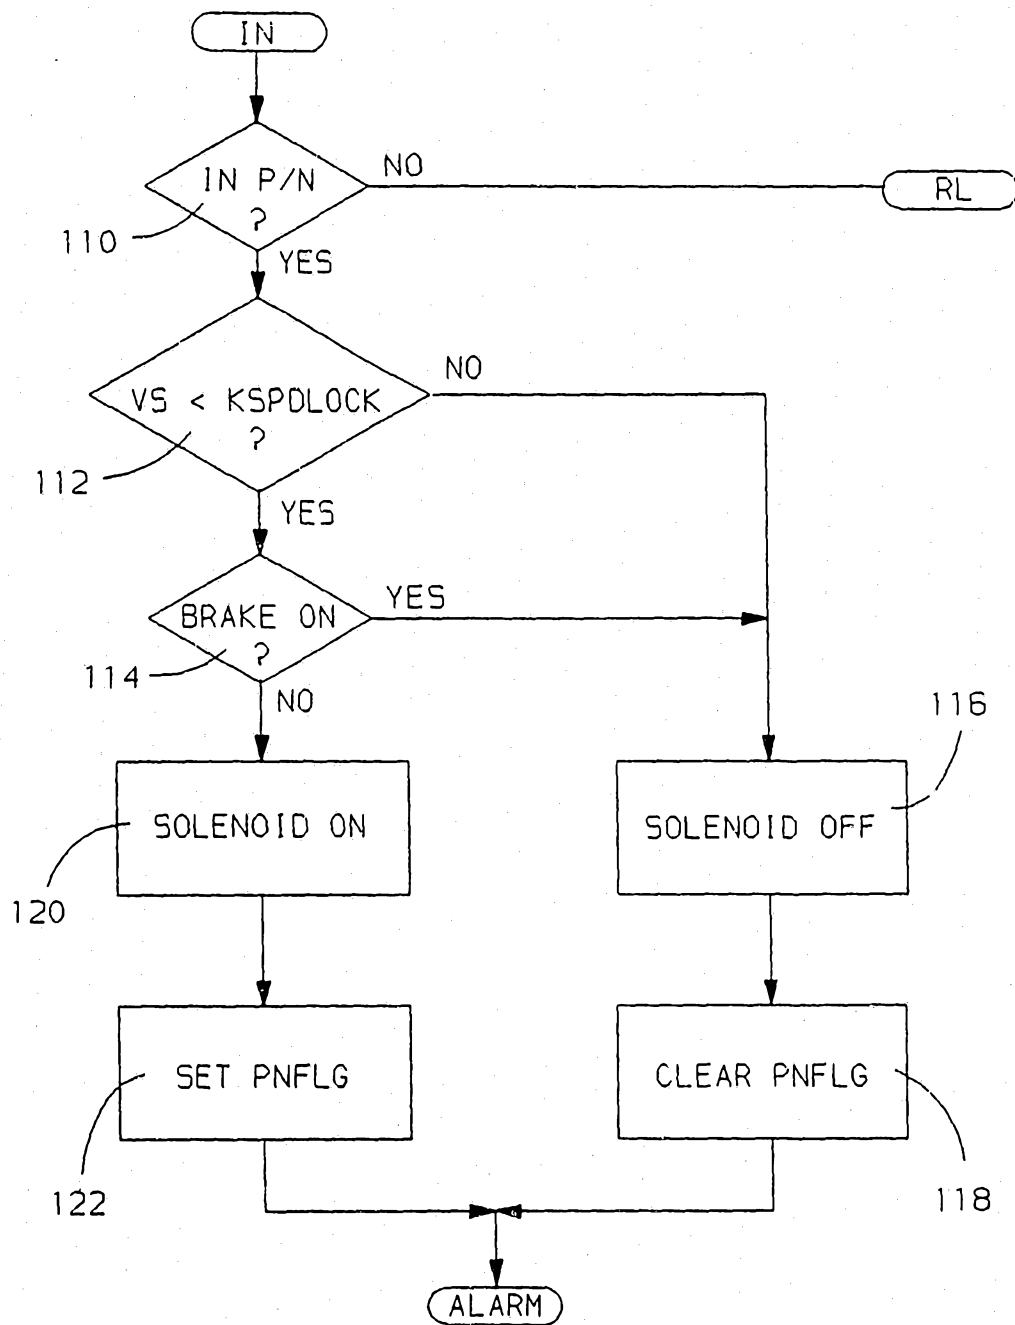


FIG. 3

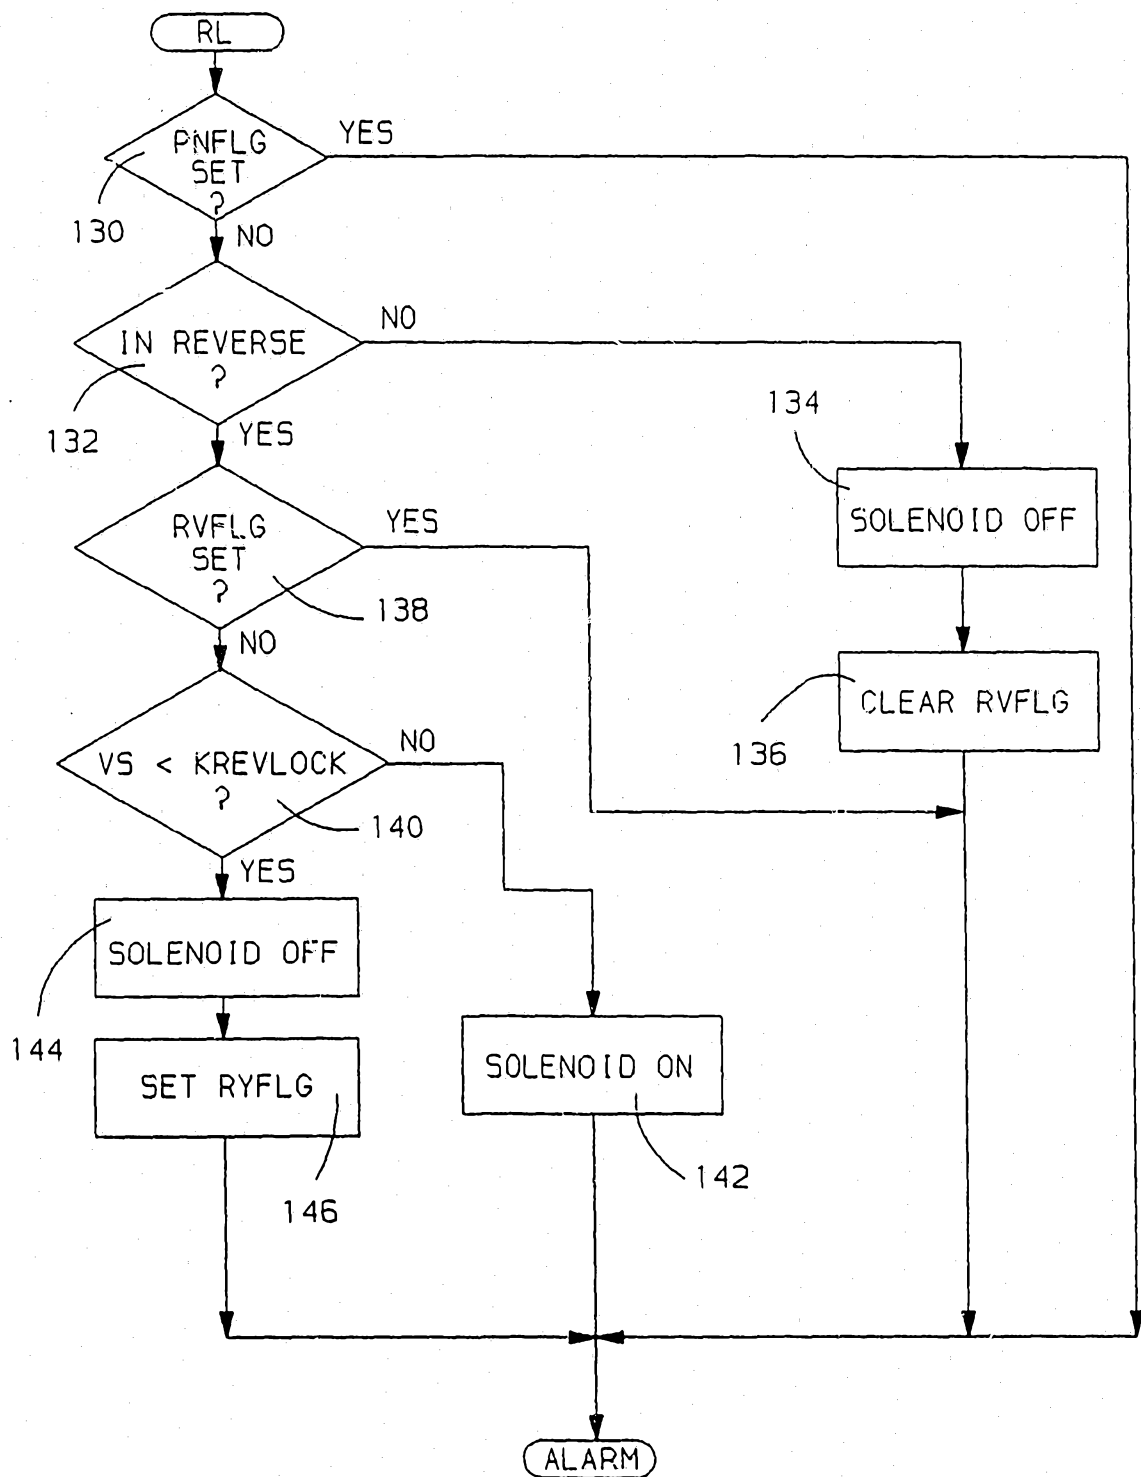


FIG. 4