(19) World Intellectual Property Organization

International Bureau





(10) International Publication Number WO 2016/073634 A1

- (43) International Publication Date 12 May 2016 (12.05.2016)
- (51) International Patent Classification: C08G 77/00 (2006.01) C09D 183/04 (2006.01) C08L 83/00 (2006.01)
- (21) International Application Number:

PCT/US2015/059080

(22) International Filing Date:

4 November 2015 (04.11.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/075,020 4 November 2014 (04.11.2014)


US

- (72) Inventors; and
- (71) Applicants: MOROS, Daniel [US/US]; 100 Crescent Court, Suite 450, Dallas, TX 75201 (US). GROSSMAN, Craig [US/US]; 100 Crescent Court, Suite 450, Dallas, TX 75201 (US). GROSSMAN, Gavri [US/US]; 100 Crescent Court, Suite 450, Dallas, TX 75201 (US).


- (74) Agent: REGELMAN, Dale, F.; Quarles & Brady LLP, One South Church Avenue, Suite 1700, Tucson, AZ 85701-1621 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: COMPOSITION AND METHOD TO FORM A SELF DECONTAMINATING SURFACE

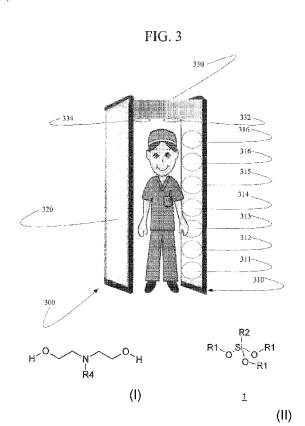

(57) Abstract: A polymeric material formed by reacting aminopolyol having a structure: wherein R4 is selected from the group consisting of -H and -CH₂-CH₂-OH; and an organosilane, wherein said organosilane has a structure:: wherein R1 is selected from the group consisting of -H, -CH₃ and -CH₂-CH₃ and R2 is selected from the group consisting of -OH, -O-CH₃, 0-CH₂-CH₃, alkyl, alkyl with a chlorine moiety, alkyl with an amino moiety, and alkyl with a quaternary ammonium group.



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))

COMPOSITION AND METHOD TO FORM A SELF DECONTAMINATING SURFACE

Field Of The Invention

[0001] Embodiments generally relate a chemical composition and a method using that composition to form a self decontaminating surface. In certain embodiments, the chemical composition comprises a photocatalyst. In certain embodiments, the photocatalyst comprises a titanium oxide moiety. In certain embodiments, the chemical composition comprises an organosilane.

Background Of The Invention

[0002] In a publication entitled "Evaluation of Two Organosilane Products for Sustained Antimicrobial Activity on High-Touch Surfaces in Patient Rooms, American Journal of Infection Control 42 (2014) 326-8, reports, *inter alia*, "[t]o the best of our knowledge, ours is the first published controlled trial of applying organosilane compounds to high-touch surfaces in patient rooms as a strategy for reducing the level of microbial contamination of environmental surfaces between daily cleanings." *Id.* at 327.

[0003] The authors found the two organosilanes ineffective for any sort of sustained antimicrobial efficacy. "In conclusion, our study was not able to demonstrate sustained antimicrobial activity for either organosilane product tested when applied to high-touch surfaces." *Id.* at 328.

Brief Description Of The Drawings

- [0004] The invention will be better understood from a reading of the following detailed description taken in conjunction with the drawings in which like reference designators are used to designate like elements, and in which:
- [0005] FIG. 1 graphically shows the number of hospital acquired *C-difficile* infections in the Glendale Memorial Hospital ICU from January 2012 through February 2014;
- [0006] FIG. 2 graphically shows the number of hospital acquired *C-difficile* infections at the Glendale Memorial Hospital (excluding ICU) from January 2012 through February 2014; and
 - [0007] FIG. 3 illustrates Applicants' sterilizing station 300.

Detailed Description Of Preferred Embodiments

[0008] The invention is described in preferred embodiments in the following description with reference to the Figures, in which like numbers represent the same or similar elements. Reference throughout this specification to "one embodiment," "an embodiment," or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases "in one embodiment," "in an embodiment," and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

[0009] The described features, structures, or characteristics of the invention may be combined in any suitable manner in one or more embodiments. In the following description, numerous specific details are recited to provide a thorough understanding of embodiments of the invention. One skilled in the relevant art will recognize, however, that the invention may be practiced without one or more of the specific details, or with other methods, components, materials, and so forth. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the invention.


[00010] In certain embodiments of Applicants' composition and method, a coating is formed on a surface of an object, where that coating comprises a plurality of titanium - oxygen bonds, where that coating is formed by disposing on the surface a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol (collectively "Titanium-Oxygen Moieties").

[00011] In certain embodiments, Applicants' Titanium-Oxygen Moieties comprises up to about a total of one weight percent loading of the mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol. In certain embodiments, Applicants' Titanium-Oxygen Moieties comprises about 0.5 weight percent Peroxotitanium acid solution in combination with about 0.5 weight percent Peroxo-modified anatase sol.

[00012] A method to prepare both Peroxotitanium acid solution and Peroxo-modified anatase sol is disclosed in Journal of Sol-Gel Science and

Technology, September 2001, Volume 22, Issue 1-2, pp 33-40. This publication discloses, inter alia, Reaction Scheme 1, shown immediately hereinbelow, which summarizes the synthetic procedure for both Peroxotitanium acid solution and Peroxo-modified anatase sol.

REACTION SCHEME 1

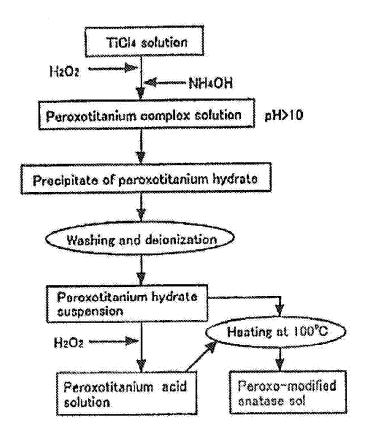

[00013] In one embodiment of Applicants' composition and method, Applicants' coating formulation comprises a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol. In another embodiment of Applicants' composition and method, a coating is formed on a surface of an object, where that coating comprises a plurality of titanium - oxygen bonds in combination with a plurality of silicon-oxygen bonds, and where that coating is formed by disposing a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol, in combination with an organosilane onto the surface.

[00014] In certain embodiments, a coating comprising a plurality of titanium-oxygen bonds in combination with a plurality of silicon-oxygen bonds is formed by first disposing on the surface an organosilane followed by disposing a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol onto the organosilane.

[00015] In certain embodiments, a coating comprising a plurality of titanium-oxygen bonds in combination with a plurality of silicon-oxygen bonds is formed by first disposing a mixture of Peroxotitanium acid solution and Peroxomodified anatase sol on the surface followed by disposing an organosilane onto the mixture of Peroxotitanium acid solution and Peroxomodified anatase sol. In certain embodiments, a coating comprising a plurality of titanium-oxygen bonds in combination with a plurality of silicon-oxygen bonds is formed by simultaneously disposing a mixture of Peroxotitanium acid solution and Peroxomodified anatase sol and an organosilane onto the surface.

[00016] In certain embodiments, Applicants' organosilane comprises organosilane 1.

1

[00017] In certain embodiments, both R1 and R2 are alkyl. In other embodiments R1 is alkyl and R2 is alkyl with an amino moiety. In still other embodiments, R1 is alkyl and R2 comprises a quarternary ammonium group. In still other embodiments, R1 is alkyl and R2 comprises a chlorine moiety. In still other embodiments, R1 is alkyl and R2 is selected from the group consisting of -O-CH₃ and -O-CH₂-CH₃.

[00018] In certain embodiments, Applicants' organosilane comprises a trihydroxy silane 2. In certain embodiments, R2 is alkyl. In other embodiments R2 is

alkyl with an amino moiety. In still other embodiments, R2 comprises a quarternary ammonium group. In still other embodiments, comprises a chlorine moiety. In still other embodiments, R2 is -OH.

2

[00019] In certain embodiments, Applicants' organosilane comprises a silanetriol 2, wherein R2 is alkyl. In other embodiments, Applicants' organosilane comprises a silanetriol 2, wherein R2 is alkyl with an amino moiety. In still other embodiments, Applicants' organosilane comprises a silanetriol 2, wherein R2 is alkyl with a quarternary ammonium group.

[00020] As those skilled in the art will appreciate and as shown in Equation (1), silyl esters, such as silyl ester $\underline{1}$, are readily hydrolysable into a corresponding silanetriol, such as silanetriol $\underline{2}$. Even exposure to atmospheric moisture is sufficient to hydrolyze silyl ester $\underline{1}$ into silanetriol $\underline{2}$.

EQUATION (1)

$$R^{2}$$
 R^{1}
 $O^{S_{1}}$
 $O^{R_{1}}$
 $H_{2}O$
 H_{3}
 H_{3}
 H_{4}
 $H_{2}O$
 H_{4}
 H_{5}
 H_{5}
 H_{5}
 H_{5}
 H_{7}
 $H_$

[00021] A silsesquioxane is an organosilicon compound <u>3</u>. In certain embodiments, R2 is alkyl. In other embodiments, R2 is alkyl with an amino moiety.

In yet other embodiments, R2 is alkyl with an chlorine moiety. In still other embodiments, R2 is alkyl with a quarternary ammonium group.

[00022] In certain embodiments, after application of Applicants' silanetriol 2 to either a hard surface, i.e. wall, door, table, and the like, or a soft surface, i.e. bedding, draperies, furniture cushions, and the like, a resulting coating disposed on the hard surface / soft surface comprises a plurality of silsesquioxane 3 structures. In certain embodiments, after application of Applicants' silanetriol 2 in combination with titanium dioxide to either a hard surface, i.e. wall, door, table, and the like, or a soft surface, i.e. bedding, draperies, furniture cushions, and the like, a resulting coating disposed on the hard surface / soft surface comprises a plurality of silsesquioxane structures 3 in combination with Applicants' Titanium-Oxygen Moieties.

[00023] The following Examples are presented to further illustrate to persons skilled in the art how to make and use the invention. These Examples are not intended as limitations, however, upon the scope of the invention.

EXAMPLE I

[00024] A study was conducted at the Glendale Memorial Hospital and Health Center in Glendale, CA (the "Glendale Memorial Hospital Study"). The Center has a 24 bed intensive care (ICU). The study was performed between May 10 and September 30, 2013.

[00025] The Glendale Memorial Hospital Study was designed to assess the anti-microbial properties of Applicants' coating composition and method, wherein the method employed utilized an initial coating of Applicants' organosilane followed by an overspray of titanium dioxide. The entire ICU was subjected to the two step spray regime to treat all objects in each room including hard surfaces (beds, tray tables, bed rail, walls, etc.) and soft surfaces (drapes, cloth and vinyl covered chairs, woven fabrics, non-woven fabrics, leather goods, and the like). The goal of the Glendale Memorial Hospital Study was to assess the anti-microbial efficacy of Applicants' coating composition in a practical application in a health care environment.

[00026] Each surface was first electrostatically spray coated at room temperature using an aqueous composition formed by mixing Octadecylaminodimethyltrihydrox-ysilylpropyl Ammonium Chloride $\underline{6}$ at 3.6 weight percent in water.

[00027] About fifteen (15) minutes after the electrostatic spray coating using the aqueous mixture of Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride 6, most of the water had evaporated leaving a coating comprising at least ninety weight percent (90 wt %)

Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride <u>6</u>, Thereafter, each surface was then electrostatically spray coated at room temperature using Applicants' Titanium-Oxide Moieties. After about 15 minutes, most of the water in the second spray deposition had evaporated leaving a coating comprising at least ninety weight percent (90 wt %) Applicants' Titanium-Oxide Moieties.

[00028] The treated surfaces were maintained at room temperature during the spray deposition of the aqueous

Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride <u>6</u>, and during the spray deposition of Applicants' Titanium-Oxide Moieties. None of the treated objects were subjected to any elevated heat treatment wherein the treated surface was heated to a temperature greater than about room temperature during or after completion of Applicants' spray coating regime.

[00029] Applicants have found that using their two step, spray coating protocol described hereinabove, after evaporation of the water from the spray deposited Titanium-Oxide Moieties and evaporation of the water portion from the spray deposited aqueous Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride, the combined weight of Applicants' Titanium-Oxide Moieties and Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride disposed on a treated surface was measured as 0.76 mg/in².

[00030] Initial microbial sampling of various fomites was conducted to assess the levels of bacteria on various hospital surfaces before selecting study sites. After review, 95 sites were selected for the study in the ICU. Each of the ninety-five (95) specific sites in the ICU were selected for recurring sampling at weeks 1, 2, 4, 8, and 15, after application of Applicants' composition. Those selected sites included bed rails, bed controls, tray tables, and walls above sinks. Samples were also collected from the two ICU nursing stations and waiting lobby including countertops, phones, computer keyboards, chair armrests and end tables. All movable items were inconspicuously tagged and coded over the course of the study so that the same objects could be sampled.

[00031] Each of the sites was cultured prior to application of Applicants' method and at 1 week (6-8 days), 2 weeks (13-17 days), 4 weeks (29-32 days), 8 weeks (59-62 days), 15 weeks (104-107 days) after application. Some objects were removed and were not available for culture at some of the subsequent time points.

[00032] Areas of 100 cm² were sampled using a sponge stick containing Letheen broth (3M, St. Paul, MN) to neutralize any residual disinfectant. After collection the samples were immediately placed on ice packs and sent overnight to the University of Arizona. Upon receipt the broth was extracted from the sponge stick by manual agitation, and then 4 mL of extracted broth was assayed using selective media for isolation of the various bacteria. Samples were cultured for total bacteria, Clostridium difficile, methicillin-resistant Staphylococcus aureus (MRSA), vancomycin resistant enterococcus (VRE), and carbapenemase resistant Enterobacteriaceae (CRE). Test methods for each organism are presented in Table 5.

TABLE 5

Organism	Culture method	Incubation conditions	Further analysis
Total bacteria)	Spread plating on R2A medium (BD Diagnostics, Sparks, MD.	24 °C for 5 days	
C. difficile	Incubation for 7 days in 0.1% sodium taurocholate and cycloserine-cefoxin fructose broth	Anaerobic conditions at 37 °C for up to 5 days	A 2-mL aliquot was mixed with equal amounts of absolute ethanol. Bacteria were concentrated by centrifugation and pellets were used to inoculate cycloserine- cefoxtin fructose agar.
MRSA	Trypticase soy agar amended with 5% sheep's blood, 10 mg/L colistin, and 25 mg/ naladixic acid using spread plate method	35 °C for 24-48 hours	B-hemolytic colonies were isolated and sub-cultured on trypticase case soy agar with no amendments and incubated at 35 °C for 24-48 hours.
CRE	Modified Hodge Test; Muller Hinton agar	35 °C for 24 hours	
VRE	Bile esculin azide agar	37 °C in CO ₂ incubator for 24- 48 hours	Gram stain, catalase test

^{*}from an original volume of 4 ml of sponge stick cluate. A 0.1 mL volume of this cluate was used for each assay.

[00033] The average number of total bacteria detected per 100 cm² at all locations and percent reductions in total bacterial numbers after treatment are shown in Table 6.

	Reseline	Baseline* Weeks after treatmen				
		1	2	4	8	15
Number of Samples	95	81	64	64	64	45
Avg number of bacteria	233,064	98	80	43	2,247	3,320
Range	10- 7,000,000	10- 2,500	10-840	10-2,500	10-44,000	10-57,000
% reduction	NA	99.96	99.97	99,98	99.04	98.58

NA = not applicable. *= before treatment

[00034] As can be seen bacterial numbers were always 99.9% less after the treatment for four weeks, 99% after eight weeks and still almost 99% after 15 weeks.

[00035] Also, significantly the number of sites containing more than 10,000 CFU/100 cm² was reduced from 71.5% of the sites before treatment to zero for the next eight weeks and after even 15 weeks only 11.1% of the sites exceeded this number as shown in Table 7.

Percent colony forming units of total bacteria per 100 cm² exceeding value indicated

TABLE 7

CFU Baseline*	Baseline*		We	eks after tre	atment	
	1	2	4	8	15	
>100	71.5	11.1	17.2	12.8	51.2	33.3
>1,000	51.5	2.4	1.5	Ö	17.1	24.4
>10,000	25.2	0	0	0	4.6	11.1

*= before treatment

[00036] Bootstrapping Analysis of Variance (ANOVA) was conducted for each stage between the baseline concentrations for the sampled fomites and the intervention concentrations for the same fomites to determine statistical significant differences based on a rejection region of 5%. Based on the p-values (<0.0005) there was a statistical significance difference between the baseline concentrations and the fomite concentrations during the entire 15 weeks of the study.

[00037] The percent of samples in which antibiotic resistant bacteria were isolated at the different sites sampled is shown in Table 8.

 $TABLE\ 8$ Isolation of antibiotic resistant bacteria (percent of positive sites)

	Baseline*		We	eks after tre	iment	
		1	2	44	8	15
Number of samples	95	81	64	64	64	45
VRE	14	0	0	0	1	0
MRSA	. 7	0.	0	0	0	0
CRE	3	0	0	0	0	0
C. difficile	0	0	0	0	0	0
Overall Percentage	25	0	0	0	1.5	0

^{*}before treatment

[00038] Antibiotic resistant bacteria were isolated from all study areas during the baseline sampling, except *C. difficile*. VRE was the most commonly isolated organism.

[00039] Prior to treatment antibiotic resistant bacteria were isolated from 25% of the sites sampled. After treatment, no antibiotic bacteria were isolated until week 8, when VRE in 1 sample (from a chair armrest) of 64 samples (1.5%) was found.

[00040] The present study demonstrates that the use of Applicants' method reduced the numbers of bacteria on fomites by greater than 99% for 8 weeks after a single treatment (Table 6).

[00041] Levels of bacteria were reduced by 99.9% at 4 weeks post-treatment. Overall average levels of bacteria never returned to those observed before treatment. Bacterial numbers increased between 8 and 15 weeks post-treatment but the average bacterial count on all treated surfaces was still less than 90% after 15 weeks. No values above 10,000 CFU/100 cm² were seen for 4 weeks after treatment vs. 25.2% pre- treatment and even after 15 weeks only 11.1% of the values exceeded this amount.

[00042] No antibiotic resistant bacteria were isolated until 8 weeks after the treatment, and then at levels below that seen before the treatment (Table 8). No MRSA or CRE were isolated even after 15 weeks post-treatment and VRE only after 8 weeks. No C. difficile were isolated during the baseline or after the treatment. However, C. difficile was isolated in the initial screening used to select the sampling sites.

[00043] In conclusion, the anti-microbial effects resulting from use of Applicants' composition and method was found to have persisted over 15 weeks in reducing the total number of bacteria and antibiotic resistant bacteria on both hard surfaces and soft surfaces within an ICU. The hard surfaces included bare metal surfaces, painted metal surfaces, epoxy-coated surfaces, unpainted wood surfaces, painted wood surfaces, and glass.

[00044] The fifteen weeks antimicrobial efficacy demonstrates that Applicants' composition forms a coating on a treated surface, where that coating is both antifouling and antimicrobial. Applicants' composition and the resulting coating formed therefrom can generate self-decontaminating surfaces that comprise both antifouling and antimicrobial properties, thereby, providing a cost-effective route to minimize transmission of disease via high touch surfaces in healthcare and industrial applications.

[00045] FIG. 1 graphically shows the number of hospital acquired *C-difficile* infections in the Glendale Memorial Hospital ICU from January 2012 through February 2014. FIG. 1 indicates that with the exception of September 2013, there were no hospital acquired *C-difficile* infections originating in the ICU during the

period May 2013 through November 2013. Thus, FIG. 1 shows that there was a single hospital acquired *C-difficile* infection originating in the ICU during the six month period May 2013 through November 2013.

[00046] FIG. 1 further shows that, other than the six month period May 2013 through November 2013, there was no other 6 month period during the 25 months from January 2012 through February 2014 wherein only a single hospital acquired C-difficile infection originated in the ICU. All surfaces in the ICU were treated as described hereinabove during the first week of May 2013 as part of the Glendale Memorial Hospital Study.

[00047] FIG. 2 graphically shows the number of hospital acquired C-difficile infections at the Glendale Memorial Hospital (excluding ICU) from January 2012 through February 2014. FIG. 2 indicates that, with the exception of April 2013, there were between 1 and 8 hospital acquired C-difficile infections every month during the 25 month period in hospital areas outside of the ICU. During the period May 2013 through November 2013, FIG. 2 shows that there were a total of 20 hospital acquired C-difficile infections originating outside of the ICU at the Glendale Memorial Hospital.

[00048] FIGs. 1 and 2 show that during the period May 2013 through November 2013, a single hospital acquired C-difficile infection originated in the ICU at the Glendale Memorial Hospital, and a total of 20 hospital acquired C-difficile infections originated outside of the ICU at the Glendale Memorial Hospital.

Octadecylaminodimethyltrihydrox-ysilylpropyl Ammonium Chloride and Applicants Titanium-Oxide Moieties, by spray deposition or by dip coating, onto a dressing prior to use of that dressing to cover a wound. As those skilled in the art will appreciate, a dressing is a sterile pad or compress applied to a wound to promote healing and/or prevent further harm. A dressing is designed to be in direct contact with the wound, as distinguished from a bandage, which is most often used to hold a dressing in place. In certain embodiments, Applicants' wound dressings including the following: alginates and other fiber gelling dressings including ropes and sheets, composite dressings, foam dressings with and without adhesive border, gauze with and without adhesive

border, hydrocolloids, specialty absorptive dressings with and without adhesive borders, transparent films, collagen dressings sheets and ropes, hydrogel sheets with and without adhesive border, cotton packing strips, roll gauze, paper tape, silk tape, compression bandages (elastic, knitted/woven), self-adherent bandage (elastic, non-knitted/non-woven).

EXAMPLE II

[00050] This Example II disposes the components of Applicants' composition onto a target surface in a reverse order. More specifically in this Example II, Applicants' first dispose Applicants' Titanium-Oxide Moieties onto the target surface, the aqueous portion of the first spray deposition is evaporated, and then dispose Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride 6 over the earlier-disposed Titanium-Oxide Moieties.

[00051] The test coupons of this Example II were prepared and using the Procedure recited immediately hereinbelow. In certain embodiments, the treated coupons were stored for at least four (4) weeks prior to inoculation with various organisms.

[00052] TABLE 9 recites efficacy data for the treated coupons after inoculation with E. coli. TABLE 10 recites efficacy data for the treated coupons after inoculation with MS-2. TABLE 11 recites efficacy data for the treated coupons after inoculation with MRSA.

[00053] In summary, TABLEs 9, 10, and 11, demonstrates that first disposing Applicants' Titanium-Oxide Moieties onto a target surface followed by disposing Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride 6 over the earlier-formed Titanium-Oxide Moieties coating, generates a self-decontaminating surface.

Procedure

[00054] Put on sterile gloves.

[00055] Prepare the test coupons by wiping them first with ISP Alcohol and allowing to dry.

[00056] Clean the test coupons with surface cleaner using a microfiber cloth. Hold sprayer about eight (8) inches from surface to be cleaned. [00057] [00058] Spray on let stand for 1-3 minutes and wipe it off, if the area is extremely dirty allow cleaner to stand longer, or apply a second spray and wipe. [00059] Wipe surface with a clean, damp sponge or cloth. Allow surface to completely dry. [00060][00061]With gloved hands examine coupons for consistency. First Coat – Applicants' Titanium-Oxide Moieties application. [00062] Add Applicants' Titanium-Oxide Moieties to the applicator container. [00063] Fasten the Liquid Hose/Bottle cap assembly tightly on the container. Connect the air hose from compressor to air fitting on the spray [00064] applicator. Connect the liquid hose to the liquid fitting on the spray [00065] applicator. [00066] Plug the power cord into an appropriate receptacle. Turn on the air compressor. [00067] Optimal spraying distance is at least 36 to 48 inches away from the target surface. Hold the spray gun at right angles to the target surface and [00068]spray. Target surface should just barely glisten with the spray. Do not [00069] over-saturate the surface. [00070] Rinse spray gun with distilled water prior to applying Applicants' Titanium-Oxide Moieties (unless using 2 sprayers, one for each product). Second Coat – Organosilane application Add the Octadecylaminodimethyltrihydroxysilylpropyl

[00071]

Ammonium Chloride 6 to applicator container.

[00072]	Fasten the Liquid Hose/Bottle cap assembly tightly on the
container.	
[00073]	Connect the air hose from compressor to air fitting on the spray
applicator.	
[00074]	Connect the liquid hose to the liquid fitting on the spray
applicator.	
[00075]	Plug the power cord into an appropriate receptacle. Turn on the
air compressor.	
[00076]	Optimal spraying distance is at least 36 to 48 inches away from
the target surface.	
[00077]	Hold the spray gun at right angles to the target surface and
spray.	
[00078]	Target surface should just barely glisten with the spray. Do not
over-saturate the surf	ace.
[00079]	Allow surface to completely dry.

TABLE 9

[08000]

specifications after each day of use.

Clean the spray gun with distilled water per manufactures'

coli testing on Formica chips	0 Hour	2 Hour	Log Reduction 2 Hours	6 Hour	Log Reduction 6 Hours
REVERSED ORDER OF COATING APPLICATION	1,000,000	41,000	1,39	140	3.85
Control	1,080,000	800,000	0.10	37,000	1.43

TABLE 10

MS-2 testing on Formica chips			
	0 Hour 2	l Hour	Log Reduction 2 Hours
	2 11041	. , , , , , , , , , , , , , , , , , , ,	2 1135113
REVERSED ORDER OF COATING APPLICATION	1,000,000 1	16,000	3.12
Control	21,000,000 1	10,000	2.28

TABLE 11

MRSA testing on Formica chips								
	8 Hour	2 Hour	Log Reduction 2 Hours	6 Hour	Log Reduction 6 Hours	24 Hour	Log Reduction 24 Hours	
REVERSED ORDER OF COATING APPLICATION	3,700,000	51,000	1.85	18,000	2.31	1,200	3.49	
Control	3,700,000	2,300,000	0,21	58,000	1.80	5,800	2.80	

EXAMPLE III

[00081] This Example III simultaneously disposes a mixture of Applicants' organosilane and Applicants' Titanium-Oxide Moieties onto the surface of a plurality of test coupons. More specifically in this Example III, Applicants' simultaneously dispose Applicants' Titanium-Oxide Moieties and Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride 6 onto a surface of each test coupon.

[00082] The test coupons of this Example III were prepared and using the Procedure recited immediately hereinbelow. In certain embodiments, the treated coupons were stored for at least four (4) weeks prior to inoculation with various organisms.

[00083] TABLE 12 recites efficacy data for the treated coupons after inoculation with E. coli. TABLE 13 recites efficacy data for the treated coupons after

inoculation with MS-2. TABLE 14 recites efficacy data for the treated coupons after inoculation with MRSA.

[00084] In summary, TABLES 12, 13, and 14, demonstrates that simultaneously disposing Applicants' Titanium-Oxygen Moieties and Applicants' organosilane onto a target surface generates a self-decontaminating surface.

Procedure

[00085] Put on sterile gloves.

[00086] Prepare the test coupons by wiping them first with ISP Alcohol and allowing to dry.

[00087] Clean the test coupons with surface cleaner using a microfiber cloth.

[00088] Hold sprayer about eight (8) inches from surface to be cleaned.

[00089] Spray on let stand for 1-3 minutes and wipe it off, if the area is extremely dirty allow cleaner to stand longer, or apply a second spray and wipe.

[00090] Wipe surface with a clean, damp sponge or cloth.

[00091] Allow surface to completely dry.

[00092] With gloved hands examine coupons for consistency.

Prepare Combined Solution

[00093] In a measured container combine 50%

Octadecylaminodimethyltrihydroxysilylpropyl Ammonium Chloride aqueous mixture and 50% Applicants' Titanium-Oxide Moieties aqueous mixture.

[00094] Mix thoroughly.

Coating

[00095] Add the mixture from [00092] to applicator container.

[00096] Fasten the Liquid Hose/Bottle cap assembly tightly on the

container.

[00097] Connect the air hose from compressor to air fitting on the spray

applicator.

[00098] Connect the liquid hose to the liquid fitting on the spray

applicator.

[00099] Plug the power cord into an appropriate receptacle. Turn on the air compressor.

[000100] Optimal spraying distance is at least 36 to 48 inches away from the target surface.

[000101] Hold the spray gun at right angles to the target surface and spray.

[000102] Target surface should just barely glisten with the spray. Do not over-saturate the surface.

[000103] Allow surface to completely dry.

[000104] Clean the spray gun with distilled water per manufactures' specifications after each day of use.

TABLE 12

	0 Hour	2 Hour	Log Reduction 2 Hours	6 Hour	Log Reduction 6 Hours
SIMULTANEOUS APPLICATION	1,000,000	42,000	1.38	110	3.96

TABLE 13

MS-2 testing on Formica chips			
	Ottava	***************************************	Log Reduction
	0 Hour	2 Hour	2 Hours
		,	
SIMULTANEOUS APPLICATION	1,000,000	42,000	2.70
Control	21,000,000	110,000	2.28

TABLE 14

185A testing on Formica chips	0 Hour	2 Hour	Log Reduction 2 Hours	6 Hour	Log Reduction 6 Hours	24 Hour	Log Reduction 24 Hours
SIMULTANEOUS APPLICATION							
	1,700,000	130,000	1.45	7,000	2.72	1,400	3.42
Control	3,700,000	2,300,000	0.21	58,000	1,80	5,800	2.80

EXAMPLE IV

[000105] This Example IV utilizes (3-Aminopropyl)trimethoxysilane in water as the only organosilane. This being the case, this Example VI utilizes NO organosilane(s) comprising a quaternary ammonium moiety. (3-Aminopropyl)trimethoxysilane is rapidly hydrolyzed to (3-Aminopropyl)trihydroxysilane) 7 when mixed with water.

[000106] The test coupons of this Example IV were prepared and using the Procedure recited immediately hereinbelow. In certain embodiments, the treated coupons were stored for at least four (4) weeks prior to inoculation with various organisms.

[000107] Applicants have found that using their two step, spray coating protocol described hereinbelow, after evaporation of the water from the spray deposited Titanium-Oxide Moieties and evaporation of the water portion from the spray deposited aqueous (3-Aminopropyl)trihydroxysilane), the combined weight of

Applicants' Titanium-Oxide Moieties and (3-Aminopropyl)trihydroxysilane) disposed on a treated surface was measured as 1.22 mg/in².

[000108] Applicants have found that they can dispose (3-Aminopropyl)trihydroxysilane and Applicants Titanium-Oxide Moieties, by spray deposition or by dip coating, onto a dressing prior to use of that dressing to cover a wound. As those skilled in the art will appreciate, a dressing is a sterile pad or compress applied to a wound to promote healing and/or prevent further harm. A dressing is designed to be in direct contact with the wound, as distinguished from a bandage, which is most often used to hold a dressing in place. In certain embodiments, Applicants' wound dressings including the following: alginates and other fiber gelling dressings including ropes and sheets, composite dressings, foam dressings with and without adhesive border, gauze with and without adhesive border, hydrocolloids, specialty absorptive dressings with and without adhesive borders, transparent films, collagen dressings sheets and ropes, hydrogel sheets with and without adhesive border, cotton packing strips, roll gauze, paper tape, silk tape, compression bandages (elastic, knitted/woven), self-adherent bandage (elastic, nonknitted/non-woven).

[000109] TABLES 15, 16, and 17, recite efficacy data for the treated coupons after inoculation with E. coli. In summary, TABLES 15, 16, and 17, demonstrate that disposing a 3-Aminopropyl)trihydroxysilane coating onto a target surface, and then disposing TiO₂ over that 3-Aminopropyl)trihydroxysilane coating generates a self-decontaminating surface.

Procedure

[000110] Put on sterile gloves.

[000111] Prepare the test coupons by wiping them first with ISP Alcohol and allowing to dry.

[000112] Clean the test coupons with surface cleaner using a microfiber cloth.

[000113] Hold sprayer about eight (8) inches from surface to be cleaned.

[000114] Spray on let stand for 1-3 minutes and wipe it off, if the area is extremely dirty allow cleaner to stand longer, or apply a second spray and wipe.

[000115] Wipe surface with a clean, damp sponge or cloth.

[000116] Allow surface to completely dry.

[000117] With gloved hands examine coupons for consistency.

Prepare Dilution for (3-Aminopropyl)triethoxysilane

[000118] Prepare a 10% solution of 3-Aminopropyl)triethoxysilane in Methanol (MeOH) (10 ml silane in 100 ml MeOH).

[000119] Prepare Triethanolamine as a 10% solution in MeOH.

[000120] Combine the triethanolamine solution and 3-

Aminopropyl)triethoxysilane solution in a 1:1 ratio on a stir plate at room temperature (ie-100 ml triethanolamine solution added to 100 ml 3-Aminopropyl)triethoxysilane solution.

First Coat – (3-Aminopropyl)triethoxysilane application

[000121] Add the mixture from [000116] to the applicator container.

[000122] Fasten the Liquid Hose/Bottle cap assembly tightly on the container.

[000123] Connect the air hose from compressor to air fitting on the spray applicator.

[000124] Connect the liquid hose to the liquid fitting on the spray applicator.

[000125] Plug the power cord into an appropriate receptacle. Turn on the air compressor.

[000126] Optimal spraying distance is at least 36 to 48 inches away from the target surface.

[000127] Hold the spray gun at right angles to the target surface and spray.

[000128] Target surface should just barely glisten with the spray. Do not over-saturate the surface.

[000129] Rinse spray gun with distilled water prior to applying

Applicants' Titanium Oxide Moieties (unless using 2 sprayers, one for each product).

Second Coat – Applicants' Titanium Oxide Moieties application.

[000130] Add Applicants' Titanium Oxide Moieties to the applicator container.

[000131] Fasten the Liquid Hose/Bottle cap assembly tightly on the container.

[000132] Connect the air hose from compressor to air fitting on the spray applicator.

[000133] Connect the liquid hose to the liquid fitting on the spray applicator.

[000134] Plug the power cord into an appropriate receptacle. Turn on the air compressor.

[000135] Optimal spraying distance is at least 36 to 48 inches away from the target surface.

[000136] Hold the spray gun at right angles to the target surface and spray.

[000137] Target surface should just barely glisten with the spray. Do not over-saturate the surface.

[000138] Allow surface to completely dry.

[000139] Clean the spray gun with distilled water per manufactures' specifications after each day of use.

TABLE 15

Test Organism	Contact Time	Sample ID	Bacterial Counts (CFU/Carrier)	Mean Bacterial Count (CFU/Carrier)	Log ₁₀ Reduction	Percent Reduction
		Control	9.80E+06	9.21E+06	Ń.A.	
		Control	8.65E+06	9.216700		
E. coli	Time Zero	(3-Aminopropyl)	8.20E+06	8.05E+06		
25922	25922	triethoxysilane	7.90E+06	0.USE7UB		
	:					

TABLE 16

	Contact Time	Sample ID	Bacterial Counts (CFU/Carrier) ^a	Mean Bacterial Count (CFU/Carrier)	Log ₁₀ Reduction	Percent Reduction
	1 Hour	Control	3.35E+06	3.61E+06	N.A.	
			3.90E+06			
E. coli		(3-Aminopropyl) triethoxysilane	≤ 5.00E+01	≤ 5.00E+01	≥ 4.86 ≥ 99.998	> 00 0000
25922			≤ 5.00E+01			2 99.9900
				,		

a "<": No bacterial colonies observed, therefore counts at or below limit of detection (based on 0.1 ml plating volume)

TABLE 17

	Contact Time	Sample ID	Bacterial Counts (CFU/Carrier) ^a	Mean Bacterial Count (CFU/Carrier)	Log ₁₀ Reduction	Percent Reduction
	4 Hours	Control	2.80E+05	3.91E+05	N.A.	
E. coli 25922			5.45E+05			
		(3-Aminopropyl) triethoxysilane	≤ 5,00E+01	≤ 5.00E+01	≥ 3.89	≥ 99.987
			≤ 5.00E+01			
						7

o v≤": No bacterial colonies observed, therefore counts at or below limit of detection (based on 0.1 ml plating volume)

EXAMPLE V

[000140] This Example V mixes (3-Chloropropyl)trimethoxysilane in water. (3-Chloropropyl)trimethoxysilane is immediately hydrolyzed to (3-Chloropropyl)trihydroxysilane 8 when mixed with water.

8

[000141] This being the case, this Example V utilizes NO organosilane(s) comprising a quaternary ammonium moiety. Furthermore, this Example VII utilizes NO organosilane(s) comprising an amino moiety.

[000142] The test coupons of this Example V were prepared using the Procedure recited immediately hereinbelow. In certain embodiments, the treated coupons were stored for at least four (4) weeks prior to inoculation with various organisms.

Chloropropyl)trihydroxysilane and Applicants Titanium-Oxide Moieties, by spray deposition or by dip coating, onto a dressing prior to use of that dressing to cover a wound. As those skilled in the art will appreciate, a dressing is a sterile pad or compress applied to a wound to promote healing and/or prevent further harm. A dressing is designed to be in direct contact with the wound, as distinguished from a bandage, which is most often used to hold a dressing in place. In certain embodiments, Applicants' wound dressings including the following: alginates and other fiber gelling dressings including ropes and sheets, composite dressings, foam dressings with and without adhesive border, gauze with and without adhesive border, hydrocolloids, specialty absorptive dressings with and without adhesive borders, transparent films, collagen dressings sheets and ropes, hydrogel sheets with and

without adhesive border, cotton packing strips, roll gauze, paper tape, silk tape, compression bandages (elastic, knitted/woven), self-adherent bandage (elastic, non-knitted/non-woven).

[000144] TABLES 18, 19, and 20, recite efficacy data for the treated coupons after inoculation with E. coli. In summary, TABLES 18, 19, and 20, demonstrates that disposing a (3-Chloropropyl)trihydroxysilane coating on a target surface followed by disposing Applicants' Titanium Oxide Moieties onto the (3-Chloropropyl)trihydroxysilane coating generates a self-decontaminating surface.

Procedure

[000145] Put on sterile gloves.

[000146] Prepare the test coupons by wiping them first with ISP Alcohol and allowing to dry.

[000147] Clean the test coupons with surface cleaner using a microfiber cloth.

[000148] Hold sprayer about eight (8) inches from surface to be cleaned.

[000149] Spray on let stand for 1-3 minutes and wipe it off, if the area is extremely dirty allow cleaner to stand longer, or apply a second spray and wipe.

[000150] Wipe surface with a clean, damp sponge or cloth.

[000151] Allow surface to completely dry.

[000152] With gloved hands examine coupons for consistency.

Prepare Organosilane Dilution for (3-Chloropropyl)trimethoxy silane

[000153] Prepare a 10% solution of (3-Chloropropyl)trimethoxy silane in Methanol (MeOH) (10 ml. silane in 100 ml. MeOH).

[000154] Prepare Triethanolamine solution as a 10% solution in MeOH.

[000155] Combine the triethanolamine solution and (3-

Chloropropyl)trimethoxy silane solution in a 1:1 ratio on a stir plate at room

temperature (ie-100 ml. trethanolamine added to 100 ml. (3-Chloropropyl)trimethoxy silane).

First Coat – (3-Chloropropyl)trimethoxy silane application

[000156] Add the mixture of [000149] to the applicator container.

[000157] Fasten the Liquid Hose/Bottle cap assembly tightly on the container.

[000158] Connect the air hose from compressor to air fitting on the spray applicator.

[000159] Connect the liquid hose to the liquid fitting on the spray applicator.

[000160] Plug the power cord into an appropriate receptacle. Turn on the air compressor.

[000161] Optimal spraying distance is at least 36 to 48 inches away from the target surface.

[000162] Hold the spray gun at right angles to the target surface and spray.

[000163] Target surface should just barely glisten with the spray. Do not over-saturate the surface.

[000164] Rinse spray gun with distilled water prior to applying Applicants' Titanium Oxide Moieties (unless using 2 sprayers, one for each product).

Second Coat – Applicants' Titanium Oxide Moieties application.

[000165] Add Applicants' Titanium Oxide Moieties to the applicator container.

[000166] Fasten the Liquid Hose/Bottle cap assembly tightly on the container.

[000167] Connect the air hose from compressor to air fitting on the spray applicator.

[000168] Connect the liquid hose to the liquid fitting on the spray applicator.

[000169] Plug the power cord into an appropriate receptacle. Turn on the air compressor.

[000170] Optimal spraying distance is at least 36 to 48 inches away from the target surface.

[000171] Hold the spray gun at right angles to the target surface and spray.

[000172] Target surface should just barely glisten with the spray. Do not over-saturate the surface.

[000173] Allow surface to completely dry.

[000174] Clean the spray gun with distilled water per manufactures' specifications after each day of use.

TABLE 18

Test Organism	Contact Time	Sample ID	Bacterial Counts (CFU/Carrier)	Mean Bacterial Count (CFU/Carrier)	Log₁₀ Reduction	Percent Reduction
		Control	9.80E+06	0.245.06	N.A.	
	Time Zero	Control	8.65E+06	9.21E+06		
E. coli 25922				\		<u> </u>
		(3-Chloropropyl) trimethoxysilane	1.16E+07	1.00E+07	-0.04	-8 9%
			8.70E+06		-0.04 -0.970	

TABLE 19

	Contact Time	Sample ID	Bacterial Counts (CFU/Carrier) ^a	Mean Bacterial Count (CFU/Carrier)	Log ₁₀ Reduction	Percent Reduction
	1 Hour	Control	3.35E+06	2.615,06	N.A.	
E. coli 25922		Control	3.90E+06	3.61E+06		
						ř
		(3-Chloropropyl) trimethoxysilane	1.10E+03	2.35E+02	4.19	99.994%
			5.00E+01			22.29476

a "<": No bacterial colonies observed, therefore counts at or below limit of detection (based on 0.1 ml plating volume)

TABLE 20

	Contact Time	Sample ID	Bacterial Counts (CFU/Carrier) ^a	Mean Bacterial Count (CFU/Carrier)	Log ₁₀ Reduction	Percent Reduction
		Constant	2.80E+05	2.045.05	N.A.	
		Control	5.45E+05	3.91E+05		
E. coli 25922	4 Hours					
		(3-Chloropropyl) trimethoxysilane	≤ 5.00E+01	≤ 5.00E+01	≥ 3.89 ≥ 99.98	- 60 007
			≤ 5.00E+01			≥ 93.307

^{* &}quot;≤": No bacterial colonies observed, therefore counts at or below limit of detection (based on 0.1 ml plating volume)

EXAMPLE VI

[000175] This Example VI utilizes three (3) coating formulations without any Titanium-Oxide containing compounds. A first of the three coating formulations identified in this Example VI as ABS 2015E utilizes

Octadecylaminodimethyltrihydrox-ysilylpropyl Ammonium Chloride <u>6</u> as the organosilane. A second of the three coating formulations identified in this Example VI as ABS 2020E utilizes (3-Aminopropyl)trihydroxysilane) <u>7</u> as the organosilane. A third of the three coating formulations identified in this Example VI as ABS 2030E utilizes (3-Chloropropyl)trihydroxysilane) <u>8</u> as the organosilane.

[000176] The method of Example IV from Paragraph [000105] through Paragraph [000124] relating to spray deposition of a silane onto test coupons was utilized in this Example VI. The method of Paragraph [000125] through and including Paragraph [000134] relating to spray deposition of the Titanium-Oxygen Moieties was not utilized in this Example VI.

TABLE 21

CFU/mL ABS-G2015E - No TiO2 ABS-G2020E - No TiO2 ABS-G2030E - No TiO2 Untreated 5.20E+06 6.20E+06 1.E+04 1.36E+07 9.70E+06 0 hour 4.00E+06 2.60E+07 1.50E+07 1.10E+07 1.E+05 1.60E+07 9.00E+06 4.00E+06 2.00E+06 0.008+00 2.00E+03 0.006+00 1.E+01 0.005+00 0.008+00 0.008+66 0.00E+00 0.00E+00 1.E+02 0.00E+00 0.008+00 0.00E+00 1.E+03 0.00E+00 1 hour 1.E+04 1,30E+07 9.10E+06 1.90E+06 2.60E+06 0.00E+00 0.008+00 0.008+60 0.005+00 0.008+000 0.00E+00 1.E+05 0.006+00 0.005+00 1.005+02 0.008400 1.00E+02 0.008+00 0.008+00 1.8+01 3.00E+02 0.001 0.008+300 1.50E+04 0.006+00 0.00E+00 1.E+02 1.5+03 1.5+04 0.00E+00 0.006+00 0.006:00 0.008400 4 hour 3,708+06 3,406+06 0.000-00 0.000 600 0.000+00 0.000 1.8+05 0.008400 0.008+00

TABLE 22 Log Reduction

	ABS-G2015E - No TiO2	ABS-G2020E - No TiO2	ABS-G2030E - No TiO2
0 hour	0.33	-0.23	0.23
1 hour	0.69	4.74	7.04
4 hour	2.84	5.55	6.55

TABLE 23

Percent Reduction

ABS-G2015H		ABS-G2020H	ABS-G2030H	
0 hour	53.42%	-69.77%	41.48%	
1 hour	79.64%	100.00%	100.00%	
4 hour	99.86%	100.00%	100 00%	

[000177] TABLE 21 recites CFU/mL data for each of the three coating formulations, wherein each formulation did not include one or more titanium-oxide moieties. TABLE 22 recites Log Reduction data for the three formulations evaluated, wherein each formulation did not include one or more titanium-oxide moieties.

TABLE 23 recites Percent Reduction data for the three formulations utilized, wherein each formulation did not include one or more titanium-oxide moieties.

[000178] In coating formulations ABS 2015E, 2020E, and 2030E, depending on the stoichiometry of the mixture of triethanolamine and the organosilane, one or polymeric species are formed on a treated surface. In certain embodiments, and as shown in Reaction Scheme 2, triethanolamine <u>9</u> and organosilane <u>1</u> react to form a linear polymer <u>10</u>.

REACTION SCHEME 2

[000179] In other embodiments, and as shown in Reaction Scheme 3, triethanolamine $\underline{9}$ and organosilane $\underline{1}$ react to form a branched polymer $\underline{11}$.

REACTION SCHEME 3

HO HO HO R R O R 1
$$\mathbb{R}^2$$
 O \mathbb{R}^2 O \mathbb

[000180] In other embodiments, and as shown in Reaction Scheme 4, triethanolamine $\underline{9}$ and organosilane $\underline{1}$ react to form a cross-linked polymer $\underline{12}$.

REACTION SCHEME 4

[000181] In certain embodiments, Applicants' organosilane comprises tetraethylorthosilicate 13. In certain embodiments and as shown in Reaction Scheme 5 and depending on the stoichiometry of the starting materials 9 and 13, Applicants cross-linked polymeric material 14 is formed by reaction of tetraethylorthosilicate 13 and triethanolamine 9. Reaction Scheme 5 illustrates a single Si atom having four (4) different polymer chains originating therefrom. Those skilled in the art will appreciate that Applicants' cross-linked polymer material 14 comprises a very high cross-link density.

REACTION SCHEME 5

[000182] In certain embodiments and as shown in Reaction Scheme 6 and depending on the stoichiometry of the starting materials <u>15</u> and <u>13</u>, Applicants cross-linked polymeric material <u>16</u> is formed by reaction of tetraethylorthosilicate <u>13</u> and diethanolamine <u>13</u>. Reaction Scheme 6 illustrates a single Si atom having four (4) different polymer chains originating therefrom. Those skilled in the art will

appreciate that Applicants' cross-linked polymer material <u>16</u> comprises a very high cross-link density.

REACTION SCHEME 6

EXAMPLE VII

[000183] Stainless steel carriers were coated with the solutions containing 7.5% of one of three different choline 16 compounds in H₂0, wherein R3 is selected from the group consisting of -H and -CO-CH₃. Cholines used included Choline Chloride, Choline Bitartrate, and Acetylcholine Chloride. Carriers were coated by dipping into solution using forceps and allowing to drip-dry overnight.

Carriers were still not completely dry even after 24 hours drying time. Twenty (20) microliters of 0/N cultures of E.coli 25592 (grown at 37C for 18 hours) were added to each carrier. Following inoculation of the carriers, the carriers were swabbed with D/E neutralizing broth and processed for the zero hour time point. This was repeated for the 1 and 4 hour time points.

$$X_{+}^{-}CH_{3}$$
 $H_{3}C_{-}CH_{3}$
 $O_{-}R3$

[000184] The collected samples were then diluted in PBS and 100 microliters were plated on to TSA plates and left overnight at 37 °C before counting and calculating cfu/ml. All carriers were tested in duplicate and two experiments were performed (A and B in data tables) in tandem. All data is represented as the mean+/- the SEM (standard error) when applicable.

[000185] When calculated relative to the timed control, choline bitartrate showed the greatest surface-kill, with a 2.39 log reduction in bacteria. Acetylcholine chloride and choline chloride showed a 1.85 and 1.40 log reduction, respectively. When compared with the results of aqueous solutions of Aminopropyl triethoxysilane (APTES) and the cholines at the same concentration, it is clear that these solutions are much more antimicrobial than the cholines on their own. APTES +Choline Chloride and APTES +Choline Bitartrate showed a 3.36 and 3.38 log reduction, respectively, at the 1hour time point.

[000186] TABLE 24 recites antimicrobial efficacy data for the above-described choline formulations at time T₀, i.e. immediately after inoculation. TABLE 25 recites antimicrobial data at one (1) hour after inoculation.

TABLE 24

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	2.50E+07	2.13E+07	0.00	0%
		Control B	1.75E+07	2.130-07	0.00	076
		Choline Chloride A	2.15E+07	2.58E+07	-0.08 0.18	-21% 34%
Fast		Choline Chloride B	3.00E+07	2,36E#07		
E. coli	0 hour	Choline Bitartrate A	1.80E+07	1.40E+07		
		Choline Bitartrate B	1.00E+07	1.406707		
		Acetylcholine Chloride A	1.45E+07	1.20E+07	0.25	44%
		Acetylcholine Chloride B	9.50E+06	1.200407	0.23	4470

TABLE 25

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	1.10E+07	7.40E+06	0.00	0%
	:	Control B	3.80E+06	7.402100	0.00	076
	1 hour	Choline Chloride A	7.38E+04	2.92E+05 3.03E+04	1.40	06.060/
E. coli		Choline Chloride B	5.10E+05			96.06%
		Choline Bitartrate A	5.75E+04		2.39	99.59%
		Choline Bitartrate B	3.17E+03			99.59%
		Acetylcholine Chłoride A	1.44E+04			98.59%
		Acetylcholine Chloride B	1.95E+05	1.05E+05	1.85	

[000187] Stainless steel carriers were coated with solutions containing 7.5% of each choline compound and 5% Aminopropyltriethoxysilane in H_20 (ABS-2040 contains choline chloride, while ABS-2041 contains choline bitartrate). Carriers were coated using an electrostatic sprayer and then allowed to dry. Carriers were still not completely dry even after 2 days of drying time. Twenty (20) microliters cultures of E.coli grown at 37 °C for 18 hours) were added to each carrier. Following inoculation of the carriers, the carriers were swabbed with neutralizing broth and processed for the zero hour time point. This was repeated for the 1 hour time point.

[000188] The collected samples were then diluted in PBS and 100 microliters were plated on to TSA plates and left 0/N at 37 °C before counting and calculating cfu/ml. All carriers were tested in duplicate and two experiments were

performed (A and B in data table) in tandem. All data is represented as the mean+/the SEM (standard error) when applicable. It is worth noting that colonies on the
Choline Bitartrate plates were significantly smaller than the others.

[000189] Table 26 recites antimicrobial efficacy data at time T_0 , i.e. immediately after inoculation. TABLE 27 recites antimicrobial data at one (1) hour after inoculation. TABLE 28 recites antimicrobial data at four (4) hours after inoculation.

TABLE 26

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	1.45E+07	1.34E+07	0.00	0%
		Control B	1.22E+07	1.346+07	0.00	U76
E. coli	0 hour	ABS-2040 A	1.05E+07	1.05E+07	0.10	240/
E. CON	O nour	ABS-2040 B	1.05E+07			21%
		ABS-2041 A	1.10E+07	9.75E+06	0.14	2=0/
		ABS-2041 B	8.50E+06			27%

TABLE 27

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	7.70E+06	7.455.06	2.00	M P.
		Control B	7.20E+06	7.45E+06	0.00	0%
E tř	* *	ABS-2040 A	5.10E+03	3.28E+03	3.36	99.96%
E. coli	1 hour	ABS-2040 B	1.45E+03			
		ABS-2041 A	1.34E+03	3.13E+03	3.38	99.96%
		ABS-2041 B	4.91E+03			

TABLE 28

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
;		Control A	3.30E+06	2,055,05	0.00	001
		Control B	4.60E+06	3.95E+06	0.00	0%
E. coli	4 hour	ABS-2040 A	1.00E+00	1.00E+00	6.60	99.999987%
L. COII	4 HOUL	ABS-2040 B	1.00E+00			
		ABS-2041 A	1.00E+00	1.00E+00	6.60	99.999987%
		ABS-2041 B	1.00E+00			

[000190] Stainless steel carriers were coated with solutions containing 15% of each choline compound and 5% Aminopropyltriethoxysilane in H20 (ABS-2040 contains choline chloride, while ABS-2041 contains choline bitartrate). Carriers were coated using an electrostatic sprayer and then allowed to dry. Carriers were still not completely dry even after 2 days of drying time. 20 microliters of cultures of E.coli 25592 grown at 37 °C for 18 hours were added to each carrier. Following inoculation of the carriers, the carriers were swabbed with D/E neutralizing broth and processed for the zero hour time point. This was repeated for the 1and 4 hour time points.

[000191] The collected samples were then diluted in PBS and 100 microliters were plated on to TSA plates and left 0/N at 37 °C before counting and calculating cfu/ml. All carriers were tested in duplicate and two experiments were performed (A and B in data table) in tandem. All data is represented as the mean+/-the SEM (standard error) when applicable.

[000192] Table 29 recites antimicrobial efficacy data at time T₀, i.e. immediately after inoculation. TABLE 30 recites antimicrobial data at one (1) hour after inoculation. TABLE 31 recites antimicrobial data at four (4) hours after inoculation.

TABLE 29

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	1.35E+07	2.35E+07	0.00	0%
		Control B	3.35E+07	Z.33E#07	0.00	078
		ABS-2040 A	6.00E+06	6.75E+06 1.32E+07	0.54	71%
E. coli	0 hour	ABS-2040 B	7.50E+06			1.170
		ABS-2041 A	2.40E+06			7 407
		ABS-2041 B	2.40E+07			44%

TABLE 30

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	1.07E+07	1.30E+07	0.00	0%
		Control B	1.54E+07	1.300+07	0.00	U76
- · · ·		ABS-2040 A	1.00E+02	6.13E+03	3,33	99.95%
E. coli	1 hour	ABS-2040 B	1.22E+04			
		AB5-2041 A	5.00E+02	2.80E+04	2.67	99.8%
		ABS-2041 B	5.56E+04		2.67	

TABLE 31

Test Organism	Contact Time	Sample ID	Cfu/mL	Mean Cfu/mL	Log ₁₀ Reduction	Percent Reduction
		Control A	4.30E+06	4.000.00	0.00	00/
		Control B	3.70E+06	4.00E+06	0.00	0%
~		ABS-2040 A	1.00E+00	2.55E+01 2.55E+01	5.20 5.20	99.9998%
E. coli	4 hour	ABS-2040 B	5.00E+01			
		ABS-2041 A	1.00E+00			00 00000
		ABS-2041 B	5.00E+01			99.9998%

[000193] Referring now to FIG. 3, Applicants' sterilizing station 300 comprises a "walk through" assembly having two opposing sides 310 and 320 which are joined by top 330. In the illustrated embodiment of FIG. 3, side 310 comprises a plurality of UV light emitters 311, 312, 313, 314, 315, 316, and 317, where that plurality of UV emitters face the interior, i.e. walking space portion, of sterilizing station 300. In other embodiments, Applicants' sterilizing station 300 comprises

fewer than seven (7) UV emitters per side. In still other embodiments, Applicants' sterilizing station comprises more than seven (7) UV emitters per side.

[000194] Side 320 is similarly formed to include a plurality of UV emitters, where each of those UV emitters face the interior, i.e. walking space portion, of sterilizing station 300. The plurality of UV emitters disposed on the interior portion of side 310 have a facing relationship with the plurality of UV emitters disposed on the interior portion of side 320.

[000195] Further in the illustrated embodiment of FIG. 3, top portion 330 comprises a plurality of UV emitters, i.e. UV emitters 332 and 334, where those UV emitters face downwardly. In other embodiments, top portion 330comprises more than two (2) UV emitters.

practitioner walking through sterilizing station 300. The medical practitioner is wearing a scrub suit, the various pieces of which have been coated on the exterior surface with Applicants' coating composition. As the practitioner walks through sterilizing station 300, the plurality of UV emitters disposed on sides 310 and 320, and the plurality of UV emitters disposed on top 330, are energized thereby maximizing the photocatalytic effect of Applicants' coating. Enhancing the photocatalytic activity of the coating maximizes the production of high energy, atomic oxygen species at the surface of scrub suit pieces, thereby, effectively sterilizing the exterior surfaces of all scrub suit articles.

[000197] While the preferred embodiments of the present invention have been illustrated in detail, it should be apparent that modifications and adaptations to those embodiments may occur to one skilled in the art without departing from the scope of the present invention as set forth herein.

We claim:

1. A polymeric material formed by reacting an aminopolyol having a structure:

wherein R4 is selected from the group consisting of -H and -CH₂-CH₂-OH; and an organosilane, wherein said organosilane has a structure:

1

wherein R1 is selected from the group consisting of -H, -CH₃ and -CH₂-CH₃ and R2 is selected from the group consisting of -OH, -O-CH₃, O-CH₂-CH₃, alkyl, alkyl with a chlorine moiety, alkyl with an amino moiety, and alkyl with a quaternary ammonium group.

2. The polymeric material of claim 1, comprising a linear polymer having a structure:

3. The polymeric material of claim 1, comprising a branched polymer having a structure:

4. The polymeric material of claim 1, comprising a cross-linked polymer having a structure:

5. The polymeric material of claim 1, comprising a cross-linked polymer having a structure:

6. The polymeric material of claim 1, comprising a cross-linked polymer having a structure:

7. The polymeric material claim 1, further comprising a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol.

- 8. The polymeric material of claim 7, further comprising titanium dioxide.
- 9. The polymeric material of claim 1, wherein said organosilane comprises a silanetriol.
- 10. The polymeric material of claim 1 further comprising a silsesquioxane having a structure:

wherein R2 is selected from the group consisting of -OH, -O-CH₃, O-CH₂-CH₃, alkyl, alkyl with a chlorine moiety, alkyl with an amino moiety, and alkyl with a quaternary ammonium group.

11. A composition formed by the method comprising:

disposing on an object an aqueous mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol (collectively the Titanium-Oxide Moieties);

evaporating substantially all of the water from said disposed aqueous mixture of Titanium-Oxide Moieties, leaving a layer comprising at least 90 weight percent of a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol;

disposing on said object an aqueous mixture of an organosilane; and evaporating substantially all of the water from said disposed aqueous mixture of said organosilane leaving a layer comprising at least 90 weight percent of the organosilane.

- 12. The method of claim 11, wherein said object is selected from the group consisting of a wall, a door, a table, a tray, bedding, draperies, or furniture cushions.
 - 13. The method of claim 11, wherein:

said layer comprising at least 90 weight percent of a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol is formed first on said object; and

said layer comprising at least 90 weight percent of the organosilane is formed over said layer comprising at least 90 weight percent of a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol.

14. The method of claim 11, wherein:

said layer comprising at least 90 weight percent of the organosilane is formed first on said object; and

said layer comprising at least 90 weight percent of said mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol is formed over said layer comprising at least 90 weight percent of said organosilane.

15. A composition formed by the method comprising:

simultaneously disposing on an object an aqueous mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol and an aqueous mixture of an organosilane;

evaporating substantially all of the water from said object leaving a mixture comprising at least about 45 weight percent of the organosilane and at least about 45 weight percent of the mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol.

16. A method, comprising:

disposing on a object an aqueous mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol (collectively the Titanium-Oxide Moieties);

evaporating substantially all of the water from said disposed aqueous mixture of Titanium-Oxide Moieties, leaving a layer comprising at least 90 weight percent of a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol;

disposing on said object an aqueous mixture of an organosilane; and evaporating substantially all of the water from said disposed aqueous mixture of said organosilane leaving a layer comprising at least 90 weight percent of the organosilane.

17. The method of claim 16, wherein said object is selected from the group consisting of a wall, a door, a table, a tray, bedding, draperies, or furniture cushions.

18. The method of claim 16, wherein:

said layer comprising at least 90 weight percent of a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol is formed first on said object; and

said layer comprising at least 90 weight percent of the organosilane is formed over said layer comprising at least 90 weight percent of a mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol.

19. The method of claim 16, wherein:

said layer comprising at least 90 weight percent of the organosilane is formed first on said object; and

said layer comprising at least 90 weight percent of said mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol is formed over said layer comprising at least 90 weight percent of said organosilane.

20. The method of claim 16, comprising:

simultaneously disposing on said object an aqueous mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol and an aqueous mixture of an organosilane;

evaporating substantially all of the water from said object leaving a mixture comprising at least about 45 weight percent of the organosilane and at least about 45 weight percent of the mixture of Peroxotitanium acid solution and Peroxo-modified anatase sol.

21. A method, comprising:

forming a mixture of choline in water, wherein said choline is present at 7.5 weight percent;

dip coating a stainless steel test coupon into said aqueous choline mixture; evaporating water from said coated test coupon.


22. The method of claim 21, further comprising:

forming a mixture of choline and Aminopropyltriethoxysilane in water, wherein said choline is present at 7.5 weight percent, and wherein said Aminopropyltriethoxysilane is present at five weight percent;

dip coating a stainless steel test coupon using said aqueous choline and Aminopropyltriethoxysilane mixture;

evaporating water from said coated test coupon.

FIG. 1

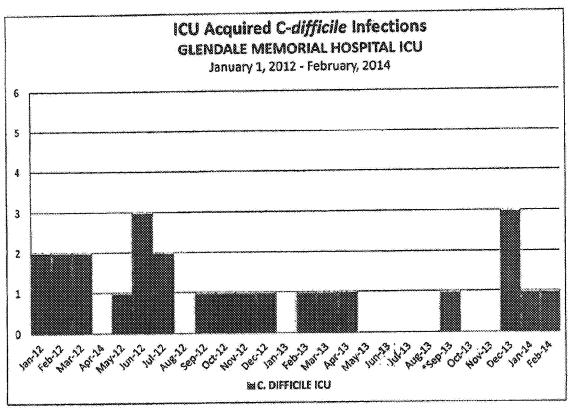

*The C-diff that occurred on September 19, 2013 was more than 13 weeks after the application ABS' application was applied mid-June

FIG. 2


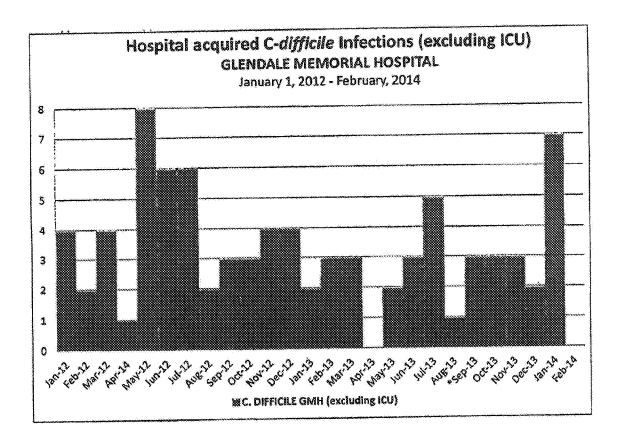


FIG. 3

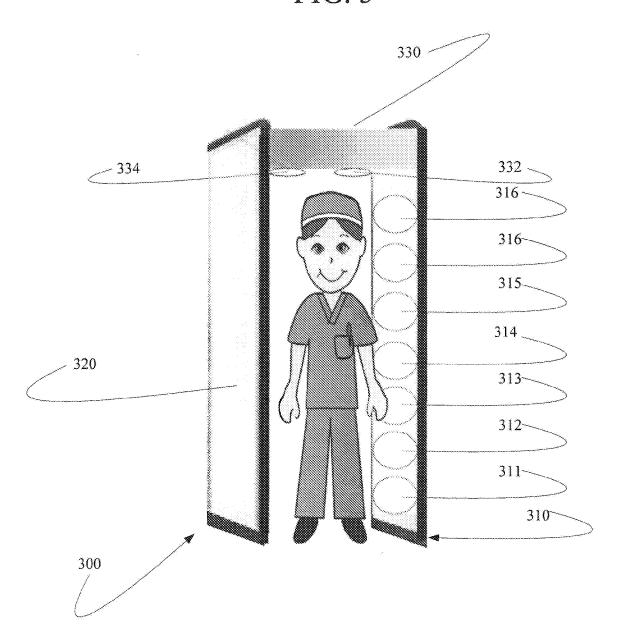

International application No. **PCT/US2015/059080**

A. CLASSIFICATION OF SUBJECT MATTER

C08G 77/00(2006.01)i, C08L 83/00(2006.01)i, C09D 183/04(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C08G 77/00; C11D 3/16; B05D 3/02; C11D 3/36; D06M 13/46; C09J 183/04; C07F 7/18; D06M 15/643; C08L 83/00; C09D 183/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: organosilane, aminopolyol, silsesquioxane, triethanolamine, diethanolamine, silanetriol, peroxotitanium

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5359104 A (HIGGS, BRUCE S. et al.) 25 October 1994 See abstract; column 4, line 55-column 9, line 19; and claims 1 and 2.	1-10
A	US 7704561 B2 (MEHTA, PRAKASH VITHALDAS et al.) 27 April 2010 See abstract; columns 3-9; and claim 1.	1–10
A	US 4005025 A (KINSTEDT, GEORGE CARL) 25 January 1977 See abstract; columns 2-21; and claim 1.	1-10
A	US 5954869 A (ELFERSY, JACQUES E. et al.) 21 September 1999 See abstract; columns 5-19; and claim 1.	1-10
A	WO 2013-082096 A1 (DOW CORNING CORPORATION) 06 June 2013 See abstract; pages 2-5; and claim 1.	1–10

		Further documents are	listed in the	e continuation	of Box	C.
--	--	-----------------------	---------------	----------------	--------	----

X

See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 23 February 2016 (23.02.2016)

Date of mailing of the international search report

23 February 2016 (23.02.2016)

Name and mailing address of the ISA/KR
International Application Division

Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Dong Seok

Telephone No. +82-42-481-5405



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2015/059080

Box No. 11 Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)
This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:
1. Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
2. Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).
Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)
This International Searching Authority found multiple inventions in this international application, as follows: Group I: Claims 1-10 relate to a polymeric material formed by reacting an aminopolyol with an organosilane. Group II: Claims 11-20 relate to a method of disposing an aqueous mixture of peroxotitanium acid solution and peroxo-modified anatase sol, and an aqueous mixture of organosiloxane, on a substrate, either sequentially or simultaneously, and a composition formed by the method. Group III: Claims 21-22 relate to a method of using choline in water.
As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1-10
Remark on Protest The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee. The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation. No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/059080

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5359104 A	25/10/1994	JP 03-188006 A JP 3311745 B2 US 5064613 A	16/08/1991 05/08/2002 12/11/1991
US 7704561 B2	27/04/2010	AU 2006-345858 A1 AU 2006-345858 B2 CA 2656793 A1 CN 101500716 A CN 101500716 B EP 2040919 A2 EP 2040919 A4 JP 2009-542838 A KR 10-1278524 B1 KR 10-2009-0031935 A US 2008-0009644 A1 US 2008-0026156 A1 US 7521573 B2 US 7553983 B2 WO 2008-004242 A2 WO 2008-004242 A3 WO 2008-004242 A8 WO 2008-004243 A2 WO 2008-004243 A3 WO 2008-004243 A3 WO 2008-004243 A3	10/01/2008 24/02/2011 10/01/2008 05/08/2009 04/12/2013 01/04/2009 12/06/2013 03/12/2009 25/06/2013 30/03/2009 10/01/2008 10/01/2008 31/01/2008 21/04/2009 30/06/2009 10/01/2008 16/04/2009 20/03/2008 10/01/2008 16/04/2009 20/03/2008 10/01/2008 16/04/2009 10/01/2008
US 4005025 A	25/01/1977	None	
US 5954869 A	21/09/1999	EP 0877027 A2 EP 0877027 A3 JP 10-330383 A US 6120587 A US 6469120 B1	11/11/1998 01/09/1999 15/12/1998 19/09/2000 22/10/2002
WO 2013-082096 A1	06/06/2013	CN 103946444 A CN 103946445 A CN 103946446 A EP 2785908 A1 EP 2785910 A1 JP 2014-534329 A JP 2015-500896 A JP 2015-500926 A US 2014-0234247 A1 US 2014-0294746 A1 US 2014-0308229 A1 WO 2013-082112 A1 WO 2013-082224 A1	23/07/2014 23/07/2014 23/07/2014 08/10/2014 08/10/2014 08/10/2014 18/12/2014 08/01/2015 08/01/2015 21/08/2014 02/10/2014 16/10/2014 06/06/2013 06/06/2013