



(51) International Patent Classification:

B01D 17/02 (2006.01) **C10G 33/06** (2006.01)
B01D 17/04 (2006.01) **E21B 43/34** (2006.01)

(21) International Application Number:

PCT/EP2011/074194

(22) International Filing Date:

28 December 2011 (28.12.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

MI2010A 002450 29 December 2010 (29.12.2010) IT

(71) Applicant (for all designated States except US): **ENI S.P.A.** [IT/IT]; Piazzale E. Mattei, 1, I-00144 Roma (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDREUSSI, Paolo** [IT/IT]; Via San Martino, 25, I-56125 Pisa (IT). **DI RENZO, Domenico Antonio** [IT/IT]; Via Cavour, 12, I-24040 Casirate D'adda (BG) (IT).(74) Agents: **COSENZA, Simona** et al.; c/o Barzanò & Zanardo Milano S.p.A., Via Borgonuovo, 10, I-20121 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: COALESCENCER SEPARATOR FOR A MIXTURE OF IMMISCIBLE PHASES WITH DIFFERENT SPECIFIC DENSITY

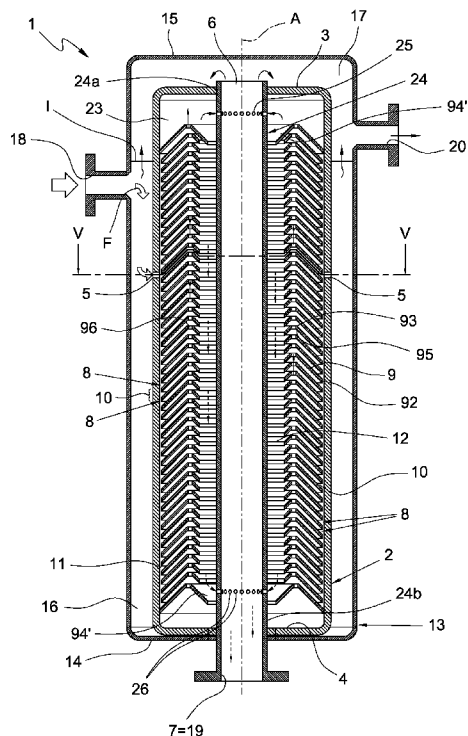


Fig. 2

(57) Abstract: The present invention relates to an apparatus (1) for the coalescence-separation of a mixture comprising two fluid phases mutually immiscible other and with a different specific density, characterized in that it comprises a tubular body (2) closed at opposite ends, of which, considering the apparatus in the configuration of use, one is higher than the other, at least one inlet mouth (5) of the mixture to be separated which is defined on the side surface of the tubular body (2), at least one outlet mouth (6) of the fluid phase with a lower specific density separated from the mixture which is defined close to the end of the tubular body at an upper height, at least one outlet mouth (7) of the fluid phase with a greater specific density separated from the mixture which is defined close to the end of the tubular body at a lower height and at least a set of coalescence plates (8) which is housed inside said tubular body (2), wherein each of the coalescence plates (8) has a flow plate (9) of the mixture which is tilted by an angle α with respect to a plane orthogonal to the longitudinal axis (A) of the tubular body (2) and which has a lower edge (92) facing the end of the tubular body (2) at a lower height and in fluid communication with a distribution channel (11) of the mixture to be separated, which is defined inside the tubular body (2) and is in fluid communication with the inlet mouth (5), and an upper edge (93) facing the end of the tubular body (2) at an upper height and in fluid communication with an outflow channel (12) of at least the fluid phase with a greater specific density, which is defined in the tubular body (2) and is in fluid communication with at least the outlet mouth (7) of said fluid phase with a greater specific density, and wherein the coalescence plates (8) are mutually arranged parallel and on top of each other at a defined reciprocal distance, pairs of coalescence plates (8) mutually adjacent forming a respective flow and separation channel (10) of the mixture.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, —
GW, ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

COALESCENCER SEPARATOR FOR A MIXTURE OF IMMISCIBLE PHASES WITH DIFFERENT
SPECIFIC DENSITY

5 The present invention relates to an apparatus for the coalescence-separation of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density or gravity.

 In particular, the present invention relates to an
10 apparatus for the coalescence-separation of a mixture comprising at least one aqueous liquid phase and an organic liquid phase, the latter comprising oil (hydrocarbons) or oleophilic compounds.

 The present invention can be applied, in particular
15 but not exclusively, in the completion of oil wells for the separation of the production fluid, which is typically composed of a mixture of water and oil, both on the surface and at the well bottom.

 The present invention can also be applied in
20 wastewater treatment plants coming from industrial or civil plants, and in general, in all separation plants of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density or gravity.

25 In various industrial fields, such as for example in the field of oil extraction, processing and refining in onshore or offshore plants, in the chemical industry or treatment of wastewater coming from industrial or civil plants, the separation of mixtures, whether they

be properly dispersions or emulsions, of water and oil or another organic liquid phase, has for long been a significant problem from both an environmental and economic point of view.

5 The enforcement of increasingly severe requirements with respect to the impurities of the waste products has led to a search for and optimization of more efficient separation technologies, capable of guaranteeing that the limits established by the
10 regulations can be reached.

With particular reference to the oil industry, it is known that the production of crude oil is often accompanied by the underground production of water present in the geological formation. The production
15 fluid of an oil well therefore comprises a mixture of water and oil. It is consequently necessary to efficiently separate the production fluid into the two components, oil and water, so that the oil separated is substantially free of water and the water separated is
20 substantially free of oil.

The separation of the production fluid can occur at the surface or well bottom (*downhole water-oil separation*),

Surface separation means separation of the
25 production fluid after this has risen to the surface.

Downhole separation means separation of the production fluid near the productive geological formation so as to obtain an organic liquid phase enriched in oil and an aqueous liquid phase enriched in

water. Once the organic liquid phase has risen to the surface, it is possibly subjected to further separation treatment envisaged at the well-head before being removed from the production field. The aqueous liquid
5 phase, on the other hand, is re-injected into the same formation. The reinjection of the aqueous liquid phase into the production formation, however, requires a high degree of purity of the same, in order not to damage the formation.

10 There are various separation techniques applied at the surface; among these, in particular, the technology based on the use of coalescence separators which promote the joining of oil drops (dispersed phase) dispersed in water (continuous phase) in larger-
15 dimensioned drops which are separated into a layer which floats on the aqueous layer.

 A coalescence separator typically comprises a set of coalescence plates which are arranged mutually parallel one upon the other, at a defined distance, so
20 that pairs of adjacent coalescence plates define a separation space through which the mixture to be separated flows.

 A typical coalescence separator is described in GB 2 116 060 and comprises, in succession, a
25 gravitational separation area, a coalescence separation area and a final filtration area.

 Coalescence separators of the type comprising a tank which extends horizontally or vertically and in which one or more sets of coalescent plates are housed,

are also known from WO88/06478, US 4,722,800, US 6,907,997, US 6,605,244 and US 5,928,524.

The coalescent plates can be flat or undulated, as described for example in WO88/06478, US 6,907,997, US 5 4,722,800 or US 5,928,524; alternatively, in order to improve the separation efficiency, the coalescent plates can have a flat upper surface and an undulated lower surface so as to contemporaneously cause the separation of the phases and favour the downward flow
10 of the solids possibly present in the mixture to be separated.

The known coalescence separators, as much as they are compact, have in any case encumbrances which are such that they can only be installed at the surface or
15 underground.

The use of coalescence separators of the known type is therefore limited to locations where there is a sufficient availability of space, which for example is lacking in some surface applications such as offshore
20 oil platforms. The known coalescence separators cannot even be used in applications directly at the downhole.

The separation technologies used downhole are in fact based on the use of gravity separators or alternatively hydrocyclone separators.

25 Gravity separators consist of a separation chamber in which the production fluid moves at a sufficiently low rate as to allow separation by gravity of the two phases. The low velocities necessary for gravity separation, however, limit the quantity of production

fluid which can be treated.

Hydrocyclone separators, with one or more separation steps mutually connected in series or in parallel, typically consist of a tubular body suitably
5 shaped, into which the production fluid is injected so as to rotate at a high velocity. The centrifugal forces which are generated as a result of the rotation imposed on the production fluid, together with the geometry of the tubular body, induce the separation of the aqueous
10 liquid phase, which, as it is heavier, tends to go towards the outer part of the hydrocyclone, from the organic liquid phase (oil) which, as it is lighter, tends to collect in the inner part of the hydrocyclone.

Typical examples of hydrocyclone separators used at
15 the downhole are described in US 5,730,871, US 6,080,312, US 6,138,578, US 2006/0186038 or WO01/65065.

Due to the high pressure drops which take place in the hydrocyclone, however, the mixture to be separated must be fed with a pump, which causes the formation of
20 very fine drops of the oily phase dispersed in the aqueous phase, making its separation even more difficult.

The necessity is therefore felt of availing of a separation apparatus which allows the production fluid
25 to be efficiently separated into an aqueous liquid phase and an oily liquid phase and which can be easily applied in both surface applications, in particular all surface applications where there is a limited availability of space, such as for example, in offshore

applications, and also in downhole applications.

An objective of the present invention is therefore to overcome the drawbacks indicated above of the known art by proposing a coalescence separation apparatus of
5 a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density which has limited overall encumbrances and a simple and flexible structure, enabling it to be installed in both surface plants, in particular where
10 there is a limited availability of space, and in downhole plants.

A further objective of the present invention is to provide a coalescence separation apparatus of a mixture comprising two fluid phases mutually at least partially
15 immiscible and with a different specific density which has reduced production, installation and management costs and which is able to guarantee an efficient separation of the mixture into two fluid phases.

These and other objectives according to the present
20 invention are achieved by providing a coalescence separation apparatus of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density as specified in the independent claims.

25 Further characteristics of the coalescence separation apparatus of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density are indicated in the dependent claims.

The characteristics and advantages of a coalescence separation apparatus of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density according to the present invention will appear more evident from the following illustrative and non-limiting description, referring to the enclosed schematic drawings, in which:

figure 1 is a schematic side view of a coalescence separation apparatus according to the present invention in the configuration for surface applications;

figure 2 is a schematic longitudinal sectional view of the apparatus of figure 1;

figure 3 is a schematic view of a possible embodiment of a set of coalescence plates of the flat type according to the present invention;

figures 4a-4c schematically show, in an axonometric view, in a plan view from above and cross-section, respectively, a coalescence plate of the truncated-conical type according to a preferred embodiment of the present invention;

figure 5 is a schematic section according to the plane V-V of figure 2;

figure 6 is a schematic axonometric and cross-sectional view of a portion of the apparatus of figure 1;

figure 7 is a schematic and longitudinal sectional view of a coalescence separation apparatus according to the present invention in a possible downhole application.

With reference to the enclosed figures, a coalescence separation apparatus of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density or gravity is indicated as a whole with 1.

It should be noted that, for the purposes of the present description, "mixture" also indicates a dispersion or a not stable emulsion, in which one of the two phases is dispersed in the form of drops in the other continuous phase, and that "fluid phases mutually at least partially immiscible" indicates two fluid phases, in particular liquid, which do not give solutions in each other at least in certain ratios.

For the purposes of the present invention, moreover, it cannot be excluded that each of the two fluid phases mutually at least partially immiscible can comprise further components, such as, for example, solid particles.

For the sake of simplicity, reference will be made hereafter in the present description to the aqueous liquid phase or water as fluid phase with a greater specific density and to the organic liquid phase or oil as fluid phase with a lower specific density, it being understood that the present invention can be applied for the separation of any two fluid phases mutually at least partially immiscible and having a different specific density.

The apparatus 1 comprises a tubular body 2 having a longitudinal axis A which, in conditions of use, is

positioned vertically, as shown in the enclosed figures, or tilted with respect to the vertical, as, for example, in the case in which the apparatus 1 is installed at the downhole where the well has at least a section which develops along a sloping direction with respect to the vertical. In any case, in conditions of use, one of the two opposite ends of the tubular body 2 is at an upper height with respect to the other.

Both of the opposite ends of the tubular body 2 are closed; in particular, the end at an upper height is closed by a top 3 and that at a lower height is closed by a bottom 4.

In the embodiments represented in the enclosed figures, the tubular body 2 is cylindrical with a circular transversal section; it cannot be excluded, however, that the tubular body 2 can have a differently-shaped transversal section.

The tubular body 2 comprises at least one inlet mouth 5 of the mixture to be separated (oil and water) which is defined on its side surface. In particular, a plurality of inlet mouths 5 is envisaged, distributed along a circular crown of the tubular body 2 and each consisting of a through hole.

Close to the end of the tubular body 2 at an upper height, at least one outlet mouth 6 of the organic liquid phase separated from the mixture, is obtained, whereas close to the end of the tubular body 2 at a lower height, at least one outlet mouth 7 of the aqueous liquid phase separated from the mixture is

defined.

At least one set of coalescence plates 8 is housed in the volume inside the tubular body 2, which are arranged mutually parallel and on top of each other, forming a stack. It should be pointed out that the expression "coalescence plate", known in technical jargon in the field, should not be interpreted limitatively as referring to "plate"-shaped bodies.

Each coalescence plate 8 has a flow plate 9 of the mixture which is tilted by an angle α , with an amplitude ranging from 30° to 60°, with respect to a plane orthogonal to the longitudinal axis A, wherein with "plate" it is meant to indicate a sheet the shape of which, as it will appear clearer in the following, should not be considered as being exclusively flat and rectangular, but also shaped according to the side surface of a rotation solid.

The plate 9 has an upper side 90 which is facing the top 3 and a lower side 91 which is facing the bottom 4. Between the lower side 91 of a coalescence plate 8 and the upper side 90 of the coalescence plate 8 immediately beneath it, a flow channel 10 of the mixture to be separated is thus defined, along which the mixture flows, separating into two components which are stratified on top of each other: a lower layer consisting of the aqueous liquid phase and an upper layer consisting of the organic liquid phase, the latter in the form of drops which, by coalescence, join to form increasingly larger drops.

Each plate 9 ends in a lower edge 92 facing the end of the tubular body 2 at a lower height and in an opposite upper edge 93 facing the end of the tubular body 2 at an upper height.

5 The lower edge 92 is in fluid communication with a distribution channel 11 of the mixture to be separated which is defined inside the tubular body 2, it extends in a direction substantially parallel to its longitudinal axis A and is in fluid communication with
10 the at least one inlet mouth 5 of the mixture to be separated.

 The upper edge 93, on the other hand, is in fluid communication with an outflow channel 12 of the aqueous liquid phase which is defined in the tubular body 2, it
15 extends in a direction substantially parallel to its longitudinal axis A and is in fluid communication with the outlet mouth 7 of the aqueous liquid phase.

 According to a specific feature of the present invention, the coalescence plates 8, whatever their
20 form may be, are arranged on top of each other at a reciprocal distance ranging from 2 mm to 5 mm. This reduced spacing between two adjacent coalescence plates 8 contributes to reducing the overall encumbrance of the apparatus 1 according to the present invention,
25 without altering the separation efficiency.

 According to a further peculiar feature of the present invention, the upper edge 93 of each coalescence plate 8 extends into a lip 94 tilted with respect to the plate 9 so as to define with it a groove

95 with a concavity facing the end of the tubular body 2 at a lower height.

Said groove 95 acts as an accumulation area of the organic liquid phase before its separation and upward
5 movement towards the respective outlet mouth 6.

In particular, the groove 95 promotes the accumulation of the drops of organic liquid phase which, when passing through the underlying channel 10, are separated from the aqueous liquid phase, and their
10 coalescence in drops having larger dimensions which are collected therein without flowing towards the outflow channel 12 of the aqueous liquid phase.

In this way, the organic liquid phase separated is prevented from flowing into the outflow channel 12
15 where it should rise towards the top of the tubular body 2 flowing in countercurrent through the aqueous liquid phase separated.

The same groove 95, along with the respective lip 94, also favours the outflow of the aqueous liquid
20 phase towards the outflow channel 12.

In particular, the angle β subtended between the lip 94, and plate 9, or rather its lower side 91, is preferably equal to 90° .

According to a further feature of the present
25 invention, moreover, close to the upper edge 93 of each coalescence plate 8 or rather at the transition area between the lip 94 and plate 9, at least one pass-through disengage hole 96 of the organic liquid phase is defined, which has accumulated in the corresponding

groove 95 and which, passing through the holes 96, flows towards the overlying channel 10 until it reaches the top of the tubular body 2 where it accumulates to subsequently flow towards the outside.

5 In particular, close to the upper edge 93 of each coalescence plate 8 or rather in correspondence with the transition area between the lip 94 and respective plate 9, a plurality of holes 96 which are distributed in a row along a direction substantially parallel to
10 the profile of the upper edge 93 is obtained; along a line, in the case of coalescence plates of the flat type (figure 3) or along an annular crown in the case of coalescence plates of the truncated-conical type (figures 4a-4c).

15 It is noted that, with such configuration, the organic liquid phase accumulates and is collected in the groove 95 of each coalescence plate 8 from which it then disengage, passing through the holes 96 until it rises, passing through the overlying channels 10, to
20 the top of the tubular body 2 where it accumulates before flowing outside it. The aqueous liquid phase, on the other hand, flows towards the outflow channel 12 accompanied by the lip 94 descending towards the respective outlet mouth 7.

25 The coalescence plates 8 can be of the flat type as represented in figure 3.

One or more sets of coalescence plates 8 of the flat type can be positioned inside the tubular body 2 mutually superimposed in a single stack.

In this case, the distribution channel 11 is defined between the portion of the side surface of the tubular body 2 subtended to the lower edges 92 of the coalescence plates 8 and the same lower edges 92. The
5 outflow channel 12, on the other hand, is defined between the portion of the side surface of the tubular body 2 subtended to the upper edges 93 of the coalescence plates 8, such same upper edge 93 and a lower height bottom 4 at a lower height.

10 Alternatively, two sets or two stacks of coalescence plates 8 of the flat type can be positioned adjacent to each other with the upper edge 93 facing the centre of the tubular body 2 and with the lower edge 92 at a distance from the internal side surface of
15 the tubular body 2.

In this case, two distribution channels 11 are present, each defined by the space delimited by the internal side surface of the tubular body 2 and the lower edges 92 of the coalescence plates 8 of each of
20 the two sets. The outflow channel 12, on the other hand, is defined at the centre of the tubular body 2 and is delimited by the upper edges 93 of the coalescence plates 8 of the two sets mutually facing and by the portions of the internal side surface of the
25 tubular body 2 which extends between them.

According to a further peculiar feature of the present invention, each coalescence plate 8 has a truncated-conical form.

In particular, as represented in figures 4a-4c,

each coalescence plate 8 has a truncated-conical shape internally hollow and open at the larger base and smaller base, the plate 9 is thus defined by the side surface of the truncated cone.

5 The coalescence plates 8 are arranged mutually parallel forming a stack.

 The set of coalescence plates 8 is housed in the tubular body 2 coaxially to it with the larger base and smaller base of the coalescence plates 8 respectively
10 facing the end of the tubular body 2 at a lower height and the end of the tubular body 2 at an upper height.

 The lower edge 92 and the upper edge 93 of each coalescence plate 8 are therefore respectively defined by the larger base and smaller base of the truncated
15 cone and have a circular profile.

 The upper edge 93 extends into the lip 94 tilted towards the inside of the truncated cone so that the groove 95 is defined between the plate 9 and the lip 94.

20 Along the transition area between the plate 9 and respective lip 94, composed of a flat annular surface, a crown of through holes 96 exists.

 At least one ridge 97 protrudes from the lower surface 91 of each coalescence plate 8 of the
25 truncated-conical type, which is destined for resting on the upper surface 90 of the coalescence plate 8 immediately beneath it, thus acting as a spacer.

 In the embodiment illustrated, the ridge 97 has the form of a ribbing which extends along a generatrix of

the cone.

As represented in figures 1, 2 and 6, one or more sets of truncated-conical coalescence plates 8 are housed in the tubular body 2 so that an annular interspace, which forms the distribution channel 11, is defined between the lower edges 92 of the coalescence plates 8 themselves and the internal side surface of the tubular body 2.

The outflow channel 12, on the other hand, is defined at the centre of the coalescence plates 8 and is delimited by the upper edges 93 (smaller bases) of the truncated-conical coalescence plates 8 and by an outflow duct 24 positioned coaxially with respect to the tubular body 2, open at opposite ends 24a and 24b, of which one end 24a faces the end of the tubular body 2 at an upper height and the other end 24b faces the end of the tubular body 2 at a lower height.

The end 24a of the outflow duct 24 which faces the end of the tubular body 2 at an upper height protrudes from the top 3 of the latter defining the outlet mouth 6.

The end 24b of the outflow duct 24 which faces the end of the tubular body 2 at a lower height protrudes from its bottom 4 defining the outlet mouth 7.

The lip 94' of the coalescence plate 8 of the truncated-conical type at the top of the set, closes the outflow channel 12 above and delimits, in cooperation with the top 3 of the tubular body 2, an accumulation compartment 23 of the separated organic

liquid phase.

Close to the end 24a of the outflow duct 24 facing the end of the tubular body 2 at an upper height, at least one upper hole 25, specifically a crown of upper
5 holes 25, is obtained, through which the organic liquid phase, which has separated and collected in the accumulation department 23, flows into the outflow duct 24 and subsequently to the outlet mouth 6.

Similarly, close to the end 24b of the outflow duct
10 24 facing the end of the tubular body 2 at a lower height, at least one lower hole 26, specifically a crown of lower holes 26, is obtained, through which the aqueous liquid separated phase flows from the outflow channel 12 into the outflow duct 24 and from this to
15 the outlet mouth 7.

It should be noted that the truncated-conical form of the coalescence plates 8, thanks to the radial symmetry, ensures a good functioning of the separator even when it is in a tilted position with respect to
20 the vertical, without needing operations of direction during the installation.

Furthermore, the coalescence plates 8 of the truncated-conical type are obtained by fusion with consequent advantages in terms of production with
25 respect to coalescence plates of the flat type obtained, on the contrary, by plate processing.

Although only one set of coalescence plates 8 housed inside the tubular body 2 is shown in the enclosed figures, in all the possible embodiments of

the apparatus 1 according to the present invention, two or more sets of coalescence plates 8 can be housed inside the same tubular body 2, arranged in series with respect to each other and consequently hydraulically
5 connected in parallel. In this way, the structure of the apparatus 1 is modular, which makes it easily adaptable to the various application requirements.

In the basic configuration, the apparatus 1 according to the present invention comprises the
10 tubular body 2 inside which one or more sets of coalescence plates 8 are housed, as described above.

This basic configuration can also be applied to downhole separation plants, as illustrated for example in figure 7.

15 For surface applications, on the other hand, the apparatus 1 is completed by a containment tank 13 of one or more tubular bodies 2.

The tank 13 also has a tubular form, with a transversal section, preferably circular, and is closed
20 at the opposite ends, of which one end is at a lower height with respect to the other.

With reference to the enclosed figures, in which the apparatus 1 is represented in the usual vertical configuration, the lower end of the tank 13 is closed
25 by a bottom surface 14 and the upper end is closed by a top surface 15.

A chamber is defined inside the tank 13, in which at least one tubular body 2 is housed, whose bottom 4 rests on the bottom surface 14 of the tank 13 and whose

top 3 is at a distance from the top surface 15 of the tank 13.

An annular interspace 16 is thus defined between the tank 13 and tubular body 2, above which there is a compartment 17 with a circular transversal section in which the outlet mouth 6 of the tubular body 2 flows.

The tank 13, moreover, is equipped with at least one inlet opening 18 of the mixture to be separated therein.

10 In particular, the inlet opening 18 is situated at a lower height with respect to the outlet mouth 6 of the organic liquid phase from the tubular body 2 and introduces the mixture to be separated into the annular interspace 16.

15 At least a first discharge opening 19, on the other hand, is situated on the bottom surface 14 of the tank 13, which is in fluid communication with the outlet mouth 7 of the aqueous liquid phase from the tubular body 2. In particular, the first discharge opening 19
20 is directly connected to the outlet mouth 7 of the tubular body 2 and can consist of an extension of the end 24b of the outflow duct 24 which is inserted so as to pass through the bottom 4 of the tubular body 2 and the bottom surface 14 of the tank 13, so that the
25 outlet mouth 7 coincides with the first discharge opening 19 (figure 2).

Finally, the tank 13 is equipped with at least a second discharge opening 20 of the organic liquid phase which is in fluid communication with the chamber inside

the tank 13 above the inlet opening 18 and above the interface I between the mixture introduced into the annular interspace 16 and the organic liquid phase composed of the fraction which is separated from the mixture present in the annular interspace 16 itself and from the fraction separated inside the tubular body 2 and discharged from the outlet mouth 6 of the same.

In the embodiments represented in the enclosed figures 1 and 2, only one tubular body 2 is present inside the tank 13, it is possible however to arrange two or more tubular bodies 2 side by side and parallel, inside the same tank 13. Each tubular body 2 therefore can be constituted by one or more modules and can be installed alone or in combination with analogous modules inside the same tank 13, making the apparatus 1 according to the present invention even more flexible and modular.

Pumping means of the known type and not illustrated, as they do not form part of the present invention, are connected to the discharge openings 19, 20.

It should be noted that the arrangement of the pumping means downstream of the separation apparatus 1 and not, on the contrary, upstream of the same, prevents further emulsions of the organic liquid phase in the aqueous liquid phase, thus favouring the separation.

With reference to figures 1 and 2, which illustrate an apparatus 1 for surface applications, the

functioning of the apparatus 1 is as follows.

The mixture or, more specifically, dispersion of the organic liquid phase (dispersed phase) in the aqueous liquid phase (continuous phase) is injected
5 through the inlet opening 18 into the annular interspace 16.

A first separation and stratification of the two phases already takes place in the annular interspace 16, of which the organic liquid phase, as it is the one
10 with lowest specific density, tends to rise towards the surface of the mixture, stratifying above it.

The liquid aqueous phase containing still oil present in the annular interspace 16 passes through the inlet mouths 5 distributed on the side surface of the
15 tubular body 2 entering the distribution channel 11 present inside the tubular body itself 2 (arrows F).

From here, the mixture flows along the channels 10 defined between pairs of adjacent coalescence plates 8 with a laminar movement, so that the residence time
20 inside the channel 10 is sufficient for allowing the separation of the mixture.

During the flow of the mixture along the channels 10 from the lower edges 92 towards the upper edges 93 of the coalescence plates 8, the two organic liquid and
25 aqueous liquid phases are separated: the organic liquid phase, in the form of drops, rises through the mixture towards the lower side 91 of the coalescence plate 8 which delimits the single channel 10 above, where, following its profile, it is joined by coalescence into

drops having increasingly larger dimensions, the aqueous liquid phase, on the other hand, is separated into a lower layer which flows along the upper side 90 of the coalescence plate 8 which delimits the channel 10 below.

The organic liquid phase accumulates in correspondence with the groove 95 of each coalescence plate 8, aggregating with the organic liquid phase which rises from the underlying channels 10 through the holes 96 of the respective coalescence plates 8.

From here, the organic liquid phase is separated from the flow present in the channel 10, passing, through the holes 96, into the overlying channel 10.

The organic liquid phase which is separated from the flow present in a channel 10 and rises, through the holes 96 of the coalescence plate 8 which delimits said channel 10 above, towards the immediately overlying channel 10, encounters the aqueous liquid phase which has been separated in the latter channel 10, without however being entrained by this, thanks to the reduced flow rate.

The organic liquid phase therefore rises through the holes 96 of all the coalescence plates 8 of the set and accumulates in the accumulation compartment 23 at the top of the tubular body 2.

The organic liquid phase which is collected in the accumulation tank 23 enters the outflow duct 24 through the upper holes 25 and rises towards the outlet mouth 6 defined by the end 24a of the same outflow duct.

The organic liquid phase once out of the outlet mouth 6, it accumulates at the top of the tank 13 stratifying above the mixture introduced into it (interface I). The organic liquid phase then exits
5 through the second discharge opening 20.

The flow of the organic liquid phase is indicated by the arrows in a continuous line.

The aqueous organic phase which is separated along the channels 10, having reached the lip 94, is
10 accompanied by the latter, flowing into the outflow channel 12 where it descends towards the bottom 4 of the tubular body 2.

The aqueous liquid phase separated and which collects towards the bottom of the outflow channel 12,
15 passes from this into the outflow duct 24 through the lower holes 26 and then to the outlet mouth 7 (discharge opening 19) defined by the end 24b of the same outflow duct.

The flow of the aqueous liquid phase is indicated
20 by the arrows in a dashed line.

As already indicated, the apparatus 1 according to the present invention, in its base configuration comprising the tubular body 2 inside which one or more sets of coalescence plates 8 are housed, can be
25 particularly applied in downhole separation plants.

A possible embodiment of this plant 100 is schematically represented in figure 7.

The plant 100 comprises a closed chamber 101 which develops between an upper outlet mouth 102a of the

fluid phase with a lower specific density (organic liquid phase) separated from the mixture, situated at a first upper height, and a lower outlet mouth 102b of the fluid phase with a greater specific density
5 (aqueous liquid phase) separated from the mixture, situated at a second lower height with respect to the first upper height.

An inlet 103 for the mixture to be separated, specifically consisting of production fluid, is
10 interpositioned between the two upper and lower outlet mouths 102a, 102b. The lower outlet mouth 102b is in fluid communication with a reinjection area 108 into which the production water, suitably deoiled, is injected.

15 A first upper device 104 for the gross separation of the mixture and at least a second lower device 105 for the fine separation of the mixture pre-treated in the first upper device 104, are situated, in axial succession, between the upper outlet mouth 102a and the
20 lower outlet mouth 102b, wherein the first upper device for the gross separation 104 comprises a gravitational separation chamber and the at least second lower fine separation device 105 comprises at least one apparatus 1 according to the present invention as described in
25 the co-pending patent application in the name of the same Applicant.

The coalescence-separation apparatus, as also the set of coalescence plates, object of the present invention, although maintaining a high separation

efficiency, have the advantage of having limited encumbrances, thus enabling them to be easily used both in surface installations, in particular in surface installations in which there is a reduced availability
5 of space, as for example in offshore platforms, and also in downhole installations; in the latter case, without requiring any enlargement operations of the well hole.

In particular, the reduced spacing between adjacent
10 coalescence plates and the numerous flow channels defined between them, allow the overall encumbrance of the separation apparatus according to the present invention to be reduced, at the same time maintaining a high separation efficiency.

15 The conformation of the single coalescence plates with a folded lip defining a collection and accumulation groove of the fluid phase with a lower specific density and close to which "disengage" holes of the same are defined, contributes to improve the
20 separation efficiency and to avoid countercurrent flows of the two phases separated.

The truncated-conical form of the coalescence plates, thanks to their radial symmetry, guarantees a good separation efficiency degree even when the
25 apparatus is positioned with a tilted axis with respect to the vertical without needing a specific direction. Furthermore, this particular embodiment allows a better exploitation of the internal volume of the tubular body and, thanks to the geometry which characterizes it, it

is suitable for pressurized applications.

Finally, this particular embodiment allows coalescence plates to be produced by means of fusion, with consequent advantages in terms of production, and
5 also facilitates assembly operations of the sets of coalescence plates.

The coalescence-separation apparatus according to the present invention can be applied to separation plants of production fluid in an oil well directly at
10 downhole, being it compact and guaranteeing an aqueous liquid phase with a reduced content of residual organic components (oil) to be obtained, so as to be possible to reinject it into the production formation without causing a deterioration of the latter.

15 The particularly simple and modular structure of the coalescence-separation apparatus according to the present invention also makes it easily installable and flexible.

It is in fact possible, on the one hand, to
20 position in the same tubular body, one or more sets (modules) of coalescence plates one upon the other forming a stack in relation to the separation requirements. It is also possible, on the other hand, to position one or more tubular bodies, each equipped
25 in its interior with one ore more sets of coalescence plates, inside the same tank in relation to the separation requirements.

The coalescence-separation apparatus thus conceived can undergo numerous modifications and variants, all

included in the invention; furthermore, all the details can be substituted by technically equivalent elements. In practice, the materials used can vary according to technical requirements.

5

CLAIMS

- 1) An apparatus (1) for the coalescence-separation of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific
5 density, characterized in that it comprises:
- a tubular body (2) closed at opposite ends, of which, considering the apparatus in the configuration of use, one is higher than the other,
 - at least one inlet mouth (5) of the mixture to be
10 separated which is defined on the side surface of said tubular body (2), at least one outlet mouth (6) of the fluid phase with a lower specific density separated from said mixture which is defined close to the end of said tubular body at an upper height, at least one
15 outlet mouth (7) of the fluid phase with a greater specific density separated from said mixture which is defined close to the end of said tubular body at a lower height and
 - at least a set of coalescence plates (8) which is
20 housed inside said tubular body (2),
 - wherein each of said coalescence plates (8) has a flow plate (9) of said mixture which is tilted by an angle α with respect to a plane orthogonal to the longitudinal axis (A) of said tubular body (2) and
25 which has a lower edge (92) facing the end of said tubular body (2) at a lower height and in fluid communication with a distribution channel (11) of the mixture to be separated, which is defined inside said tubular body (2) and is in fluid communication with

said at least one inlet mouth (5), and an upper edge (93) facing the end of said tubular body (2) at an upper height and in fluid communication with an outflow channel (12) of the fluid phase with a greater specific density, which is defined in said tubular body (2) and is in fluid communication with at least said outlet mouth (7) of said fluid phase with a greater specific density,

- above said set of coalescence plates (8), being defined an accumulation compartment (23) of the fluid phase with a specific lower density in fluid communication with said respective outlet mouth (6), and wherein

- said coalescence plates (8) are arranged mutually parallel and one upon the other at a reciprocal distance ranging from 2 mm to 5 mm, pairs of coalescence plates (8) mutually adjacent forming a respective flow and separation channel (10) of said mixture.

2) The apparatus (1) according to claim 1, characterized in that the upper edge (93) of each of said coalescence plates (8) extends into a lip (94) tilted with respect to said flow plate (9) defining a groove (95) with a concavity facing the end of said tubular body (2) at a lower height, for the accumulation of the fluid phase with a lower density and for the outflow of said fluid phase with a greater density.

3) The apparatus (1) according to claim 2,

characterized in that an angle β of 90° is defined between said lip (94) and said flow plate (9).

4) The apparatus (1) according to claim 2 or 3, characterized in that at least one through hole (96) is
5 defined close to the transition area between said lip (94) and said plate (9) of each of said coalescence plates (8), for the separation of the fluid phase with a lower specific density from the mixture flowing in the flow channel (10) defined between each of said
10 coalescence plates (8) and the coalescence plate immediately below it and its passage in the flow channel (10) defined between said coalescence plate (8) and the coalescence plate immediately above it.

5) The apparatus (1) according to claim 4,
15 characterized in that each of said coalescence plates (8) comprises a plurality of said through holes (96) distributed along a direction substantially parallel to said respective upper edge (93).

6) The apparatus (1) according to one or more of the
20 previous claims, characterized in that each of said coalescence plates (8) has a truncated-conical form internally hollow and open in correspondence with the larger base and smaller base.

7) The apparatus (1) according to claim 6,
25 characterized in that each of said coalescence plates (8) is positioned inside said tubular body (2) with the larger base facing said end of the tubular body at a lower height and the smaller base facing said end of the tubular body at an upper height, said flow plate

(9) being defined by the side surface of said truncated-cone and said upper edge (93) and lower edge (92) being defined by the edge of said smaller base and the edge of said larger base respectively.

5 8) The apparatus (1) according to claim 7, characterized in that said coalescence plates (8) are positioned substantially coaxially with respect to said tubular body (2) with the lower edge (92) at a distance from the internal side surface of said tubular body
10 (2), the space delimited by the upper edges (93) of said coalescence plates (8) defining said outflow channel (12) and the annular space delimited by the internal side surface of said tubular body (2) and the lower edge (92) of said coalescence plates (8) defining
15 said distribution channel (11).

9) The apparatus (1) according to claim 7 or 8, characterized in that it comprises an outflow duct (24) which is positioned inside said outflow channel (12) coaxially with respect to said tubular body (2) and
20 that it is open at opposite ends, of which one end (24a) faces the end of said tubular body (2) at an upper height and is in fluid communication with said outlet mouth (6) of the fluid phase with a lower specific density and the other end (24b) faces the end
25 of said tubular body (2) at a lower height and is in fluid communication with said outlet mouth (7) of the fluid phase with a greater specific density, wherein at least one upper hole (25) is defined close to said end (24a) of the outflow duct (24) facing the end of said

tubular body (2) at an upper height, which puts said accumulation compartment (23) in fluid communication with the interior of said outflow duct (24) and wherein at least one lower hole (26) is defined close to said end (24b) of the outflow duct (24) facing the end of said tubular body (2) at a lower height, which puts said outlet channel (12) in fluid communication with the interior of said outflow duct (24).

10) The apparatus (1) according to one or more of the previous claims from 1 to 5, characterized in that each of said coalescence plates (8) has a substantially planar form.

11) An apparatus (1) for the coalescence-separation of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density, characterized in that it comprises:

- a tubular body (2) closed at opposite ends, of which, considering the apparatus in the configuration of use, one is higher than the other,
- at least one inlet mouth (5) of the mixture to be separated which is defined on the side surface of said tubular body (2), at least one outlet mouth (6) of the fluid phase with a lower specific density separated from said mixture which is defined close to the end of said tubular body at an upper height, at least one outlet mouth (7) of the fluid phase with a greater specific density separated from said mixture which is defined close to the end of said tubular body at a lower height and

- at least one set of coalescence plates (8) which is housed inside said tubular body (2) with said coalescence plates (8) arranged mutually parallel and one upon the other at a defined distance forming a
5 respective flow and separation channel (10) of said mixture,
- wherein each of said coalescence plates (8) has a flow plate (9) of said mixture which is tilted by an angle α with respect to a plane orthogonal to the
10 longitudinal axis (A) of said tubular body (2) and which has a lower edge (92) facing the end of said tubular body (2) at a lower height and in fluid communication with a distribution channel (11) of the mixture to be separated, which is defined inside said
15 tubular body (2) and is in fluid communication with said at least one inlet mouth (5), and an upper edge (93) facing the end of said tubular body (2) at an upper height and in fluid communication with an outflow channel (12) of the fluid phase with a greater specific
20 density, which is defined in said tubular body (2) and is in fluid communication with at least said outlet mouth (7) of said fluid phase with a greater specific density,
- above said set of coalescence plates (8), being
25 defined an accumulation compartment (23) of the fluid phase with a lower density in fluid communication with said respective outlet mouth (6), and wherein
- the upper edge (93) of each of said coalescence plates (8) extends into a lip (94) tilted with respect

to said flow plate (9) defining a groove (95) with a concavity facing the end of said tubular body (2) at a lower height, for the accumulation of the fluid phase with a lower density and for favouring the outflow of said fluid phase with a greater density, a plurality of through holes (96) being defined close to the transition area between said lip (94) and said plate (9) of each of said coalescence plates (8), for the separation of the fluid phase with a lower specific density from the mixture flowing in the flow channel (10) defined between each of said coalescence plates (8) and the coalescence plate immediately below it and its passage in the flow channel (10) defined between said coalescence plate (8) and the coalescence plate immediately above it.

12) The apparatus (1) according to claim 11, characterized in that an angle β of 90° is defined between said lip (94) and said flow plate (9).

13) The apparatus (1) according to claim 11 or 12, characterized in that each of said coalescence plates (8) has a truncated-conical form internally hollow and open in correspondence with the larger base and smaller base.

14) The apparatus (1) according to claim 13, characterized in that each of said coalescence plates (8) is positioned inside said tubular body (2) with the larger base facing said end of the tubular body at a lower height and the smaller base facing said end of the tubular body at an upper height, said flow plate

- (9) being defined by the side surface of said truncated-cone and said upper edge (93) and lower edge (92) being defined by the edge of said smaller base and the edge of said larger base respectively.
- 5 15) The apparatus (1) according to claim 14, characterized in that said coalescence plates (8) are positioned substantially coaxially with respect to said tubular body (2) with the lower edge (92) at a distance from the internal side surface of said tubular body
- 10 (2), the space delimited by the upper edges (93) of said coalescence plates (8) defining said outflow channel (12) and the annular space delimited by the internal side surface of said tubular body (2) and the lower edge (92) of said coalescence plates (8) defining
- 15 said distribution channel (11).
- 16) The apparatus (1) according to claim 14 or 15, characterized in that it comprises an outflow duct (24) which is positioned inside said outflow channel (12) coaxially with respect to said tubular body (2) and
- 20 that it is open at opposite ends, of which one end (24a) faces the end of said tubular body (2) at an upper height and is in fluid communication with said outlet mouth (6) of the fluid phase with a lower specific density and the other end (24b) faces the end
- 25 of said tubular body (2) at a lower height and is in fluid communication with said outlet mouth (7) of the fluid phase with a greater specific density, wherein at least one upper hole (25) is defined close to said end (24a) of the outflow duct (24) facing the end of said

tubular body (2) at an upper height, which puts said accumulation compartment (23) in fluid communication with the interior of said outflow duct (24) and wherein at least one lower hole (26) is defined close to said end (24b) of the outflow duct (24) facing the end of said tubular body (2) at a lower height, which puts said outlet channel (12) in fluid communication with the interior of said outflow duct (24).

17) The apparatus (1) according to one or more of the previous claims from 11 to 12, characterized in that each of said coalescence plates (8) has a substantially planar form.

18) The apparatus (1) according to one or more of the previous claims from 11 to 17, characterized in that the distance between two subsequent coalescence plates (8) ranges from 2 mm to 5 mm.

19) An apparatus (1) for the coalescence-separation of a mixture comprising two fluid phases mutually at least partially immiscible and with a different specific density, characterized in that it comprises:

- a tubular body (2) closed at opposite ends, of which, considering the apparatus in the configuration of use, one is higher than the other,
- at least one inlet mouth (5) of the mixture to be separated which is defined on the side surface of said tubular body (2), at least one outlet mouth (6) of the fluid phase with a lower specific density separated from said mixture which is defined close to the end of said tubular body at an upper height, at least one

- outlet mouth (7) of the fluid phase with a greater specific density separated from said mixture which is defined close to the end of said tubular body at a lower height and
- 5 - at least one set of coalescence plates (8) which is housed inside said tubular body (2) with said coalescence plates (8) mutually arranged parallel and one upon the other at a defined distance forming a respective flow and separation channel (10) of said
10 mixture,
- wherein each of said coalescence plates (8) has a flow plate (9) of said mixture which is tilted by an angle α with respect to a plane orthogonal to the longitudinal axis (A) of said tubular body (2) and
15 which has a lower edge (92) facing the end of said tubular body (2) at a lower height and in fluid communication with a distribution channel (11) of the mixture to be separated, which is defined inside said tubular body (2) and is in fluid communication with
20 said at least one inlet mouth (5), and an upper edge (93) facing the end of said tubular body (2) at an upper height and in fluid communication with an outflow channel (12) of the fluid phase with a greater specific density, which is defined in said tubular body (2) and
25 is in fluid communication with at least said outlet mouth (7) of said fluid phase with a greater specific density,
- above said set of coalescence plates (8), being defined an accumulation compartment (23) of the fluid

phase with a lower density in fluid communication with said respective outlet mouth (6), and wherein

- each of said coalescence plates (8) has a truncated-conical form internally hollow and open in

5 correspondence with the larger base and smaller base.

20) The apparatus (1) according to claim 19, characterized in that each of said coalescence plates (8) is positioned inside said tubular body (2) with the larger base facing said end of the tubular body at a

10 lower height and the smaller base facing said end of the tubular body at an upper height, said flow plate (9) being defined by the side surface of said truncated-cone and said upper edge (93) and lower edge (92) being defined by the edge of said smaller base and

15 the edge of said larger base respectively.

21) The apparatus (1) according to claim 20, characterized in that said coalescence plates (8) are positioned substantially coaxially with respect to said tubular body (2) with the lower edge (92) at a distance

20 from the internal side surface of said tubular body (2), the space delimited by the upper edges (93) of said coalescence plates (8) defining said outflow channel (12) and the annular space delimited by the internal side surface of said tubular body (2) and the

25 lower edge (92) of said coalescence plates (8) defining said distribution channel (11).

22) The apparatus (1) according to claim 20 or 21, characterized in that it comprises an outflow duct (24) which is positioned inside said outflow channel (12)

coaxially with respect to said tubular body (2) and that it is open at opposite ends, of which one end (24a) faces the end of said tubular body (2) at an upper height and is in fluid communication with said outlet mouth (6) of the fluid phase with a lower specific density and the other end (24b) faces the end of said tubular body (2) at a lower height and is in fluid communication with said outlet mouth (7) of the fluid phase with a greater specific density, wherein at least one upper hole (25) is defined close to said end (24a) of the outflow duct (24) facing the end of said tubular body (2) at an upper height, which puts said accumulation compartment (23) in fluid communication with the interior of said outflow duct (24) and wherein at least one lower hole (26) is defined close to said end (24b) of the outflow duct (24) facing the end of said tubular body (2) at a lower height, which puts said outlet channel (12) in fluid communication with the interior of said outflow duct (24).

23) The apparatus (1) according to one or more of the claims from 19 to 22, characterized in that the upper edge (93) of each of said coalescence plates (8) extends into a lip (94) tilted with respect to said flow plate (9) defining a groove (95) with a concavity facing the end of said tubular body (2) at a lower height, for the accumulation of the fluid phase with a lower density and for favouring the outflow of said fluid phase with a greater density.

24) The apparatus (1) according to claim 23,

characterized in that an angle β of 90° is defined between said lip (94) and said flow plate (9).

25) The apparatus (1) according to claim 23 or 24, characterized in that a series of through holes (96) is
5 defined close to the transition area between said lip (94) and said plate (9) of each of said coalescence plates (8), for the separation of the fluid phase with a lower specific density from the mixture flowing in the flow channel (10) defined between each of said
10 coalescence plates (8) and the coalescence plate immediately below it and its passage in the flow channel (10) defined between said coalescence plate (8) and the coalescence plate immediately above it.

26) The apparatus (1) according to one or more of the
15 previous claims from 19 to 25, characterized in that the distance between two subsequent coalescence plates (8) ranges from 2 mm to 5 mm.

27) The apparatus (1) according to one or more of the previous claims, characterized in that said angle α
20 ranges from 30° to 60° .

28) The apparatus (1) according to one or more of the previous claims, characterized in that it comprises a plurality of said inlet mouths (5) distributed along a perimetric line of said tubular body (2).

25 29) The apparatus (1) according to one or more of the previous claims, characterized in that it comprises at least one pair of said sets of coalescence plates (8) arranged in series with respect to each other inside said tubular body (2).

30) The apparatus (1) according to one or more of the previous claims, characterized in that it also comprises a containment tank (13) in whose interior there is a chamber in which at least one of said
5 tubular bodies (2) is housed, wherein the at least one inlet mouth (5) of said tubular body (2) is in fluid communication with said chamber and wherein said tank (13) comprises at least one inlet opening (18) into said chamber of the mixture to be separated which,
10 under conditions of use, is positioned at a lower height with respect to the outlet mouth (6) of said tubular body of the fluid phase with a lower specific density, at least a first discharge opening (19) which is in fluid communication with the outlet mouth (7) of
15 said tubular body of the fluid phase with a greater specific density separated from said mixture and at least a second discharge opening (20) of the fluid phase with a lower specific density which is in fluid communication with said chamber, and which is
20 positioned at an upper height with respect to said inlet opening (18), the outlet mouth (6) of said tubular body of said fluid phase with a lower specific density resulting in said chamber.

31) The apparatus (1) according to claim 30,
25 characterized in that it comprises at least two of said tubular bodies (2) situated in parallel inside the chamber of said tank (13).

1/6

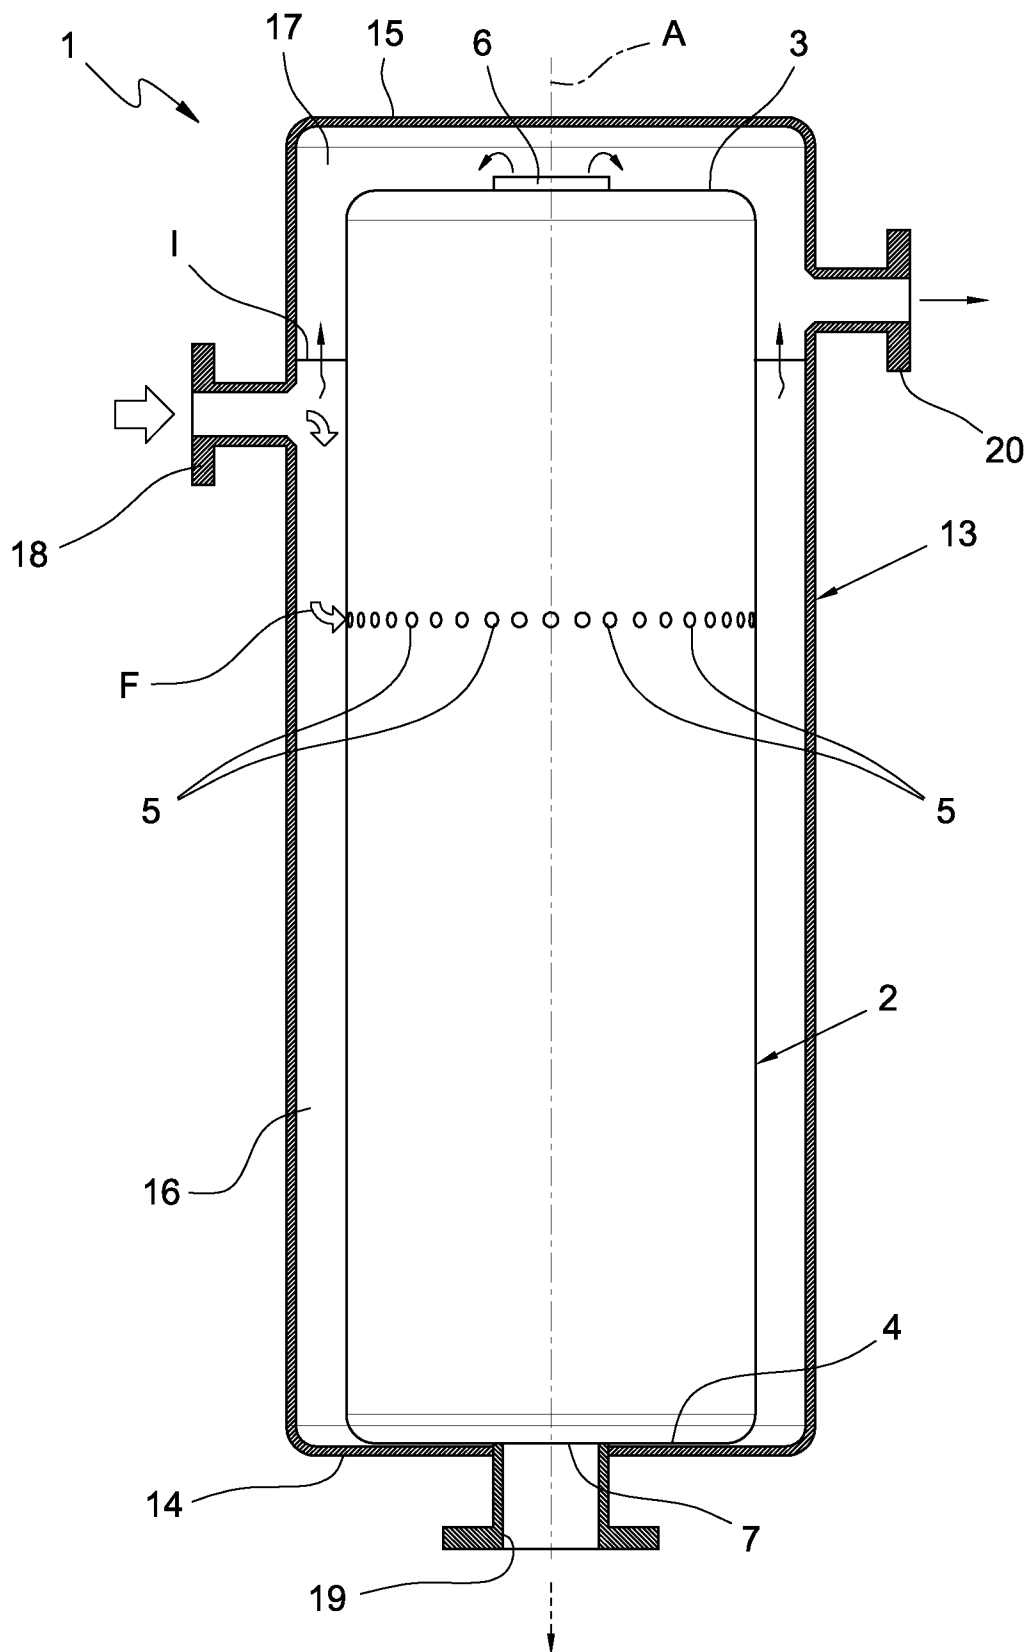


Fig. 1

2/6


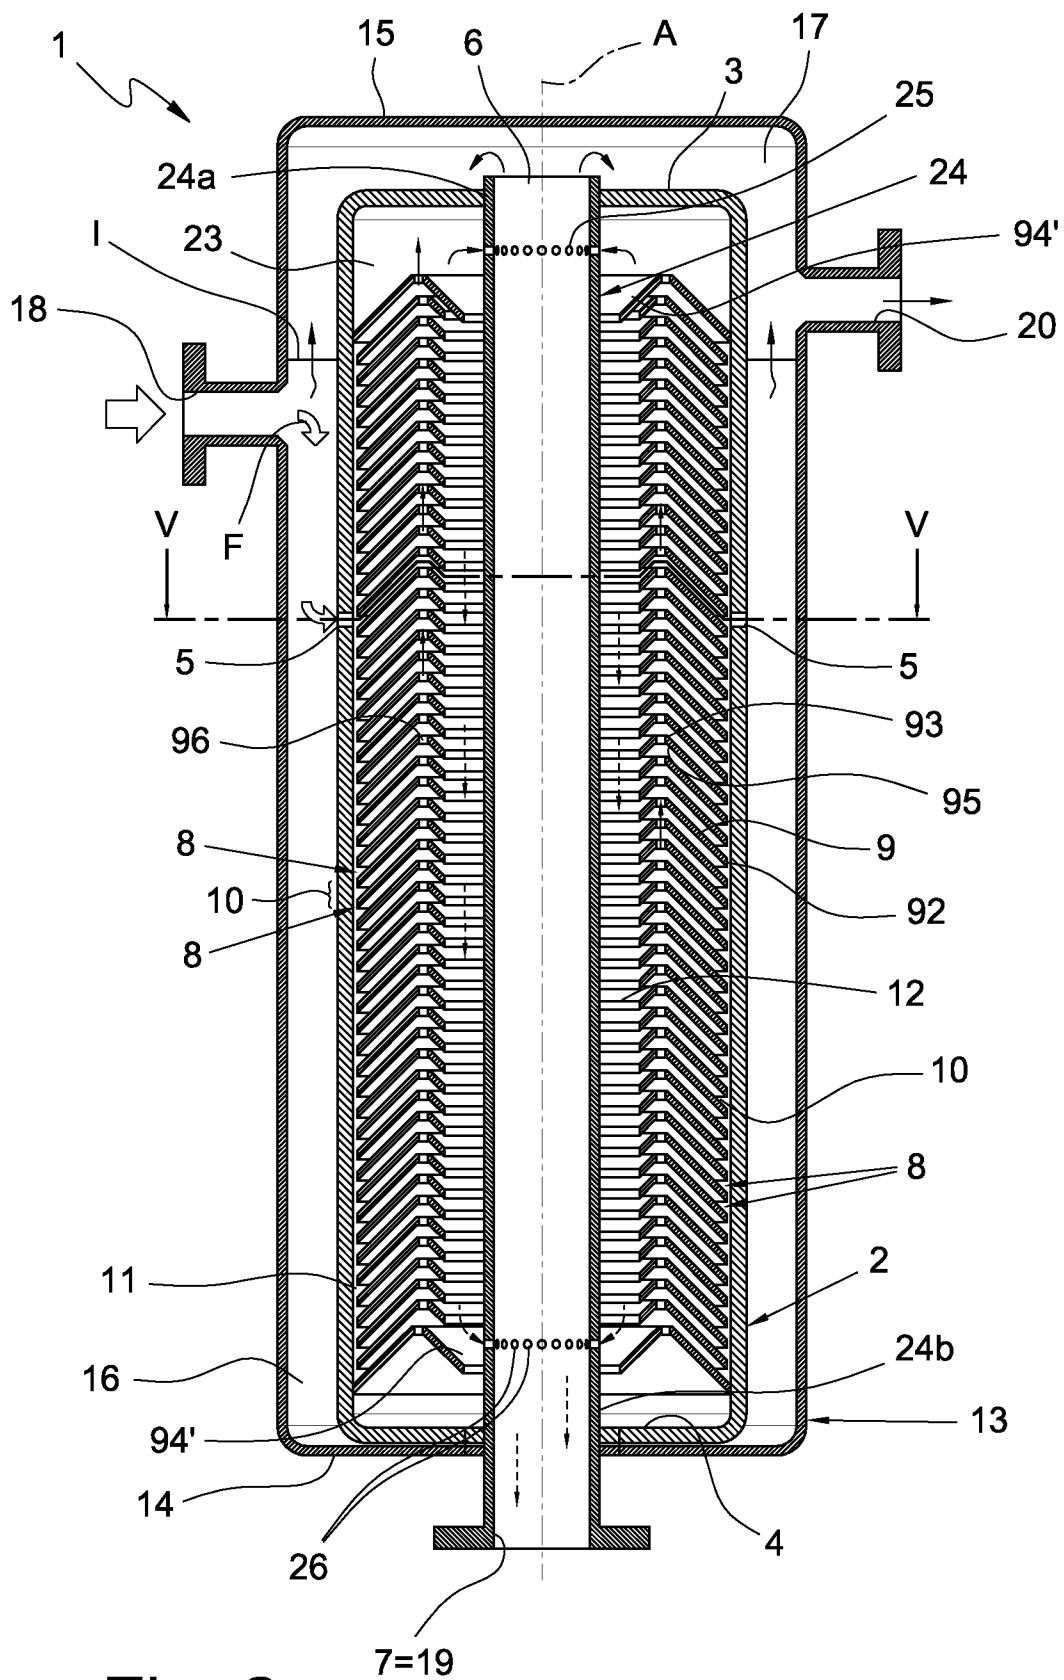


Fig. 2

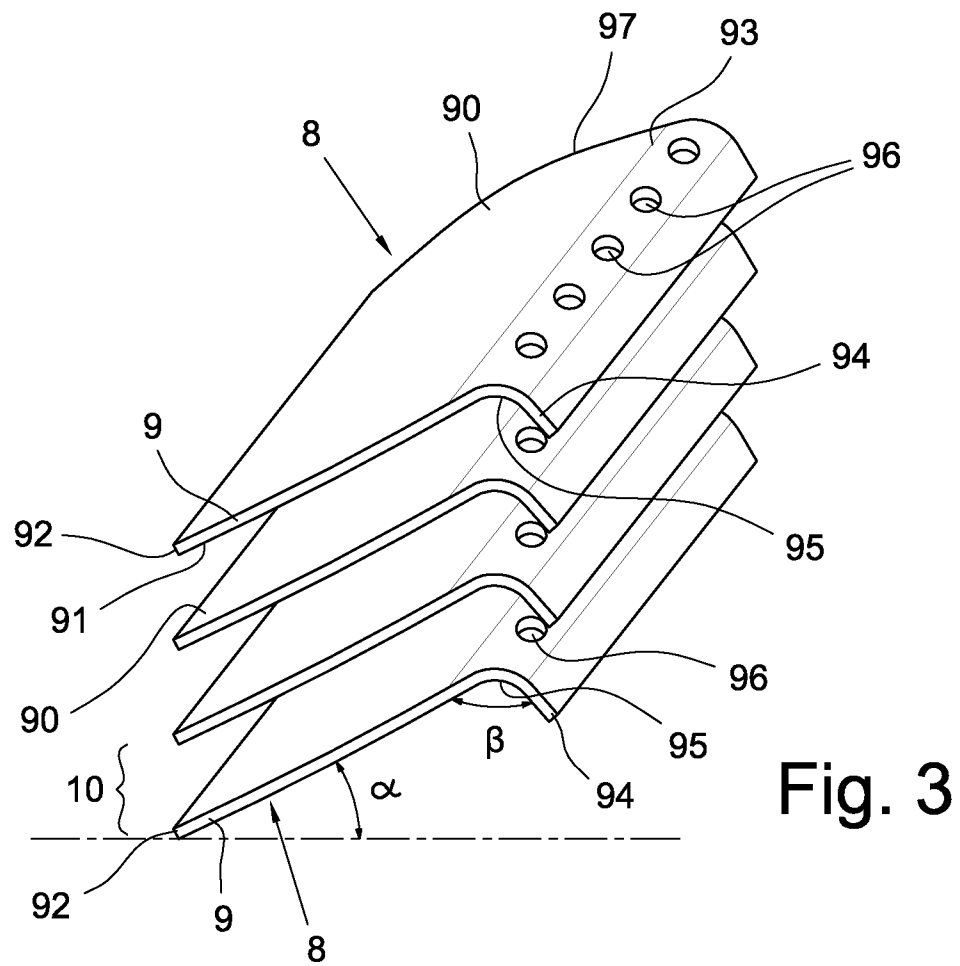

4/6

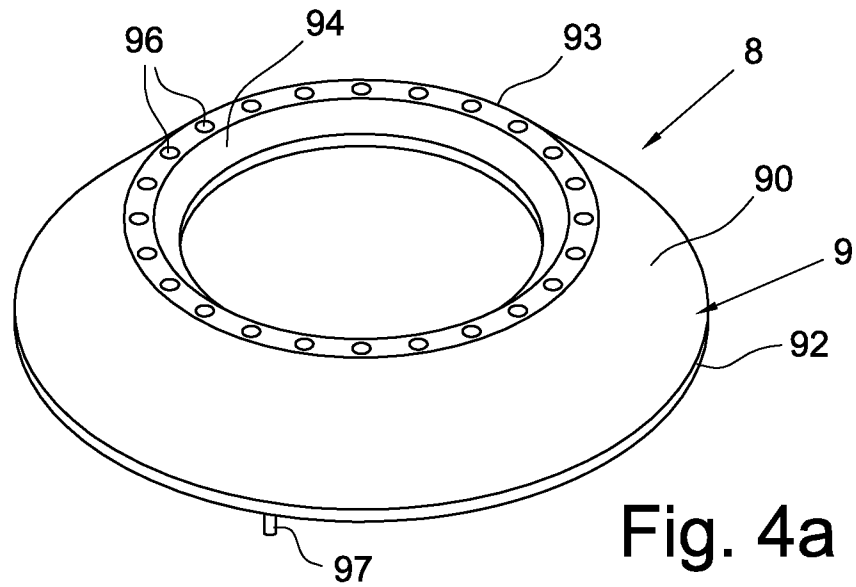


Fig. 4a

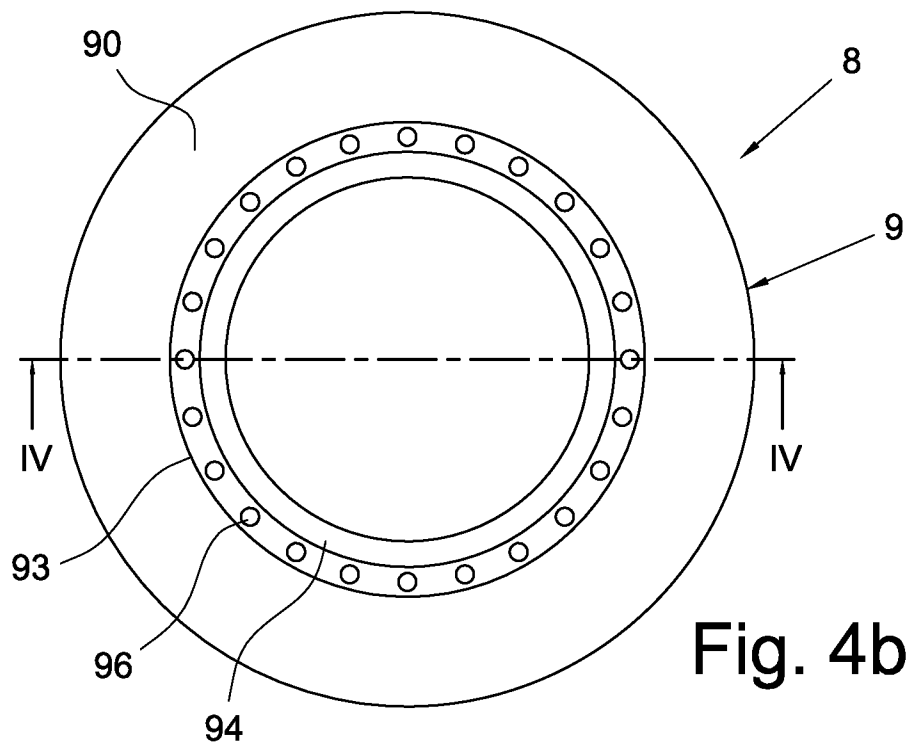


Fig. 4b

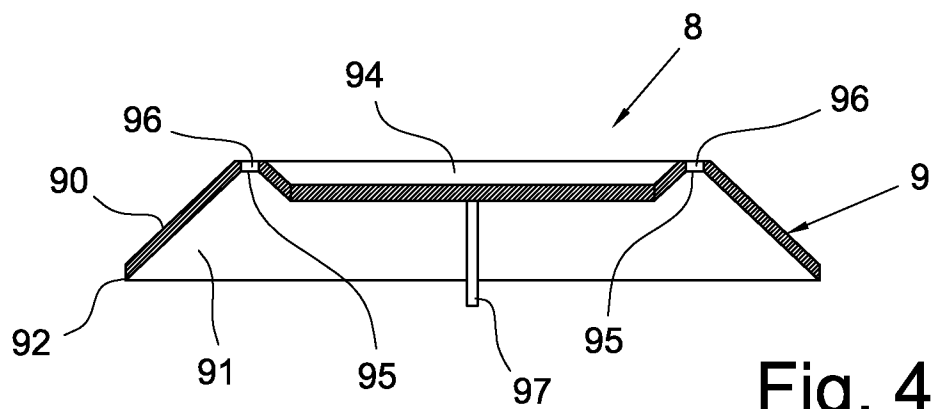
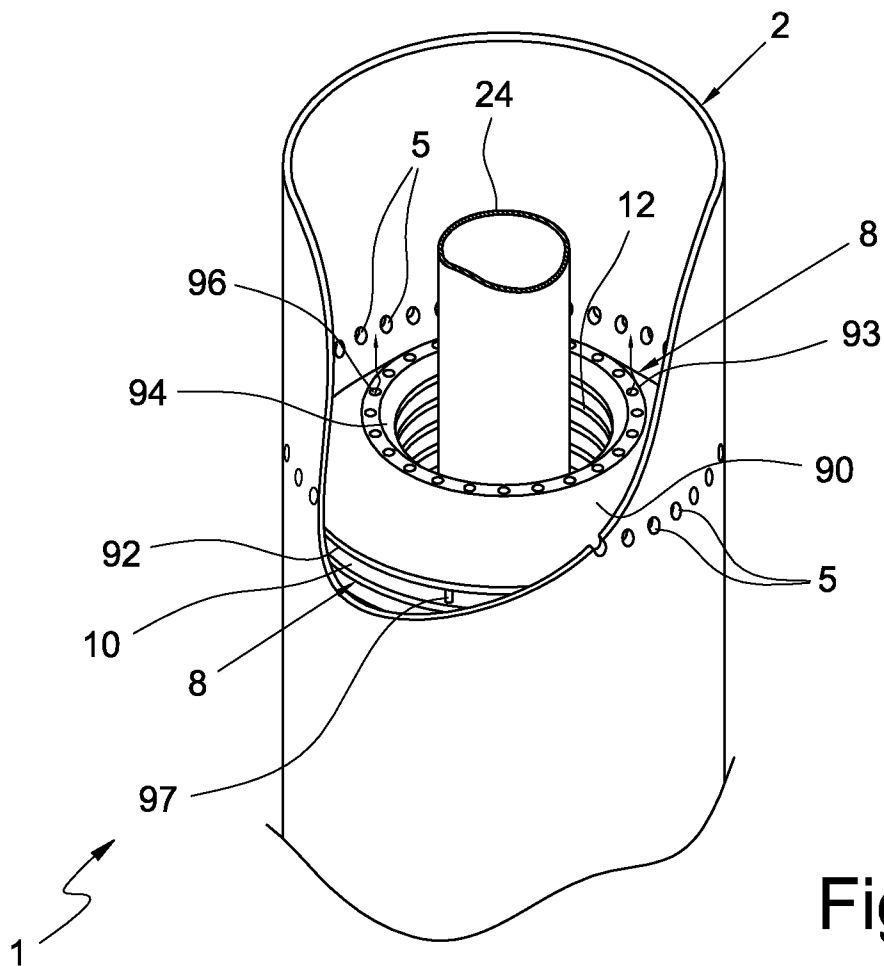
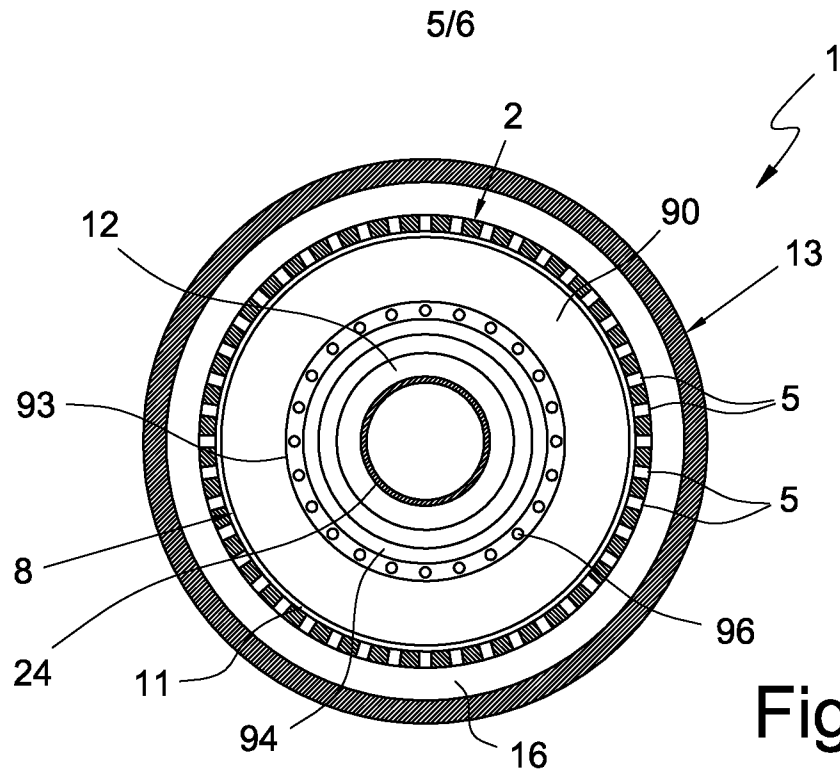


Fig. 4c



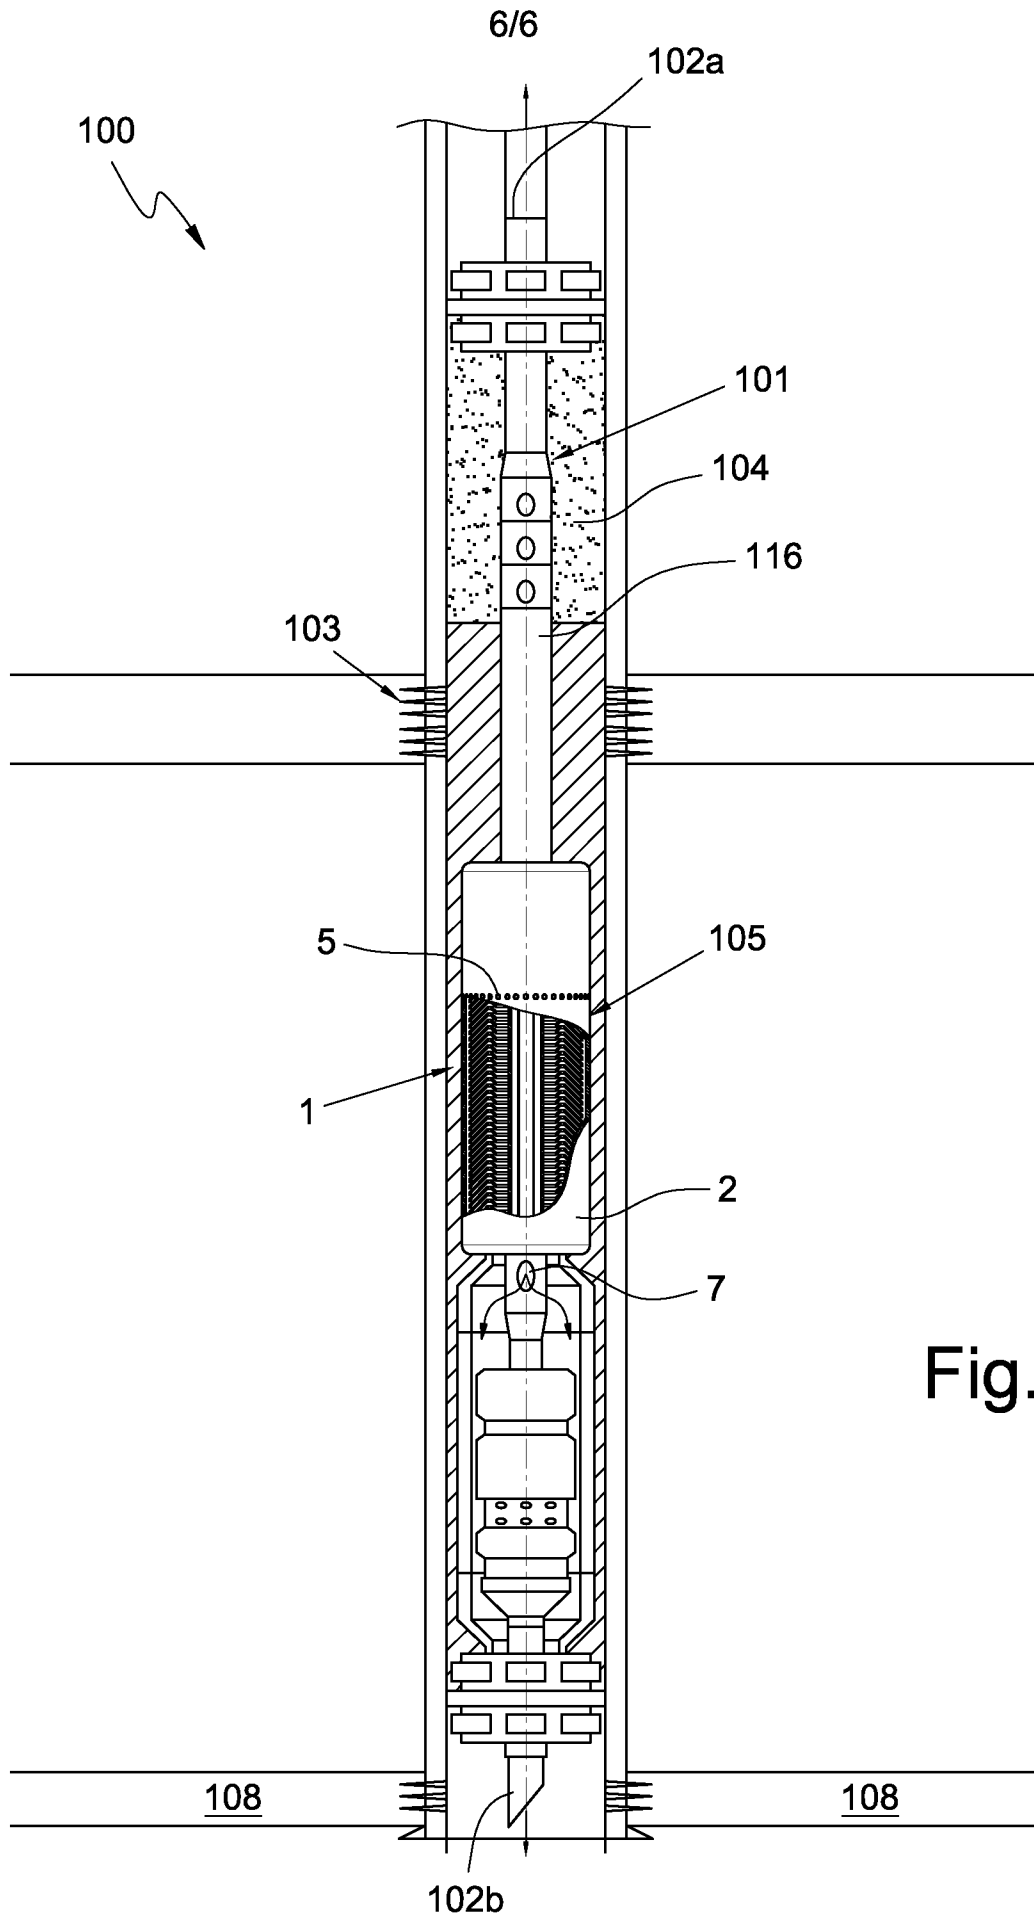


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/074194

A. CLASSIFICATION OF SUBJECT MATTER

INV. B01D17/02 B01D17/04 C10G33/06 E21B43/34
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01D C10G E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 840 198 A (CLARKE NEVILLE [AU]) 24 November 1998 (1998-11-24)	3,6-10, 12-17, 19-22, 24,27-31
Y	column 3, line 12 - line 17 column 5, line 9 - line 19 column 6, line 5 - line 8 column 8, line 58 - line 67 claim 1 figures 1, 10	1,2,4,5, 11,18, 23,25,26
Y	US 4 921 609 A (FROMSON ROBERT E [US]) 1 May 1990 (1990-05-01) column 2, line 58 - line 66	1,18,26
Y	US 3 847 813 A (CASTELLI J) 12 November 1974 (1974-11-12) column 1, line 49 - line 64; figure 3	2,4,5, 11,23,25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 April 2012

Date of mailing of the international search report

27/04/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

García Alonso, Nuria

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/074194

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5840198	A	24-11-1998	AT 256487 T	15-01-2004
			AU 685659 B2	22-01-1998
			BR 9508462 A	09-06-1998
			CA 2196086 A1	15-02-1996
			DE 69532329 D1	29-01-2004
			DE 69532329 T2	09-09-2004
			EP 0773821 A1	21-05-1997
			JP 4358906 B2	04-11-2009
			JP H10503420 A	31-03-1998
			NO 970381 A	04-02-1997
			NZ 290088 A	26-05-1997
			US 5840198 A	24-11-1998
			WO 9604058 A1	15-02-1996

US 4921609	A	01-05-1990	NONE	

US 3847813	A	12-11-1974	JP 1096601 C	14-05-1982
			JP 49097370 A	13-09-1974
			JP 56038243 B	05-09-1981
			US 3847813 A	12-11-1974
