




(86) Date de dépôt PCT/PCT Filing Date: 2000/06/07
(87) Date publication PCT/PCT Publication Date: 2000/12/21
(45) Date de délivrance/Issue Date: 2008/09/02
(85) Entrée phase nationale/National Entry: 2002/06/25
(86) N° demande PCT/PCT Application No.: AU 2000/000637
(87) N° publication PCT/PCT Publication No.: 2000/077336
(30) Priorité/Priority: 1999/06/10 (AUPQ 0902)

(51) Cl.Int./Int.Cl. *C03C 27/06* (2006.01),
E06B 3/663 (2006.01), *E06B 3/673* (2006.01)
(72) Inventeur/Inventor:
COLLINS, RICHARD E., AU
(73) Propriétaire/Owner:
THE UNIVERSITY OF SYDNEY, AU
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : PANNEAU DE VERRE
(54) Title: GLASS PANEL

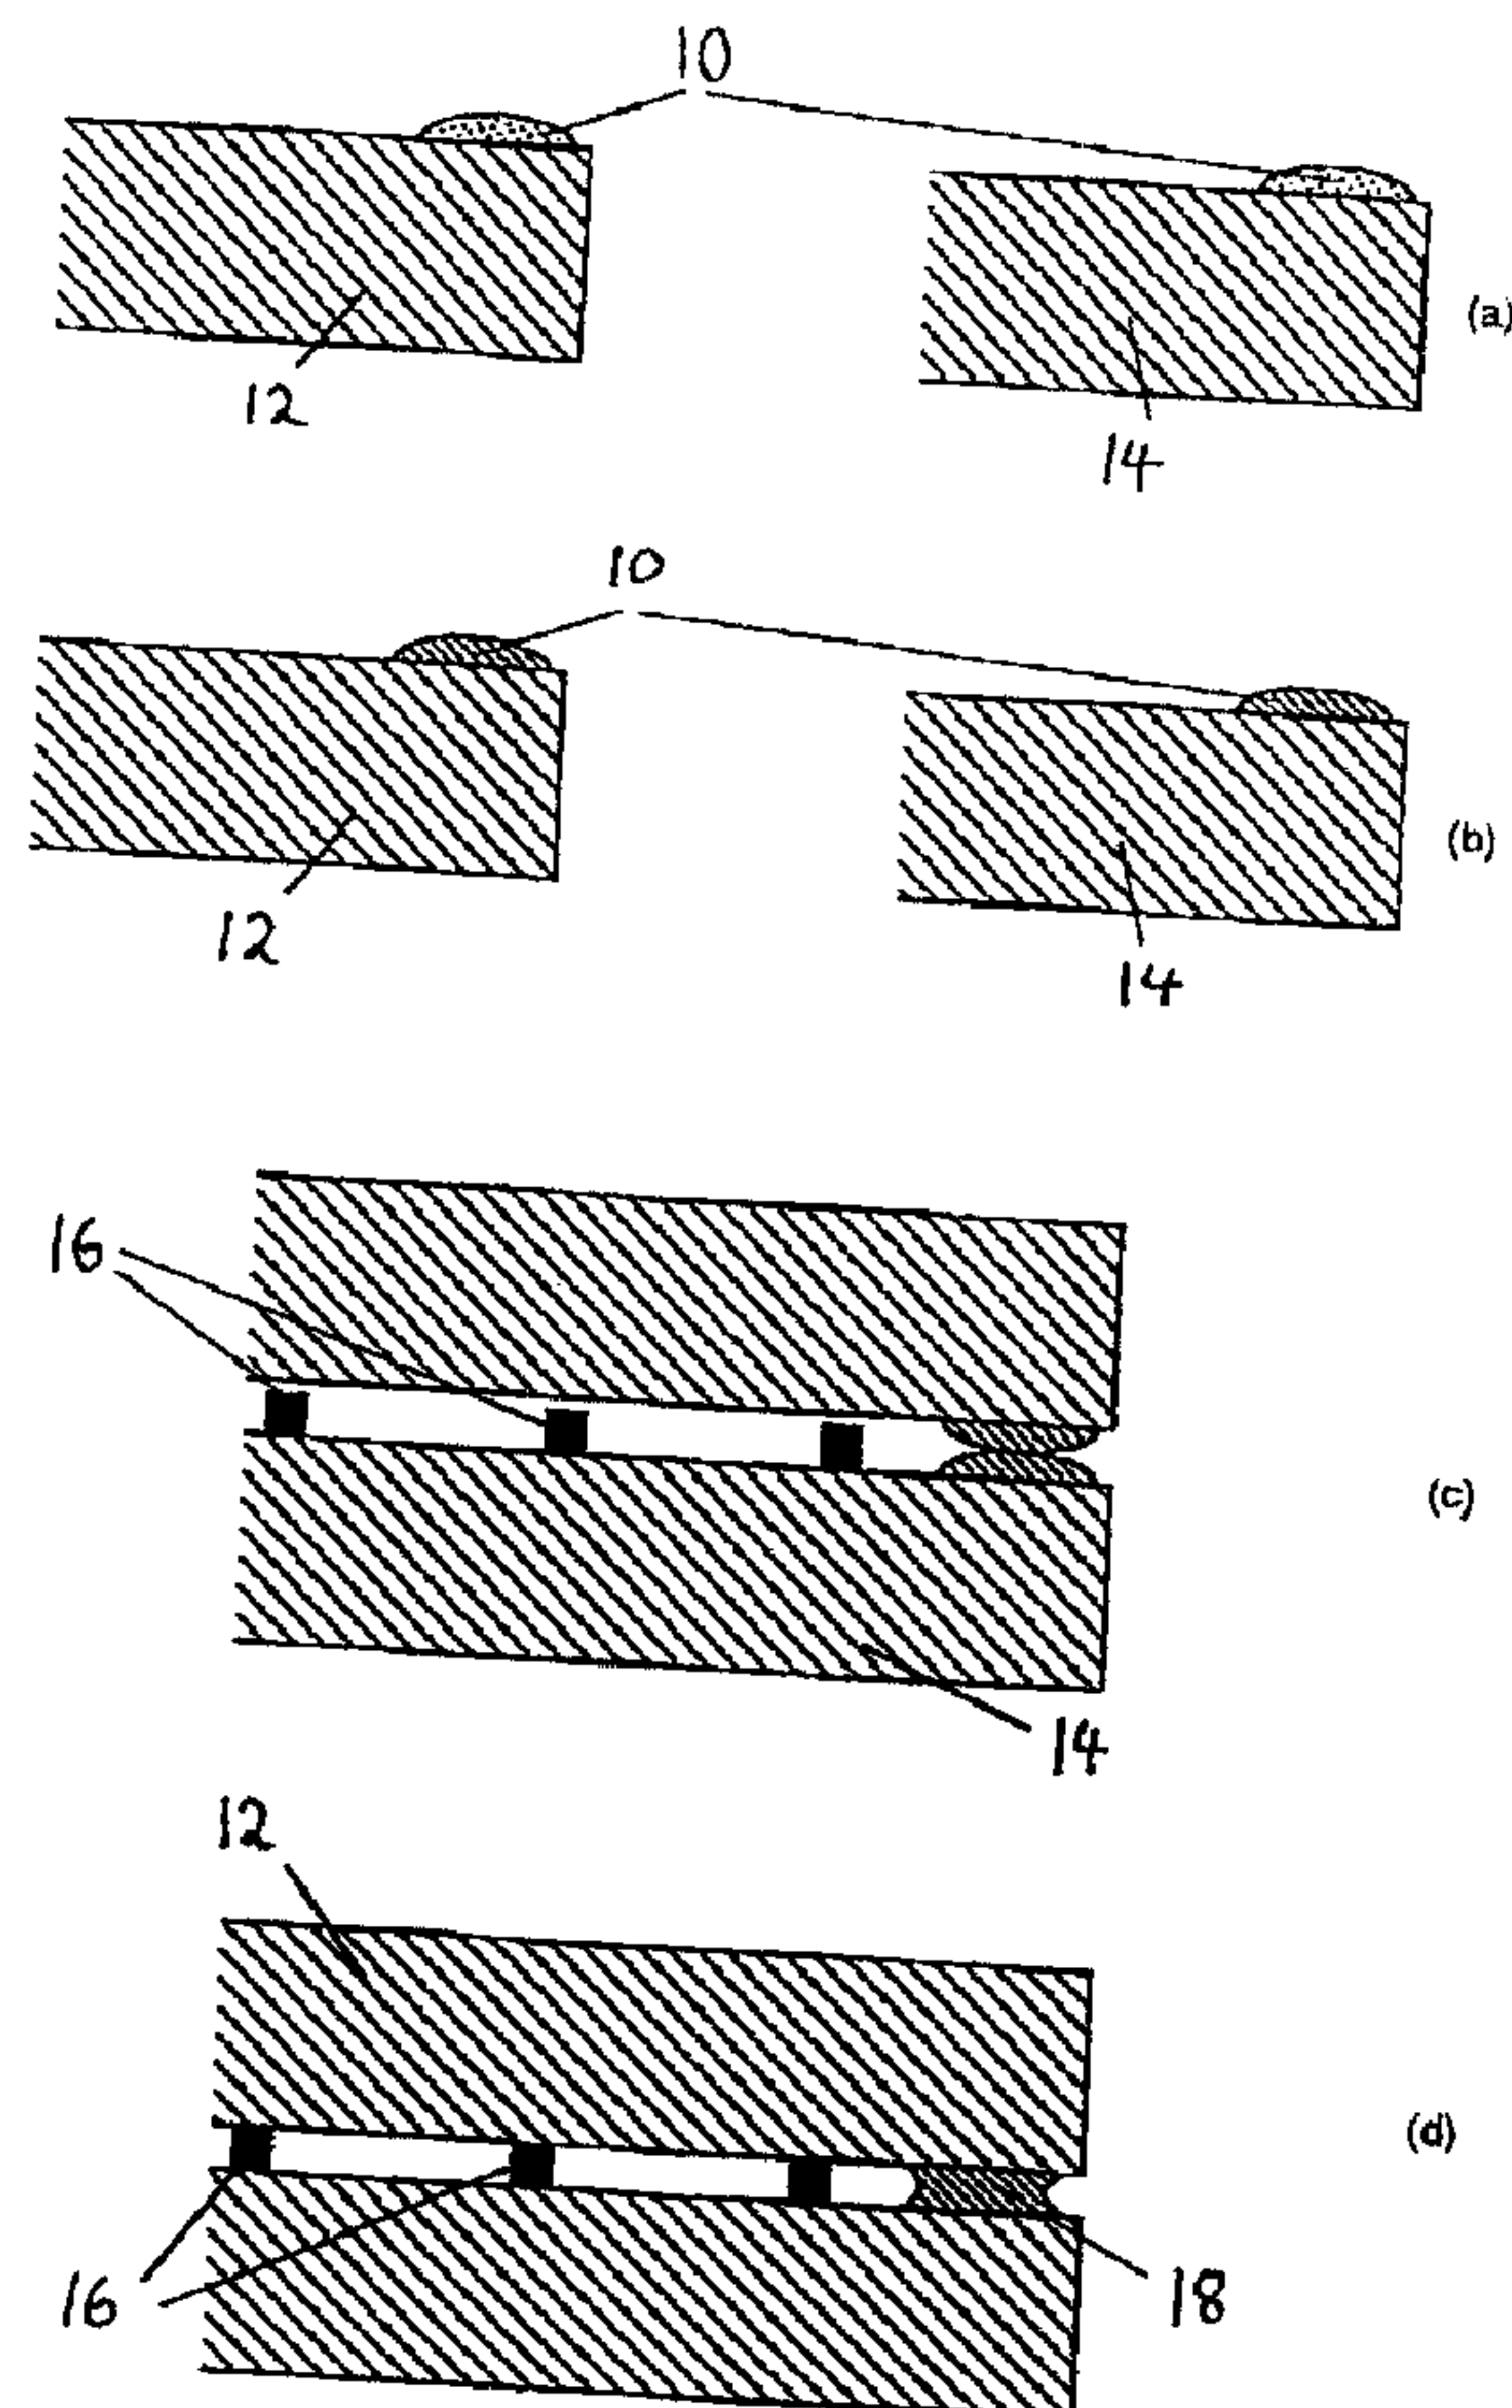

(57) Abrégé/Abstract:

A method of constructing a glass panel which comprises two confronting edge sealed glass sheets (12, 14), the method comprises the following step: (a) providing a solder glass band (10) around the margin of one surface of each glass sheet (12/14), (b) forming,



(57) **Abrégé(suite)/Abstract(continued):**

at a first temperature, a hermetic bond between the solder glass band (10) and the associated surface of each glass sheet (12/14), (c) positioning the glass sheets (12, 14) in spaced-apart confronting relationship, (d) forming, at a second temperature which is lower than the first temperature, a hermetic seal (18) between the two solder glass bands (10, 10) while maintaining the spaced-apart relationship between the glass sheets (12, 14).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number
WO 00/77336 A1

(51) International Patent Classification⁷: **E06B 3/673**,
C03C 27/06

(74) Agent: GRIFFITH HACK; GPO Box 4164, Sydney,
NSW 2001 (AU).

(21) International Application Number: PCT/AU00/00637

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(22) International Filing Date: 7 June 2000 (07.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 0902 10 June 1999 (10.06.1999) AU

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): THE UNIVERSITY OF SYDNEY [AU/AU]; Parramatta Road, Sydney, NSW 2006 (AU).

Published:


— With international search report.

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): COLLINS, Richard, E. [AU/AU]; c/o The University of Sydney, Parramatta Road, Sydney, NSW 2006 (AU).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: GLASS PANEL

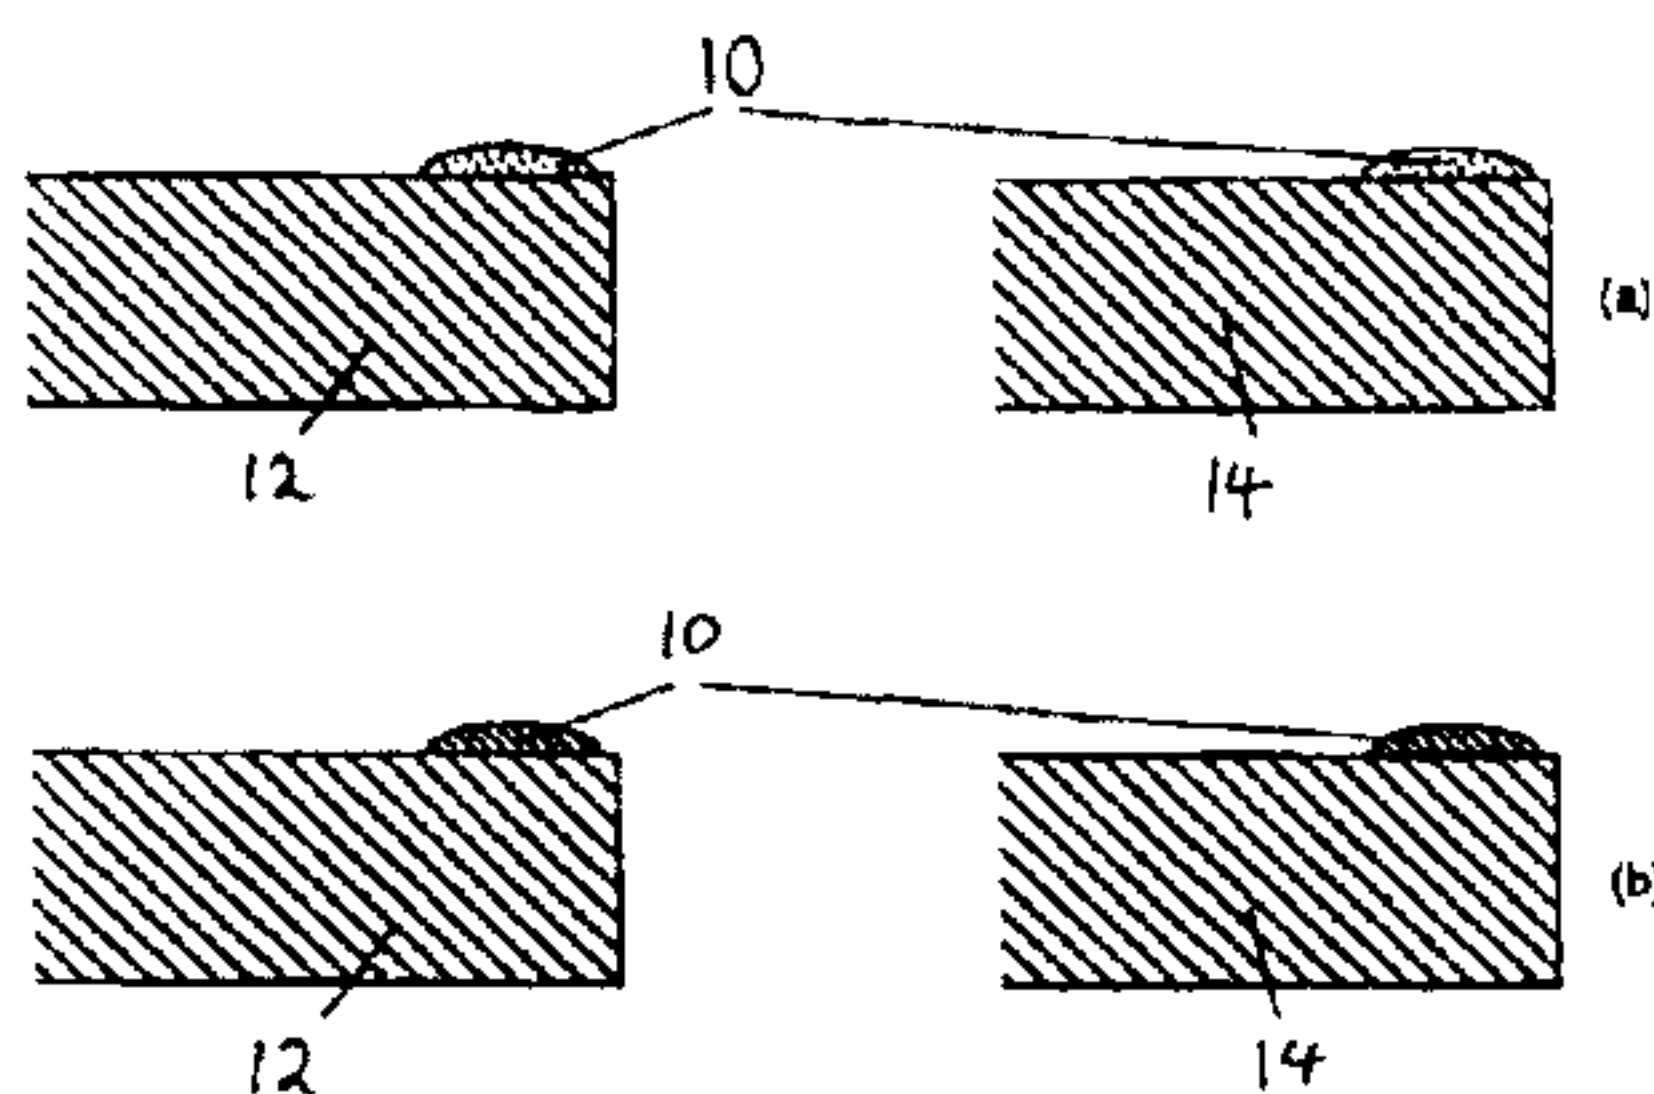

(57) Abstract: A method of constructing a glass panel which comprises two confronting edge sealed glass sheets (12, 14), the method comprises the following step: (a) providing a solder glass band (10) around the margin of one surface of each glass sheet (12/14), (b) forming, at a first temperature, a hermetic bond between the solder glass band (10) and the associated surface of each glass sheet (12/14), (c) positioning the glass sheets (12, 14) in spaced-apart confronting relationship, (d) forming, at a second temperature which is lower than the first temperature, a hermetic seal (18) between the two solder glass bands (10, 10) while maintaining the spaced-apart relationship between the glass sheets (12, 14).

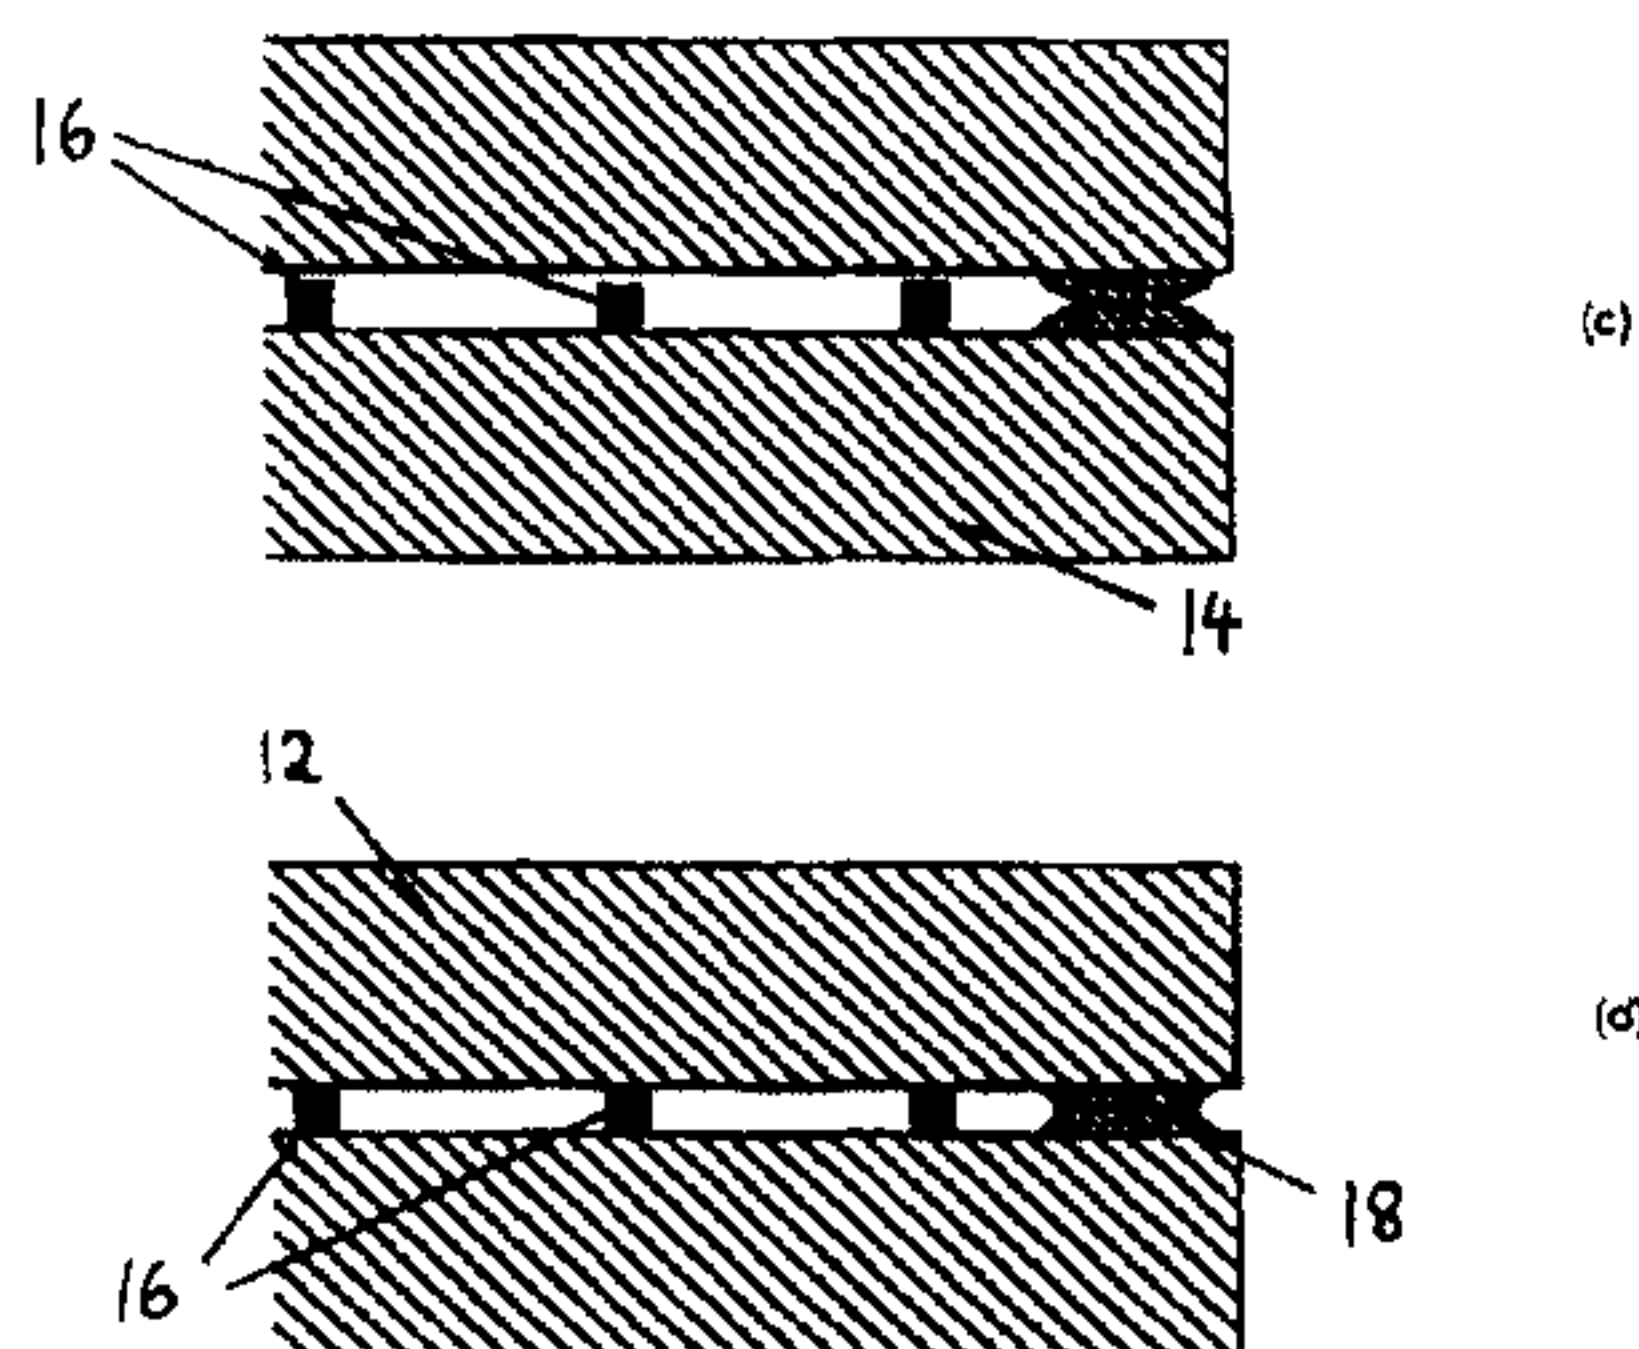

WO 00/77336 A1

GLASS PANELField of the Invention

The present invention relates broadly to glass panels which comprise spaced-apart edge sealed glass sheets. The present invention will be described herein with reference to vacuum glazing, however, it will be appreciated that the present invention does have broader applications including, for example, in automobile windows, glass panel displays or solar collector panels.

10 Background of the Invention

Hermetic seals which are suitable for use in vacuum glazing typically involve the use of solder glass, which is also referred to as glass frit. The term "solder glass" refers to a glass which melts and softens at a lower temperature than the glass sheets of the glazing, but which has a coefficient of thermal expansion which closely matches that of the glass sheets. As such, a suitable solder glass will depend upon the glass used for the glass sheets of the vacuum glazing. A typical example of glass used for vacuum glazing is soda lime glass.

The use of solder glass has the advantage that, unlike other solders such as metal solder, it is "compatible" with the glass sheets. For example, bonds between the solder glass and the glass sheets can be formed by inter-diffusion. At the same time, the solder glass is impermeable so that a low pressure within the internal volume of vacuum glazing can be maintained indefinitely for all practical purposes.

To form an hermetic seal between two glass sheets of a vacuum glazing, solder glass, normally in the form of a viscous liquid paste containing solder glass powder, is provided around the edges of the glass sheets, which are positioned in a spaced apart relationship, e.g. by way of support pillars placed between the sheets. The entire structure is then heated to a temperature at which the solder glass melts and whilst in its molten state, flows by

capillary action between the spaced apart sheets and diffuses into the atomic structure of the respective glass surfaces, forming a strong and leak free joint between them.

5 Although the temperature at which the edge seal process occurs is less than that at which the glass sheets soften and melt, it is in general necessary for the temperature at which the sealing process occurs to be such that the glass sheets are quite close to the point at which
10 softening and distortion occur. In other words the influence of the heating on the glass sheets cannot be ignored for all purposes.

As an example, the temperatures necessary to form the seal with the process described above can result in a
15 significant relaxation of internal stresses in the glass sheets. Treatment of the glass sheets at such temperatures for that purpose is commonly referred to as annealing. Although the annealing may result in the removal of unwanted stresses in the glass sheets for some
20 applications, for other applications the removal of residual stresses during the formation of the solder glass seal is undesirable. As an example, it is often required that the glass in windows and doors should be tempered or heat strengthened. Tempered glass contains internal
25 stresses which need to be retained to maintain the increased strength of the glass sheet.

Since a significant stress relaxation in the glass sheets cannot be avoided during the forming of the hermetic edge seal made from solder glass as described above, it has
30 up until now been impossible to manufacture vacuum glazing which incorporates an hermetic edge seal made from solder glass and which utilise (fully) heat strengthened glass.

Summary of the Invention

The present invention may be defined broadly as
35 providing a method of constructing a glass panel which comprises two confronting edge sealed glass sheets. The

Received 29 June 2001

3

method comprises the steps of providing a solder glass band around the margin of one surface of each glass sheet; forming, at a first temperature, an hermetic bond between the solder glass band and the associated surface of each glass sheet; positioning the glass sheets in spaced-apart confronting relationship; forming, at a second temperature which is lower than the first temperature, an hermetic seal between the two solder glass bands whilst maintaining the spaced apart relationship between the glass sheets, in a manner that substantially avoids annealing of either glass sheet.

In one embodiment, the step of forming the hermetic seal between the solder glass bands comprises fusing together the two solder glass bands to form an hermetic bond directly between those bands.

Alternatively, the step of forming the hermetic seal between the two solder glass bands comprises interposing solder glass between the two solder glass bands and fusing the solder glass with the two solder glass bands.

The temperature and time for forming the hermetic bond between the solder glass band and at least one of the glass sheets is preferably selected such that tempering of the glass sheet will be effected.

Support pillars may be used to maintain the glass sheets in the spaced apart relationship.

The method does have an application in vacuum glazing, in which case the method further comprises the step of evacuating the hermetically sealed space between the two glass sheets.

Preferably, the step of providing the marginal solder glass bands comprises depositing a liquid paste comprising solder glass powder onto the surfaces.

The solder glass may alternatively be deposited using different techniques, including deposition by a screen

Received 29 June 2001

3a

printing process or deposition as a pre-formed film or tape.

During the forming of the hermetic seal between the two solder glass bands, a spacing between the glass sheets

may change compared to the situation when the glass sheets
are positioned in the spaced-apart confronting
5 relationship.

The glass sheets may be flat or curved and may be of
any circumferential shape.

The present invention may also be defined in terms of
a glass panel which comprises two confronting edge sealed
10 glass sheets, in which the edge sealing is being effected
by the above defined method.

In a further aspect, the present invention provides a
method of constructing a panel which comprises two
confronting edge sealed tempered glass sheets, the method
15 comprising the steps of: providing a solder glass band
around a margin of one surface of each glass sheet; heating
the glass sheets to a first temperature to temper each
sheet and to form an hermetic bond between the solder glass
band and the associated surface of each glass sheet, which
20 bond is maintained after each sheet has been tempered;
positioning the glass sheets in spaced-apart confronting
relationship; and heating the glass sheets to a second
temperature, which is lower than the first temperature, to
form an hermetic seal between the two solder glass bands
25 while substantially avoiding annealing of either glass
sheet, and while maintaining the spaced apart relationship
between the glass sheets.

Preferred forms of the invention will now be
described, by way of example only, with reference to the
30 accompanying drawings.

Brief Description of the Drawings

Figure 1 is a schematic drawing illustrating a method
of forming a glass panel embodying the present invention.

4a

Figure 2 is a schematic drawing illustrating another method of forming a glass panel embodying the present invention.

5

Detailed Description of the Preferred Embodiments

We seek to manufacture a glass panel comprising two confronting edge sealed glass sheets. In Figure 1(a) liquid solder glass 10 is deposited as marginal bands on the surfaces of two glass sheets 12, 14. In Figure 1(b) the glass sheets 12, 14 are then tempered to establish the necessary stresses within the glass sheets 12, 14 for heat strengthening the same. During the tempering process, the solder glass 10 melts and forms an hermetic bond to the surface of the glass sheets 12, 14. This bond is achieved by interdiffusion of the atoms of the solder glass 10 and the glass sheets 12, 14, typically over a distance of approximately 0.1 μm . As the temperature is decreased at the end of the tempering process, the solder glass solidifies.

The two tempered glass sheets are then assembled into a configuration illustrated in Figure 1(c), with the bands of solidified solder glass 10 being positioned on top of

25

each other. In the configuration illustrated in Figure 1(c), an array of support pillars 16 has been provided on the bottom glass sheet 14. The sum of the thicknesses of the two bands of solidified solder glass 10 is slightly greater than the height of the support pillars 16. During a second heating process, the bands of solidified solder glass 10 are softened and melted sufficiently to form a hermetic seal between them. At the required temperature, the solder glass 10 softens sufficiently that it deforms, permitting the upper glass sheet 12 to move towards glass sheet 14 until it contacts the support pillars 16, as illustrated in Figure 1(d). After cooling down from the second heating process, a hermetic seal 18 exists between the edges of the glass sheets 12, 14 around their periphery. The second heating process occurs at a lower temperature, and for a shorter time, than is necessary to produce the hermetic bond between the solder glass 10 and the glass sheets 12, 14 during the first heating process (Fig. 1(b)), with the temperature of the second heating process being sufficiently low to avoid a significant relaxation of the stresses within the glass sheets 12, 14 to maintain their heat-strengthened property. The bands of solidified solder glass 10 melt and fuse into a non-porous material during the second heating process, and fuse to each other at a lower temperature than that required for significant interdiffusion to occur between the atoms of the bands of solder glass 10 and the glass sheets 12, 14.

For glass sheets made from soda lime glass, the solder glass used would for example have a "conventional" specification of being fusible with soda lime glass at 450-480°C for one hour, or at higher temperatures for a shorter time. The tempering process will be chosen to cover those specifications. However, the second heating process, i.e. the fusing of the bands of solder glass 10, can be performed at 440°C, preferably 350°C for one hour, thereby

avoiding a significant stress relaxation in the tempered glass sheets during the second heating process.

Turning now to Figure 2 (a), in an alternative embodiment marginal bands of solder glass 20, 22 are deposited on to glass sheets 24, 26, respectively, with the band of solder glass 22 on one of the sheets 26 being wider than the other. The glass sheet 26 is dimensioned to exceed a width of the glass sheet 24 at any point around the periphery of glass sheet 24.

Both sheets 24, 26 are then tempered and during the tempering process, hermetic bonds are formed between the bands of solder glass 20, 22 and the glass sheets 24, 26, respectively (see Figure 2(b)).

The sheets 24, 26 are then assembled into a configuration as illustrated in Figure 2 (c), with the bottom sheet 26 protruding the upper sheet 24 at any point around the circumference of glass sheet 24. In the configuration illustrated in Figure 2(c), an array of support pillars 28 is provided between the glass sheets 24, 26 with a combined thickness of the bands of solder glass 20, 22 being slightly less than a height of the support pillars 28.

Next, a further band of solder glass 30 in a liquid paste form is deposited around the periphery of the upper glass sheet 24, on top of the band of solder glass 22, as illustrated in Figure 2(d).

The entire structure is then subjected to a second heating process during which the band of solder glass 30 is softened and melted to fuse both to itself to form an impermeable layer, and to each of the bands of solder glass 20, 22 (Figure 2(e)). This melting and fusing operation takes place at a substantially lower temperature, and over a shorter time, than is necessary to form a hermetic bond between the solder glass 20, 22 and the glass sheets 24, 26 directly (Figure 2(b)).

WO 00/77336

PCT/AU00/00637

7

In this embodiment, the final separation of the glass sheets 24, 26 is "automatically" controlled to be equal to the height of the support pillars 16, without having to allow for sufficient deformation of the bands of the solder glass 10 to ensure "complete" lowering of the upper sheet 14 as described for the other embodiment (see Figure 1).

It will be appreciated by a person skilled in the art that numerous variations and/or modifications may be made to the present invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects to be illustrative and not restrictive.

For example, the further solder glass band used for forming an hermetic seal between the pre-deposited bands of solder glass on both glass sheets does not necessarily require one of the glass sheets to be larger than the other. Rather, the further solder glass band may be deposited "directly" on the peripheral side of equally dimensioned glass sheets in the area between the glass sheets.

As another example, the further solder glass can be the same solder glass as used for the pre-deposited solder glass bands, or may be a different solder glass with different specifications.

Claims

1. A method of constructing a panel which comprises
5 two confronting edge sealed tempered glass sheets, the
method comprising the steps of: providing a solder glass
band around a margin of one surface of each glass sheet;
heating the glass sheets to a first temperature to temper
each sheet and to form an hermetic bond between the solder
10 glass band and the associated surface of each glass sheet,
which bond is maintained after each sheet has been
tempered; positioning the glass sheets in spaced-apart
confronting relationship; and heating the glass sheets to a
second temperature, which is lower than the first
15 temperature, to form an hermetic seal between the two
solder glass bands while substantially avoiding annealing
of either glass sheet, and while maintaining the spaced
apart relationship between the glass sheets.

2. A method as claimed in claim 1, wherein the step of
20 forming the hermetic seal between the solder glass bands
comprises fusing together the two solder glass bands to
form a hermetic bond directly between those bands.

3. A method as claimed in claim 1, wherein the step of
forming the hermetic seal between the two solder glass
25 bands comprises interposing solder glass between the two
solder glass bands and fusing the solder glass with the two
solder glass bands.

4. A method as claimed in claim 1, wherein support
pillars are used to maintain the glass sheets in the spaced
30 apart relationship.

5. A method as claimed in claim 1, wherein the method
further comprises a step of evacuating hermetically sealed
spaced between the two glass sheets.

6. A method as claimed in claim 1, wherein the step of
35 providing the marginal solder glass bands comprises
depositing a liquid paste comprising solder glass powder

onto the surfaces.

7. A method as claimed in claim 1, wherein the solder glass is deposited by a screen printing process.

5 8. A method as claimed in claim 1, wherein, during the forming of the hermetic seal between the two solder glass bands, a spacing between the glass sheets changes compared to when the glass sheets are positioned in the spaced-apart confronting relationship.

10 9. A method as claimed in claim 1, wherein the glass sheets are flat.

10. A method as claimed in claim 1, wherein the glass sheets are curved.

WO 00/77336

PCT/AU00/00637

1/2

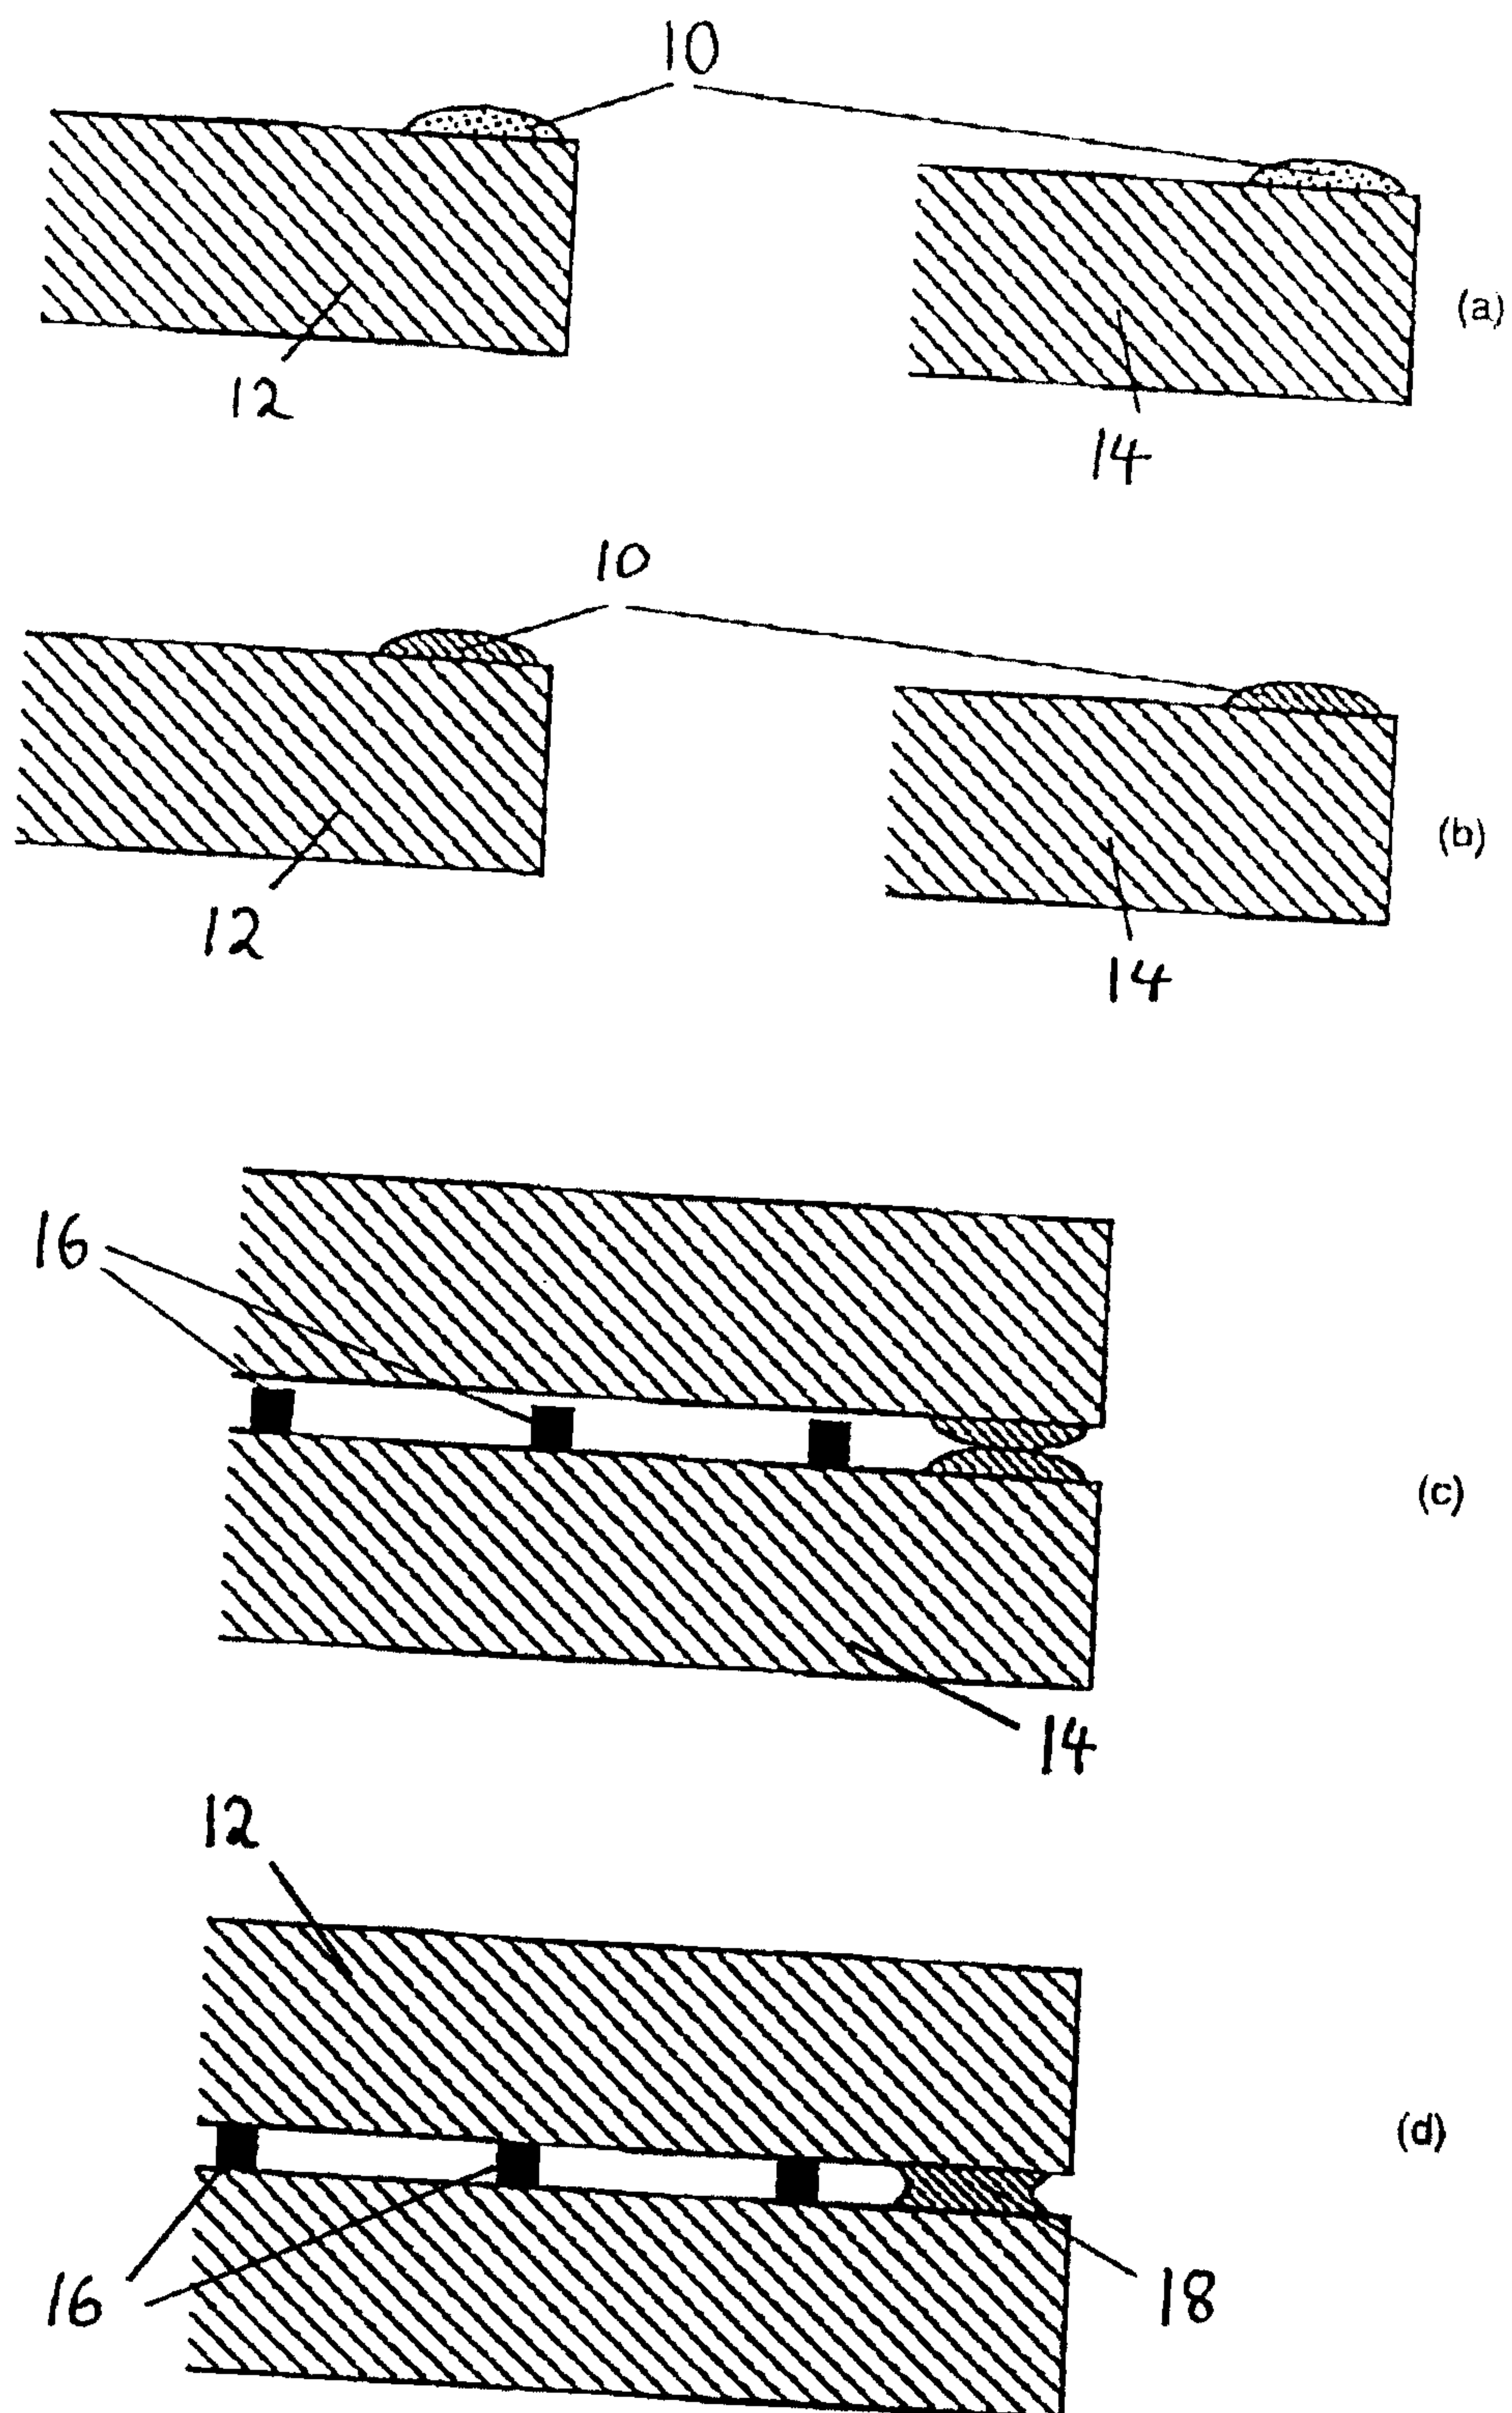


Figure 1

Substitute Sheet (Rule 26) R0/AU

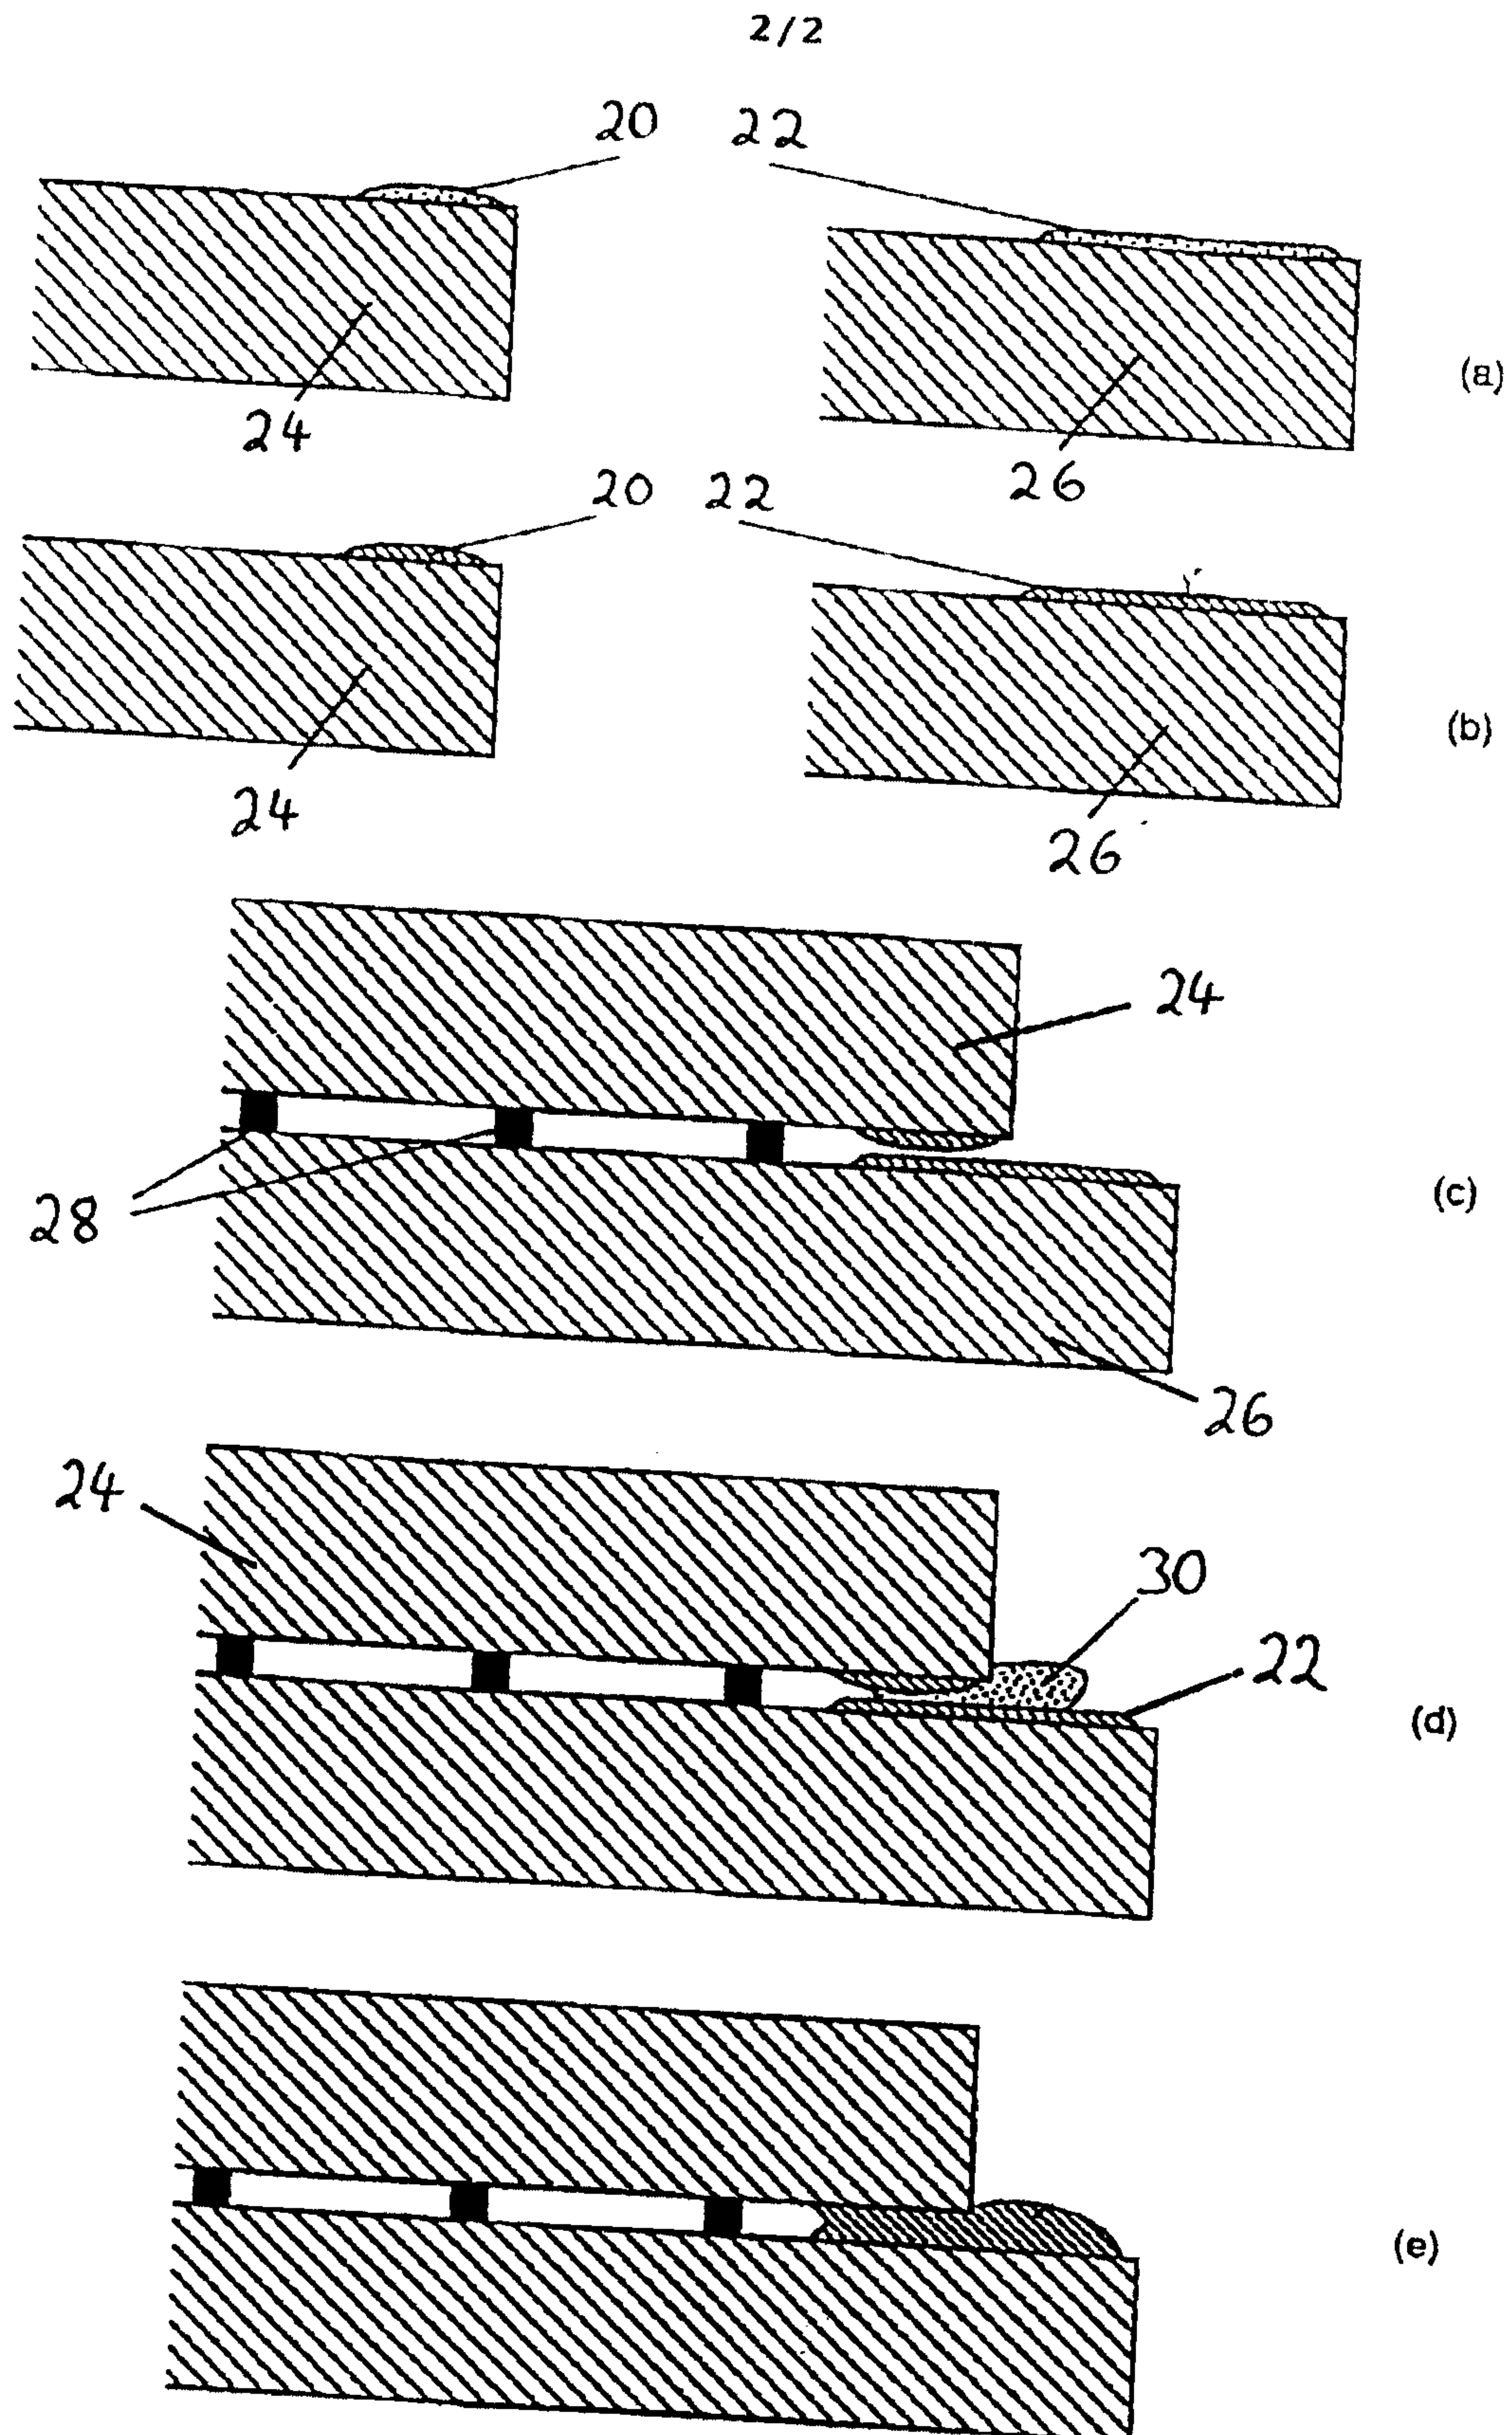


Figure 2
Substitute Sheet (Rule 26) R0/AU

