

(19)



(11)

EP 2 639 358 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
18.09.2013 Bulletin 2013/38

(51) Int Cl.:
E02F 3/76 (2006.01) **E02F 9/08** (2006.01)
B60S 9/10 (2006.01) **F41H 11/24** (2011.01)

(21) Application number: **12159895.7**

(22) Date of filing: **16.03.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(74) Representative: **Vinsome, Rex Martin**
Urquhart-Dykes & Lord LLP
12th Floor
Cale Cross House
156 Pilgrim Street
Newcastle-upon-Tyne NE1 6SU (GB)

(71) Applicant: **Pearson Engineering Limited**
Newcastle upon Tyne NE6 3QS (GB)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(72) Inventor: **Simpson, James**
Houghton le Spring, DH4 6TL (GB)

(54) **Mounting assembly for mounting implement to a vehicle**

(57) A mounting assembly (6) for mounting a bulldozer blade (2) to a vehicle (4) is disclosed. The assembly comprises a lower link (8) adapted to be mounted to a vehicle, a pair of first actuators (16, 18) adapted to be pivotally mounted to the blade, and to a pair of link plates

(24, 26) via respective pin joints (28, 30), and a pair of second actuators (36, 38) adapted to adjust the position of respective pin joints (28, 30) relative to the lower link to adjust the orientation of the blade relative to the vehicle.

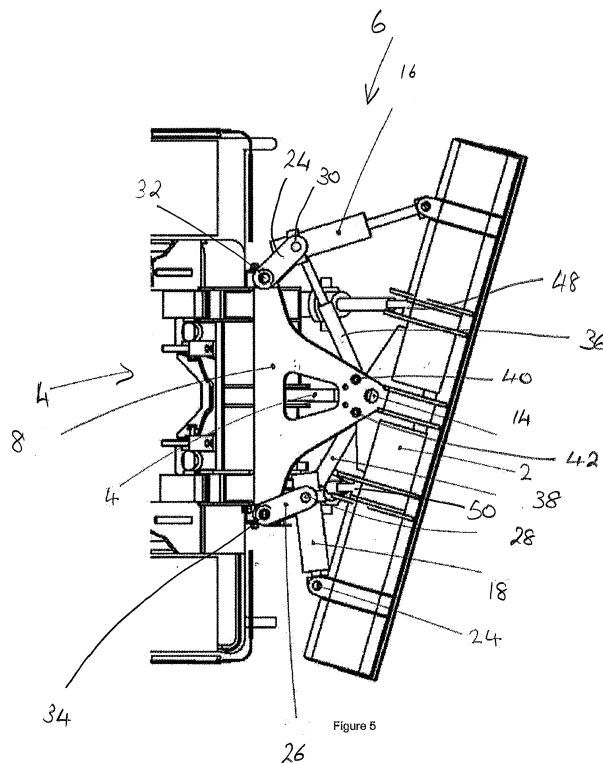


Figure 5

Figure 5

EP 2 639 358 A1

Description

[0001] The present invention relates to a mounting assembly for mounting an implement to a vehicle, and relates particularly, but not exclusively, to a mounting assembly for mounting a bulldozer blade to a military work vehicle.

[0002] Blade mounting assemblies for mounting bulldozer blades to vehicle bodies are known. These often include mechanisms which allow the lift (height of the blade relative to the vehicle), pitch (orientation of the blade about an axis generally normal to the vehicle centre line plane), angle (orientation of the blade about a generally vertical axis) and tilt (orientation of the blade about a generally horizontal axis parallel to the vehicle centre line plane) to be adjusted for particular operations. Military work vehicles generally operate as conventional bulldozers, i.e. clearing debris, filling holes and so on, but in some cases also function as "earth anchors" in which the blade is buried deeply in the ground to provide a secure anchor to allow the vehicle, fitted with a suitable winch, to recover other vehicles stuck in soft terrain.

[0003] Since the blade is generally designed to be fitted to heavy vehicles, the assembly may be subjected to very high loads. For example, if the edge of the blade strikes a sufficiently immovable obstacle while bulldozing, the vehicle will be stopped almost instantly. The loads in the assembly in such a situation may be very large compared to normal bulldozing loads.

[0004] At the same time, it is also desirable to be able to adjust blade angle, for example when clearing snow from a carriageway to a roadside. In one known arrangement, one or more powered actuators are connected between the blade and a frame in order to rotate the blade relative to the frame. Such arrangements suffer from the disadvantage that when the blade is facing straight ahead, the actuator cylinders are partly extended, usually at their mid-point of travel, and actuators are then further extended and/or contracted to turn the blade left or right from its mid position. The blade is typically held rigidly in the mid position by locking the actuators. Since hydraulic cylinders are usually used as actuators, these are locked by closing hydraulic valves connected to the cylinder ports, preventing oil leaving or entering the cylinder, and thus preventing the cylinders extending or contracting. In order to avoid damage to the cylinders by excess pressure or buckling, hydraulic circuits typically include pressure relief valves which override this lock if a sufficiently high external force results in hydraulic pressures above some set threshold value, for example as a result of the blade edge striking some sufficiently immovable object and if the moving vehicle has sufficient mass and speed.

[0005] Such arrangements suffer from the disadvantage that in order to increase the size of load which the assembly can withstand, larger hydraulic cylinders need to be used, which significantly increases the weight and volume of the assembly.

[0006] Preferred embodiments of the present invention

seek to overcome the above disadvantage of the prior art.

[0007] According to an aspect of the present invention, there is provided a mounting assembly for mounting an implement to a vehicle, the assembly comprising:-

5 a body adapted to be mounted to a vehicle;

10 at least one pair of first actuators; each said first actuator being adapted to be pivotably mounted, at a respective first pivot, to one of said body or an implement;

15 a plurality of first link members, each said first link member being pivotably mounted, at a respective second pivot, to a respective said first actuator and adapted to be pivotably mounted, at a respective third pivot, to the other of said body or said implement; and

20 a plurality of second actuators, each said second actuator being adapted to adjust the position of a respective said second pivot relative to the body to adjust the orientation of the implement relative to the vehicle.

25 **[0008]** By providing first link members pivotably mounted at respective second pivots to first actuators and second actuators for adjusting the position said second pivots relative to the body to adjust the orientation of the implement relative to the vehicle, this provides the advantage of enabling the distance between the implement and an adjacent part of the vehicle to be reduced by means other than reducing the length of one or more of the first actuators. As a result, the implement can be in its angular mid position with fully compressed first actuators, which provides the advantage of significantly increasing the compressive forces which the assembly can withstand by means of actuators of a given size, as a result of which a lighter and more compact mounting assembly can be used for a given load.

30 **[0009]** At least one said first link member and the corresponding said first actuator may be arranged in use such that a line directly connecting said first and second pivots is arranged at an obtuse angle to a line directly connecting said second and third pivots.

35 **[0010]** This provides the advantage of enabling compressive loads tending to cause the obtuse angle to change to be resisted by means of a more compact second actuator when in tension, thereby further contributing to reduction in weight and volume of the assembly.

40 **[0011]** At least one said second actuator may be adapted to move the corresponding said second pivot from one side of a line directly joining the corresponding said first and third pivots to the other side of said line.

45 **[0012]** This provides the advantage of enabling the angle of the implement relative to the vehicle to be adjusted by means of a more compact assembly.

[0013] At least one said first link member and the cor-

responding said first actuator may be arranged such that loads urging the implement towards the vehicle in use tend to decrease the size of said obtuse angle.

[0014] At least one said second actuator may be arranged such that loads urging the implement towards the vehicle in use cause tensile loading of said second actuator.

[0015] This provides the advantage of enabling the loads to be resisted by means of a more compact second actuator.

[0016] At least one said second actuator may be pivotably mounted at a respective fourth pivot to said body.

[0017] The assembly may further comprise at least one third actuator for adjusting the orientation of the body relative to the vehicle.

[0018] At least one said third actuator may be adapted to cause pivoting of the implement relative to the vehicle about a first axis, and said first and second actuators may be adapted to cooperate to cause pivoting of the implement relative to the vehicle about a second axis substantially perpendicular to said first axis.

[0019] At least one said third actuator may be adapted to be pivotably mounted relative to the vehicle and to the implement.

[0020] The assembly may comprise a plurality of said third actuators.

[0021] This provides the advantage of providing a further degree of freedom of pivoting of the implement relative to the vehicle, by means of extending at least one said third actuator and/or contracting at least one said third actuator.

[0022] The assembly may further comprise at least one second link member adapted to be pivotably mounted relative to the implement and to the vehicle to adjust the orientation of the implement relative to the body as the orientation of the body relative to the vehicle changes.

[0023] This provides the advantage of enabling automatic pitch control of the implement when the implement is a bulldozer blade without the need for an additional actuator, thereby minimising increases in weight and volume of the assembly.

[0024] According to another aspect of the present invention, there is provided a vehicle comprising:

a vehicle body;

an implement; and

a mounting assembly as defined above connected to said vehicle body and said implement.

[0025] A preferred embodiment of the invention will now be described, by way of example only, and not in any limitative sense, with reference to the accompanying drawings, in which:-

Figure 1 is a side view of a bulldozer blade attached to a vehicle by means of a mounting assembly em-

bodying the present invention and with the blade level with a nominal ground plane;

Figure 2 is a plan view of the arrangement of Figure 1;

Figure 3 is a side view of the arrangement of Figure 1 with the blade in a raised position for travelling between work locations;

Figure 4 is a side view of the arrangement of Figure 1 with the blade in a lowered position for earth anchoring;

Figure 5 is a view from below of the arrangement of Figure 1 with the blade angled to one side; and

Figure 6 is a side view of the arrangement of Figure 1 with the blade in a tilted position for breaking through a hard surface.

[0026] Referring to Figures 1, 2 and 5, a bulldozer blade 2 is attached to a vehicle 4 by means of a mounting assembly 6 embodying the present invention. The assembly 6 comprises a body in the form of a lower link 8 connected to the vehicle 4 by means of a pin joint 10, the axis of the pin joint 10 being generally perpendicular to a vehicle centre line plane 12 (Figure 2). The lower link 8 is connected the blade 2 by means of a ball joint 14 (Figure 5).

[0027] A pair of first actuators 16, 18 are connected to the blade 2 by respective ball joints 20, 22 and to respective first link members in the form of link plates 24, 26 by means of respective pin joints 28, 30. The link plates 24, 26 are connected to the lower link 8 by means of respective ball joints 32, 34 (Figure 5). A pair of second actuators 36, 38 are connected to the lower link 8 by respective ball joints 40, 42 and to the respective link plates 24, 26 and actuators 16, 18 at the respective pin joints 28, 30 such that the actuators 16, 18 and respective link plates 24, 26 form respective obtuse angles to each other in the arrangement shown in Figure 2. As a result, high loads tending to urge the blade 2 towards the vehicle 4 will result in high compressive loads in the actuators 16, 18 and link plates 24, 26 tending to urge the respective pin joints 28, 30 outwardly to reduce the size of the respective obtuse angles, this movement being resisted by tensile loads in the respective actuators 36, 38 which can be resisted by means of a more compact actuator design, since actuators are more effective in tension than in compression.

[0028] A pair of third actuators 44, 46 are connected to the blade 4 by respective "point on line" joints 48, 50. As will be appreciated by persons skilled in the art, a "point on line" joint is a joint having one translational degree of freedom and three rotational degrees of freedom, for example a plain spherical bearing which can slide along a pin. In the arrangement shown in Figure 2, the axis of the translational degree of freedom is fixed normal

to the centre line plane 52 of the blade 2. Left actuator 46 is connected to the vehicle 4 by means of a pin joint 54, the structure connecting the pin joint 54 to the vehicle body being omitted from the Figures for clarity, and the axis of the pin joint 54 is generally perpendicular to the vehicle centre line plane 12. Similarly, right actuator 44 is connected to the blade 2 by "point on line" joint 48 and to the vehicle body by means of a pin joint 56. Again, the structure connecting the pin joint 56 to the vehicle body is omitted from the Figures for clarity.

[0029] A top link 58 is attached to the vehicle body by means of a ball joint 60 and to the bulldozer blade 2 by means of a ball joint 62. Referring to Figure 3, the blade 2 is raised relative to ground plane 64 by retraction of actuators 44, 46 so that the blade 2 and mounting assembly 6 fit within an envelope 66 bounded by an approach angle plane 68 and a sight or gun line plane 70. This enables the apparatus to be effectively stowed when not in use.

[0030] Referring now to Figure 4, extension of the actuators 44, 46 causes the assembly 6 to lower the blade 2 deeply below the nominal ground plane 64. This enables secure earth anchoring to be carried out.

[0031] Referring to Figures 2 and 5, in order to adjust the angle of the blade 2 relative to the vehicle 4 body, one of the second actuator 36 is extended and the other second actuator 38 is contracted. This urges one pin joint 30 outwardly of the assembly 6 and withdraws the other pin joint 28 inwardly, as a result of which the respective first actuators 16, 18 and corresponding link plates 24, 26 pivot relative to each other. As can be seen from Figure 5, the pin joint 28 moves from one side of a line directly connecting the ball joints 24, 34 to the other side of that line, thereby enabling the distance between the blade 2 and the adjacent part of the vehicle 4 to be reduced by means other than retraction of the actuator 18. This movement is also assisted by means of connection of the lower link 8 to the blade 2 by means of ball joint 14. Since the blade 2 is also connected to the upper link 58 by means of a ball joint 62, the blade 2 can rotate about an axis passing through the ball joints 14, 62.

[0032] Finally, referring to Figure 6, by extending one of the third actuators 44, 46 and contracting the other actuator, the blade 2 can be arranged in a tilted position for penetrating hard ground.

[0033] It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only, and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

Claims

1. A mounting assembly for mounting an implement to a vehicle, the assembly comprising:-
a body adapted to be mounted to a vehicle;

at least one pair of first actuators; each said first actuator being adapted to be pivotably mounted, at a respective first pivot, to one of said body or an implement;

a plurality of first link members, each said first link member being pivotably mounted, at a respective second pivot, to a respective said first actuator and adapted to be pivotably mounted, at a respective third pivot, to the other of said body or said implement; and

a plurality of second actuators, each said second actuator being adapted to adjust the position of a respective said second pivot relative to the body to adjust the orientation of the implement relative to the vehicle.

2. An assembly according to claim 1, wherein at least one said first link member and the corresponding said first actuator are arranged in use such that a line directly connecting said first and second pivots is arranged at an obtuse angle to a line directly connecting said second and third pivots.
3. An assembly according to claim 2, wherein at least one said second actuator is adapted to move the corresponding said second pivot from one side of a line directly joining the corresponding said first and third pivots to the other side of said line.
4. An assembly according to claim 2 or 3, wherein at least one said first link member and the corresponding said first actuator are arranged such that loads urging the implement towards the vehicle in use tend to decrease the size of said obtuse angle.
5. An assembly according to any one of the preceding claims, wherein at least one said second actuator is arranged such that loads urging the implement towards the vehicle in use cause tensile loading of said second actuator.
6. An assembly according to any one of the preceding claims, wherein at least one said second actuator is pivotably mounted at a respective fourth pivot to said body.
7. An assembly according to any one of the preceding claims, further comprising at least one third actuator for adjusting the orientation of the body relative to the vehicle.
8. An assembly according to claim 7, wherein at least one said third actuator is adapted to cause pivoting of the implement relative to the vehicle about a first axis, and said first and second actuators are adapted to cooperate to cause pivoting of the implement relative to the vehicle about a second axis substantially perpendicular to said first axis.

9. An assembly according to claim 7 or 8, wherein at least one said third actuator is adapted to be pivotably mounted relative to the vehicle and to the implement.
10. An assembly according to any one of claims 7 to 9, comprising a plurality of said third actuators.
11. An assembly according to any one of the preceding claims, further comprising at least one second link member adapted to be pivotably mounted relative to the implement and to the vehicle to adjust the orientation of the implement relative to the body as the orientation of the body relative to the vehicle changes.
12. A vehicle comprising:
- a vehicle body;
 - an implement; and
 - a mounting assembly according to any one of the preceding claims connected to said vehicle body and said implement.

Amended claims in accordance with Rule 137(2) EPC.

1. A mounting assembly for mounting an implement to a vehicle, the assembly comprising:-
- a body (6) adapted to be mounted to a vehicle; at least one pair of first actuators (16, 18), each said first actuator being adapted to be pivotably mounted, at a respective first pivot (20, 22), to one of said body or an implement; and
 - a plurality of first link members (24, 26), each said first link member being pivotably mounted, at a respective second pivot (28, 30), to a respective said first actuator and adapted to be pivotably mounted, at a respective third pivot (32, 34), to the other of said body or said implement;
 - characterised by** a plurality of second actuators (36, 38), each said second actuator being adapted to adjust the position of a respective said second pivot relative to the body to adjust the orientation of the implement relative to the vehicle, wherein at least one said first link member and the corresponding said first actuator are arranged in use such that a line directly connecting said first and second pivots is arranged at an obtuse angle to a line directly connecting said second and third pivots, and at least one said second actuator is adapted to move the corresponding said second pivot from one side of a line directly joining the corresponding said first and third pivots to the other side of said line.

2. An assembly according to claim 1, wherein at least one said first link member and the corresponding said first actuator are arranged such that loads urging the implement towards the vehicle in use tend to decrease the size of said obtuse angle.

3. An assembly according to any one of the preceding claims, wherein at least one said second actuator is arranged such that loads urging the implement towards the vehicle in use cause tensile loading of said second actuator.

4. An assembly according to any one of the preceding claims, wherein at least one said second actuator is pivotably mounted at a respective fourth pivot (40, 42) to said body.

5. An assembly according to any one of the preceding claims, further comprising at least one third actuator (44, 46) for adjusting the orientation of the body relative to the vehicle.

6. An assembly according to claim 5, wherein at least one said third actuator is adapted to cause pivoting of the implement relative to the vehicle about a first axis, and said first and second actuators are adapted to cooperate to cause pivoting of the implement relative to the vehicle about a second axis substantially perpendicular to said first axis.

7. An assembly according to claim 5 or 6, wherein at least one said third actuator is adapted to be pivotably mounted relative to the vehicle and to the implement.

8. An assembly according to any one of claims 5 to 7, comprising a plurality of said third actuators.

9. An assembly according to any one of the preceding claims, further comprising at least one second link member adapted to be pivotably mounted relative to the implement and to the vehicle to adjust the orientation of the implement relative to the body as the orientation of the body relative to the vehicle changes.

10. A vehicle comprising:

- a vehicle body (4);
- an implement (2); and
- a mounting assembly according to any one of the preceding claims connected to said vehicle body and said implement.

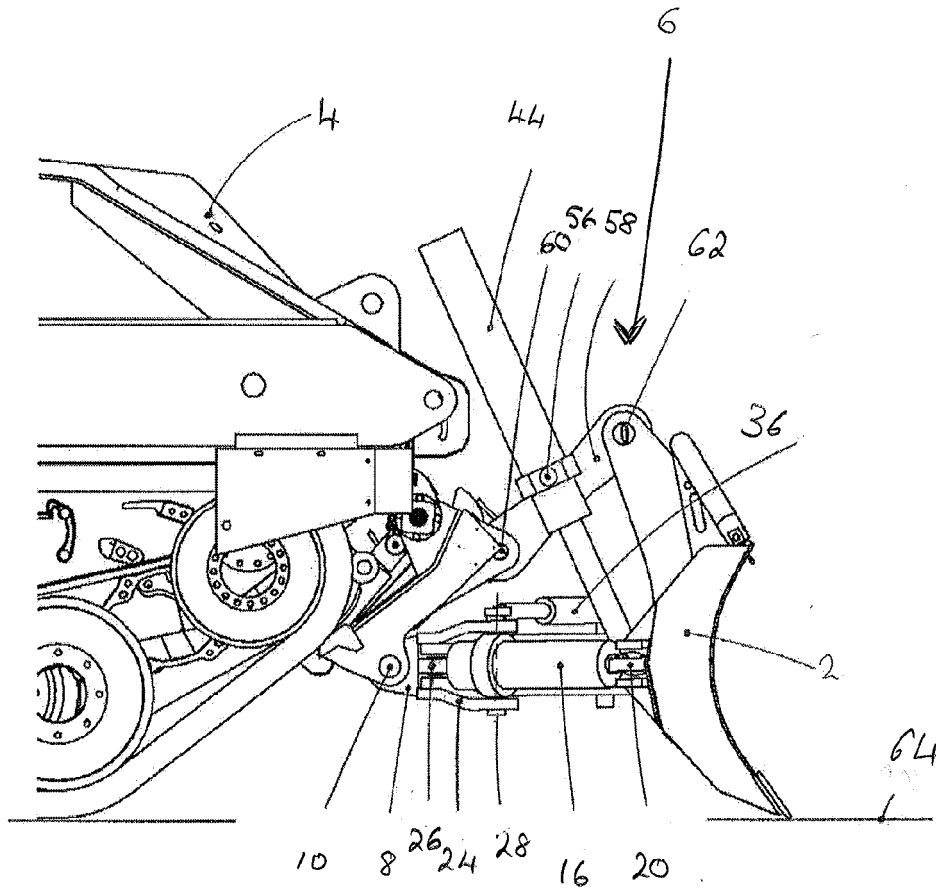


Figure 1

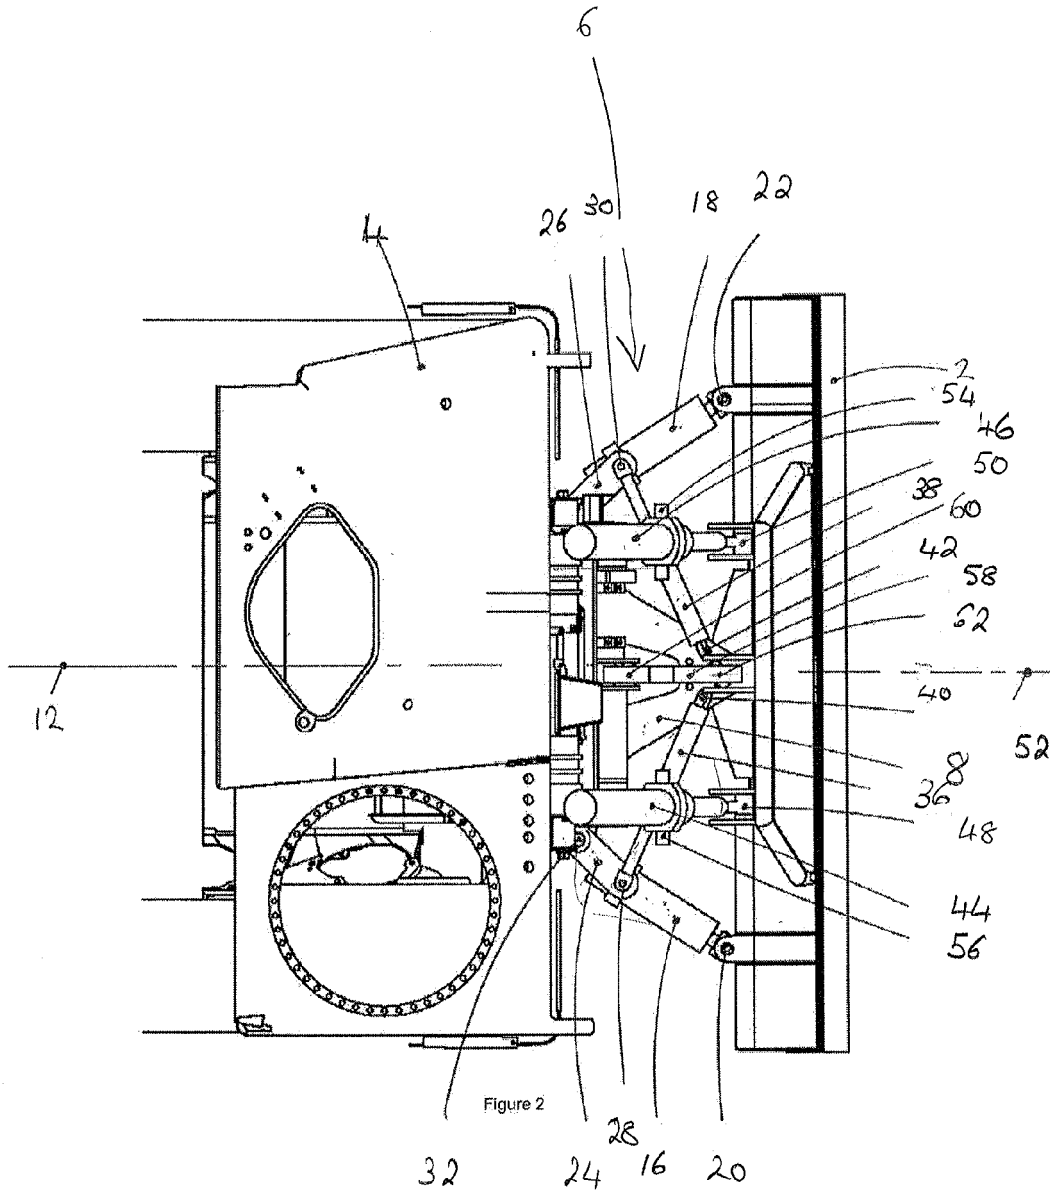


Figure 2

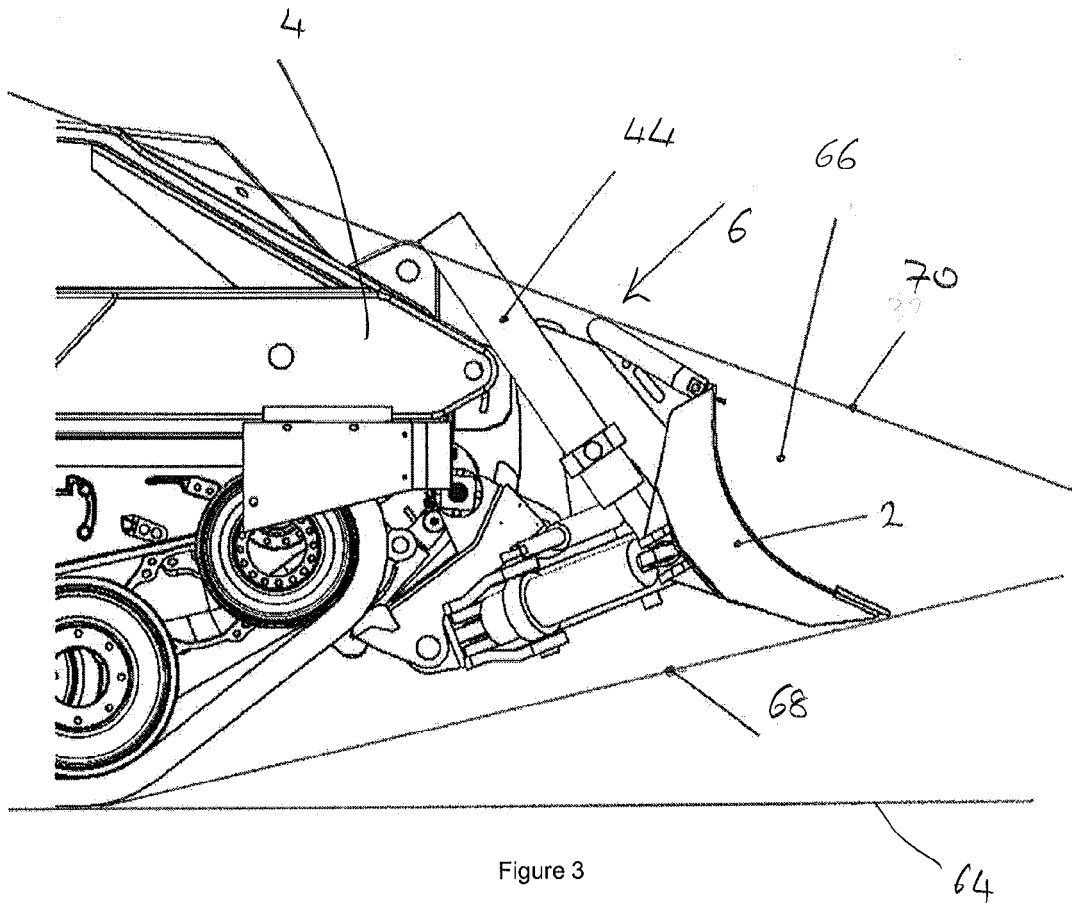


Figure 3

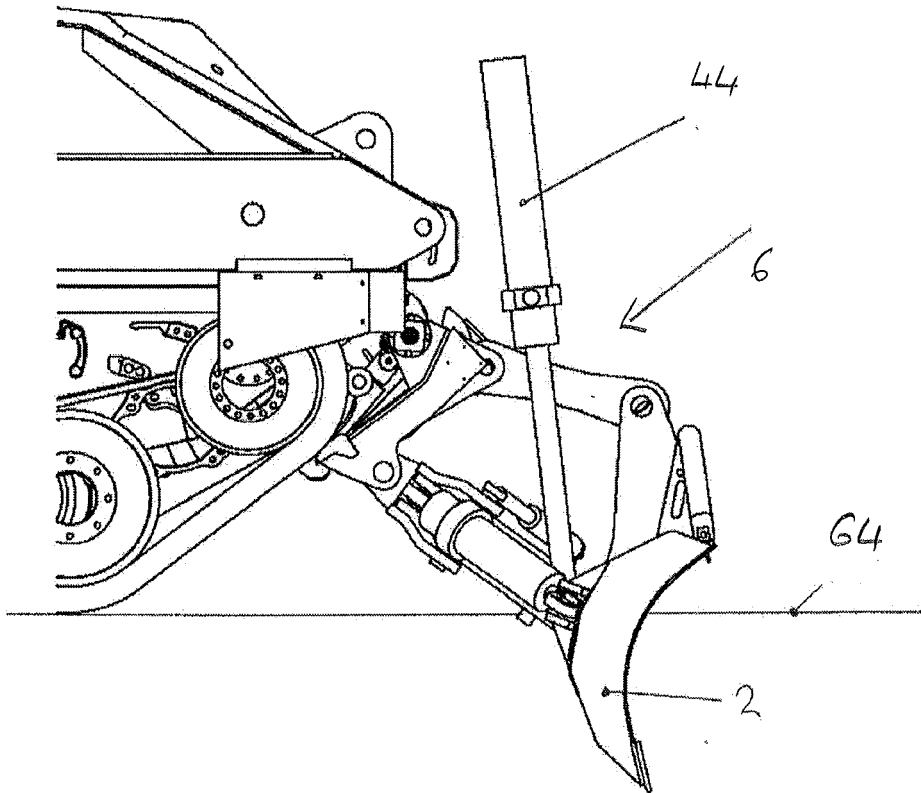


Figure 4

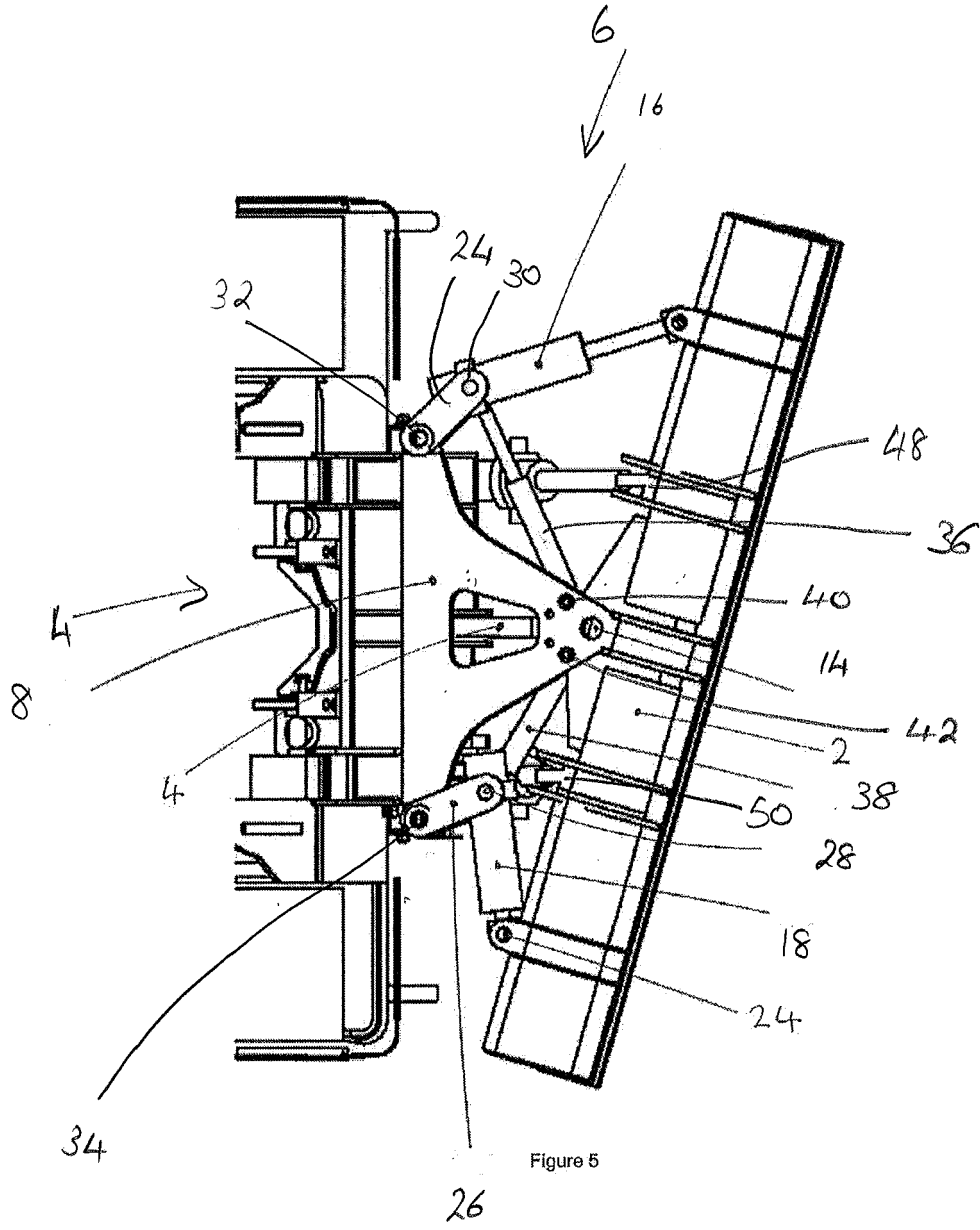


Figure 5

Figure 5

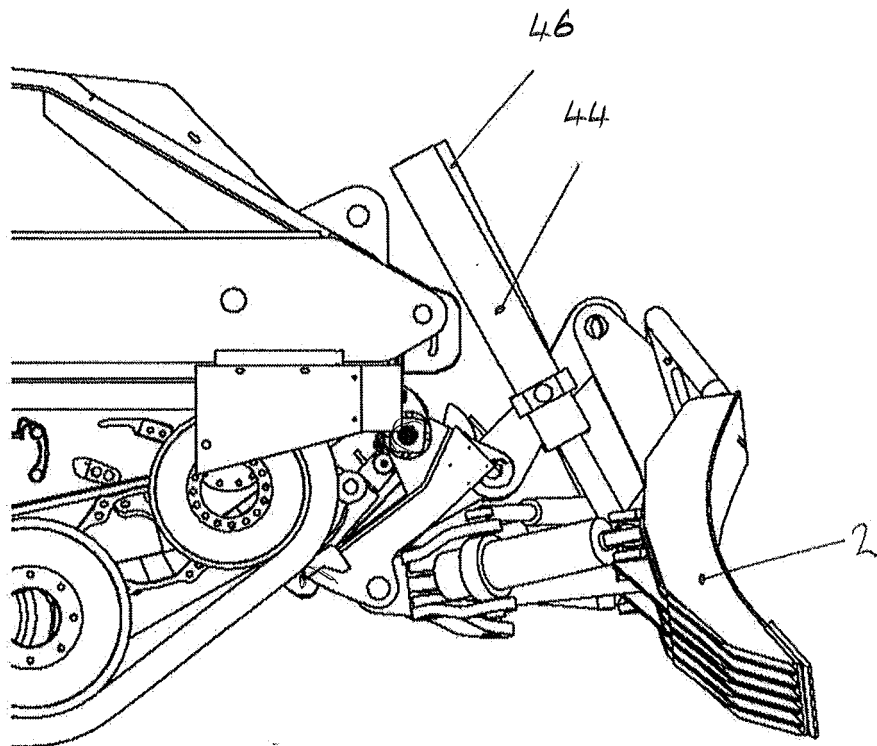


Figure 6



EUROPEAN SEARCH REPORT

Application Number
EP 12 15 9895

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 3 011 276 A (LIKELY NEWTON A) 5 December 1961 (1961-12-05) * column 1, line 63 - column 3, line 17; figures 1-3 *	1,2,4-6, 11,12	INV. E02F3/76 E02F9/08 B60S9/10 F41H11/24
Y	US 3 628 612 A (LIESS RICHARD K ET AL) 21 December 1971 (1971-12-21) * column 2, line 7 - line 40; figures 1, 2 *	1,2,4, 7-10	
Y	US 2 943 407 A (LONG ELTON B) 5 July 1960 (1960-07-05) * column 3, line 5 - line 24; figures 1, 2, 3 *	1,2,4, 7-10	
A	US 2 643 472 A (MERZ JOHN W) 30 June 1953 (1953-06-30) * figures 1, 2 *	1-12	
A	JP 49 049403 B (.) 27 December 1974 (1974-12-27) * the whole document *	1-12	
A	JP 47 011105 U (.) 9 October 1972 (1972-10-09) * the whole document *	1-12	TECHNICAL FIELDS SEARCHED (IPC) E02F B60S F41H E01H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 18 July 2012	Examiner Bultot, Coralie
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

1
EPO FORM 1503 03.82 (P/04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 15 9895

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-07-2012

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3011276	A	05-12-1961	NONE	
US 3628612	A	21-12-1971	NONE	
US 2943407	A	05-07-1960	NONE	
US 2643472	A	30-06-1953	NONE	
JP 49049403	B	27-12-1974	NONE	
JP 47011105	U	09-10-1972	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82