

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 February 2009 (12.02.2009)

PCT

(10) International Publication Number
WO 2009/018788 A2

(51) International Patent Classification:
F03B 3/12 (2006.01)

Prague 6 (CZ). NOVÁK, Jirí [CZ/CZ]; Italská 2304,
27201 Kladno (CZ).

(21) International Application Number:
PCT/CZ2008/000042

(74) Agent: KRATOCHVÍL, Václav; Radlická 28/663, 15000
Prague 5 (CZ).

(22) International Filing Date: 10 April 2008 (10.04.2008)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PV 2007-520 3 August 2007 (03.08.2007) CZ

(71) Applicant (for all designated States except US): Czech
Technical University in Prague, Faculty of Civil Engi-
neering [CZ/CZ]; Thakurova 7, 16629 Prague 6 (CZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SEDLÁČEK,
Miroslav [CZ/CZ]; Pruchova 58, 15000 Prague 5 (CZ).
BERAN, Václav [CZ/CZ]; Kozlovská 1a/2038, 16000

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: FLUID TURBINE

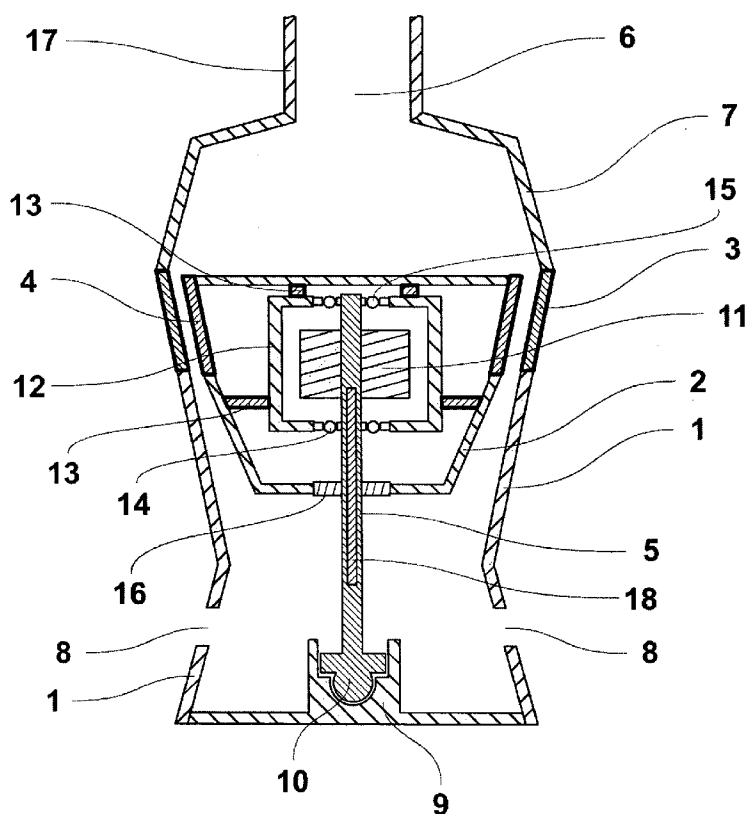


Fig. 1

(57) Abstract: The invention concerns
a fluid turbine comprising stator (1),
fitted with fluid inlet (6) and outlet (8),
and rolling rotor (2) installed inside the
confusor part of stator (1) at one end
of shaft (5), with the other end fixed in
clamp (9) of clamping mechanism (10)
on stator (1). Shaft (5) of rolling rotor
(2) is fixed in clamp (9) of clamping
mechanism (10) non-rotationally with
the possibility of angular deflection in
all directions. A generator connected to
shaft (5).



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

Fluid turbine

5

TECHNICAL FIELD

10 This technical solution involves fluid turbines in the shape of rolling fluid machines comprising a cylindrical or conical stator, in which a rotor of an axially symmetrical shape is seated on the shaft. The rotor touches a stator and can circulate around its internal wall.

BACKGROUND OF THE INVENTION

15

Fluid turbines with the rolling principle are generally known, comprising a stator, usually in the shape of a confusor, while the rotor has an axially symmetrical shape, very often a hemisphere or a cone. For example based on Czech patent No. 284483 with the title Rolling Fluid Machine, and European patent No. EP1015760 B1 with the title Rolling Fluid Machine, a water turbine is known, comprising a fluid reservoir with an inlet and at least one outlet nozzle, with a rolling rotor of an axially symmetrical shape placed on a holding device near the outlet nozzle. This machine can operate as a water turbine, when the water flowing around the rotor deflects it towards the internal side of the outlet nozzle and starts rolling it in the outlet nozzle – stator. The solution of the rolling fluid motor in the design patented by Czech patent No. 7606 with the title Hydraulic Motor and European patent No. EP1082538 B1 with the title Hydraulic Motor can be used to produce energy. Likewise, the solution under Czech patent No. 294708 with the title Rolling Fluid Turbine shows a water motor of the rolling type, with hydraulic channels arranged in the places of mutual contact between the rotor and the stator; these channels also act as a geared transmission, preventing rotor slippage inside the stator.

20
25
30

The fundamental disadvantages of the turbines mentioned briefly above is that they have to be fitted with a transmission that transmits the turbine's mechanical output to a

power generator. If they are not fitted with a transmission and the rotor and the stator of the rolling turbine constitute a carrying generator, power production has a low efficiency.

- 5 The aim of the proposed technical solution is to adjust the rolling turbine to improve the efficiency of its function, i.e. to make sure that the transformation of the obtained mechanical energy to power does not require any geared transmissions.

10 SUMMARY OF THE INVENTION

The aim mentioned above is achieved by a rolling fluid turbine comprising a stator, fitted with at least one inlet hole and at least one outlet hole, where a rolling rotor is arranged in the stator using a shaft and a clamping mechanism, the rotor comprising a
15 body of a rotational shape in conformity with the invention, whose essence consists in the principle that a power generator is installed inside the rotor and the shaft, on whose one end the rotor is arranged, is seated with its other end fixed firmly in the clamp of the clamping mechanism. The clamping mechanism makes sure that the shaft can longitudinally deflect from its axis in all directions and perform a precessional
20 movement, but cannot rotate around its longitudinal axis. The rolling rotor is arranged on the shaft in a freely rotating manner and constitutes a freely rotating couple with the shaft. Sealing against water penetration inside the rolling rotor is installed between the rolling rotor and the shaft.

- 25 The advantage of the solution as per the invention is that the power generator is rotated without any geared transmission in such a manner that the generator is lodged inside the rolling rotor so that the generator's stator is fixed to the rolling rotor and the generator's rotor is fixed to the rolling rotor's shaft, making it a freely rotating couple vs. the rolling rotor and the generator's stator. If a synchronous generator with coils
30 arranged on the rotor is used, the permanent magnets are placed on the stator. The generated power is discharged through power conductors. These conductors are located inside a cavity in the shaft of the rolling rotor.

Advantageously the generator's rotor is fixed to the rolling rotor and the shaft of the rolling rotor makes up one unit with the generator's stator, while the generator's rotor and the rolling rotor constitute a freely rotating couple vs. the shaft with the generator's stator. The rolling rotor in this arrangement can contain an asynchronous generator
5 and the power conductors are placed inside a cavity in the shaft.

Practice has confirmed that if the difference in the diameters of the rolling rotor and the stator is at least 1cm, the water used can be polluted by soft biological materials with the size of several centimeters, such as residues of grass, leaves, clusters of algae
10 etc. These residues do not affect the turbine's function and pass through it, leaving it in a partly crushed condition.

Presumably the use of the fluid turbine as specified in the invention for flow rates of about 10 liters per second on heads of up to 15 meters will result in an increased use
15 of these parameters for power generating purposes. Outputs can be expected to be similar as those achieved for the mentioned flow rates and heads by existing rolling turbines, equipped with power generators and employing miscellaneous transmission mechanisms. Depending on the specific installation parameters, their daily outputs are approximately 2 – 5kWh of power. The utilization of the marginal flow rates and heads
20 achieved by existing rolling turbines for power generation and ranging around the flow rate of 5 liters per second with the head of 3 meters will be achievable with the fluid turbine as specified in this invention as well. It has been demonstrated that this marginal potential energy has a practical meaning. For example if a 12V / 120W asynchronous generator is used, the mentioned head of 3m and flow rate of 5 liters per
25 second can be used to generate steadily at least 0.8kWh of power daily, which is utilized, after the necessary alignment and accumulation, for ordinary household appliances thanks to a 230V, 50Hz converter.

From an economic point of view, the industrial application of the presented solution
30 consists especially in specific forms of production and utilization of the generated power. Very small renewable sources of hydraulic energy can be very important in real economy because the frequency of water micro-sources is very high in certain regions. Their utilization is, however, still absolutely insufficient and inefficient. From the point of

view of the presented solution, micro-sources also include all pumping equipment in industrial plants, public facilities, housing projects, where fluids are circulating. In case of a closed circuit of power handling, where the generated power is consumed in the place of its production, the technical solution as specified in this invention can yield major economic benefits. When the costs of maintenance of the equipment are deducted, the benefits will correspond with the saved payments for power supply from the public distribution network. The generated power is first accumulated, and later used as needed. It is not provided to other entities for any fee and is used exclusively for consumption in the place of its production. Its industrial applications include telemetric measurements of industrial systems, linked for example to safety, registration and failure conditions and other functions for applications where connection to the public distribution network is expensive and does not meet the functional needs. The micro-source can perform the function of a backup source for short-term needs and can be activated within a very short period of time.

The presented solution therefore seems to be usable industrially in the field of sustainable development and the determining economic and environmental context. As implied above, no fields of power generation can be excluded from sustainable development in advance. It is therefore necessary to count on the use of micro-properties of potential energy from renewable sources of water and other fluids. The fluid turbine as specified in this invention can become another tool for specific exploitation thanks to its simple design and economic efficiency of its operation as well as the return on investments.

BRIEF DESCRIPTION OF THE DRAWINGS

The fluid turbine will be described in detail using drawings with individual schematic views:

Figure 1 – first embodiment of the fluid turbine as specified in the invention, partial cross-section in side view, where an asynchronous generator with permanent magnets

seated along the perimeter of the generator's stator is located inside the rolling rotor and the generator's stator is fixed to the rolling rotor;

Figure 2 – second embodiment of the fluid turbine as specified in the invention, partial cross-section in side view, where an asynchronous generator, consisting of an asynchronous electric motor, is located inside the rolling rotor and the shaft of the rotor of the electric motor is fixed to the rolling rotor.

10 EXAMPLES OF THE INVENTION

One of the specific embodiments of the fluid turbine as specified in the invention is shown schematically in figure 1.

15 The fluid turbine comprises stator 1, which consists, in the direction of fluid supply, of a confusor 122mm long and a diffuser 62mm long attached to it, the diffuser being closed with clamp 9 of clamping mechanism 10. The biggest internal diameter of the confusor is 160mm and the smaller diameter 109mm. The smallest internal diameter of the diffuser is 109mm and the biggest diameter 138mm. A part of stator 1, in the shape
20 of the confusor, has hydraulic channels 3 on the side of the biggest confusor diameter, the channels being oriented along the longitudinal axis of stator 1 and their length being 43mm. Using shaft 5, rolling rotor 2 is placed inside stator 1, in the area of the confusor; the rolling rotor having the shape of a blunted cone, the biggest diameter 144mm, the smallest diameter 85mm and its length 95mm. On the side of the biggest
25 diameter rolling rotor 2 is fitted with hydraulic channels 4, oriented along the longitudinal axis of rolling rotor 2 and 43mm long. Stator 1 on the side of the confusor, i.e. on its biggest diameter, is attached to distributor 7, whose height is 65mm and which forms, at its narrowed end, inlet 6 with the diameter of 48mm for the supply of fluid to the turbine; it is connected to supply line 17 with the diameter of 48mm. In the
30 diffuser part, half down its length, stator 1 is fitted with four outlet holes 8 with the diameter of 21mm for the discharge of fluid from the turbine.

The bottom end of shaft 5 is fitted with clamping mechanism 10 in the shape of an adjusted spherical bushing, fixed non-rotationally in clamp 9 of clamping mechanism 10. This non-rotational arrangement allows the angular deflection of shaft 5 in all directions and does not allow the rotation of shaft 5 around its longitudinal axis. A synchronous generator is installed at the other end of shaft 5, its stator 12 being fixed to rolling rotor 2 using clamps 13 of the generator's stator 12 and its rotor 11 being fixed to shaft 5. The fixed connection of the generator's rotor 11 to shaft 5 makes up a freely rotating couple vs. the fixed connection of the generator's stator 12 with rolling rotor 2. The conformity of the longitudinal axis of rolling rotor 2 and shaft 5 of rolling rotor 2 is achieved using lower bearing 14 of the generator and upper bearing 15 of the generator. O-ring 16 is fixed to rolling rotor 2 and attached in a freely rotating manner to shaft 5 and restricts the penetration of fluid to the inside of rolling rotor 2.

The fluid, brought through supply line 17, rolls rolling rotor 2 through hydraulic channels 4 on rolling rotor 2 along hydraulic channels 3 of stator 1, thus rotating the generator's stator 12 vs. the generator's rotor 11 and generating power, which is taken away for further utilization by means of conductors in cavity 18 in shaft 5.

In its advantageous arrangement shown in figure 2, an asynchronous motor acting as a power generator is installed in rolling rotor 2.

Compared to the arrangement in figure 1, this specific arrangement differs so that the generator's stator 12 is fixed to shaft 5 of rolling rotor 2 and shaft 19 of the generator is fixed using clamp 20 of the generator's shaft 19 to rolling rotor 2.

The fluid brought through supply line 17 rolls rolling rotor 2 by means of hydraulic channels 4 on rolling rotor 2 along hydraulic channels 3 on stator 1, thus rotating the generator's shaft 19 and the generator's rotor 11 against the generator's stator 12 and generating power, which is taken away for further utilization by means of conductors through cavity 18 in shaft 5.

Practical tests identified that the fluid turbine with a generator as specified in this invention, with the rotor diameter of 144mm and stator diameter of 160mm, achieved

the maximum power output of 68W. A synchronous generator with permanent magnets placed on the stator was installed inside the rotor; the stator being fixed to the rolling rotor. The head used was 4.8m and the flow rate 6.9 liters of water per second, and the rotational speed of the generator – rolling rotor was 367 RPM.

5

It was also verified that the rolling rotor with the diameter of 65mm, in which a power generator is arranged, can achieve a working rotational speed of 630 to 790 a minute with a head of 8 to 10 meters in practice.

10

INDUSTRIAL UTILIZATION

The fluid turbine as specified in the invention can be especially used for the generation of power from very small water flows. It can be used on a head of one meter to several
15 tens of meters depending on the absolute size of the rolling rotor and the stator and the difference between their diameters.

C L A I M S

1. Fluid turbine consisting of stator (1), fitted with fluid inlet (6) and outlet (8), and rolling rotor (2) installed inside the confusor part of stator (1) at one end of shaft
5 (5), with the other end fixed in clamp (9) of clamping mechanism (10) on stator (1), **comprising** shaft (5) of rolling rotor (2) fixed in clamp (9) of clamping mechanism (10) non-rotationally with the possibility of angular deflection in all directions, and a generator connected to it.
- 10 2. Fluid turbine under claim 1 **comprising** rotor (11) of the generator fixed to shaft (5) of rolling rotor (2) and stator (12) of the generator fixed to the internal part of rolling rotor (2) using clamp (13).
- 15 3. Fluid turbine under claim 1 **comprising** stator (12) of the generator fixed to shaft (5) of rolling rotor (2) and shaft (19) of the generator fixed to the internal part of rolling rotor (2) using clamp (20).

List of parts and symbols

- | | | |
|----|----|----------------------------------|
| | 1 | stator |
| | 2 | rolling rotor |
| 5 | 3 | hydraulic channels in the stator |
| | 4 | hydraulic channels in the rotor |
| | 5 | rolling rotor shaft |
| | 6 | inlet hole |
| | 7 | distributor |
| 10 | 8 | outlet hole |
| | 9 | clamp of the clamping mechanism |
| | 10 | clamping mechanism |
| | 11 | generator's rotor |
| | 12 | generator's stator |
| 15 | 13 | clamp of the generator's stator |
| | 14 | lower bearing of the generator |
| | 15 | upper bearing of the generator |
| | 16 | o-ring |
| | 17 | supply line |
| 20 | 18 | cavity in the shaft |
| | 19 | generator shaft |
| | 20 | clamp of the generator shaft |

1/2

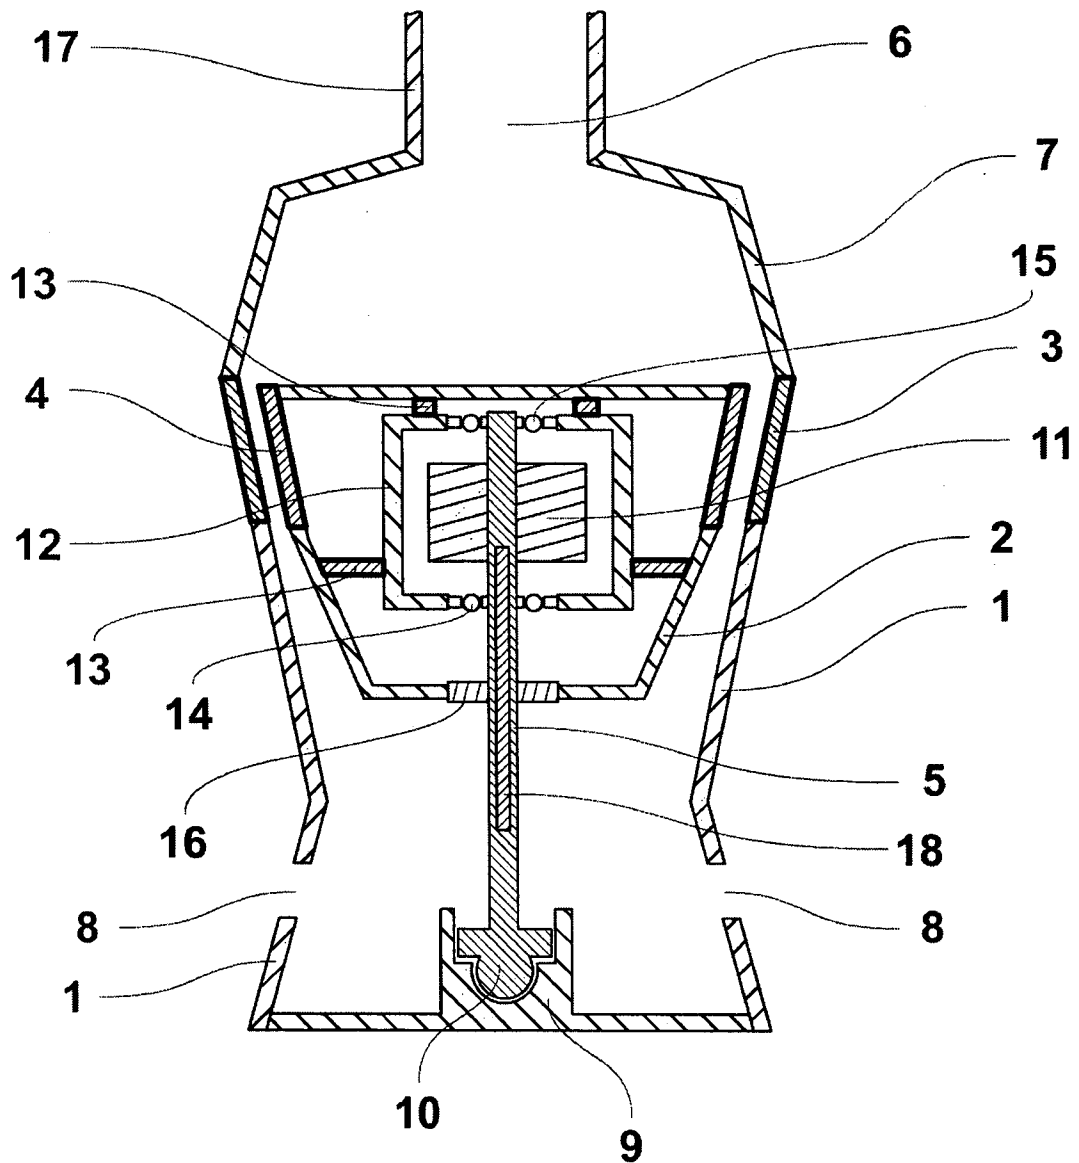


Fig. 1

2/2

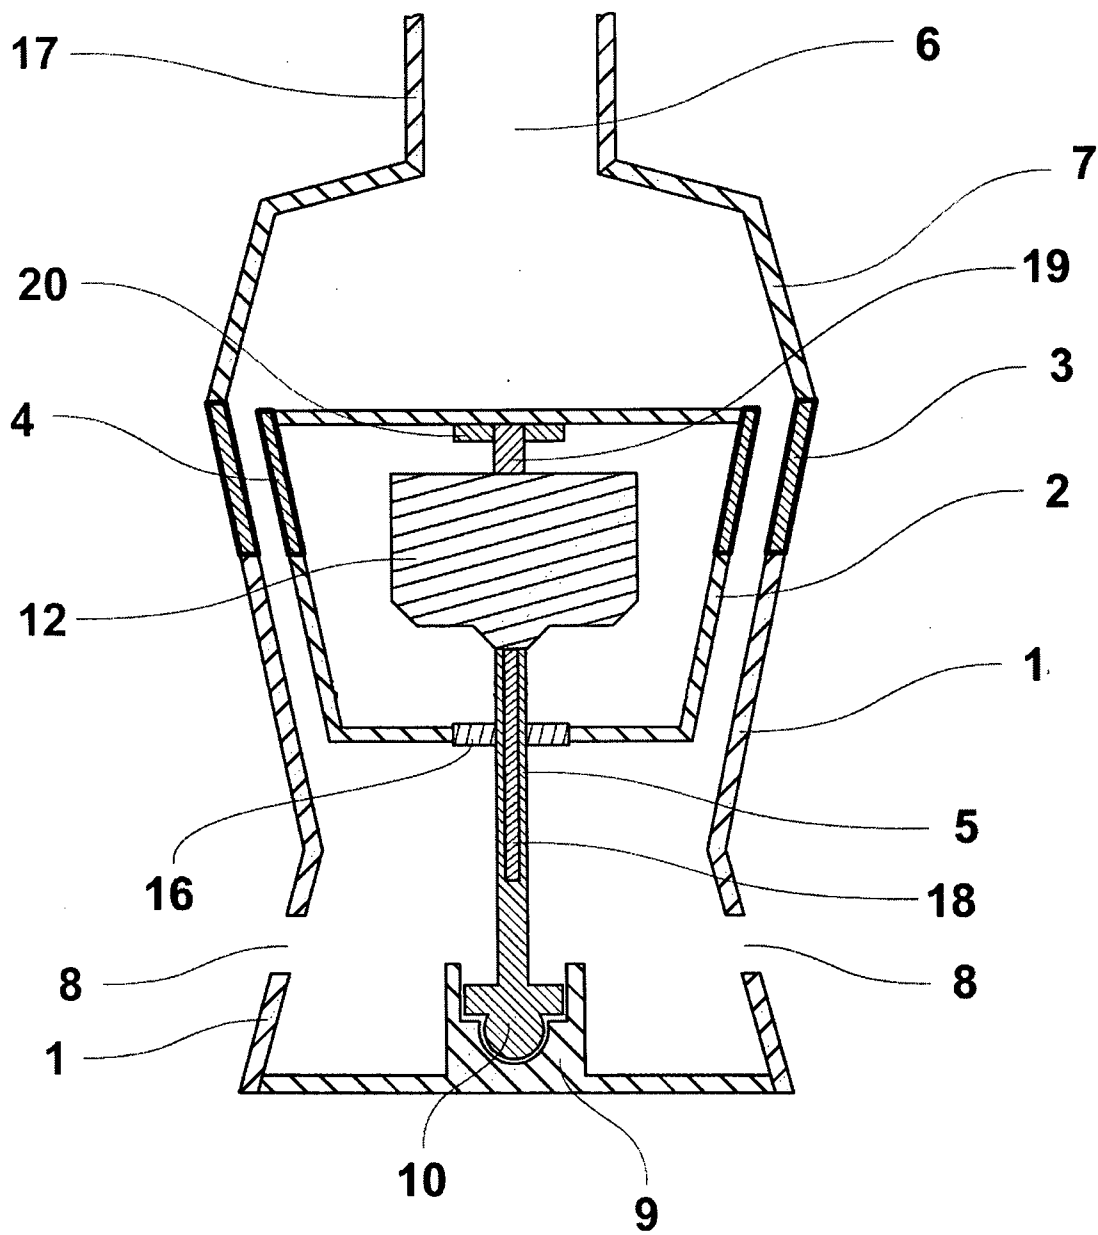


Fig. 2