



US00RE46448E

(19) **United States**  
(12) **Reissued Patent**  
**Anderson et al.**

(10) **Patent Number:** **US RE46,448 E**  
(45) **Date of Reissued Patent:** **Jun. 20, 2017**

(54) **ISOLATION REGION FABRICATION FOR REPLACEMENT GATE PROCESSING**

257/E21.426, E21.445, E21.453;  
438/183, 400, 587, 368, 671, 926

See application file for complete search history.

(71) Applicant: **Samsung Electronics Co., Ltd.**,  
Suwon-si, Gyeonggi-do (KR)

(56) **References Cited**

(72) Inventors: **Brent A. Anderson**, Jericho, VT (US);  
**Edward J. Nowak**, Shelburne, VT (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Samsung Electronics Co., Ltd.** (KR)

6,803,278 B2 10/2004 Tran  
6,812,149 B1 11/2004 Wang et al.  
7,049,185 B2 5/2006 Ito  
7,052,937 B2\* 5/2006 Clevenger ..... H01L 21/76264  
257/717

(21) Appl. No.: **15/015,546**

7,525,173 B2 4/2009 Yang et al.  
7,569,887 B2 8/2009 Otsuki  
7,671,469 B2 3/2010 Lee et al.  
8,502,316 B2 8/2013 Fung et al.  
2005/0169052 A1 8/2005 Hsu et al.

(22) Filed: **Feb. 4, 2016**

**Related U.S. Patent Documents**

(Continued)

Reissue of:

(64) Patent No.: **8,643,109**  
Issued: **Feb. 4, 2014**  
Appl. No.: **13/771,275**  
Filed: **Feb. 20, 2013**

**OTHER PUBLICATIONS**

U.S. Applications:

Hirose Shingo, JP2004288685, Oct. 14, 2004, Abstract.  
Shinohara Tsuneo, JP2005340461, Dec. 8, 2005, Abstract.

(62) Division of application No. 13/213,713, filed on Aug. 19, 2011, now Pat. No. 8,546,208.

*Primary Examiner* — Kenneth J Whittington

(51) **Int. Cl.**

(74) *Attorney, Agent, or Firm* — Ward and Smith, P.A.

**H01L 27/12** (2006.01)  
**H01L 29/66** (2006.01)  
**H01L 21/28** (2006.01)  
**H01L 21/84** (2006.01)  
**H01L 21/762** (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.**


A semiconductor structure includes a silicon-on-insulator (SOI) substrate, the SOI substrate comprising a bottom silicon layer, a buried oxide (BOX) layer, and a top silicon layer; a plurality of active devices formed on the top silicon layer; and an isolation region located between two of the active devices, wherein at least two of the plurality of active devices are electrically isolated from each other by the isolation region, and wherein the isolation region extends through the top silicon layer to the BOX layer.

CPC .. **H01L 29/66545** (2013.01); **H01L 21/28123** (2013.01); **H01L 21/76283** (2013.01); **H01L 21/84** (2013.01); **H01L 27/1203** (2013.01)

(58) **Field of Classification Search**

CPC ..... H01L 29/66545; H01L 21/28123; H01L 27/1203; H01L 21/76283; H01L 21/84  
USPC ..... 257/E27.112, 347, E21.703, E21.409, 257/369, 374, 446, 501, 506, 510, 257/E29.02, E21.545, E21.564, E20.018,

**21 Claims, 9 Drawing Sheets**

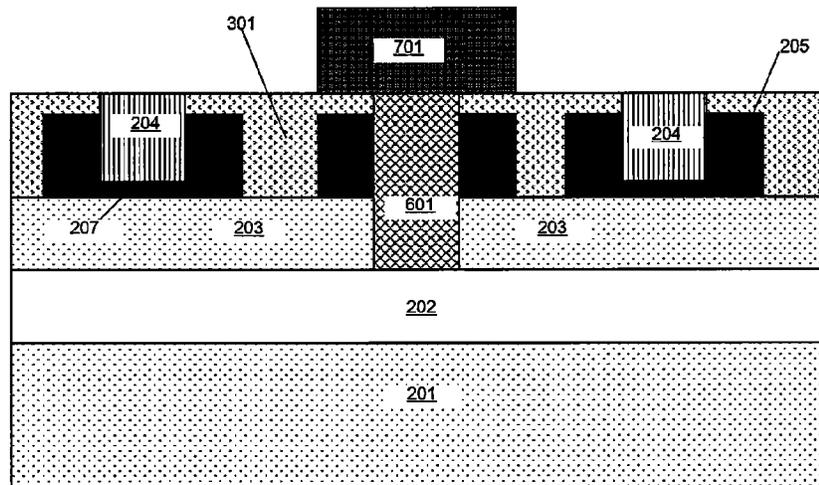

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2005/0239242	A1*	10/2005	Zhu .....	H01L 21/845	
					438/199
2006/0125024	A1	6/2006	Ishigaki		
2007/0176235	A1*	8/2007	Tsujiuchi et al. ....	257/347	
2007/0178660	A1*	8/2007	Miller et al. ....	438/424	
2008/0020515	A1*	1/2008	White et al. ....	438/118	
2008/0079074	A1*	4/2008	Icel et al. ....	257/347	
2008/0079088	A1	4/2008	Kudo		
2008/0197424	A1*	8/2008	Haensch .....	H01L 21/26586	
					257/407
2009/0114995	A1*	5/2009	Suzuki .....	H01L 21/26506	
					257/369
2010/0148248	A1	6/2010	Mikasa		
2010/0193877	A1	8/2010	Liaw et al.		
2011/0147765	A1	6/2011	Huang et al.		

\* cited by examiner

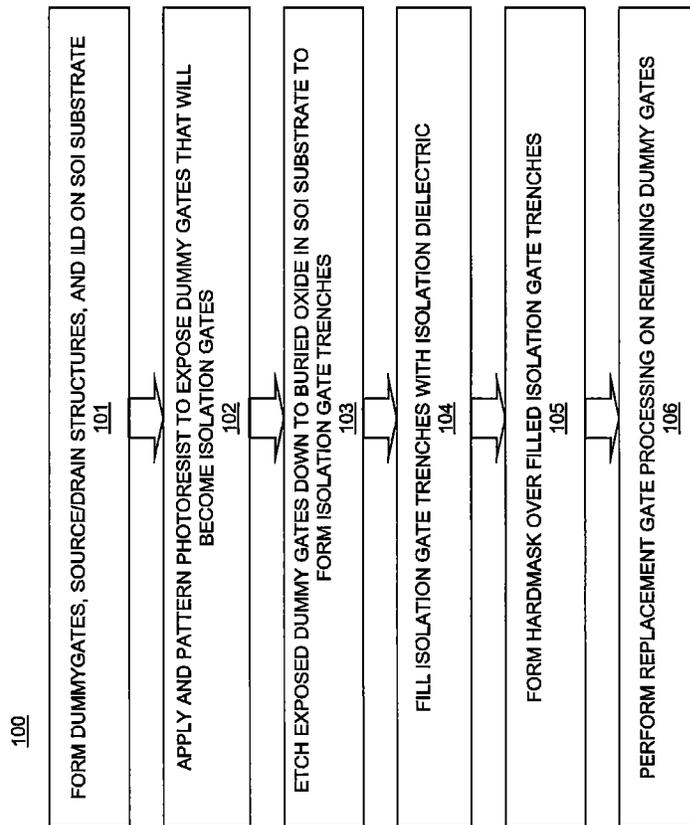


FIG. 1

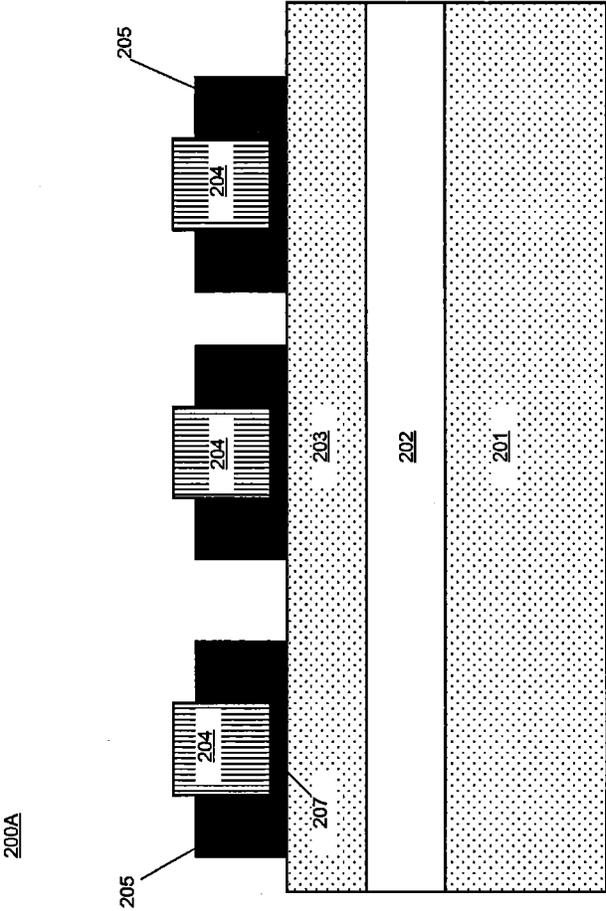


FIG. 2A

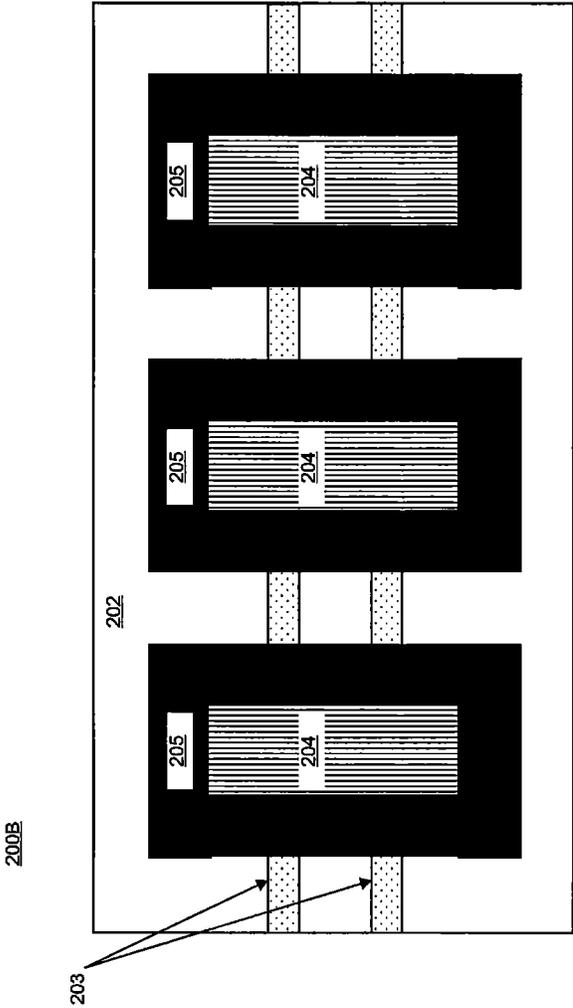


FIG. 2B

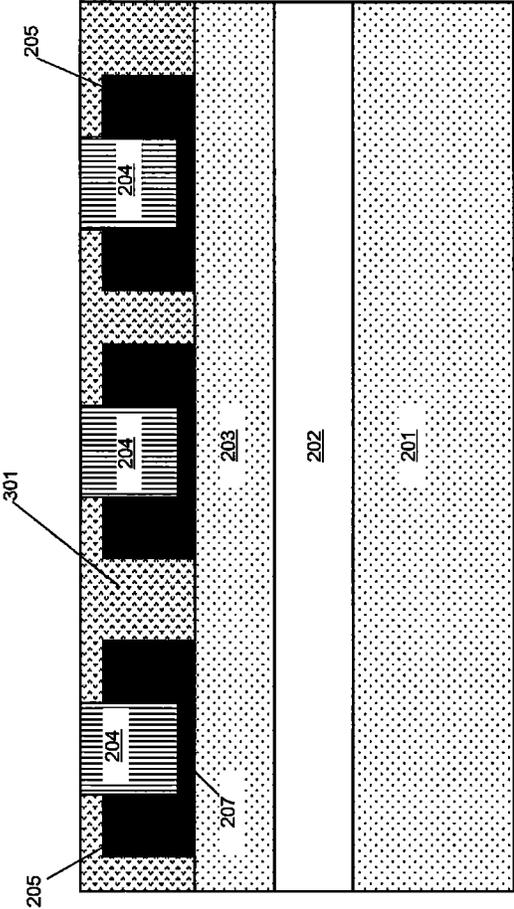


FIG. 3

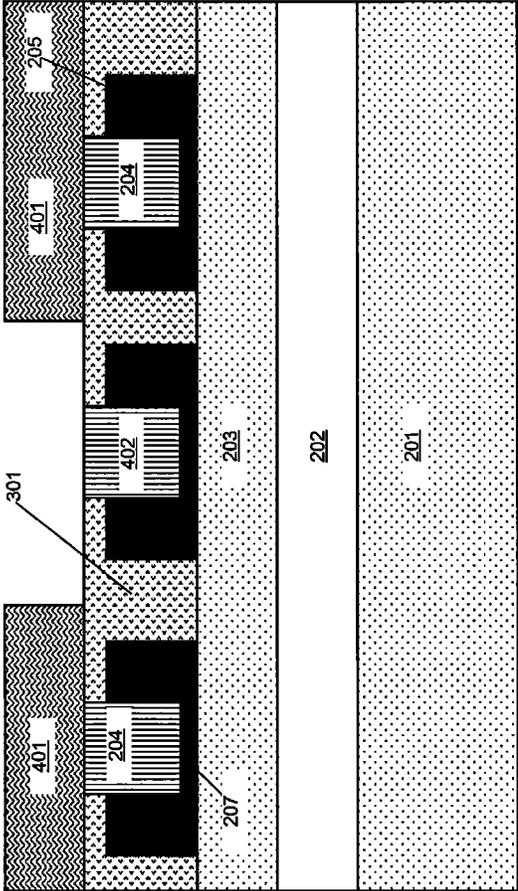


FIG. 4

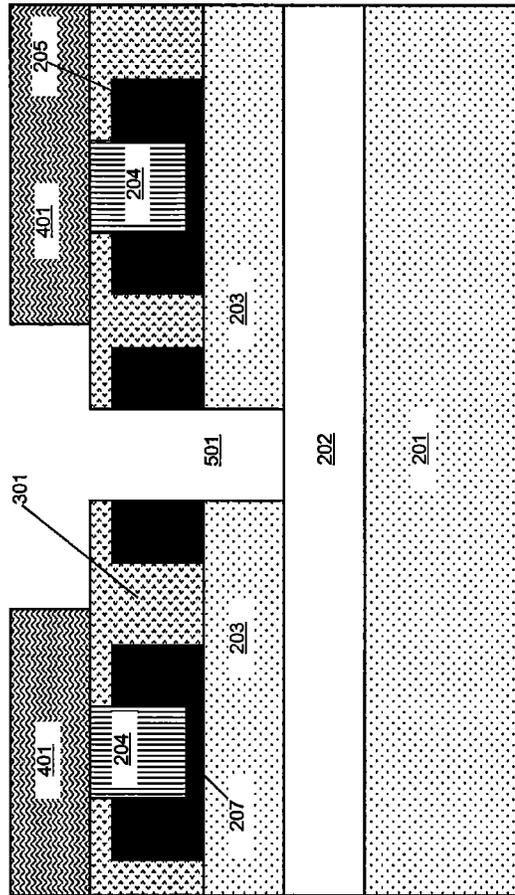


FIG. 5

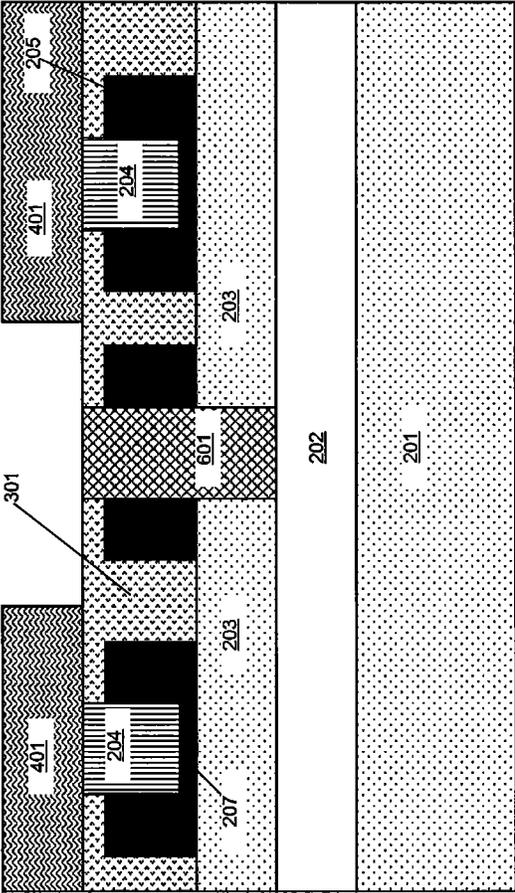


FIG. 6

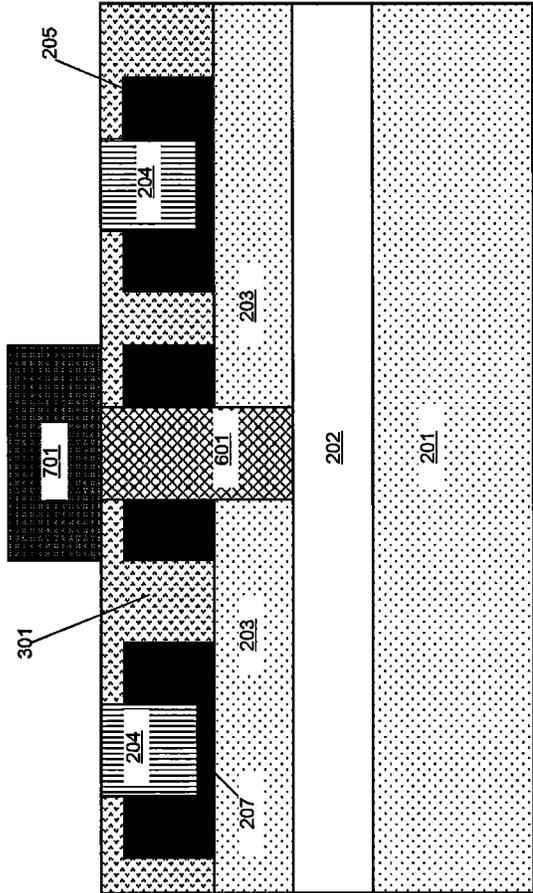


FIG. 7

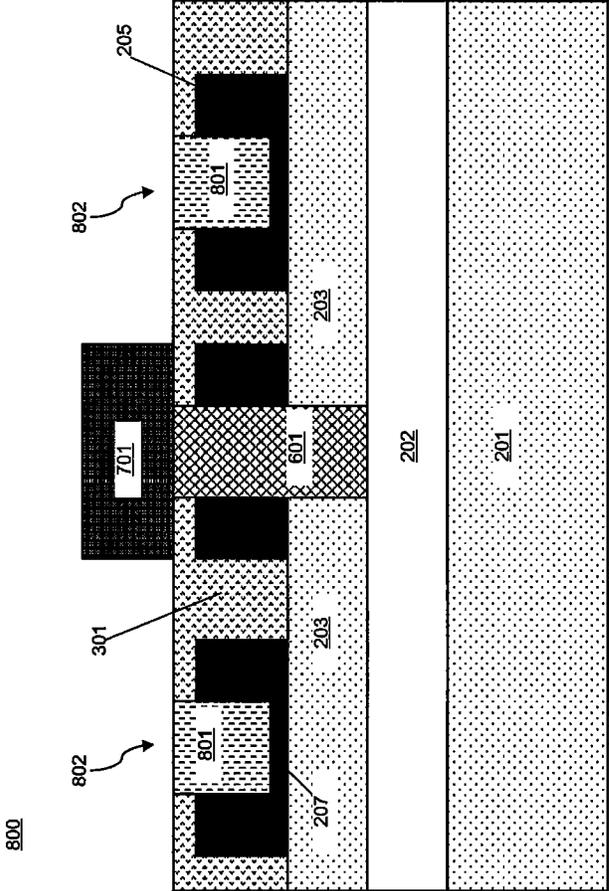


FIG. 8

## ISOLATION REGION FABRICATION FOR REPLACEMENT GATE PROCESSING

**Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.**

### CROSS-REFERENCE TO RELATED APPLICATION

This application is a divisional of U.S. application Ser. No. 13/213,713, filed on Aug. 19, 2011, which is herein incorporated by reference in its entirety.

### BACKGROUND

This disclosure relates generally to the field of integrated circuit (IC) manufacturing, and more specifically to isolation region fabrication for electrical isolation between semiconductor devices on an IC.

ICs are formed by connecting isolated active devices, which may include semiconductor devices such as field effect transistors (FETs), through specific electrical connection paths to form logic or memory circuits. Therefore, electrical isolation between active devices is important in IC fabrication. Isolation of FETs from one another is usually provided by shallow trench isolation (STI) regions located between active silicon islands. An STI region may be formed by forming a trench in the substrate between the active devices by etching, and then filling the trench with an insulating material, such as an oxide. After the STI trench is filled with the insulating material, the surface profile of the STI region may be planarized by, for example, chemical mechanical polishing (CMP).

However, use of raised (or regrown) source/drain structures, which may be employed to achieve lower series resistances of the IC or to strain FET channels, may exhibit significant growth non-uniformities at the boundary between a gate and an STI region, or when the opening in which the source/drain structure is formed is of variable dimensions. This results in increased variability in FET threshold voltage ( $V_t$ ), delay, and leakage, which in turn degrades over-all product performance and power. One solution to such boundary non-uniformity is to require all STI regions to be bounded by isolation regions. However, inclusion of such isolation region structures may limit space available for wiring, device density, and increase the load capacitance, thereby increasing switching power of the IC.

### BRIEF SUMMARY

In one aspect, a semiconductor structure includes a silicon-on-insulator (SOI) substrate, the SOI substrate comprising a bottom silicon layer, a buried oxide (BOX) layer, and a top silicon layer; a plurality of active devices formed on the top silicon layer; and an isolation region located between two of the active devices, wherein at least two of the plurality of active devices are electrically isolated from each other by the isolation region, and wherein the isolation region extends through the top silicon layer to the BOX layer.

Additional features are realized through the techniques of the present exemplary embodiment. Other embodiments are

described in detail herein and are considered a part of what is claimed. For a better understanding of the features of the exemplary embodiment, refer to the description and to the drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings wherein like elements are numbered alike in the several FIGURES:

FIG. 1 illustrates a flowchart of an embodiment of a method of isolation region fabrication for replacement gate processing.

FIG. 2A is a cross sectional view illustrating an embodiment of a semiconductor structure including dummy gates on a silicon-on-insulator (SOI) substrate.

FIG. 2B is a top view illustrating an embodiment of the semiconductor structure of FIG. 2A that comprises fins for formation of fin field effect transistors (finFETs).

FIG. 3 is a cross sectional view illustrating the semiconductor structure of FIG. 2A after formation of an interlevel dielectric layer (ILD) over the dummy gates.

FIG. 4 is a cross sectional view illustrating the semiconductor structure of FIG. 3 after application and patterning of photoresist.

FIG. 5 is a cross sectional view illustrating the semiconductor structure of FIG. 3 after removal of an exposed dummy gate to form an isolation region trench.

FIG. 6 is a cross sectional view illustrating the semiconductor structure of FIG. 4 after removal filling the isolation region trench with an isolation dielectric.

FIG. 7 is a cross sectional view illustrating the semiconductor structure of FIG. 5 after formation of a hardmask layer over the isolation region trench.

FIG. 8 is a cross sectional view illustrating the semiconductor structure of FIG. 6 after replacement gate processing.

### DETAILED DESCRIPTION

Embodiments of a method for isolation region fabrication for replacement gate processing, and an IC including isolation regions, are provided, with exemplary embodiments being discussed below in detail. Instead of placing isolation regions at STI region boundaries, isolation regions may replace STI regions, as is described in U.S. patent application Ser. No. 12/951,575 (Anderson et al.), filed Nov. 22, 2010, which is herein incorporated by reference in its entirety. A relatively dense, low-capacitance IC may be formed by replacement gate (i.e., gate-last) processing through use of a block mask that selectively allows removal of active silicon in a gate opening to form an isolation region. The active silicon is removed in a manner that is self-aligned to the dummy gate, such that there is no overlap of gate to active area and hence minimal capacitance penalty.

FIG. 1 shows a flowchart of an embodiment of a method 100 of isolation region fabrication for replacement gate processing. FIG. 1 is discussed with reference to FIGS. 2-7. First, in block 101 of FIG. 1, a semiconductor structure including dummy gates, source/drain regions, spacers, is formed on a substrate using regular semiconductor processing techniques, and an interlevel dielectric layer (ILD) is formed over the dummy gates. The semiconductor structure may also include raised source/drain regions located on either side of the dummy gates underneath the spacers in some embodiments. The semiconductor structure may include any appropriate semiconductor structure that includes dummy gates, including but not limited to a fin field

effect transistor (finFET) structure. An embodiment of such a semiconductor structure **200A** is shown in FIG. 2A. The substrate is a silicon-on-insulator substrate, including bottom silicon layer **201**, buried oxide (BOX) layer **202**, and top silicon layer **203**. Dummy gates **204** are located on top silicon layer **203**. In some embodiments, a gate dielectric layer **207** is formed underneath each dummy gate **204**. The dummy gate structure **204** may be polysilicon in some embodiments. The gate dielectric layer **207** may be any appropriate dielectric material, and in some embodiments may include a bottom dielectric layer and a top metal layer. Spacers **205** are formed on either side of the dummy gates **204**. FIG. 2B shows a top view of an embodiment of the semiconductor structure **200A** of FIG. 2A in which the top silicon layer **203** has been patterned to form fins for finFETs. In the semiconductor structure **200B** of FIG. 2B, the dummy gates **204** wrap around and cover the fins that comprise top silicon layer **203**. After formation of the dummy gates **204**, as shown in FIG. 3, ILD **301** is formed over the dummy gates **204** and spacers **205**, and ILD **301** is planarized such that the top surfaces of dummy gates **204** are exposed.

Returning to method **100**, in block **102**, a block mask is applied to the top surface of the dummy gates and the ILD, and the block mask is patterned to selectively expose the dummy gates that are to become isolation regions. The block mask may comprise, for example, photoresist. FIG. 4 shows an embodiment of the semiconductor structure **200A** after application and patterning of photoresist **401** to form the block mask, which exposes a dummy gate **402**. Then, turning again to method **100**, in block **103**, the exposed dummy gate is removed, and the portion of the top silicon layer located underneath the removed dummy gate is etched down to the BOX layer to form an isolation region recess. FIG. 5 shows an embodiment of a device including an isolation region recess **501**. The etch used to remove exposed dummy gate **402** and its respective gate dielectric layer **207**, and to form the recess **501** in top silicon layer **203**, may be a sequential multistage etch. The sequential multistage etch may have 3 or 4 different stages depending on the materials that make up dummy gate **204** and gate dielectric layer **207**. In embodiments in which the dummy gate **402** is polysilicon, dummy gate **402** may be removed using a dry etch such as a bromine-based etch. The respective gate dielectric layer **207** may next be removed using a wet etch, such as a hydrofluoric etch for example. In embodiments in which respective gate dielectric layer **207** includes a bottom dielectric layer and a top metal layer, the etch to remove the gate dielectric layer **207** may be a 2-stage etch. Then, the recess **501** may be formed in the top silicon layer **203** using a dry etch such as a bromine-based etch to etch down to BOX layer **202**.

Next, in method **100** of FIG. 1, in block **104**, the recess that was formed during the etch performed in block **103** is filled with an insulating material to form the isolation region, and the top surface of the insulating material is planarized such as is shown in FIG. 6. In FIG. 6, the recess **501** is filled with an insulator, and the top surface of the insulator is planarized, to form isolation region **601**. The insulator that comprises isolation region **601** may include silicon dioxide or silicon nitride in various embodiments. Then, flow of method **100** proceeds to block **105**, in which a hardmask layer is formed over the isolation region and the photoresist is removed. FIG. 7 shows an embodiment of a hardmask layer **701** formed over the isolation region **601**. The hardmask layer **701** may be silicon nitride. The photoresist **401** is also removed to expose the top surfaces of the remaining dummy gates **204**.

Lastly, in block **106** of method **100** of FIG. 1, replacement gate processing is performed on the remaining dummy gates, resulting in an IC device including electrical devices separated by isolation regions. An example of an IC device **800** including an isolation region **601** between two active devices is shown in FIG. 7. Dummy gates **204** have been replaced with gate stacks **801** to form active FETs **802**, including gate stacks **801**, gate dielectric layer **207**, spacers **205**, and source/drain and channel regions located underneath the devices in the top silicon layer **203**. The active FETs **802** may include raised source/drain regions (not shown) located under the spacers **205** in some embodiments. The active FETs **802** are separated by the isolation region **601**, which extends down to BOX layer **202**, preventing electrical leakage between active FETs **802**. The hardmask layer **701** acts to protect the isolation region **601** during the replacement gate processing. The hardmask layer **701** may be left on the device **800** in some embodiments, or in other embodiments the hardmask layer **701** may be removed after replacement gate processing is completed. FIGS. 2A-8 are shown for illustrative purposes only; a device formed using method **100** may include any appropriate number, type, and layout of FETs separated by any appropriate number and layout of isolation regions. For example, in some embodiments, two active devices in a semiconductor structure may have two isolation regions located between the two active devices. Also, in some embodiments, the gate dielectric layer that is initially formed underneath the dummy gate may be replaced during the replacement gate processing. The finished active devices may comprise finFETs in some embodiments, or any other appropriate type of active device that may be formed by replacement gate processing in other embodiments.

The technical effects and benefits of exemplary embodiments include formation of an IC having relatively high device density and low capacitance through replacement gate processing.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an", and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

The corresponding structures, materials, acts, and equivalents of all means or step plus function elements in the claims below are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the invention. The embodiment was chosen and described in order to best explain the principles of the invention and the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

5

The invention claimed is:

1. A semiconductor structure, comprising:  
a silicon-on-insulator (SOI) substrate, the SOI substrate comprising a bottom silicon layer, a buried oxide (BOX) layer, and a top silicon layer;  
a plurality of active devices formed on the top silicon layer; and  
an isolation region located between two of the plurality of active devices, wherein [at least] the two of the plurality of active devices are electrically isolated from each other by the isolation region, wherein the isolation region extends through the top silicon layer to the BOX layer, wherein the isolation region further extends between a pair of spacers that are located on the top silicon layer on either side of the isolation region to provide an inactive device between the two of the plurality of active devices, and wherein the isolation region further extends through an interlevel dielectric (ILD) layer that is located over the pair of spacers of the inactive device.
2. The semiconductor structure of claim 1, further comprising a hardmask layer located over the isolation region.
3. The semiconductor structure of claim 2, wherein the hardmask layer comprises silicon nitride.
4. A semiconductor structure, comprising:  
a substrate;  
a plurality of active devices on the substrate; and  
an isolation region located between two of the plurality of active devices, wherein the two of the plurality of active devices are electrically isolated from each other by the isolation region, wherein the isolation region extends into the substrate, wherein the isolation region further extends between a pair of spacers that are located on the substrate on either side of the isolation region to provide an inactive device between the two of the plurality of active devices, and wherein the isolation region further extends through an interlevel dielectric (ILD) layer that is located over the pair of spacers of the inactive device.
5. The semiconductor structure of claim 4 further comprising:  
a plurality of pairs of gate spacers, wherein each of the plurality of active devices comprises a respective gate electrode and a respective one of the plurality of pairs of gate spacers on opposing sides of the respective gate electrode.
6. The semiconductor structure of claim 5 wherein a distance between each of the plurality of pairs of gate spacers through the respective gate electrode is about equal to a distance between the pair of spacers that are located on the substrate on either side of the isolation region.
7. The semiconductor structure of claim 14 wherein the pair of spacers absent from between the isolation region and the substrate.
8. The semiconductor structure of claim 4 wherein the ILD layer and isolation region are separate structures.
9. The semiconductor structure of claim 4 wherein the pair of spacers comprise replacement gate spacers.
10. The semiconductor structure of claim 4 wherein the ILD layer surrounds the isolation region.
11. The semiconductor structure of claim 4 wherein the plurality of active devices comprise finFET active devices.
12. The semiconductor structure of claim 11 wherein the finFET active devices comprise respective gate electrodes surrounded by respective gate spacers.

6

13. The semiconductor structure of claim 12 wherein an uppermost surface of the isolation region is above a lowest portion of a gate electrode included in the plurality of active devices.
14. The semiconductor structure of claim 4 wherein the isolation region penetrates the pair of spacers into the substrate.
15. A semiconductor structure, comprising:  
a substrate;  
a plurality of active fins extending parallel to one another in a first direction on the substrate, wherein at least one of the plurality of active fins is included in a plurality of respective finFET active devices spaced apart in the first direction on the substrate;  
a plurality of adjacent insulation regions in the substrate, respective ones of which are located between adjacent ones of the plurality of fins; and  
an isolation region located between two of the plurality of respective finFET active devices spaced apart in the first direction, wherein the two of the plurality of respective finFET active devices are electrically isolated from each other by the isolation region, wherein the isolation region extends into the substrate, wherein the isolation region further extends between a pair of spacers that are located on the substrate on first and second sides the isolation region to provide an inactive finFET device between the two of the plurality of respective finFET active devices, and wherein the isolation region further extends through a interlevel dielectric (ILD) layer that is located over the pair of spacers of the finFET inactive device.
16. The semiconductor structure of claim 15 wherein the isolation region penetrates the pair of spacers into the substrate.
17. The semiconductor structure of claim 15 wherein the ILD layer surrounds the isolation region.
18. A semiconductor structure, comprising:  
a substrate;  
a plurality of fins extending parallel to one another in a first direction on the substrate and spaced apart on the substrate in a second direction, at least one of the plurality of fins being segmented by an isolation region into a plurality of respective finFET active devices spaced apart in the first direction on the substrate; and  
a plurality of adjacent insulation regions in the substrate, respective ones of which are located between adjacent ones of the plurality of fins,  
wherein the isolation region is located between two of the plurality of respective finFET active devices spaced apart in the first direction, wherein the two of the plurality of respective finFET active devices are electrically isolated from each other by the isolation region, wherein the isolation region extends into the substrate, wherein the isolation region further extends between a pair of spacers that are located on the substrate on first and second sides of the isolation region to provide an finFET inactive device between the two of the plurality of respective finFET active devices, and wherein the isolation region further extending through an interlevel dielectric (ILD) layer that is located over the pair of spacers of the finFET inactive device.
19. The semiconductor structure of claim 18 wherein the ILD layer surrounds the isolation region.
20. The semiconductor structure of claim 18 wherein the isolation region penetrates the pair of spacers into the substrate.

21. A semiconductor structure, comprising:  
a substrate;  
a first active device on the substrate, the first active device  
having a first gate electrode and first spacers on  
opposing sides of the first gate electrode; 5  
a second active device on the substrate, the second active  
device having a second gate electrode and second  
spacers on opposing sides of the second gate electrode;  
and  
an isolation region located on the substrate between the 10  
first and second active devices, wherein the first and  
second active devices are electrically isolated from  
each other by the isolation region, wherein the isolation  
region extends into the substrate, wherein the isolation  
region further extends between third spacers that are 15  
located on the substrate on either side of the isolation  
region to provide an inactive device between the first  
and second active devices, and wherein the isolation  
region further extends through an interlevel dielectric  
(ILD) layer that is located over the third spacers. 20

\* \* \* \* \*