(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
09 February 2023 (09.02.2023)

WIPO | PCT

(10) International Publication Number
WO 2023/014800 A1

(51) International Patent Classification:
H01Q 1/00 (2006.01) *H01Q 1/20* (2006.01)
H01Q 1/28 (2006.01) *H01Q 1/27* (2006.01)
H01Q 1/36 (2006.01) *H01Q 21/06* (2006.01)
H01Q 1/08 (2006.01) *H01Q 15/20* (2006.01)
H01Q 1/12 (2006.01)

(21) International Application Number:
PCT/US2022/039288

(22) International Filing Date:
03 August 2022 (03.08.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/229,412 04 August 2021 (04.08.2021) US

(71) Applicant: **M.M.A. DESIGN, LLC** [US/US]; 2000 Taylor Avenue, Suite 200, Louisville, Colorado 80027 (US).

(72) Inventors: **RING, Timothy John**; 2000 Taylor Avenue, Suite 200, Louisville, Colorado 80027 (US). **TOWER, Susan Christine**; 2000 Taylor Avenue, Suite 200, Louisville, Colorado 80027 (US).

(74) Agent: **RICHARD J. HOLZER, JR.**; Holzer Patel Drennan, 216 16th St, Suite 1350, Denver, Colorado 80202 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA,

(54) Title: MULTI-DIRECTION DEPLOYABLE ANTENNA

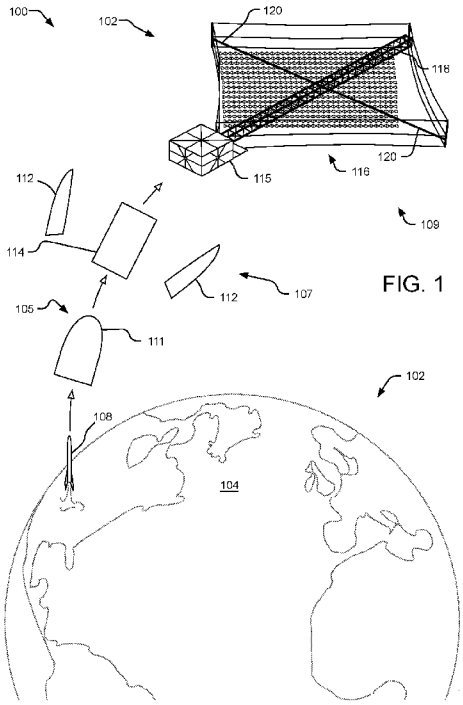


FIG. 1

(57) Abstract: An antenna system for space applications provides a membrane antenna with one or more flexible membranes. An antenna enclosure stores the membrane antenna during stowage. One or more first deployable support structures extend along a first axis from the antenna enclosure during deployment, at least a first point of the membrane antenna being operably anchored to a point on the first deployable support structures. Deployment mechanisms are operably anchored at a junction with the first deployable support structures. The deployment mechanisms extend one or more second deployable support structures along a second axis from the first deployable support structures during deployment. At least a second point of the membrane antenna is operably anchored to a point on the second deployable support structures. Extension of the first deployable support structures and second deployable support structures unfurls the membrane antenna along both axes to overlap the junction.

WO 2023/014800 A1

[Continued on next page]

NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Multi-direction Deployable Antenna

Cross-reference to Related Applications

The present application claims the benefit of priority to U.S. Provisional Patent Application No. 63/229,412, entitled "Multi-direction Deployable Antenna" and filed on August 4, 2021, which is specifically incorporated herein by reference.

Technical Field

The present application relates to deployable space systems.

Summary

The technology described herein relates to a multi-direction deployable antenna for space applications. An antenna system for space applications is provided with a membrane antenna with one or more flexible membranes. An antenna enclosure is configured to store the membrane antenna during stowage. One or more first deployable support structures (e.g., extendable truss booms) are configured to extend along a first axis from the antenna enclosure during deployment, at least a first point of the membrane antenna being operably anchored to a point on the one or more first deployable support structures. One or more deployment mechanisms are operably anchored at a junction with the one or more first deployable support structures. The one or more deployment mechanisms are configured to extend one or more second deployable support structures along a second axis from the one or more first deployable support structures during deployment. At least a second point of the membrane antenna is operably anchored to a point on the one or more second deployable support structures. Extension of the one or more first deployable support structures and one or more second deployable support structures unfurls the membrane antenna along the first axis and the second axis to overlap the junction.

This summary is provided to introduce a selection of concepts in a simplified form that is further described below in the Detailed Description. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

Other implementations are also described and recited herein.

Brief Descriptions of the Drawings

FIG. 1 illustrates an example environment for use in a multi-direction deployable antenna in multiple phases.

FIG. 2 illustrates an example multi-direction deployable antenna in a stowed configuration.

FIG. 3 illustrates an example multi-direction deployable antenna in a deployed configuration, wherein an extendable truss boom extends along an axis from an antenna enclosure during deployment.

FIG. 4 illustrates another example multi-direction deployable antenna in a deployed configuration.

FIG. 5 illustrates an example extendable truss boom in an undeployed state.

FIG. 6 illustrates an example extendable truss boom in a deployed state.

FIG. 7 illustrates example operations for deploying a multi-direction deployable antenna.

Detailed Descriptions

The technology described herein relates to a multi-direction deployable antenna for space applications. The multi-directional deployable antenna is configured to be stowed in a confined volume within an antenna enclosure during launch and prior to deployment. During deployment, an example expandable truss boom having one or more expandable longerons and one or more battens extends from the antenna enclosure in at least a first direction during deployment of the antenna. The expandable truss boom also supports one or more tape deployers, which extend one or more tape booms (e.g., tape springs) in at least a second direction. During deployment, one or more antenna membranes are unfurled (e.g., unfolded and/or unrolled) in at least the first direction along the expandable truss boom and in at least the second direction along the one or more tape booms.

In one implementation, the antenna includes at least a single antenna membrane, providing RF signal communications via both sides of the antenna membrane (e.g., relative to the Earth's surface on one side and relative to GPS satellites on the other side). In another implementation, the antenna includes three antenna membranes – an artificial dielectric layer, an active dipole layer (e.g., having an 8x8 array of dipoles/sub-apertures, each dipole or sub-aperture being separated by a predefined distance), and a ground layer). The three layers are

also separated from each other by predefined distances. The second example implementation provides communications on one side of the antenna. Other configurations are contemplated.

FIG. 1 illustrates an example environment 100 for use in a multi-direction deployable antenna 102 in multiple phases. The example environment 100 includes a target body 104 (e.g., the Earth or other astronomical object). In the example environment, a launch vehicle 108 launches from the Earth, typically with multiple stages. In one implementation, an engine stage is ignited at launch and burns through a powered ascent until its propellants are exhausted. The engine stage is then extinguished, and a payload stage separates from the engine stage and is ignited in a first phase 105. The payload is carried atop the payload stage into orbit in the first phase, contained within payload fairings 112 that form a nose cone to protect a launch vehicle payload against the dynamic pressure and aerodynamic heating during launch through an atmosphere.

In this first phase 105, the multi-direction deployable antenna 102 is illustrated as stowed in a small-volume undeployed state (e.g., within a payload section 111) relative to the large-volume deployed state shown in a subsequent phase. In this case, the multi-direction deployable antenna 102 is smaller and is less massive than other deployable systems used for similar purposes.

In FIG. 1, the multi-direction deployable antenna 102 is shown in a second phase 107 in the space environment, with the payload fairings 112 jettisoned from a launch canister 114 (that contains the multi-direction deployable antenna 102 in a stowed or undeployed state, including antenna enclosure 115 (such as a satellite body), deployable support structures, and one or more antenna membranes 116. The antenna membranes 116 can be electromagnetic radiation directing surfaces or lenses. While described as a multi-direction deployable antenna 102, the multi-direction deployable antenna 102 can be adapted to transmit, phase shift, pass, direct, and/or redirect electromagnetic radiation in any portion of the electromagnetic spectrum (e.g., visible light, radio, microwave, infrared, ultraviolet, x-rays, gamma-rays, etc.) and may alternatively be called a deployable electromagnetic radiation antenna system.

In the illustrated implementation, the multi-direction deployable antenna 102 includes the antenna membranes 116 acting as the one or more antenna layers - an artificial dielectric layer, an active dipole layer (e.g., having an 8x8 array of dipoles/sub-apertures, each dipole or sub-aperture being separated by a predefined distance), and a ground layer. The three antenna membranes 116 of FIG. 1 are also separated from each other by predefined distances. While described as redirecting radiofrequency energy in implementations, the

antenna membranes 116 can be adapted to direct and/or pass electromagnetic radiation of any frequency and/or wavelength, including ones outside of the radio wave portion of the electromagnetic spectrum. The antenna membranes 116 may include one or more flexible, semi-flexible, semi-rigid, rigid, both (perhaps alternating) rigid and panelized portions. Examples of antenna membranes 116 are contemplated with portions that are unfurled and/or expanded when being deployed after launch from a stowed state before and during launch.

The multi-direction deployable antenna 102 in FIG. 1 includes one or more deployment instruments, which may include without limitation a device providing one or more of unfurling, unrolling, and/or unfolding of the antenna membranes 116, such as by extending support structures (also herein referred to as deployable support structures) from the antenna enclosure 115. Example deployable support structures may include without limitation other deployment mechanisms, such as compression struts, extendable truss booms, tape springs, and/or an inflation element (e.g., a compressed air source) for expanding inflatable supports. Each deployable support structure can be extended from a deployment mechanism, such as a motorized extender (e.g., a screw mechanism) extending a telescoping truss boom, a latch or door constraining a telescoping truss boom, an active or passive tape dispenser for tape springs, or an inflation source for inflatable elements. The antenna membranes 116 may be a continuous surface or may be panelized or composed of multiple parts and assembled when deployed. The antenna membranes 116 may be one or more of an optical or a radiofrequency responsive surface. The antenna membranes 116 can have one or more active or passive directional elements.

As shown in a deployed state in phase 109, the multi-direction deployable antenna 102 includes the antenna enclosure 115 and the antenna membranes 116 connected to the antenna enclosure 115 by one or more deployable support structures, illustrated in FIG. 1 as including an extendable truss boom and tape springs 120. It should be appreciated that other deployable support structures, such as inflatable systems, coiled longeron booms, pantographic structures, or otherwise extendable structures, are contemplated. Furthermore, tape springs may have an open cross-section (e.g., like a carpenters tape), a closed cross-section (e.g., two carpenters tapes with concave surfaces facing each other and connected to form a closed cross-section), or a combination of these characteristics. The antenna enclosure 115 may include without limitation a variety of different subsystems, such as any combination of navigation subsystems, propulsion subsystems, control subsystems, communication subsystems, power subsystems, deployment subsystems, instrument subsystems, and any other payload subsystems.

The multi-direction deployable antenna 102 is shown in a deployed state in which the antenna membranes 116 have been expanded to a larger area relative to the size of the antenna membranes 116 in its undeployed state. The tensioning of the antenna membranes 116 into substantially parallel flat planes reduces the depth of the deployed surface(s) and requires fewer parts and less touch labor than other approaches. During deployment, the antenna membranes 116 are deployed away from the antenna enclosure 115 by the extendable truss boom 118 and/or the tape springs 120, which are mechanically or electronically synchronized to work in concert deploying and tensioning the antenna membrane lens. The tape springs 120 deploy in compression to balance the tension loads of the antenna membranes 116.

FIG. 2 illustrates an example multi-direction deployable antenna 200 in a stowed configuration. An antenna enclosure 202 encloses antenna membranes and deployable support structures while the multi-direction deployable antenna 200 is stowed. During deployment, one or more doors of the antenna enclosure 202 open to expose the antenna membranes and deployable support structures to the space environment.

The antenna enclosure 202 also includes an RF processor subsystem 204, which is attached to the antenna enclosure 202 in the illustrated implementation. In another implementation, the RF processor subsystem 204 may also be enclosed in the antenna enclosure 202. Further details of the RF processor subsystem 204 are provided below.

FIG. 3 illustrates an example multi-direction deployable antenna 300 in a deployed configuration, wherein an extendable truss boom 302 extends along an axis 304 from an antenna enclosure 306 during deployment. In the illustrated example, the extendable truss boom 302 extends linearly away from the antenna enclosure 306 to unfurl antenna membranes 308 from their undeployed state along the axis 304 toward their deployed state. Likewise, tape springs 314 and 316 extend away from the extendable truss boom 302 to unfurl the antenna membranes 308 from their undeployed state along the axis 310 toward their deployed state. As such, a junction 337 between the extendable truss boom 302 and the tape springs 314 and 316 is positioned within the bounds of the antenna membranes 308 when viewed along the Z-axis (e.g., looking down on the antenna membranes from above in FIG. 3) such that the antenna membranes 308 overlap the junction 337. The antenna enclosure 306 is illustrated outside the bounds of the antenna membranes 308, although, in some implementations, these structures may also overlap to some extent.

Locations near the perimeter (e.g., edges) of the antenna membranes 308 may be operably anchored (e.g., directly or indirectly) to terminal ends and/or other portions of the

extendable truss boom 302 and the tape springs 314 and 316. For the purposes of the description of the illustrated configuration in FIG. 3, the proximal end of the extendable truss boom 302 is located near the antenna enclosure 306 (e.g., near a pole 324), and the distal end of the extendable truss boom 302 is located near the pole 322. Likewise, the proximal ends of the tape springs 314 and 316 are located near the extendable truss boom 302, and the distal ends are located near the pole 326 and the pole 328, respectively. As the extendable truss boom 302 extends, the terminal end of the extendable truss boom 302 pushes and/or pulls the edges of the antenna membranes 308 along axis 304 to unfurl the antenna membranes 308 from their undeployed state toward their deployed state. Likewise, as the tape springs 314 and 316 extend to push and/or pull the edges of the antenna membranes 308 along axis 310 also to unfurl the antenna membranes 308 from their undeployed state toward their deployed state.

In the deployed state, the antenna membranes 308 are extended to a substantially planar and/or flat arrangement (or arrangement with multiple planes, e.g., a multifaceted arrangement) where the antenna membranes 308 are oriented substantially perpendicular to a Z-axis, referencing the legend in the upper-right hand corner of FIG. 3 (the deployed antenna membranes are depicted as being in or substantially parallel to the X-Y plane). For the purposes of this specification, substantially planar or substantially flat may mean that points on all or a portion of the deployed antenna membranes 308 diverge by less than a predefined distance in a plane or parallel planes (e.g., a plane defined by the peripheral edges of the antenna membranes 308) or a predefined angle relative to an edge (e.g., an edge among the peripheral edges of the antenna membranes 308). For example, predefined distances may be between any or be one or more of 1 millimeter (mm), 2 mm, 3 mm, 4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 1 centimeter (cm), 1.5 cm, 2 cm, 3 cm, 4 cm, 5 cm, 10 cm, 15 cm, 20 cm, 25 cm, and 30 cm. Predefined angles may be between any or be one or more of 1°, 2°, 3°, 4°, 5°, 6°, 7°, 8°, 9°, 10°, 15°, 20°, 25°, 30°, and 35°. The extendable truss boom 302 may be deployed in synchronicity, in sequence, or in some temporally overlapping manner.

In the illustrated example, the extendable truss boom may include a variety of telescoping poles and/or extendable struts/tapes (collectively, extendable members) that extend from antenna enclosure 306. As shown in FIG. 3, four extendable members are bound by a series of battens to form the extendable truss boom 302. In some implementations, truss boom extenders, positioned in or near the antenna enclosure 306, in the form of a spring pushing the telescoping longerons to extend the extendable truss boom 302 away from the

antenna enclosure 306, although alternative trust boom extenders may be employed (e.g., a motorized screw mechanism to extend the telescoping longerons).

A tape spring 314 and a tape spring 316 are configured to extend outward from the extendable truss boom 302 as they unfurl the antenna membranes 308. The tape springs may be or include bi-stable tapes that can be rolled up for stowage and unrolled for deployment to provide support for the antenna membranes 308. For example, tape dispensers (not illustrated) associated with each tape spring may be included as part of the multi-direction deployable antenna 300. In one implementation, the tape dispensers are positioned at a junction substantially in the middle of the extendable truss boom 302 (e.g., substantially equidistant between the terminal ends of the one or more extendable truss booms) when it is extended, although other implementations may position the tape dispensers at other positions along the extendable truss boom 302. For example, in one implementation, the tape dispensers are positioned at a junction substantially at least an eighth of the length of the one or more extendable truss booms from the terminal end of the one or more extendable truss booms. Tape springs and extendable truss booms are examples of deployable support structures.

In many implementations, positioning the tape dispensers at a junction with the terminal ends of the extendable truss boom 302 would not result in a rhombus-shaped antenna membrane after deployment, so such terminal end junctions are generally not employed. Nevertheless, the terminal ends of the extendable truss boom 302 may be used in other implementations to achieve other shapes for the antenna membranes 308.

Upon deployment of multi-direction deployable antenna 300, the tape dispensers may deploy the tapes from a rolled state to an unrolled state. In this example, the tapes may be carpenter-style tapes where the tapes extend (e.g., unroll from the tape dispensers) to expand antenna membranes 308 to their deployed state and provide a level of structural rigidity to the deployed state of antenna membranes 308.

In some cases, the antenna enclosure 306 includes or is attached to solar panels (or other power sources) and instrumentation. The antenna enclosure 306 may also include instrumentation for use in maneuvering the multi-direction deployable antenna 300 and/or the RF communications operations of the antenna.

The multi-direction deployable antenna 300 may communicate (e.g., emit or receive) radiofrequency (RF) waves or other energy frequency waves. Such radiofrequency energy or other electromagnetic radiation may be used to measure the moisture content on the surface of the Earth or for other radio frequency applications (e.g., a radiometer). In some

implementations, the multi-direction deployable antenna 300 may be employed in radar applications, such as from UHF and L-band up to X and Ku, possibly as high as Ka.

When deployed, the antenna membranes 308 present substantially in the form of a rhombus constructed from multiple flexible membrane layers, subject to some tensioning nonlinearities and strictly nonplanar behaviors. Corners of the rhombus are operably anchored to or near the terminal ends of the extendable truss boom 302 and the tape springs 314 and 316.

The antenna membranes 308 present more than one surface. For example, the antenna membranes 308 can be a multifaceted element with multiple substantially flat and/or planar surfaces. The antenna membranes 308 may have a shape, for example, a pyramidal, triangular prismatic, rectangular prismatic (e.g., tent-like or v-shaped), other polygonal prismatic, spherical, hemispherical, curvilinear, or other shapes. In implementations, the antenna membranes 308 can have surfaces of the same or different sizes. The arrangements of the surfaces may be axisymmetrical about a center and/or central axis of the antenna membranes 308. The antenna membranes 308 can have some surfaces that pass electromagnetic beams and other surfaces that do not. In implementations, one or more of multiple facets of the antenna membranes 308 and/or phase-shifting properties of the antenna membranes 308 can cooperatively or independently cause beam splitting of the beam of electromagnetic radiation at or within the antenna membranes 308. Beam splitting may cause portions or elements of the beam of electromagnetic radiation to be emitted in different directions from the antenna membranes 308.

The multi-direction deployable antenna 300 can include a transceiver to receive and transmit communications between the multi-direction deployable antenna 300 and an external computing system (e.g., a computing system on Earth). RF elements (see artwork 344) form an array (e.g., an 8x8 array) of conductive dipole/sub-apertures on the active dipole membrane 340.

The multi-direction deployable antenna 300 can be further adapted to receive a received beam from the target body in response to the resulting phase-shifted beam. In alternative implementations, the multi-direction deployable antenna 300 may be a passive system that receives the received beam that is not responsive to an emitted beam emitted by the multi-direction deployable antenna 300. The antenna membranes 308 can phase shift the received beam to redirect the received beam in a direction that is substantially the reverse of the original direction from which the beam is communicated to or from the antenna feed. The multi-direction deployable antenna 300 may include an internal computing system (e.g., in or

attached to the antenna enclosure 306) that includes a processor and a memory, the processor to execute operations stored in memory. Operations can include receiving data representing the received RF signals, associating the data representing the received beam geometric associating data, and transmitting the data representing the received beam and the association to a different computing system. The computing system can further account, in the association, for any time between the emitting of the resulting phase-shifted beam (or the originally emitted beam) and the receiving data representing the received beam. The accounting may be conducted by a data generation module.

An example payload of a multi-direction deployable antenna 400 includes an antenna subsystem and a radio frequency (RF) processor subsystem, which may be located in or attached to the antenna enclosure 408. In one implementation, the RF processor subsystem outputs a 28 VDC power supply to the antenna subsystem and a deployment enable signal to the antenna subsystem to trigger deployment of the multi-direction deployable antenna 400. The RF processor subsystem also controls the RF signaling operation of the deployable antenna system. A primary network node autonomously connects and controls the satellite system of which the deployable antenna system is a component and coordinates communications to/from multiple satellites in a constellation of related satellites.

The generated data may be associated, using a data generation module, with geometric associating data to associate data representing electromagnetic radiation beams (e.g., a received and/or emitted beam(s)) with a relative geometric characteristic of the multi-direction deployable antenna. Geometric associating data may represent the position and/or orientation of the multi-direction deployable antenna and/or the antenna membranes 308 relative to one or more of, without limitation, a target, a monitoring station, an external computing device, a communication array, and nadir. Examples of geometric associating data include data representing one or more of an orientation of the antenna membranes 308, nadir, an orbital position of the multi-direction deployable antenna 300, a timestamp for data transmitted and/or received from and/or by the multi-direction deployable antenna, a rate of oscillation (or rotational velocity) of an element of the electromagnetic radiation antenna system, and a rotational velocity of the antenna membranes 308 and/or the multi-direction deployable antenna 300. The generated data may account for any time or position delay between transmission of an emitted beam (e.g., from a transmitting operation) to reception of a responsively received beam (e.g., in a receiving operation).

In summary, FIG. 3 illustrates an implementation of a multi-direction deployable antenna 300. An extendable truss boom 302 is operably anchored to an edge of the antenna

membranes 308 to deploy that edge away from the antenna enclosure 306 by extending along an axis from the antenna enclosure 306. In one implementation, the opposite edge of the antenna membranes 308 is operably anchored to the antenna enclosure 306 and/or the end of the extendable truss boom 302. The one or more antenna membranes 308 are operably anchored to at least one end of the extendable truss boom by a pole 322, although other anchoring structures may be employed (e.g., fasteners, lanyards, combinations thereof).

The antenna enclosure 306 is shown as open in the deployed configuration of FIG. 3, with a door 330 open to expose the extendable truss boom 302. The extendable truss boom 302 extends in a first direction (e.g., along a first axis) from the antenna enclosure 306, although other implementations may include a truss boom that extends from the antenna enclosure 306 in more than one direction (e.g., in opposite directions – see FIG. 4). The illustrated implementation shows an extendable truss boom 302 including four longerons (e.g., longeron 332) supported by multiple battens (e.g., batten 334) spaced periodically along the truss boom 302. In one implementation, the longerons extend in a telescoping manner, although other extending mechanisms may be employed. In other implementations, the number of longerons may be greater or less than four.

Two tape dispensers 336 are also positioned at the junction 337 along substantially half the length of the extendable truss boom 302 at deployment. In one implementation, the tape dispensers 336 are configured to deploy after the extendable truss boom 302 is fully extended, but this timing may be adjusted as desired. In FIG. 3, the tape dispensers 336 deploy two tape springs 314 and 316 perpendicularly away from the extendable truss boom 302, although other angles may be employed. It should be understood that such tape dispensers may be active (e.g., motorized) to unroll the tape springs or passive to allow the tape springs to unroll under their own stored strain energy. In both cases, the tape springs may be constrained by a latch or other mechanism until the deployment is triggered and the time for tape spring extension has been reached, at which point the latch releases and the tapes unroll. (In some implementations, the tape springs are rolled up in opposition to their own bias to remain unrolled. As such, when a mechanism constraining a rolled tape spring is released, the stored strain energy will cause the tape spring to unroll, thereby extending the tape spring to unfurl the antenna membrane.) In addition, in some implementations, the tape springs and/or the extendable truss may be replaced with other deployable support structures, such as compression struts, tape springs, extendable truss booms, telescoping booms, inflatable booms, etc. As shown in FIG. 3, the planar extent of the flexible membranes of the membrane antenna overlaps the junction 337 at the tape dispensers 336 (e.g., overlapping the

junction of the extendable truss boom 302 and the tape springs 314 and 316 when observed along the Z-axis).

In the illustrated implementation, the antenna includes three membrane layers: an artificial dielectric membrane 338, an active dipole membrane 340, and a ground plane membrane 342, although the number of membranes may be greater or less than three. Points on or near the periphery of the membranes are anchored to the extendable truss boom 302 or the tape springs 314 and 316, causing the membranes to unfurl as the extendable truss boom 302 and tape springs 314 and 316 extend. In this manner, the stowed membranes are expanded to provide a larger aperture than would be possible in their stowed condition. The membrane layers are spatially separated from each other by a distance that this larger than the thickness of each membrane. For example, in one implementation having three layers (e.g., an artificial dielectric layer; an active dipole layer having an 8x8 array of dipoles/sub-apertures, and a ground layer), the first two layers are separated by 7.5 inches, and the second two layers are separated by 5.9 inches. Each dipole in the array is separated by 7.52 inches.

RF elements (see artwork 344) form an array (e.g., an 8x8 array) of conductive dipole/sub-apertures mounted on the active dipole membrane 340. In one implementation, the individual dipoles/sub-apertures of the array are spaced by 7.52 inches, although such spacing may depend on the overall size of the antenna membrane and/or the communication application for which it is used. In other implementations, a sinuous or spiral pattern of RF elements may be used instead of an array. RF cables (e.g., coaxial or twisted pair cables – not shown) connect the RF elements to a feed (not shown) at the extendable truss boom 302 (connected to a power supply and RF control system in the antenna enclosure 306 or the RF processor). The RF cables are stowed in such a way as to deploy without catching or tangling as the membrane antenna unfurls. Furthermore, the RF elements (and potentially active tape dispensers, if needed) may be fed by one or more electrical connections running from the antenna enclosure through or along the extendable truss boom to the artwork 344 and/or the coax cables. In some implementations, the one or more electrical connectors may be strung along the extendable truss boom and, in some of these implementations, through the battens of the extendable truss boom. Accordingly, the described technology may be applied to active antennas (e.g., having RF elements powered by an electrical connection) and/or passive antennas (e.g., a reflectarray illuminated by a feed antenna or other RF source).

FIG. 4 illustrates another example multi-direction deployable antenna 400 in a deployed configuration. This implementation is similar to the implementation depicted in FIG. 3 but differs in that two extendable truss booms 402 and 404 extend along an axis 406 in

opposite directions from an antenna enclosure 408 during deployment, rather than a single extendable truss boom extending in a single direction. Also, rather than being positioned to one side of the deployed antenna membranes, the antenna enclosure and the junction between the extendable truss booms 402 and the tape springs 412 are positioned within the bounds of the antenna membranes 410 when viewed along the Z-axis (e.g., looking down on the antenna membranes from above in FIG. 4).

As described, multiple extendable truss booms are used to deploy edges of the antenna membranes 410 away from the antenna enclosure 408, thereby unfurling the antenna membranes (note: artwork similar to the artwork 344 in FIG. 3 is also present in the implementation of FIG. 4, but it has been removed from the drawing to better present the underlying antenna enclosure). Likewise, the multi-direction deployable antenna 400 also includes similar electrical connections to the implementation of FIG. 3, such as the coax cabling.

In this implementation, one or more doors (e.g., door 411) expose the antenna membranes 410 to the space environment, allowing the extendable truss booms 402 and 404 to extend from the antenna enclosure. The stowed antenna membranes 410, the extendable truss booms 402 and 404, the tape springs 412, and associated truss boom extenders and trap dispensers are raised to clear the open top, and then the truss boom extenders and trap dispensers extend their corresponding supports, although, in other implementations, the doors of the antenna enclosure could fold away enough to not require the raising operation.

The two extendable truss booms 402 and 404 are operably anchored to edges (e.g., opposite edges) of the antenna membranes 410 to deploy those edges away from the antenna enclosure 408 by extending along an axis in opposite directions from the antenna enclosure 408. Likewise, tape springs 412 unfurl the antenna membranes 410 along another axis (e.g., an orthogonal axis to the extendable truss booms 402 and 404). The one or more antenna membranes 410 are operably anchored to the extendable truss booms 402 and 404 and to the tape springs 412 by poles (e.g., the pole 414), although other anchoring structures may be employed (e.g., fasteners, lanyards, combinations thereof).

Two tape dispensers 436 are also positioned at a junction 437 along substantially half the length of the extendable truss booms 402 and 404 at deployment. In one implementation, the tape dispensers 436 are configured to deploy after the extendable truss booms 402 and 404 are fully extended, but this timing may be adjusted as desired. In FIG. 4, the tape dispensers 436 deploy two tape springs 412 perpendicularly away from the extendable truss booms 402 and 404, although other angles may be employed. As shown in

FIG. 4, the planar extent of the flexible membranes of the membrane antenna overlaps the junction 437 at the tape dispensers 436 (e.g., the junction of the extendable truss boom 404 and the tape springs 412 when observed along the Z-axis). It should be understood that such tape dispensers may be active (e.g., motorized) to unroll the tape springs or passive to allow the tape springs to unroll under their own tensional force. In both cases, the tape springs may be constrained by a latch or other mechanism until the deployment is triggered and the time for tape spring extension has been reached.

FIG. 5 illustrates an example extendable truss boom 500 in an undeployed state. The extendable truss boom 500 includes four telescoping longerons (e.g., as shown by the ends or end caps of telescoping longerons 502, 504, 506, and 508) that are bound by numerous battens (e.g., a batten 510 and a batten 512). The telescoping longerons and the battens are collapsed for stowage in an antenna enclosure (not shown).

FIG. 6 illustrates an example extendable truss boom 600 in a deployed state. The extendable truss boom 600 includes four telescoping longerons 602, 604, 606, and 608 that are bound by numerous battens (e.g., a batten 610 and a batten 612). The telescoping longerons and the battens are extended along an extension axis 614, which is substantially parallel to the axis of each longeron in the illustrated implementation, for deployment from an antenna enclosure (not shown). The battens improve the rigidity and strength of the extendable truss boom 600 as and after it is extended

FIG. 7 illustrates example operations 700 for deploying a multi-direction deployable antenna. In a space environment, a deployment operation 702 opens an antenna disclosure that stows a membrane antenna. In one implementation, one or more doors of the antenna disclosure open to expose the membrane antenna to the space environment.

A truss deployment operation 704 extends one or more extendable trust booms along a first axis from the antenna enclosure. At least a first point of the membrane antenna is operably anchored to a point on the one or more extendable truss booms, such that extension of the extendable trust boom(s) partially unfurls the antenna membranes, at least along the first axis.

A tape spring deployment operation 706 extends one or more tape springs along a second axis from one or more tape dispensers operably anchored to the one or more extendable truss booms during deployment. At least a second point of the membrane antenna is operably anchored to a point on the one or more tape springs, such that the extension of the tape springs partially unfurls the antenna membranes, at least along the second axis. In

combination, the extension of the one or more extendable truss booms and one or more tape springs unfurls the membrane antenna along the first axis and the second axis.

In some aspects, an example antenna system for space applications is provided, including: a membrane antenna including one or more flexible membranes; an antenna enclosure configured to store the membrane antenna during stowage; one or more first deployable support structures configured to extend along a first axis from the antenna enclosure during deployment, at least a first point of the membrane antenna being operably anchored to a point on the one or more first deployable support structures; and one or more deployment mechanisms operably anchored at a junction with the one or more first deployable support structures, the one or more deployment mechanisms being configured to extend one or more second deployable support structures along a second axis from the one or more first deployable support structures during deployment, at least a second point of the membrane antenna being operably anchored to a point on the one or more second deployable support structures, wherein extension of the one or more first deployable support structures and one or more second deployable support structures unfurls the membrane antenna along the first axis and the second axis to overlap the junction.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more first deployable support structures include at least one first deployable support structure extending along the first axis away from the antenna enclosure and the one or more second deployable support structures include at least second deployable support structures along the second axis in opposite directions from the at least one first deployable support structure.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more first deployable support structures include at least two first deployable support structures extending along the first axis in opposite directions from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the antenna enclosure.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the membrane antenna unfurls during deployment along at least two axes to substantially form a rhombus, wherein two opposing corners of the rhombus are operably anchored to the one or more first deployable support structures and two other opposing corners of the rhombus are operably anchored to the one or more second deployable support structures.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more first deployable support structures include one or more extendable truss booms.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more first deployable support structures include one or more tape springs.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more deployment mechanisms include one or more tape dispensers.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the first axis and the second axis are substantially orthogonal to each other.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more flexible membranes of the membrane antenna are deployed substantially into one or more planes that are parallel to the first axis and the second axis to overlap the junction.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more deployment mechanisms are positioned between terminal ends of the one or more first deployable support structures and at least an eighth of a length of one of the one or more first deployable support structures from the terminal ends of the one or more first deployable support structures.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more deployment mechanisms are positioned substantially equidistant between terminal ends of the one or more first deployable support structures.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the first point of the membrane antenna is operably anchored at a terminal point on the one or more first deployable support structures.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the one or more deployment mechanisms are further configured to extend the one or more second deployable support structures from the one or more first deployable support structures in opposite directions.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the membrane antenna includes at least three flexible membrane layers.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the at least three flexible membrane layers include a dielectric layer, an active dipole layer, and a ground layer.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein at least two of the membrane layers are spatially separated from each other by a distance greater than a thickness of each membrane layer.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the membrane antenna is fed by electrical connections strung along the one or more first deployable support structures.

In some aspects, another example antenna system of any preceding antenna system is provided, wherein the membrane antenna includes radio frequency elements mounted on a membrane and further including: an electrical connection running from the antenna enclosure; and one or more radio frequency cables connecting the electrical connection to the radio frequency elements mounted on the membrane.

In some aspects, an example method for deploying an antenna system from stowage for space applications is provided, including: opening an antenna enclosure storing a membrane antenna during stowage; extending one or more first deployable support structures along a first axis from the antenna enclosure, at least a first point of the membrane antenna being operably anchored to a point on the one or more first deployable support structures; and extending one or more second deployable support structures along a second axis from one or more deployment mechanisms operably anchored at a junction with the one or more first deployable support structures during deployment, at least a second point of the membrane antenna being operably anchored to a point on the one or more second deployable support structures, wherein extension of the one or more first deployable support structures and one or more second deployable support structures unfurls the membrane antenna along the first axis and the second axis.

In some aspects, another example method of any preceding method is provided, wherein the one or more first deployable support structures include at least one first deployable support structure extending along the first axis away from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the at least one first deployable support structure.

In some aspects, another example method of any preceding method is provided, wherein the one or more first deployable support structures include at least two second

deployable support structures extending along the first axis in opposite directions from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the antenna enclosure.

In some aspects, another example method of any preceding method is provided, wherein the membrane antenna unfurls during deployment along at least two axes to substantially form a rhombus, wherein two opposing corners of the rhombus are operably anchored to the one or more first deployable support structures and two other opposing corners of the rhombus are operably anchored to the one or more second deployable support structures.

In some aspects, another example method of any preceding method is provided, wherein the one or more first deployable support structures include one or more extendable truss booms.

In some aspects, another example method of any preceding method is provided, wherein the one or more first deployable support structures include one or more tape springs.

In some aspects, another example method of any preceding method is provided, wherein the one or more deployment mechanisms include one or more tape dispensers.

In some aspects, another example method of any preceding method is provided, wherein the first axis and the second axis are substantially orthogonal to each other.

In some aspects, another example method of any preceding method is provided, wherein the membrane antenna includes one or more flexible membranes of the membrane antenna that are deployed substantially into one or more planes that are parallel to the first axis and the second axis to overlap the junction.

In some aspects, another example method of any preceding method is provided, wherein the one or more deployment mechanisms are positioned between terminal ends of the one or more first deployable support structures and at least an eighth of a length of one of the one or more first deployable support structures from the terminal ends of the one or more first deployable support structures.

In some aspects, another example method of any preceding method is provided, wherein the one or more deployment mechanisms are positioned substantially equidistant between terminal ends of the one or more first deployable support structures.

In some aspects, an example system for deploying an antenna system from stowage for space applications is provided, including: means for opening an antenna enclosure storing a membrane antenna during stowage; means for extending one or more first

deployable support structures along a first axis from the antenna enclosure, at least a first point of the membrane antenna being operably anchored to a point on the one or more first deployable support structures; and means for extending one or more second deployable support structures along a second axis from one or more deployment mechanisms operably anchored at a junction with the one or more first deployable support structures during deployment, at least a second point of the membrane antenna being operably anchored to a point on the one or more second deployable support structures, wherein extension of the one or more first deployable support structures and one or more second deployable support structures unfurls the membrane antenna along the first axis and the second axis.

In some aspects, another example system of any preceding system is provided, wherein the one or more first deployable support structures include at least one first deployable support structure extending along the first axis away from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the at least one first deployable support structure.

In some aspects, another example system of any preceding system is provided, wherein the one or more first deployable support structures include at least two second deployable support structures extending along the first axis in opposite directions from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the antenna enclosure.

In some aspects, another example system of any preceding system is provided, wherein the membrane antenna unfurls during deployment along at least two axes to substantially form a rhombus, wherein two opposing corners of the rhombus are operably anchored to the one or more first deployable support structures and two other opposing corners of the rhombus are operably anchored to the one or more second deployable support structures.

In some aspects, another example system of any preceding system is provided, wherein the one or more first deployable support structures include one or more extendable truss booms.

In some aspects, another example system of any preceding system is provided, wherein the one or more first deployable support structures include one or more tape springs.

In some aspects, another example system of any preceding system is provided, wherein the one or more deployment mechanisms include one or more tape dispensers.

In some aspects, another example system of any preceding system is provided, wherein the first axis and the second axis are substantially orthogonal to each other.

In some aspects, another example system of any preceding system is provided, wherein the membrane antenna includes one or more flexible membranes of the membrane antenna that are deployed substantially into one or more planes that are parallel to the first axis and the second axis to overlap the junction.

In some aspects, another example met system hod of any preceding system is provided, wherein the one or more deployment mechanisms are positioned between terminal ends of the one or more first deployable support structures and at least an eighth of a length of one of the one or more first deployable support structures from the terminal ends of the one or more first deployable support structures.

In some aspects, another example system of any preceding system is provided, wherein the one or more deployment mechanisms are positioned substantially equidistant between terminal ends of the one or more first deployable support structures.

While this specification contains many specific implementation details, these should not be construed as limitations on the scope of any inventions or of what may be claimed, but rather as descriptions of features specific to particular embodiments of a particular described technology. Certain features that are described in this specification in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

Particular embodiments of the subject matter have been described. Other embodiments are within the scope of the following claims. In some cases, the actions recited in the claims can be performed in a different order and still achieve desirable results. In addition, the processes depicted in the accompanying figures do not necessarily require the particular order shown, or sequential order, to achieve desirable results.

A number of implementations of the described technology have been described. Nevertheless, it will be understood that various modifications can be made without departing from the spirit and scope of the recited claims.

Claims

WHAT IS CLAIMED IS:

1. An antenna system for space applications, the antenna system comprising:

a membrane antenna including one or more flexible membranes;

an antenna enclosure configured to store the membrane antenna during stowage;

one or more first deployable support structures configured to extend along a first axis from the antenna enclosure during deployment, at least a first point of the membrane antenna being operably anchored to a point on the one or more first deployable support structures; and

one or more deployment mechanisms operably anchored at a junction with the one or more first deployable support structures, the one or more deployment mechanisms being configured to extend one or more second deployable support structures along a second axis from the one or more first deployable support structures during deployment, at least a second point of the membrane antenna being operably anchored to a point on the one or more second deployable support structures, wherein extension of the one or more first deployable support structures and one or more second deployable support structures unfurls the membrane antenna along the first axis and the second axis to overlap the junction.

2. The antenna system of claim 1, wherein the one or more first deployable support structures include at least one first deployable support structure extending along the first axis away from the antenna enclosure and the one or more second deployable support structures include at least second deployable support structures along the second axis in opposite directions from the at least one first deployable support structure.

3. The antenna system of claim 1, wherein the one or more first deployable support structures include at least two first deployable support structures extending along the first axis in opposite directions from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the antenna enclosure.

4. The antenna system of claim 1, wherein the membrane antenna unfurls during deployment along at least two axes to substantially form a rhombus, wherein two opposing corners of the rhombus are operably anchored to the one or more first deployable support structures and two other opposing corners of the rhombus are operably anchored to the one or more second deployable support structures.

5. The antenna system of claim 1, wherein the one or more first deployable support structures include one or more extendable truss booms.

6. The antenna system of claim 1, wherein the one or more first deployable support structures include one or more tape springs.

7. The antenna system of claim 1, wherein the one or more deployment mechanisms include one or more tape dispensers.

8. The antenna system of claim 1, wherein the first axis and the second axis are substantially orthogonal to each other.

9. The antenna system of claim 1, wherein the one or more flexible membranes of the membrane antenna are deployed substantially into one or more planes that are parallel to the first axis and the second axis to overlap the junction.

10. The antenna system of claim 1, wherein the one or more deployment mechanisms are positioned between terminal ends of the one or more first deployable support structures and at least an eighth of a length of one of the one or more first deployable support structures from the terminal ends of the one or more first deployable support structures.

11. The antenna system of claim 1, wherein the one or more deployment mechanisms are positioned substantially equidistant between terminal ends of the one or more first deployable support structures.

12. The antenna system of claim 1, wherein the first point of the membrane antenna is operably anchored at a terminal point on the one or more first deployable support structures.

13. The antenna system of claim 1, wherein the one or more deployment mechanisms are further configured to extend the one or more second deployable support structures from the one or more first deployable support structures in opposite directions.

14. The antenna system of claim 1, wherein the membrane antenna includes at least three flexible membrane layers.

15. The antenna system of claim 14, wherein the at least three flexible membrane layers include a dielectric layer, an active dipole layer, and a ground layer.

16. The antenna system of claim 14, wherein at least two of the membrane layers are spatially separated from each other by a distance greater than a thickness of each membrane layer.

17. The antenna system of claim 1, wherein the membrane antenna is fed by electrical connections strung along the one or more first deployable support structures.

18. The antenna system of claim 1, wherein the membrane antenna includes radio frequency elements mounted on a membrane and further comprising:

an electrical connection running from the antenna enclosure; and

one or more radio frequency cables connecting the electrical connection to the radio frequency elements mounted on the membrane.

19. A method for deploying an antenna system from stowage for space applications, the method comprising:

opening an antenna enclosure storing a membrane antenna during stowage;

extending one or more first deployable support structures along a first axis from the antenna enclosure, at least a first point of the membrane antenna being operably anchored to a point on the one or more first deployable support structures; and

extending one or more second deployable support structures along a second axis from one or more deployment mechanisms operably anchored at a junction with the one or more first deployable support structures during deployment, at least a second point of the membrane antenna being operably anchored to a point on the one or more second deployable support structures, wherein extension of the one or more first deployable support structures and one or more second deployable support structures unfurls the membrane antenna along the first axis and the second axis.

20. The method of claim 19, wherein the one or more first deployable support structures include at least one first deployable support structure extending along the first axis away from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the at least one first deployable support structure.

21. The method of claim 19, wherein the one or more first deployable support structures include at least two second deployable support structures extending along the first axis in opposite directions from the antenna enclosure and the one or more second deployable support structures include at least two second deployable support structures along the second axis in opposite directions from the antenna enclosure.

22. The method of claim 19, wherein the membrane antenna unfurls during deployment along at least two axes to substantially form a rhombus, wherein two opposing corners of the rhombus are operably anchored to the one or more first deployable support structures and two other opposing corners of the rhombus are operably anchored to the one or more second deployable support structures.

23. The method of claim 19, wherein the one or more first deployable support structures include one or more extendable truss booms.

24. The method of claim 19, wherein the one or more first deployable support structures include one or more tape springs.

25. The method of claim 19, wherein the one or more deployment mechanisms include one or more tape dispensers.

26. The method of claim 19, wherein the first axis and the second axis are substantially orthogonal to each other.

27. The method of claim 19, wherein the membrane antenna includes one or more flexible membranes of the membrane antenna that are deployed substantially into one or more planes that are parallel to the first axis and the second axis to overlap the junction.

28. The method of claim 19, wherein the one or more deployment mechanisms are positioned between terminal ends of the one or more first deployable support structures and at least an eighth of a length of one of the one or more first deployable support structures from the terminal ends of the one or more first deployable support structures.

29. The method of claim 19, wherein the one or more deployment mechanisms are positioned substantially equidistant between terminal ends of the one or more first deployable support structures.

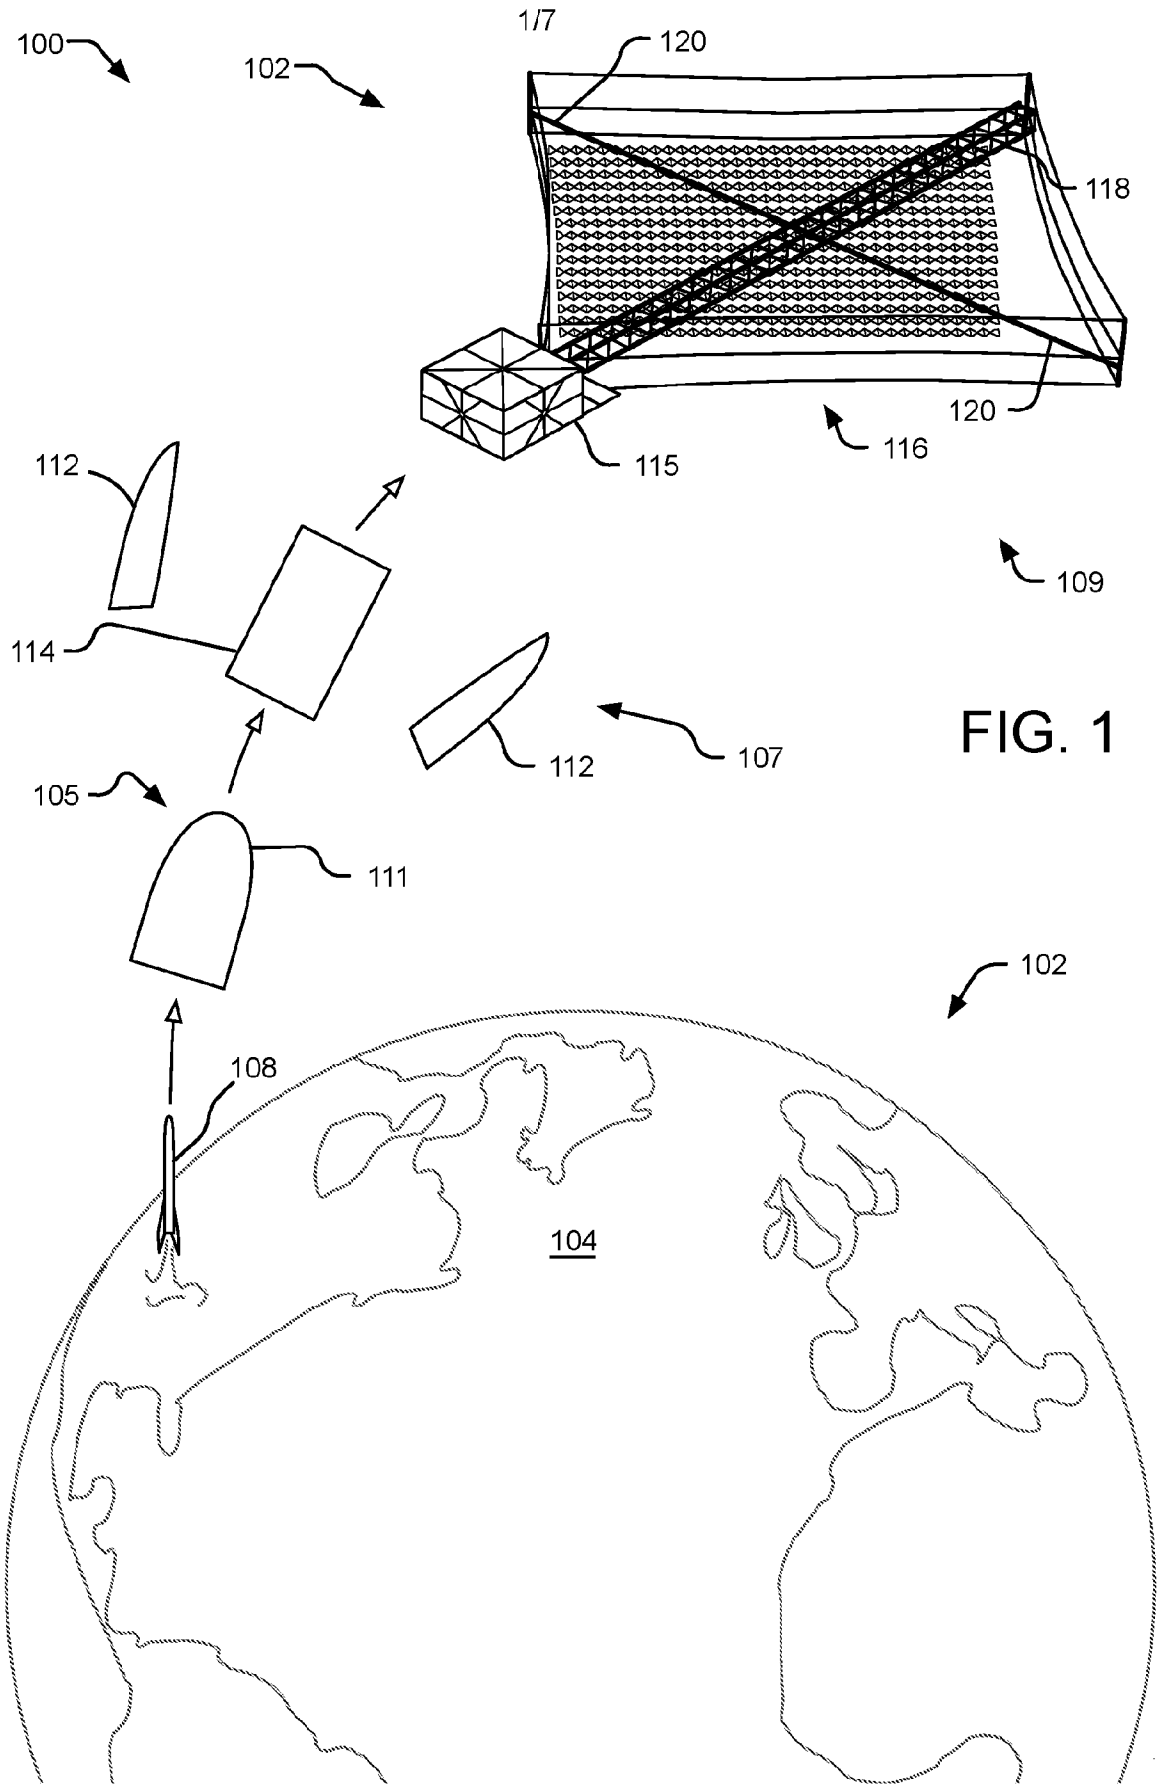

100
102
120
118
120
116
115
112
114
109
112
107
105
111
102
108
104

FIG. 1

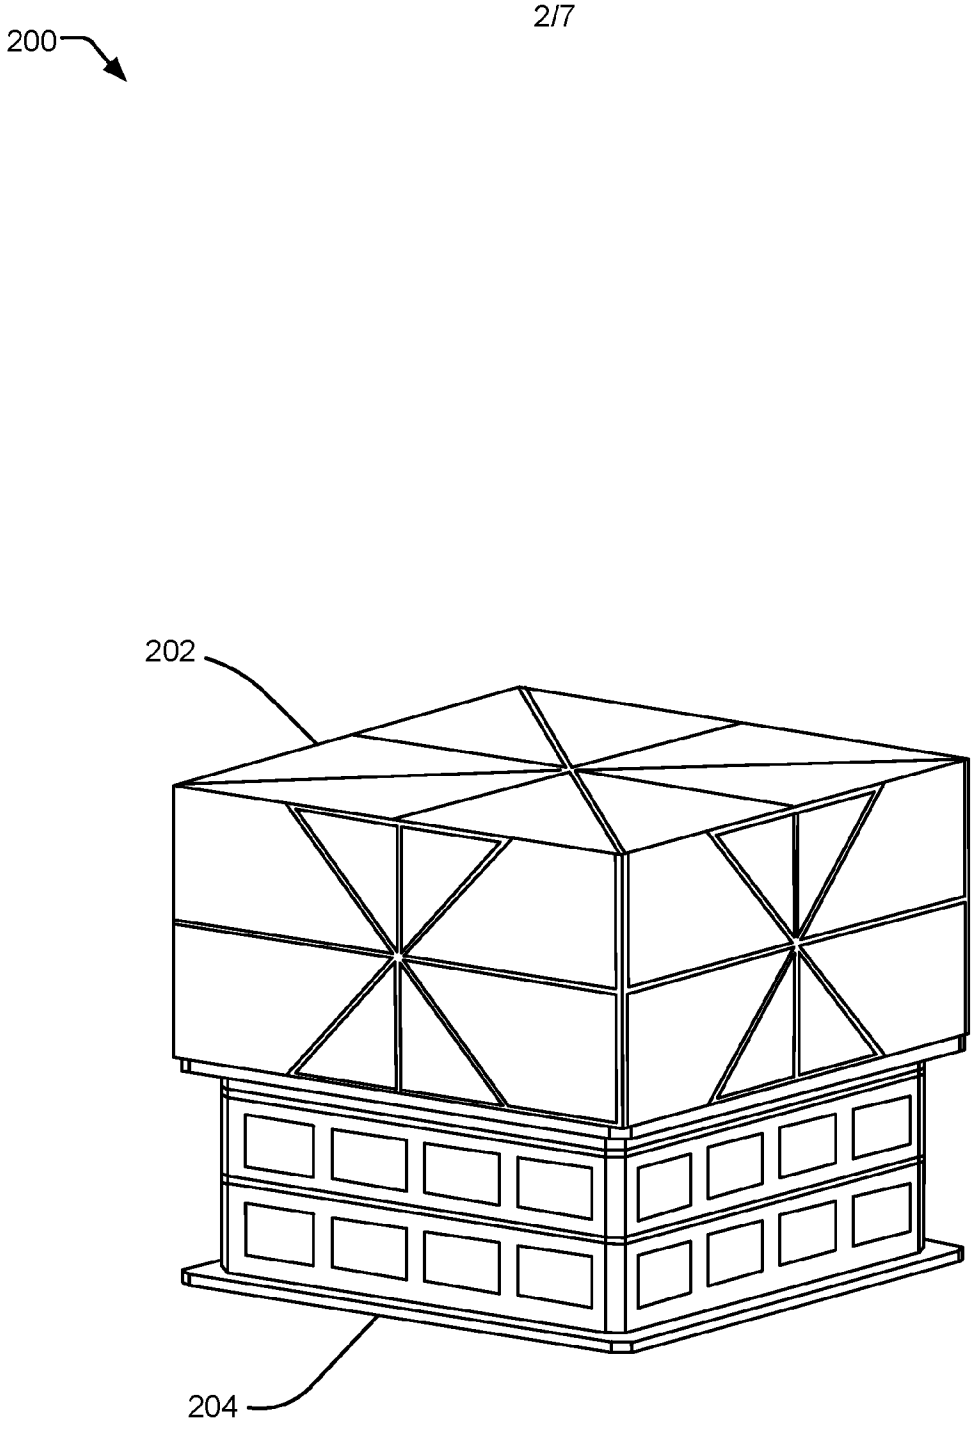


FIG. 2

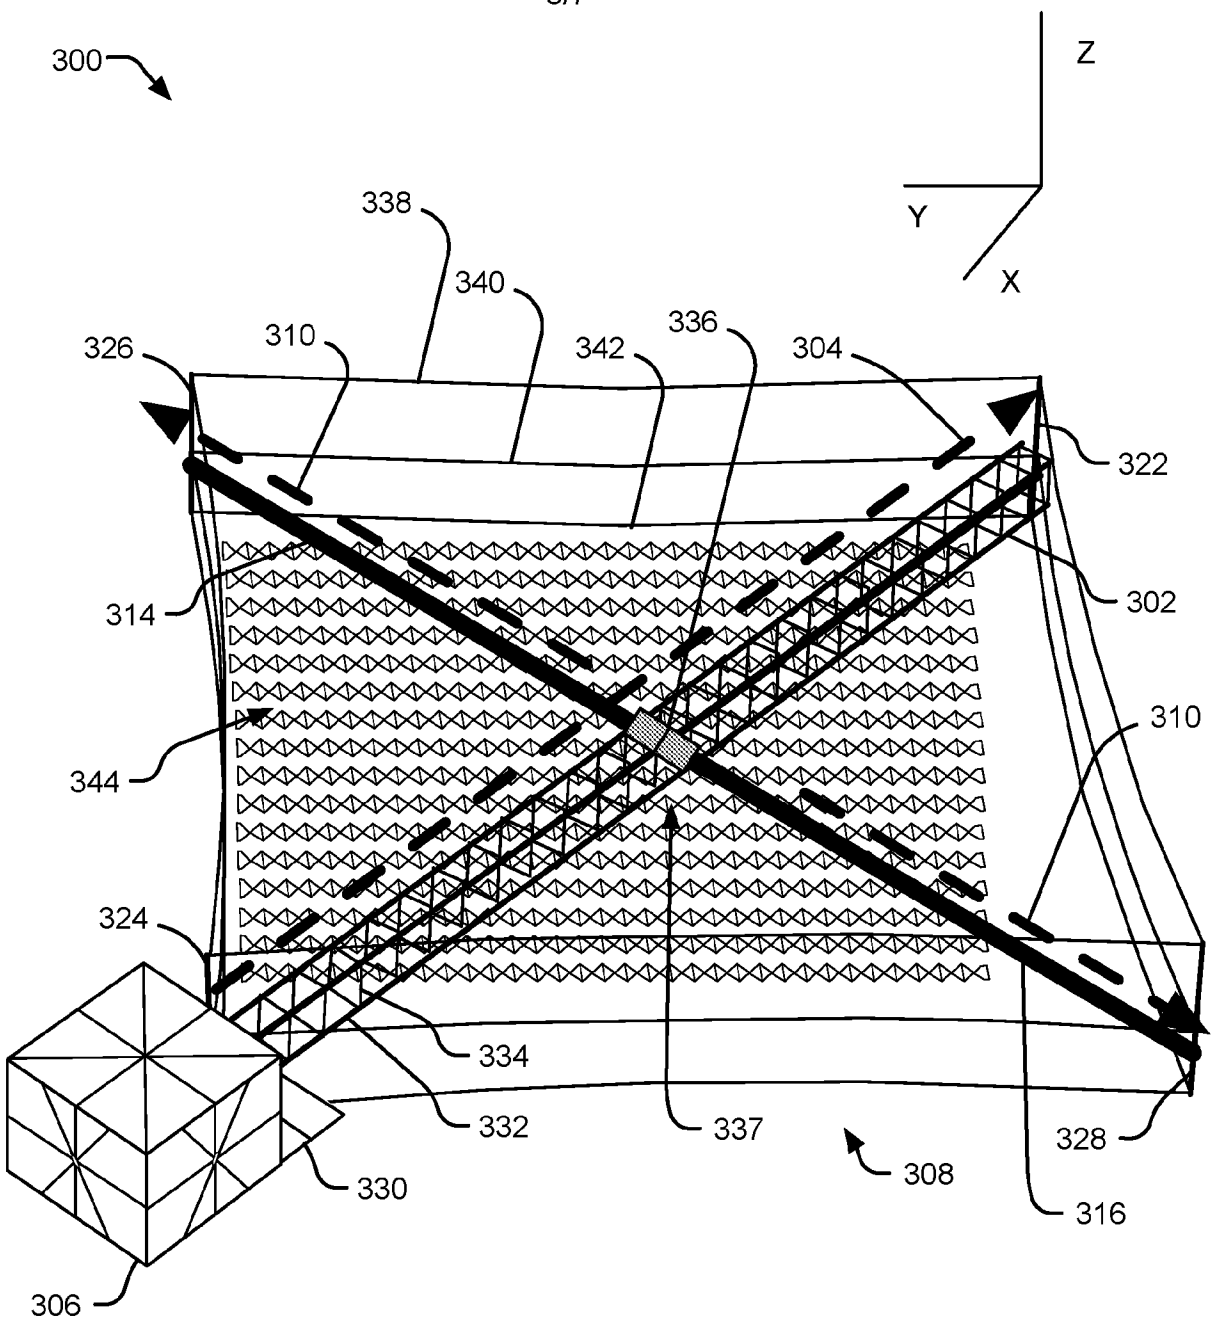

300
Z
Y
X
338
340
336
326
310
342
304
322
314
302
310
344
324
334
332
337
328
308
330
316
306

FIG. 3

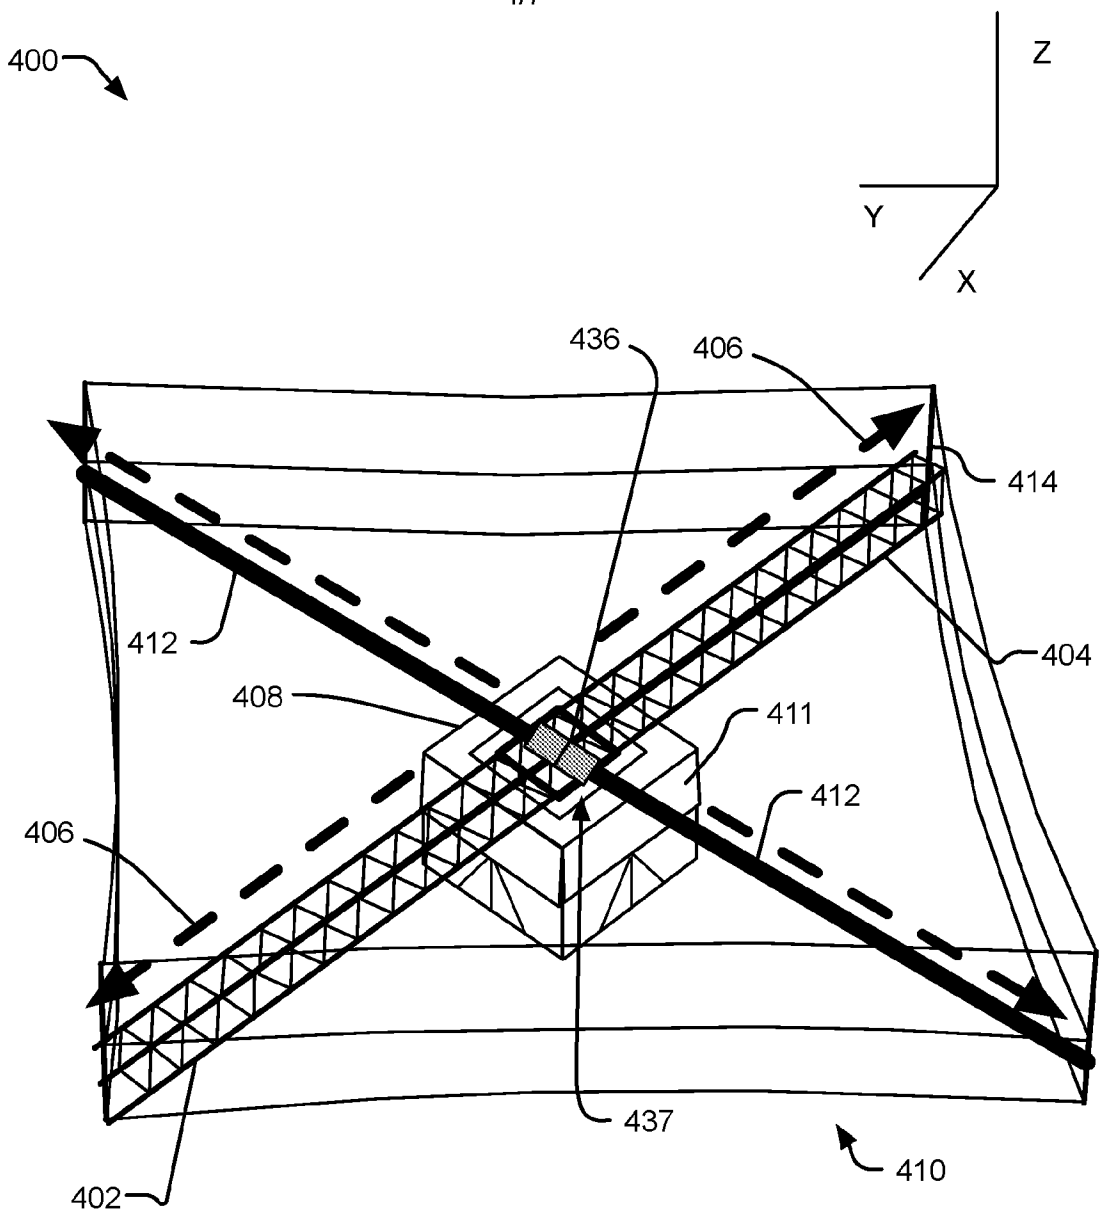


FIG. 4

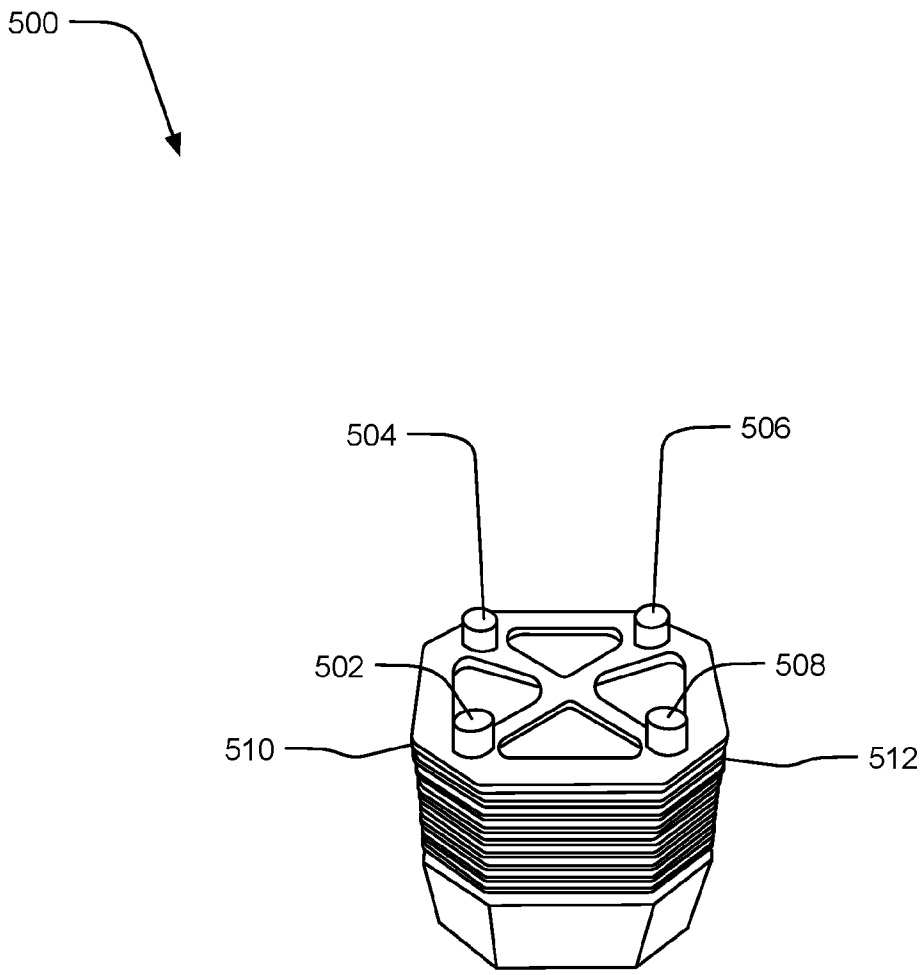


FIG. 5

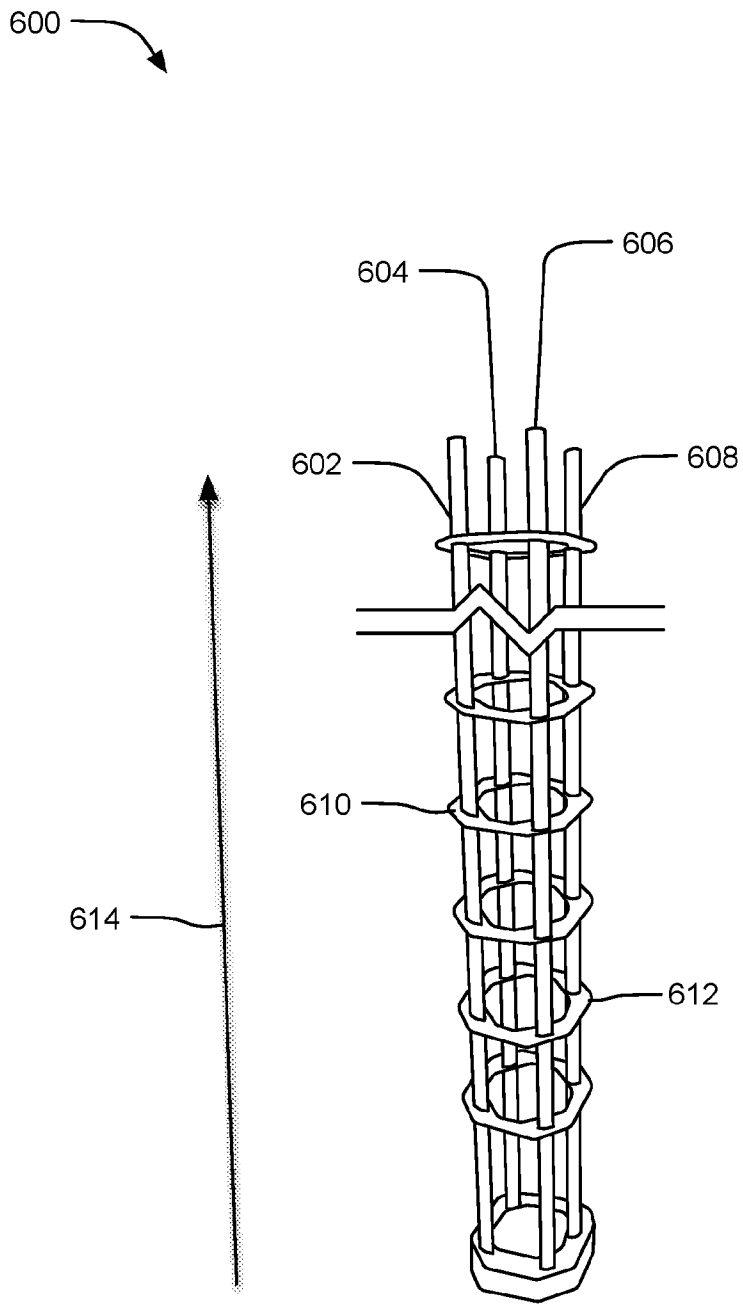


FIG. 6

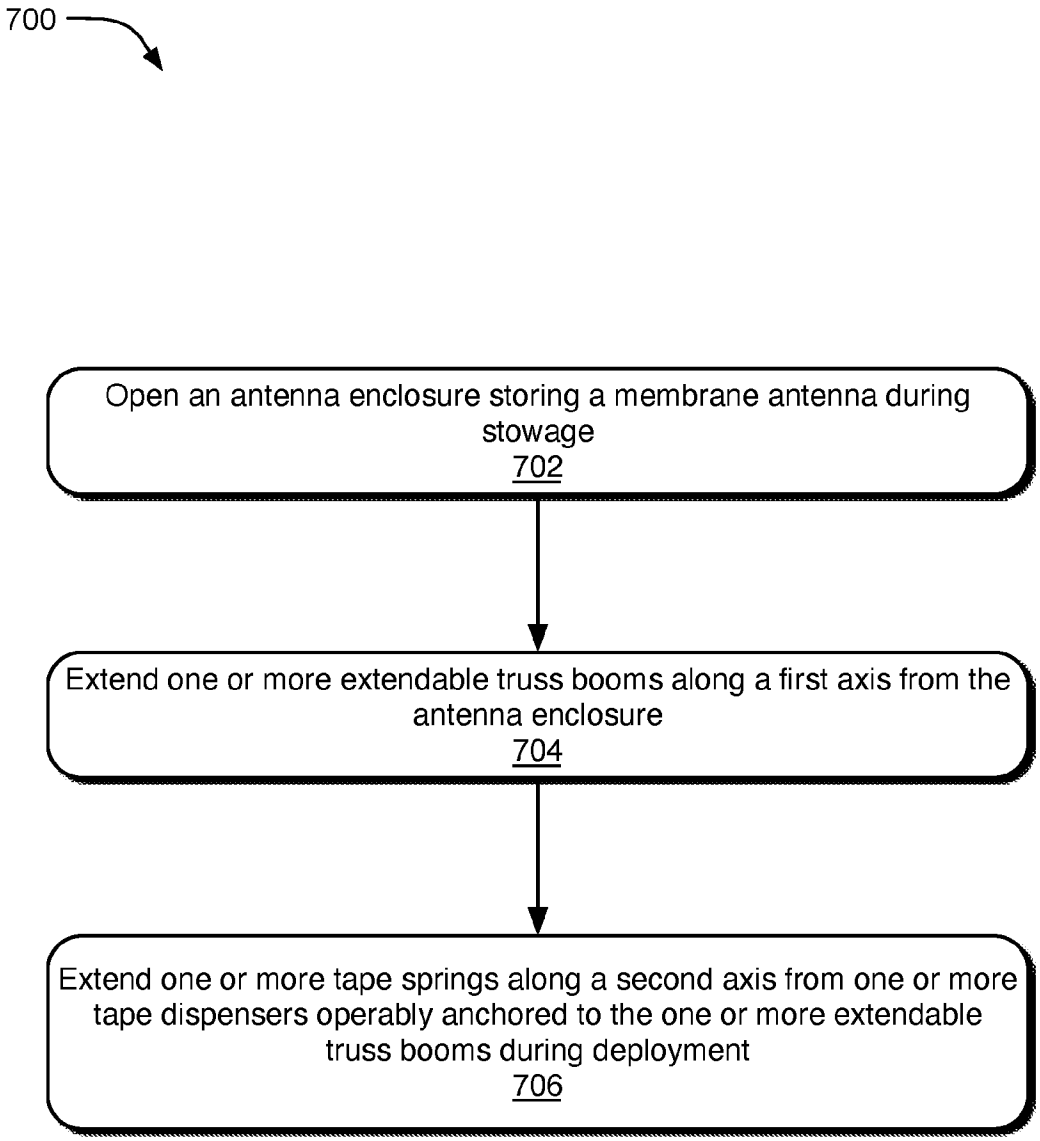

700
Open an antenna enclosure storing a membrane antenna during stowage
702
Extend one or more extendable truss booms along a first axis from the antenna enclosure
704
Extend one or more tape springs along a second axis from one or more tape dispensers operably anchored to the one or more extendable truss booms during deployment
706

FIG.7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 22/39288

A. CLASSIFICATION OF SUBJECT MATTER

IPC - INV. H01Q 1/00 H01Q 1/28, H01Q 1/36 (2022.01)
ADD. H01Q 1/08, H01Q 1/12, H01Q 1/20, H01Q 1/27, H01Q 21/06, H01Q 15/20 (2022.01)

CPC - INV. H01Q 1/288, H01Q 1/36, H01Q 1/00, H01Q 1/12, H01Q 1/27, H01Q 1/42, H01Q 15/20
ADD. H01Q 1/08, H01Q 1/20, H01Q 1/288, H01Q 21/061, H01Q 15/20, H01Q 7/02, H01Q 11/086

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 9,676,501 B1 (Deployable Space Systems) 13 June 2017 (13.06.2017), entire document, especially col 7, ln 2-3, ln 31-45, ln 41-45, ln 61; col 10, ln 48-50; fig. 1, fig. 2, fig. 3, fig. 12	1-13, 17, 19-29 --- 14-16, 18
Y	US 5,777,582 A (Raab) 07 July 1998 (07.07.1998), entire document, especially col 2, ln 33, ln 36-38, ln 55-58; col 4, ln 66-67; col 5, ln 1-2, ln 13-14, ln 26; fig. 2A, fig. 2B, fig. 4;	14-16, 18
A	WO 2017/054005 A1 (M.M.A. Design, LLC) 30 March 2017 (30.03.2017), entire document	1-29
A	US 6,647,668 B1 (Cohee) 19 October 2000 (19.10.2000), entire document	1-29
A	Us 3,698,958 A (Williamson) 17 October 1972 (17.10.1972), entire document	1-29
A	US 9,550,584 B1 (MMA Design, LLC) 24 January 2017 (24.01.2017), entire document	1-29

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"D" document cited by the applicant in the international application
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
10 October 2022	OCT 19 2022
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-8300	Authorized officer Kari Rodriquez Telephone No. PCT Helpdesk: 571-272-4300