

**CONVENTION**

**AUSTRALIA**

Patents Act 1990

**NOTICE OF ENTITLEMENT**

We, **ISHIKAWAJIMA-HARIMA JUKOGYO KABUSHIKI KAISHA** of 2-1, Ote-machi 2-chome, Chiyoda-ku, Tokyo 100, Japan state the following in connection with Australian Application No. 65129/94:

1. We are the nominated person.
2. The nominated person is the assignee of the actual inventors.
3. The nominated person is the applicant of the basic applications listed in the declaration under Article 8 of the PCT.
4. The basic applications are the applications first made in a Convention country in respect of the invention.

Dated: 7 November 1994

By **PHILLIPS ORMONDE & FITZPATRICK**  
Patent Attorneys for the Applicant

By:

*David B Fitzpatrick*

To: The Commissioner of Patents

**PHILLIPS ORMONDE & FITZPATRICK**  
367 Collins Street  
Melbourne, Australia, 3000

Our Ref: 389223

1925x



AU9465129

(12) PATENT ABRIDGMENT (11) Document No. AU-B-65129/94  
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 668821

- (54) Title  
ELECTRIC ARC FUSION FURNACE
- International Patent Classification(s)  
(51)<sup>6</sup> F27B 003/08 C21C 005/52 F27B 003/22 F27B 003/28
- (21) Application No. : 65129/94 (22) Application Date : 14.04.94
- (87) PCT Publication Number : WO95/09336
- (30) Priority Data
- |             |           |              |
|-------------|-----------|--------------|
| (31) Number | (32) Date | (33) Country |
| 5-244839    | 30.09.93  | JP JAPAN     |
| 5-324158    | 22.12.93  | JP JAPAN     |
- (43) Publication Date : 18.04.95
- (44) Publication Date of Accepted Application : 16.05.96
- (71) Applicant(s)  
ISHIKAWAJIMA-HARIMA JUKOGYO KABUSHIKI KAISHA
- (72) Inventor(s)  
MASAKI OGUSHI; OSAMU TAKEUCHI; IKUO YAMAMURA; TORU IURA; HIRONOBU YOSHIDA
- (74) Attorney or Agent  
PHILLIPS ORMONDE & FITZPATRICK , 367 Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents  
EP 462898  
JP 63-93815  
WO 91/15727
- (57) Claim

1. An electric arc melting furnace <sup>including</sup> ~~characterized by comprising~~ a furnace shell with an electrode for melting scrap by heat of arc, an air blasting port for blasting air, oxygen or oxygen-enriched air to an upper space in said furnace shell through an air control valve, a carbon blasted quantity indicator for measuring quantity of carbon to be charged into said furnace shell, a scrap charged quantity indicator for measuring quantity of the scrap charged into said furnace shell, an oxygen blasted quantity indicator for measuring quantity of oxygen blasted into said furnace shell and an arithmetic processor for computing quantity of air required for complete combustion of carbon monoxide in said furnace shell in response to measured value from said indicators to control a degree of opening of said air control valve.

(11) AU-B-65129/94  
(10) 668821

-2-

2. A furnace according to claim 1 <sup>wherein</sup> ~~characterized in that~~ said arithmetic processor receives measured values from a gas pressure indicator and a analyzed gas indicator for detection of pressure and gas analyzation of the exhaust gases at an exhaust gas port of the furnace shell as well as a measured value from a temperature indicator for measurement of temperature of the upper space in the furnace shell so as to obtain a correction signal for computation of air quantity required for complete combustion of the carbon monoxide in the furnace shell.

OPI DATE 18/04/95 APPLN. ID 65129/94  
AOJP DATE 08/06/95 PCT NUMBER PCT/JP94/00619




AU9465129

(51) 国際特許分類 6 F27B 3/08, 3/28, 3/22, C21C 5/52		A1	(11) 国際公開番号 WO 95/09336
		(43) 国際公開日 1995年4月6日 (06.04.95)	
(21) 国際出願番号 PCT/JP94/00619 (22) 国際出願日 1994年4月14日 (14. 04. 94)		吉田弘信 (YOSHIDA, Hironobu) [JP/JP] 〒279 千葉県浦安市入船3-70 タウンハウスE-1-3 Chiba, (JP)	
(30) 優先権データ 特願平5/244839 1993年9月30日 (30. 09. 93) JP 特願平5/324158 1993年12月22日 (22. 12. 93) JP		(74) 代理人 弁理士 山田恒光, 外 (YAMADA, Tsunemitsu et al.) 〒101 東京都千代田区内神田三丁目5番3号 矢萩第二ビル Tokyo, (JP)	
(71) 出願人 (米国を除くすべての指定国について) 石川島播磨重工業株式会社 (ISHIKAWAJIMA-HARIMA JUKOGYO KABUSHIKI KAISHA) [JP/JP] 〒100 東京都千代田区大手町二丁目2番1号 Tokyo, (JP)		(81) 指定国 AU, CA, CN, KR, US, 欧州特許 (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 大串正樹 (OGUSHI, Masaki) [JP/JP] 〒235 神奈川県横浜市磯子区汐見台1-6-6 磯子第一寮 Kanagawa, (JP) 竹内 修 (TAKEUCHI, Osamu) [JP/JP] 〒181 東京都三鷹市下連雀3-8-23 Tokyo, (JP) 山村郁夫 (YAMAMURA, Ikuo) [JP/JP] 〒116 東京都荒川区町屋7-19-5 尾竹橋公園スカイハイツ1103 Tokyo, (JP) 井浦 透 (IURA, Toru) [JP/JP] 〒251 神奈川県藤沢市大鋸1213-16 Kanagawa, (JP)		添付公開書類 国際調査報告書	

668821

(54) Title : ELECTRIC ARC FUSION FURNACE

(54) 発明の名称 電気アーク溶解炉

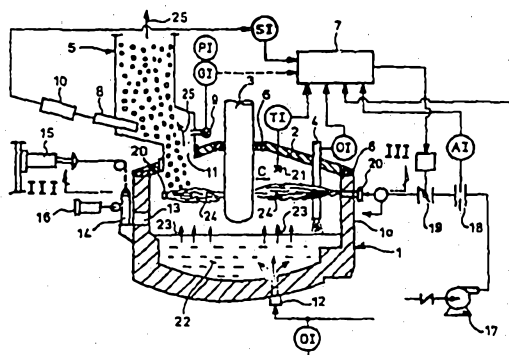

(57) Abstract

This invention is provided with a furnace body (1) having an electrode (3) and adapted to melt scrap with arc heat, an air blow port (20) from which air is blown into the furnace body (1) via an air control valve (19), a carbon blow rate indicator (CI) adapted to measure the quantity of carbon introduced into the furnace body (1), a scrap feed rate indicator (SI) adapted to measure the quantity of scrap introduced into the furnace body (1), an oxygen blow rate indicator (OI) adapted to measure the quantity of oxygen introduced into the furnace body (1), and a computing element (7) adapted to determine the quantity of air, which is required to completely burn carbon monoxide (23) in the furnace body (1), on the basis of the measurement values from the carbon blow rate indicator (CI), scrap feed rate indicator (SI) and oxygen blow rate indicator (OI) and control the degree of opening of the air control valve (19). The air the quantity of which is proportional to that of carbon monoxide (23) is blown from the air blow port (20) into the furnace to enable the combustion temperature in the furnace body (1) and the temperature in a scrap preheater to be controlled.

# ELECTRIC ARC MELTING FURNACE

## TECHNICAL FIELD

The present invention relates to an electric arc melting furnace for melting scrap to reproduce refined steel.

## BACKGROUND ART

In a conventional electric arc melting furnace as shown in Fig. 1 in vertical section, a furnace shell a has a water-cooled roof b at a center of which an electrode c is vertically provided. The furnace shell a has at its bottom an oxygen blasting port d through which oxygen is blasted into the the shell a.

The furnace shell a has a spout e at its side. A spout door f outside of the spout e is vertically movable by a door cylinder g such that the spout e is closed and opened by downward and upward moment of the door f, respectively.

The roof b is provided with an exhaust gas duct h which accommodates a conveyer j to charge scrap i into the shell a and which has an air suction port k.

The scrap i is transported together with carboniferous material such as coke by the conveyer j, charged into the shell a and is heated and melted by heat of arc from the electrode c into molten steel l. The roof b serves to absorb radiant heat from a surface of the molten steel l.

The oxygen blasted through the port d reacts with the carbon to generate carbon monoxide m which is partially burned with air n intruding into the shell a through the spout e and other gaps. Generally, the quantity of the intruding air n is not sufficient to

completely burn all of the carbon monoxide m and therefore about 30-60% of the carbon monoxide m remains unburned and enters into the exhaust duct h in which the carbon monoxide m is re-burned with air from the suction port k. Resultant reaction products to be discharged from the duct h as exhaust gases o preheat the scrap i and carboniferous material transported by the conveyer j into the shell a.

In the conventional electric arc melting furnace shown in Fig. 1 where the carbon monoxide m generated in the shell a is burned with the intruding air n, the quantity of the intruding air n is less as described above and the carbon monoxide m generated is partially burned so that temperature in the shell a is locally increased to generate local heat, disadvantageously resulting in failure of uniform heating of the molten steel l.

The intruding air n which is relied upon for combustion in the shell a is not controlled at all in relation with the quantity of carbon monoxide m generated in the shell a and the combustion in the shell is left to take its natural course. Therefore, such combustion of the carbon monoxide m cannot be employed for control of temperature in the shell a and, in fact, hardly contributes to any enhancement of thermal efficiency in the shell a depending upon conditions.

Flames are nonuniformly distributed in the shell a due to the partial combustion of the carbon monoxide by the intruding air n so that radiant heat from the surface of the molten steel l cannot be effectively absorbed by the water-cooled roof b, disadvantageously resulting in decrease of heat efficiency of the electric arc melting furnace.

The carbon monoxide m, which remains unburned in the shell a in the nonuniform combustion by the intruding air n, is introduced into the

duct h with its concentration being left uneven. The introduced carbon monoxide with uneven concentration is nonuniformly or locally burned in the duct h, which may cause the scrap i in the duct h to be nonuniformly preheated or may lead to explosion in the duct h. Preheating temperature of the scrap i cannot be controlled at all.

In view of the above, it is an object of the present invention to overcome, or at least alleviate, one or more of the above and other defects encountered in the prior art. An advantage of the invention is an electric arc melting furnace in which not only combustion temperature in a furnace shell but also preheating temperature in a scrap preheating device are controllable as desired, thereby positively ensuring a high degree of thermal efficiency and safety in furnace operation.

#### DISCLOSURE OF THE INVENTION

According to the present invention, there is provided an electric arc melting furnace including a furnace shell with an electrode for melting scrap by heat of arc, an air blasting port for blasting air, oxygen or oxygen-enriched air to an upper space in said furnace shell through an air control valve, a carbon blasted quantity indicator for measuring quantity of carbon to be charged into said furnace shell, a scrap charged quantity indicator for measuring quantity of the scrap charged into said furnace shell, an oxygen blasted quantity indicator for measuring quantity of oxygen blasted into said furnace shell and an arithmetic processor for computing quantity of air required for complete combustion of carbon monoxide in said furnace shell in response to measured value from said indicators to control a degree of opening of said air control valve.

Accordingly, a quantity of carbon monoxide to be generated in the furnace shell is computed by an arithmetic unit based on quantities of carbon, scrap and oxygen charged into the shell so that air whose quantity is controlled by a control valve to be in proportion to the quantity of the carbon monoxide generated is fed through an air blasting port into the shell. Therefore, the carbon monoxide generated in the shell can be uniformly burned, which improves the thermal



efficiency and prevents the carbon monoxide from being introduced into a scrap preheating device.

5 Deviation in quantity of actually required air due to errors in measurements of the air intruding through gaps in the furnace shell and the carbon, scrap and oxygen to be charged into the furnace may be compensated on the basis of measured values from a combined pressure gage and gas analyzer and a thermometer, so that a quantity of air required for complete combustion of the carbon monoxide generated in the furnace shell can be supplied.

10 The air may be blasted tangentially to an upper space in the furnace shell through a plurality of air blasting ports provided through a peripheral wall of the furnace shell so that the carbon monoxide in the the shell can be uniformly burned and direct transmission of high-temperature radiant heat from the molten steel to the water-cooled roof is prevented by the combustion in the upper space.

15 The air may be blasted to the center of the upper space in the furnace shell through a plurality of air blasting ports provided through the peripheral wall of the furnace shell so that the carbon monoxide in the the shell can be uniformly burned and direct transmission of high-temperature radiant heat from the molten steel to the water-cooled roof is prevented by the combustion in the upper space.

20 Part of the exhaust gases discharged by induction from an upper outlet of the scrap preheating device by an induction fan may be recirculated to the upper space of the shell by a recirculation fan. The exhaust gases whose partially recirculated quantity is adjusted to maintain the temperature in the upper space of the shell to a preset temperature dilute the carbon monoxide in the shell.

25 Part of the exhaust gases exhausted by the induction fan from the upper output of the scrap preheating device may be blasted into a lower inlet of the scrap preheating device by a recirculation. The exhaust gases whose partially recirculated quantity is adjusted to maintain the temperature in the



lower inlet to a preset temperature and whose bypassed flow rate is adjusted to maintain the temperature in the upper outlet to a preset temperature, dilute the carbon monoxide in the shell and control the temperature in the scrap preheating device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a vertical sectional view of a conventional electric arc melting furnace;

Fig. 2 is a vertical sectional view of embodiments of first and second aspects of the invention;

Fig. 3 is a sectional view looking in the direction of arrows III-III in Fig. 2, illustrating an embodiment of a third aspect of the invention;

Fig. 4 is a sectional view similar to Fig. 3, illustrating an embodiment of a fourth aspect of the invention;

Fig. 5 is a vertical sectional view of an embodiment of a fifth aspect of the invention; and

Fig. 6 is a vertical sectional view of an embodiment of a sixth aspect of the invention.

#### BEST MODES FOR CARRYING OUT THE INVENTION

Embodiments of the present invention will be described in conjunction with the accompanying drawings.

Fig. 2 is a vertical sectional view of embodiments of first and second aspects of the invention in which a furnace shell 1 has a water-cooled roof 2 at a center of which an electrode 3 is vertically provided. The roof 2 has also a carbon blasting port 4 and a scrap preheating device 5 at positions away from the center of the roof 2.

Both the roof 2 and the electrode 3 are peripherally surrounded with sealing members 6 to prevent air from intruding into the shell 1.

The carbon blasting port 4 serves to charge into the shell 1 carboniferous material such as coke, graphite or the like after it has been measured by a carbon blasted quantity indicator CI, the measured quantity being inputted as an electric signal into an arithmetic processor 7.

The scrap preheating device 5 is provided with a scrap cutout pusher 8 and a gas exhaust port 11 is provided with a combined pressure gage and gas analyzer 9. The pusher 8 is driven by a scrap cutout drive 10 to charge the scrap into the shell 1 through the port 11. Scrap cutout quantity is measured by a scrap charged quantity indicator SI in response to displacement amount of the drive 10 and is inputted as an electric signal to the arithmetic processor 7. The combined pressure gage and gas analyzer 9 measures gas pressure and quantities of carbon monoxide and oxygen in the scrap preheating device 5 which are inputted as electric signals to the arithmetic processor 7 by pressure and analyzed gas indicators PI and GI.

The furnace shell 1 is provided at its bottom with an oxygen blasting port 12 to blast the oxygen into the shell 1. Quantity of oxygen to be blasted into the shell 1 is measured by an oxygen blasted quantity indicator OI and is inputted as an electric signal into the arithmetic processor 7. In Fig. 2, the oxygen blasting port 12 is shown at the bottom of the shell 1; but it may be opened at an upper side portion of the shell 1.

A thermometer 21 is installed to measure temperature of an upper space C in the shell 1. Temperature measured by the thermometer 21 is inputted from a temperature indicator TI into the arithmetic processor

7.

A spout 13 extends through a side of the shell 1 and a spout door 14 outwardly of the spout 13 is adapted to be vertically moved by a door lifting cylinder 15 such that the door 14 is moved upward and downward to open and close the spout 13, respectively. When the door 14 is moved downward, a door pressing cylinder 16 is actuated to press the door 14 against the shell 1 to prevent the surrounding air from intruding into the shell 1 through the spout 13.

A blower 17 is installed outside of the furnace shell 1. Air, oxygen or oxygen-enriched air is blasted from the blower 17 via an air flowmeter 18 and an air control valve 19 into the upper space C in the shell 1 through an air blasting port 20. A quantity of air blasted into the shell 1 is measured by the air flowmeter 18 and is inputted through an air flow indicator AI into the arithmetic processor 7. The degree of opening of the air control valve 19 is controlled in response to a signal from the arithmetic processor 7.

Fig. 3 illustrates an embodiment of a third aspect of the invention which has at least two air blasting ports 20 extending such that the air is blasted tangentially of a peripheral wall 1a of the furnace shell 1.

Fig. 4 illustrates an embodiment of a fourth aspect of the invention which has four or more air blasting ports 20 (4 to 36 ports in the case of larger-sized electric arc melting furnaces) extending such that the air is blasted through the peripheral wall 1a of the furnace shell 1 to the center of the upper space C in the shell 1.

In Figs. 2 and 3, iron scrap fed to the scrap preheating device 5 is cut out by the pusher 8 through the port 11 into the shell 1 where the scrap is heated and melted by the arc from the electrode 3 into the

molten steel 22. Adjustment of carbon content in the molten steel 22 and steel refining are carried out by charging the scrap, blasting the carboniferous material through the carbon blasting port 1 and blasting the oxygen through the oxygen blasting port 12. In this case, carbon in the blasted carboniferous material and in the scrap charged reacts with the blasted oxygen to generate heat and carbon monoxide 23. The heat generated is 2450 kcal per kg of carbon.

In the arrangement shown in Fig. 2, in order to completely burn the generated carbon monoxide 23 which is combustible, the air, oxygen or oxygen-enriched air to be blasted is controlled to a required quantity through passage thereof via the blower 17, the air flowmeter 18 and the air control valve 19 and is blasted into the shell 1 through the air blasting port 20 to produce flames 24. The heat generated in this combustion is 5630 kcal per kg of carbon and is great. In the case of the oxygen or oxygen-enriched air being blasted, temperature of flames can be increased and quantity of gases discharged can be reduced as compared with the case of the air being blasted.

High-temperature exhaust gases after combustion of the carbon monoxide 23 flow through the port 11 into the scrap preheating device 5, preheat iron scrap charged into the preheating device 5 and are discharged out of the furnace as low-temperature exhaust gases 25.

The furnace shell 1 is sealed by the sealing members 6 for elimination of any gaps and the door pressing cylinder 16 is provided for the spout door 14 at the spout 13, thereby minimizing the quantity of the intruding air and providing the closed furnace.

The quantity of the carbon monoxide 23 generated in the furnace shell 1 is therefore dependent upon the quantity of carbon in the molten steel 22 and the quantity of the oxygen blasted.

The quantity of carbon in the molten steel is sum of the carbon blasted quantity from the carbon blasting port 4 measured by the carbon blasted quantity indicator CI, the carbon quantity from the electrode 3 and absorbed into the molten steel 22 and the carbon quantity in the scrap which can be computed on the basis of measurement of the scrap charged quantity indicator SI. When the scrap cutout quantity is inputted from the indicator SI to the arithmetic processor 7, the processor 7 computes the quantity of carbon charged into the molten metal per unit time and the quantity of the oxygen blasted through the oxygen port 12 is inputted as an electric signal from the oxygen blasted quantity indicator OI, whereby quantity of the carbon monoxide 23 generated is computed by calculation on the chemical reaction.

On the basis of the computed quantity of the carbon monoxide 23, the arithmetic processor 7 computes the quantity of the air, oxygen or oxygen-enriched air to be blasted into the shell 1 and delivers an output signal to the air control valve 19, whereby the air, oxygen or oxygen-enriched air with a quantity measured by the air flowmeter 18 is blasted into the furnace shell 1.

The air, oxygen or oxygen-enriched air is blasted through the air blasting port 20 into the furnace shell 1 at 30-100 m/s and absorbs the carbon monoxide 23 evolved from an upper surface of the molten steel 22, thereby burning with flames over the whole inner surface of the furnace shell 1.

Heat radiated by the combustion serves to heat the molten steel 22 and maintain the temperature thereof and the flames 24 substantially reduce heat radiation from the surface of the molten steel 22 to the water-cooled roof 2. The radiant heat from the flames 24 is of course transmitted to the roof 2 and therefore thermal loss from the flames 24

results; however, the thermal transfer loss from the molten steel 22 is prevented. Thus, the carbon monoxide 23 utilized merely partly in the prior art can be fully burned in the furnace shell 1 to enhance the thermal efficiency of the electric arc melting furnaces.

Furthermore, unlike the prior art, re-combustion of the carbon monoxide 23 is not effected in the scrap preheating device 5, resulting in no local heat due to combustion flames. The scrap is efficiently preheated and the preheated temperature, which is conventionally 200°C, reaches 500°C or more so that the overall thermal efficiency is considerably improved.

In the above-mentioned embodiment, the quantity of the air to be required for complete combustion of the carbon monoxide 23 in the furnace shell 1 is estimatedly computed for control. However, the furnace shell 1 cannot be made completely air-tight and the air may intrude more or less. In addition, there may exist any erroneous deviations between quantities of carbon, scrap and oxygen actually charged into the shell 1 and the measured quantities thereof.

For compensation of them, inputted into the arithmetic processor 7 are measured values via the gas pressure indicator PI and the analyzed gas indicator GI from the combined gas pressure gage and gas analyzer 9 which effects detection of pressure and gas analyzation of the exhaust gases at the port 11 as well as a measured value from the temperature indicator TI which measures the temperature of the upper space C in the furnace shell 1 so as to obtain a correction signal for computation of the air quantity required for complete combustion of the carbon monoxide 23 in the furnace shell 1. Thus, the quantity of the air, oxygen or oxygen-enriched air to be blasted via the air blasting port 20 into the furnace shell 1 can be controlled for complete combustion of the carbon

monoxide 23 generated so that the carbon monoxide 23 generated can be effectively used for melting of the scrap.

In Fig. 3, a plurality of air blasting ports 20 extending through a peripheral wall 1a of the furnace shell 1 blast the air tangentially to the upper space C in the shell 1 so that the carbon monoxide 23 in the shell 1 can be uniformly and effectively burned and direct transmission of high-temperature radiant heat from the molten steel 22 to the water-cooled roof 2 is prevented by the combustion in the upper space C.

In Fig. 4, a plurality of air blasting ports 20 extending through the peripheral wall 1a of the furnace shell 1 blast the air to the center of the upper space C in the shell 1 so that the carbon monoxide 23 in the shell 1 can be uniformly burned and direct transmission of high-temperature radiant heat from the molten steel 22 to the water-cooled roof 2 is prevented by the combustion in the upper space C.

Fig. 5 illustrates an embodiment of a fifth aspect of the invention in which parts same as those in Fig. 2 are denoted by the reference numerals same as those used in Fig. 2.

A discharged gas blasting port 26 extends through the peripheral wall 1a of the furnace shell 1 at an upper portion thereof to open inside the shell 1. The scrap preheating device 5, which is provided above the furnace shell 1 to preheat the scrap to be fed to the shell 1 by the exhaust gases from the shell 1, has an upper outlet 27 which is connected through an exhaust piping 28 and a gas cooler 29 to an induction fan 30.

The induction fan 30 is connected at its outlet side through exhaust gas supply piping 31 to the exhaust gas blasting port 26. A recirculation fan 32 is incorporated in the piping 31 to supply part of

the exhaust gases 25 from the outlet side of the induction fan 30 into the upper space C in the furnace shell 1. Furthermore, a flow control damper 33 is disposed at outlet side of the fan 32.

A thermometer 34 is provided to detect a temperature in the upper space C in the furnace shell 1. An upper-space temperature controller 37 is installed into which temperature 35 detected by the thermometer 34 and preset temperature 36 are inputted so as to control the degree of opening of the damper 33 for maintenance of the temperature in the upper space C of the furnace shell 1 to the preset temperature 36. Reference numeral 38 denotes a flowmeter which detects the quantity of the recirculated exhaust gases in the piping 31.

In Fig. 5, the exhaust gases 25 from the upper outlet 27 of the scrap preheating device 5 are cooled by the gas cooler 29 and suctioned by and discharged from the induction fan 30. The exhaust gases 25 at the outlet side of the induction fan 30 are partly recirculated into the upper space C in the shell 1 through the recirculation fan 32 and the exhaust gas supply piping 31. The temperature 25 detected by the thermometer 34, which detects the temperature in the upper space C in the shell 1, is inputted into the upper-space temperature controller 37 to which the preset temperature 36 is also inputted. In view of the detected value from the flowmeter 38, the degree of opening of the flow control damper 33 is controlled to adjust the flow rate of the recirculated exhaust gases 25 so that the detected temperature 35 of the thermometer 34 may be accorded with the the preset temperature 36 by the controller 37.

The above-mentioned recirculation of the cooled exhaust gases 25 to the upper space C makes it possible to maintain the temperature in the upper space C to the predetermined temperature 36. ~~The discharged~~



~~gases 25 fed to the upper space C interrupts transmission of the radiant heat from the molten steel 22 to the roof 2 to thereby enhance the thermal efficiency.~~ Furthermore, the uniform dilution of the carbon monoxide 23 in the furnace shell 1 and the recirculation of the exhaust gases 25 with a low oxygen content prevent adverse problems such as oxidation, nonuniform combustion and explosion in the scrap preheating device 5.

Fig. 6 illustrates an embodiment of a sixth aspect of the invention in which parts same as those in Figs. 2 and 5 are denoted by the reference numerals same as those used in Figs. 2 and 5.

The scrap preheating device 5 on the furnace shell 1 has an upper outlet 27 which is connected through exhaust piping 28 and a gas cooler 29 to an induction fan 30. The induction fan 30 is connected at its outlet side through exhaust gas supply piping 41 to an exhaust gas blasting port 40 on a lower inlet 39 of the scrap preheating device 5. A recirculation fan 42 is incorporated in the piping 41 to supply part of the exhaust gases 25 from the outlet side of the induction fan 30 to the lower inlet 39 of the scrap preheating device 5. Furthermore, a flow control damper 43 is disposed at outlet side of the fan 42.

A thermometer 44 is provided to detect a temperature in the lower inlet portion 39 of the scrap preheating device 5. An inlet-portion temperature controller 47 is installed into which temperature 45 detected by the thermometer 44 and preset temperature 46 are inputted so as to control the degree of opening of the damper 43 for maintenance of the temperature in the lower inlet 39 to the preset temperature 46. Reference numeral 48 denotes a flowmeter which detects the quantity of the recirculated exhaust gases in the piping 41.

The lower inlet 39 of the preheating device 5 is connected to the



exhaust piping 28 at the outlet side of the upper outlet 27 through bypass piping 49 which has a bypass damper 50. A thermometer 51 is provided to detect a temperature at the upper outlet 27 of the scrap preheating device 5. An outlet temperature controller 54 is installed into which temperature 52 detected by the thermometer 51 and preset temperature 53 are inputted so as to control the degree of opening of the bypass damper 50 for maintenance of the temperature in the upper outlet 39 to the preset temperature 53. Reference numeral 55 denotes a switch damper disposed in the bypass piping 41.

In Fig. 6, the exhaust gases 25 from the upper outlet 27 of the scrap preheating device 5 are cooled by the gas cooler 29 and suctioned by and discharged from the induction fan 30. The exhaust gases 25 at the outlet side of the induction fan 30 are partly recirculated into the lower inlet 39 of the preheating device 5 through the recirculation fan 42 and the exhaust gas supply piping 41. The temperature 45 detected by the thermometer 44, which detects the temperature in the lower inlet 39, is inputted into the inlet temperature controller 47 to which the preset temperature 46 is also inputted. In view of the detected value from the flowmeter 48, the degree of opening of the flow control damper 43 is controlled to adjust the flow rate of the recirculated exhaust gases 25 so that the detected temperature 45 of the thermometer 44 may be accorded with the the preset temperature 46 by the controller 47.

The above-mentioned recirculation of the cooled exhaust gases 25 to the lower inlet 39 makes it possible to maintain the temperature in the lower inlet 39 to the predetermined temperature. Furthermore, the discharged gases 25 with a low oxygen content uniformly dilutes the carbon monoxide 23 in the lower inlet 39. These facts prevent adverse problems such as oxidation, nonuniform combustion and explosion in the

scrap preheating device 5.

The exhaust gases 25 in the lower inlet 39 of the preheating device 5 are bypassed through the bypass piping 49 and the bypass damper 50 to the downstream side of the upper outlet 27. The detected temperature 52 from the thermometer 51, which detects the temperature of the upper outlet 27, is inputted into outlet temperature controller 54. The degree of opening of the bypass damper 50 is controlled to adjust the bypassed flow rate of the exhaust gases 25.

The exhaust gases 25 partly bypassed through the bypass piping 49 to the downstream side of the upper outlet 27 contributes to controlling the temperature of the upper outlet 27 to a predetermined temperature, which also prevents white smoke and noxious compounds (dioxin) from being generated. Furthermore, the exhaust gases 25 may be bypassed in overfed quantity for preheating of the scrap, which contributes to reducing the pressure loss in the scrap preheating device 5 and compacting the induction fan 30 in size. In the event of troubles such as clogging of the scrap preheating device 5, the exhaust gases 25 may be escaped to the bypass pipe 39 which can therefore also serve as a safety system.

#### INDUSTRIAL APPLICABILITY

In an electric arc melting furnaces for melting scrap, combustion temperature in the furnace and temperature in the scrap preheating device can be controlled to enhance the thermal efficiency and safety.

CLAIMS:

1. An electric arc melting furnace <sup>including</sup> ~~characterized by comprising~~ a furnace shell with an electrode for melting scrap by heat of arc, an air blasting port for blasting air, oxygen or oxygen-enriched air to an upper space in said furnace shell through an air control valve, a carbon blasted quantity indicator for measuring quantity of carbon to be charged into said furnace shell, a scrap charged quantity indicator for measuring quantity of the scrap charged into said furnace shell, an oxygen blasted quantity indicator for measuring quantity of oxygen blasted into said furnace shell and an arithmetic processor for computing quantity of air required for complete combustion of carbon monoxide in said furnace shell in response to measured value from said indicators to control a degree of opening of said air control valve.

2. A furnace according to claim 1 <sup>wherein</sup> ~~characterized in that~~ said arithmetic processor receives measured values from a gas pressure indicator and a analyzed gas indicator for detection of pressure and gas analyzation of the exhaust gases at an exhaust gas port of the furnace shell as well as a measured value from a temperature indicator for measurement of temperature of the upper space in the furnace shell so as to obtain a correction signal for computation of air quantity required for complete combustion of the carbon monoxide in the furnace shell.

3. A furnace according to claim 1 or 2 <sup>wherein</sup> ~~characterized in that~~ a plurality of air blasting ports extend through a peripheral wall of said furnace shell such that the air is blasted tangentially to the upper space of said furnace shell.



4. A furnace according to claim 1 or 2 wherein a plurality of air blasting ports extend through a peripheral wall of said furnace shell such that the air is blasted to a center of the upper space in said furnace shell.

5. An electric arc melting furnace, substantially as herein described with reference to any one of the embodiments shown in Figures 2 to 6 of the accompanying drawings.



10

DATED: 13 March 1996

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

- 15 ISHIKAWAJIMA-HARIMA JUKOGYO KABUSHIKI KAISHA




## ABSTRACT


An electric arc melting furnace comprises a furnace shell (1) with an electrode (3) for melting scrap by heat of arc, an air blasting port (20) for blasting air, oxygen or oxygen-enriched air into the furnace shell (1) through an air control valve (19), a carbon blasted quantity indicator (CI) for measuring quantity of carbon to be charged into the furnace shell (1), a scrap charged quantity indicator (SI) for measuring quantity of the scrap charged into the furnace shell (1), an oxygen blasted quantity indicator (OI) for measuring quantity of oxygen blasted into the furnace shell (1) and an arithmetic processor (7) for computing quantity of air required for complete combustion of carbon monoxide (23) in the furnace shell (1) in response to measured value from the indicators (CI)(SI)(OI) to control a degree of opening of the air control valve (19). Air with quantity in proportion to the carbon monoxide (23) is blasted through the air blasting port (20), which enables control of combustion temperature in the furnace shell (1) and control of temperature in the scrap preheating device.

1 / 6


## 第 1 図

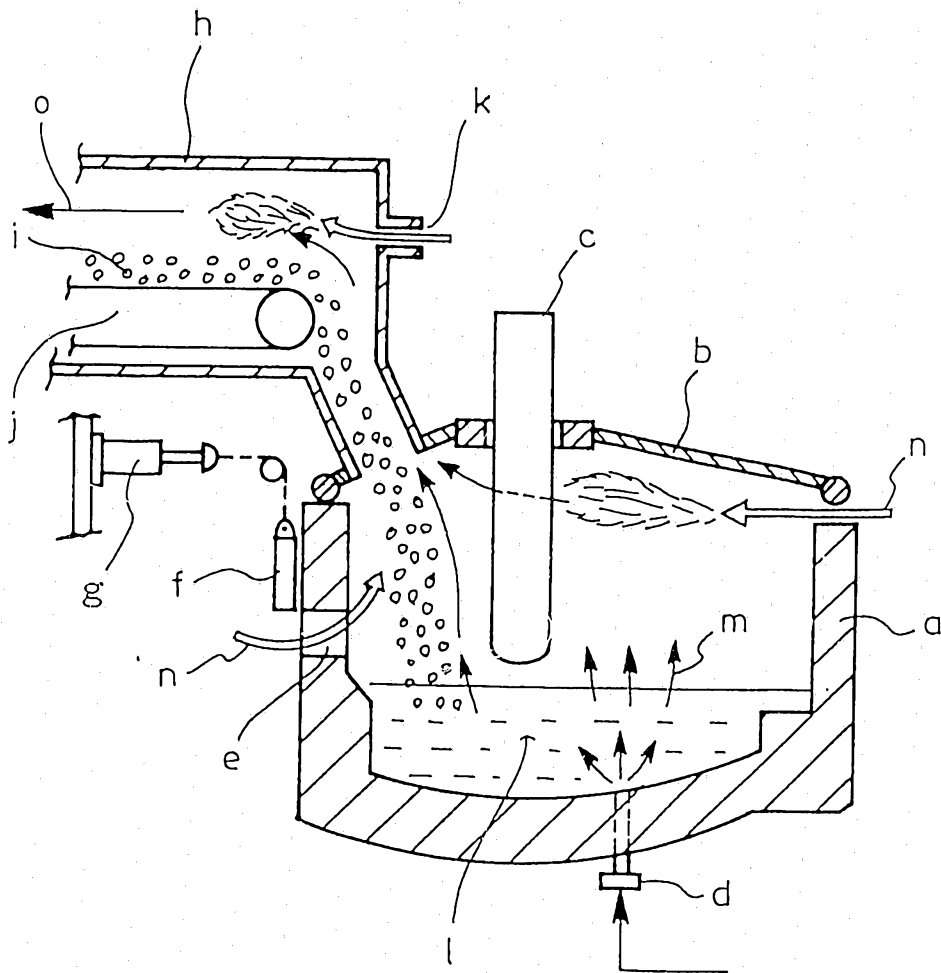


第 2 図

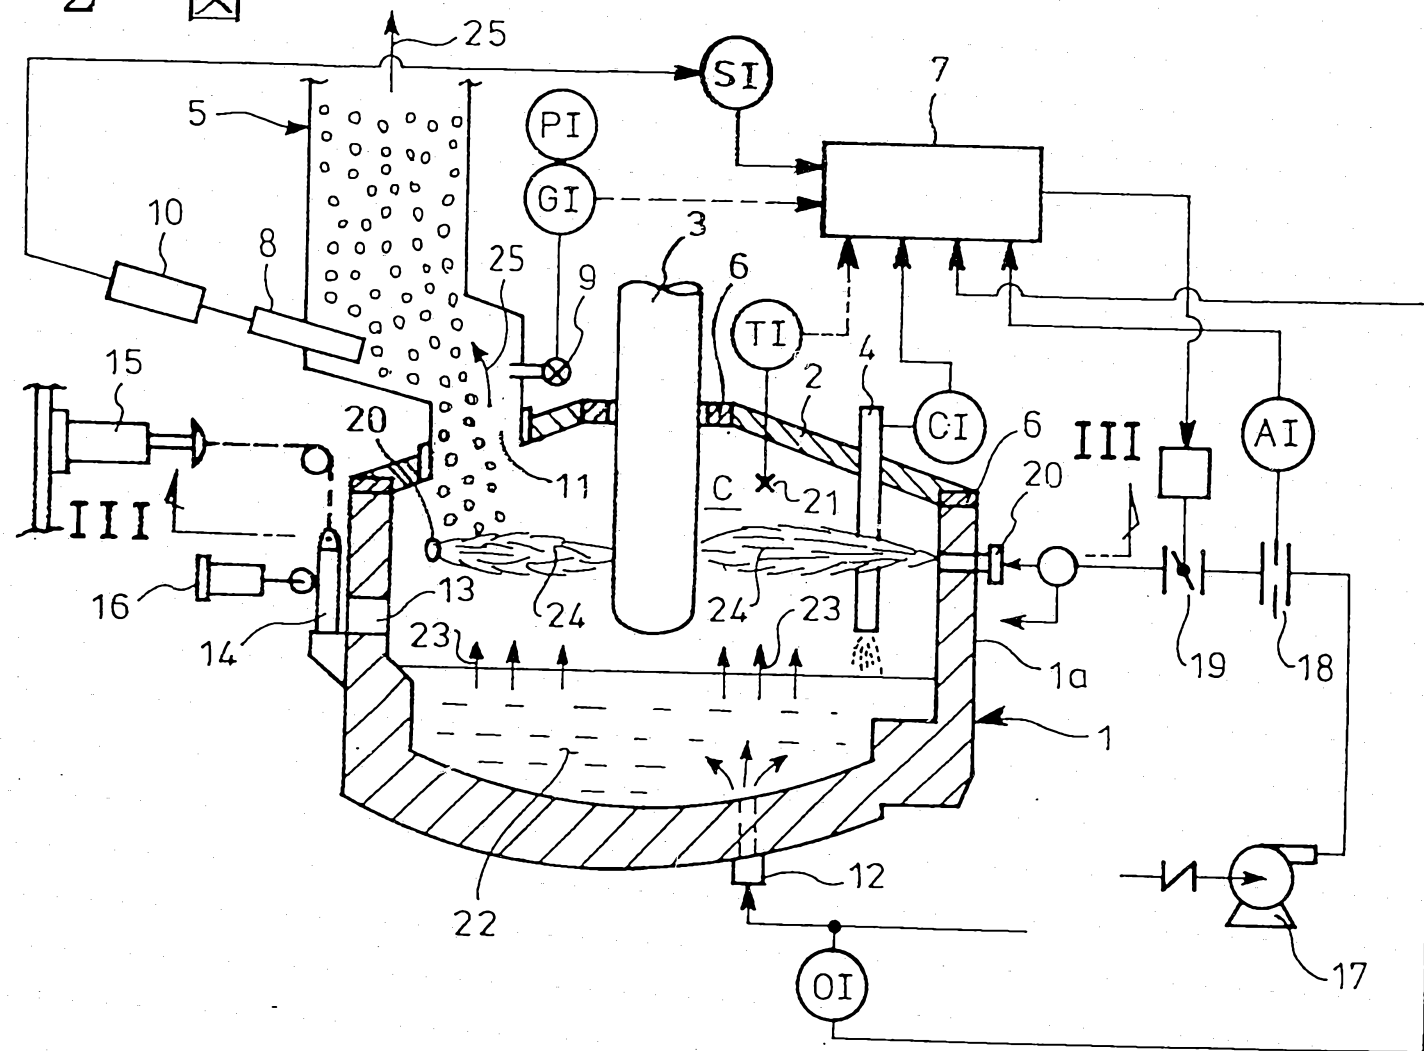


# 第 3 図

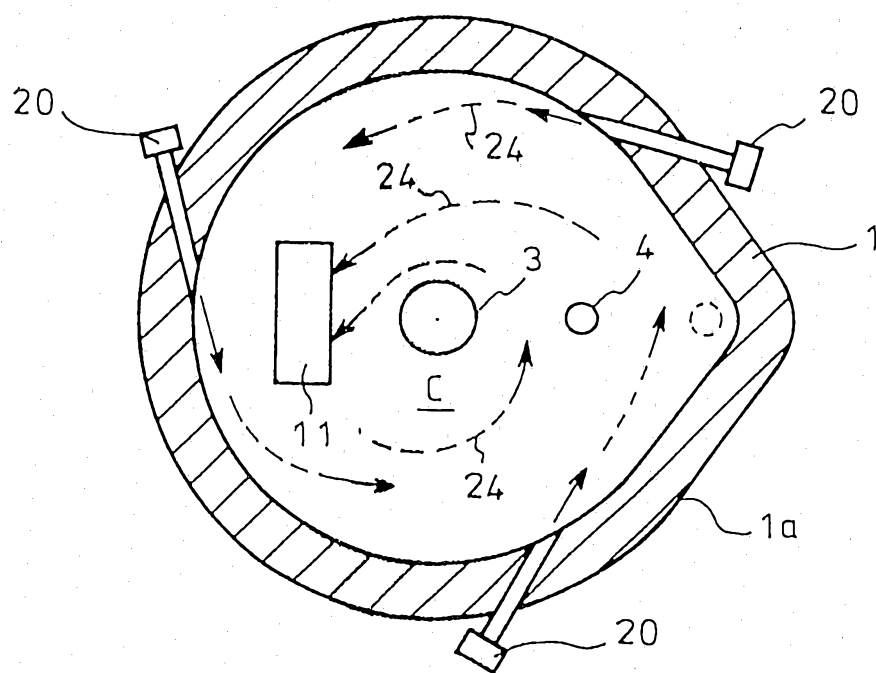


# 第 4 図

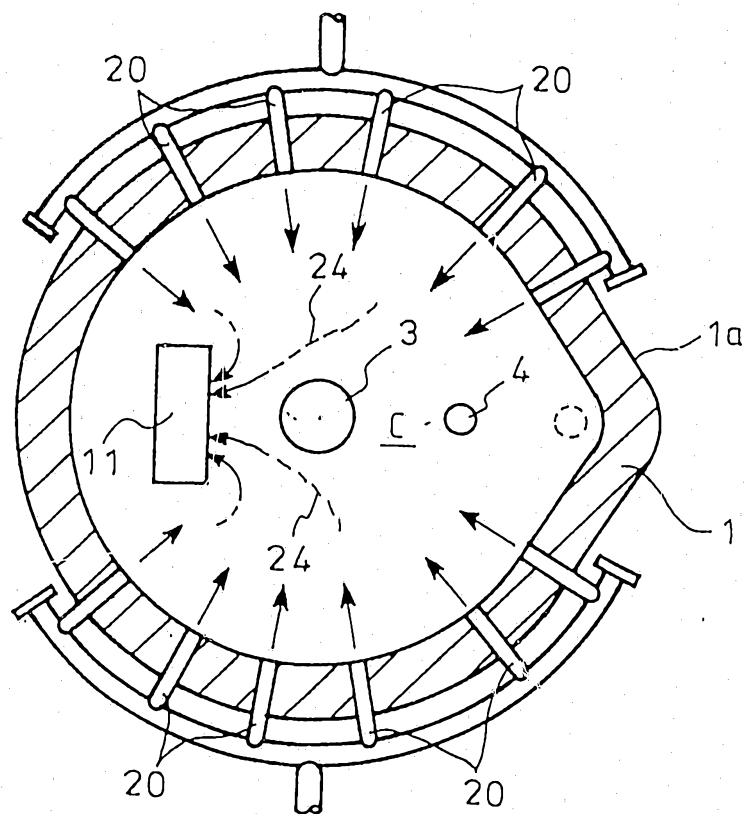

第 5 図

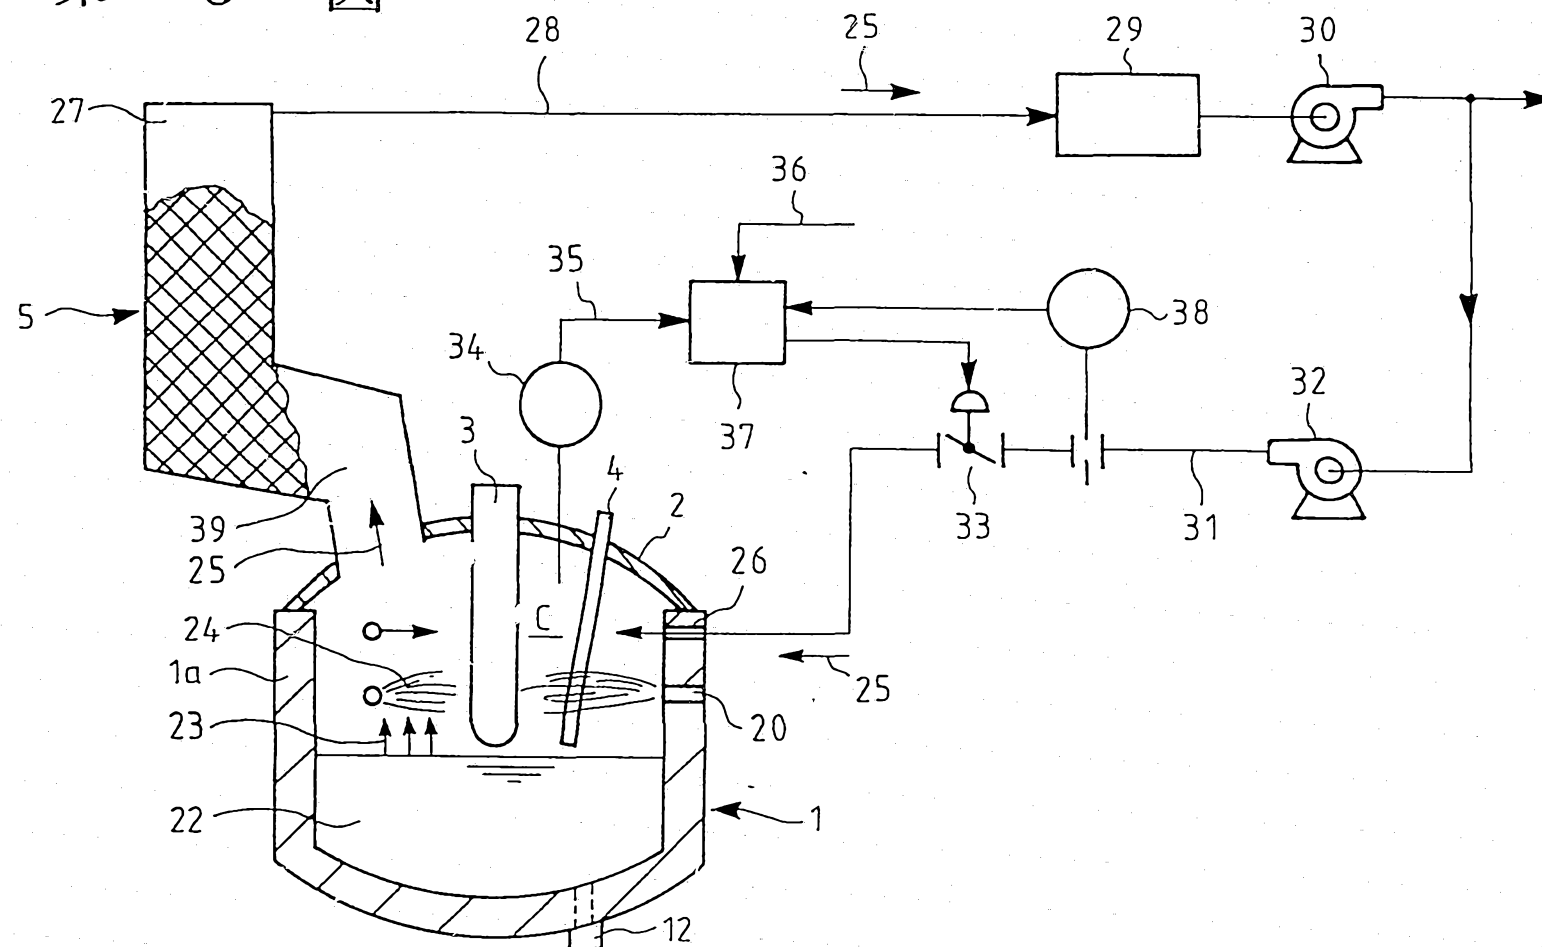

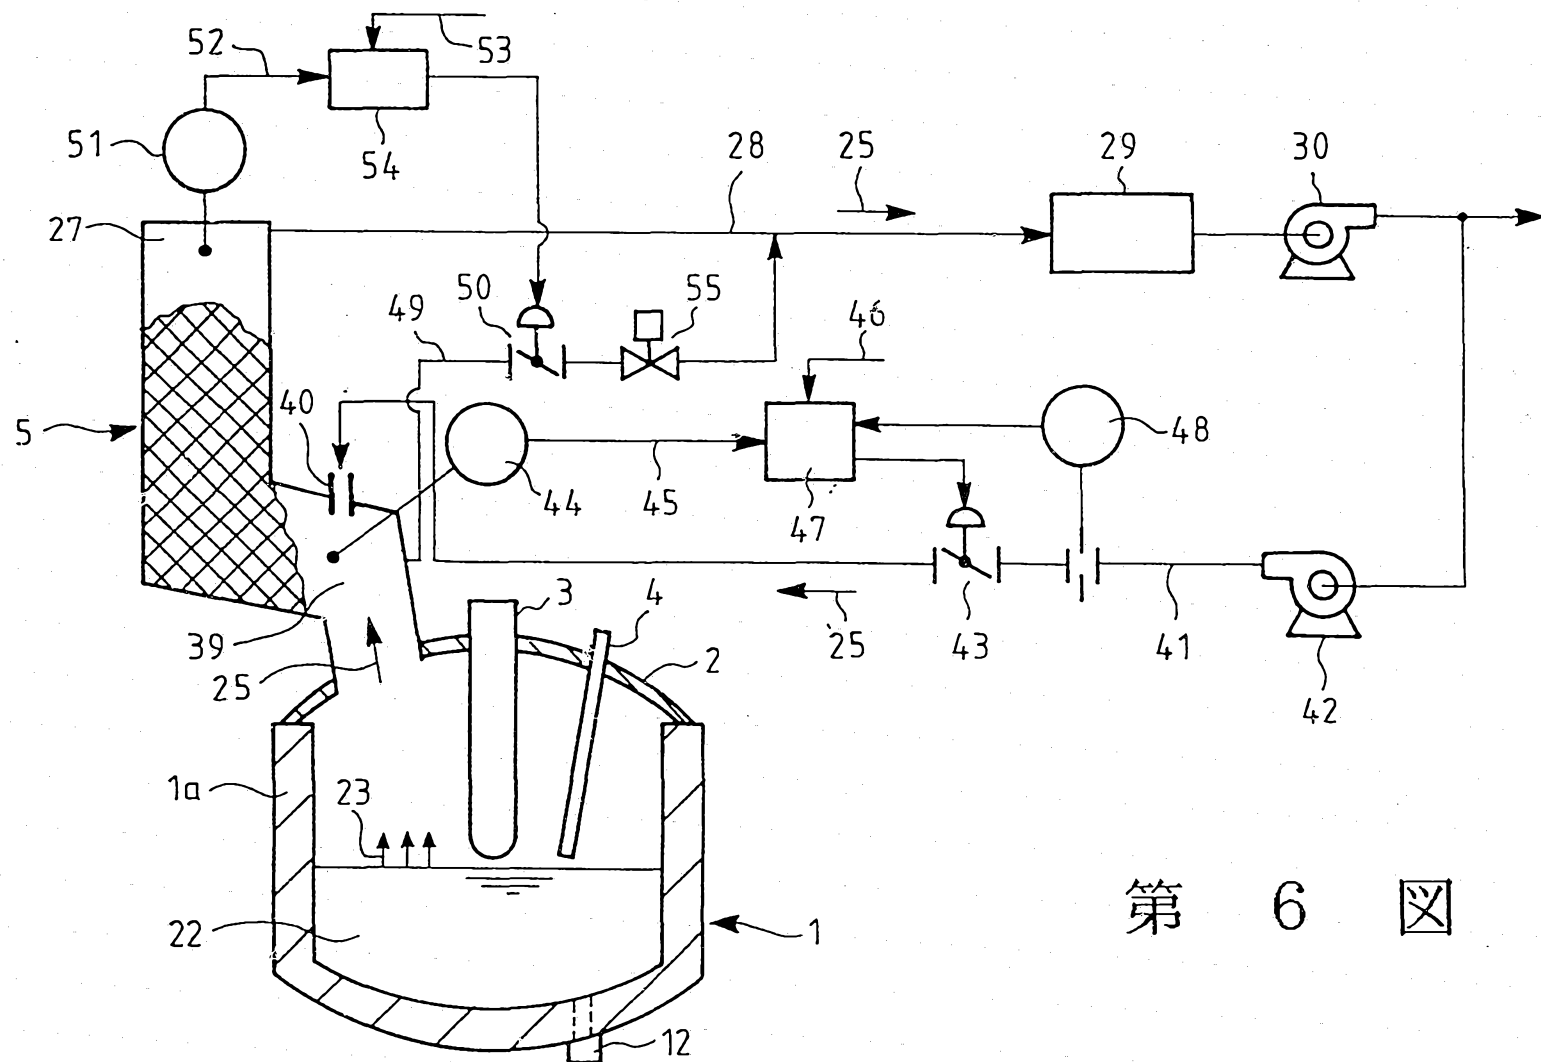

第 6 図

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP94/00619

## A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl 6 F27B3/08, 3/28, 3/22, C21C5/52

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int. Cl<sup>5</sup> F27B3/00-3/28, C21C5/52

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922 - 1994

Kokai Jitsuyo Shinan Koho 1973 - 1994

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, B2, 58-48834 (Daido Steel Co., Ltd.), October 31, 1983 (31. 10. 83), (Family: none)	1, 2
A	JP, B2, 1-20208 (Daido Steel Co., Ltd.), April 14, 1989 (14. 04. 89), (Family: none)	1, 2
A	JP, A, 63-93815 (Daido Steel Co., Ltd.), April 25, 1988 (25. 04. 88), (Family: none)	1, 2
A	JP, A, 61-66080 (Daido Steel Co., Ltd.), April 4, 1986 (04. 04. 86), (Family: none)	3, 4
A	JP, B2, 59-32525 (Ishikawajima-Harima Heavy Industries Co., Ltd.), August 9, 1984 (09. 08. 84), (Family: none)	5, 6



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

June 13, 1994 (13. 06. 94)

Date of mailing of the international search report

July 5, 1994 (05. 07. 94)

Name and mailing address of the ISA/

Japanese Patent Office

Facsimile No.

Authorized officer

Telephone No.

A. 発明の属する分野の分類 (国際特許分類 (IPC))

Int. Cl.<sup>8</sup> F27B3/08.3/28.3/22.C21C5/52

B. 調査を行った分野

調査を行った最小限資料 (国際特許分類 (IPC))

Int. Cl.<sup>8</sup> F27B3/00-3/28.C21C5/52

最小限資料以外の資料で調査を行った分野に含まれるもの

日本国実用新案公報 1922-1994年

日本国公開実用新案公報 1973-1994年

国際調査で使用した電子データベース (データベースの名称、調査に使用した用語)

C. 関連すると認められる文献

引用文献の カテゴリー*	引用文献名 及び一部の箇所が関連するときは、その関連する箇所の表示	関連する 請求の範囲の番号
A	JP, B2, 58-48834 (大同特殊鋼株式会社), 31. 10月. 1983 (31. 10. 83) (ファミリーなし)	1, 2
A	JP, B2, 1-20208 (大同特殊鋼株式会社), 14. 4月. 1989 (14. 04. 89) (ファミリーなし)	1, 2
A	JP, A, 63-93815 (大同特殊鋼株式会社), 25. 4月. 1988 (25. 04. 88) (ファミリーなし)	1, 2

☒ C欄の続きにも文献が列挙されている。

☐ パテントファミリーに関する別紙を参照。

\* 引用文献のカテゴリー

- 「A」 特に関連のある文献ではなく、一般的な技術水準を示すもの  
 「E」 先行文献ではあるが、国際出願日以後に公表されたもの  
 「L」 優先権主張に疑義を提起する文献又は他の文献の発行日若しくは他の特別な理由を確立するために引用する文献 (理由を付す)  
 「O」 口頭による開示、使用、展示等に言及する文献  
 「P」 国際出願日前で、かつ優先権の主張の基礎となる出願の日の後に公表された文献

- 「T」 国際出願日又は優先日後に公表された文献であって出願と矛盾するものではなく、発明の原理又は理論の理解のために引用するもの  
 「X」 特に関連のある文献であって、当該文献のみで発明の新規性又は進歩性がないと考えられるもの  
 「Y」 特に関連のある文献であって、当該文献と他の1以上の文献との、当業者にとって自明である組合せによって進歩性がないと考えられるもの  
 「&」 同一パテントファミリー文献

国際調査を完了した日

13. 06. 94

国際調査報告の発送日

05.07.94

名称及びあて先

日本国特許庁 (ISA/JP)

郵便番号100

東京都千代田区霞が関三丁目4番3号

特許庁審査官 (権限のある職員)

奥井正樹

4 K 7 5 1 6

電話番号 03-3581-1101 内線 3435

C (続き). 関連すると認められる文献

引用文献の カテゴリー*	引用文献名 及び一部の箇所が関連するときは、その関連する箇所の表示	関連する 請求の範囲の番号
A	JP, A, 61-66080 (大同特殊鋼株式会社), 4. 4月. 1986 (04. 04. 86) (ファミリーなし)	3. 4
A	JP, B2, 59-32525 (石川島播磨重工業株式会社), 9. 8月. 1984 (09. 08. 84) (ファミリーなし)	5. 6