



(43) International Publication Date
31 January 2013 (31.01.2013)

- (51) International Patent Classification:
A47J 31/40 (2006.01) *A47J 31/44* (2006.01)
- (21) International Application Number:
PCT/EP2012/064465
- (22) International Filing Date:
24 July 2012 (24.07.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11175675.5 28 July 2011 (28.07.2011) EP
- (71) Applicant (for all designated States except US): NESTEC
S.A. [CH/CH]; Av. Nestlé 55, CH-1800 Vevey (CH).

- (72) Inventors; and
(75) Inventors/Applicants (for US only): REY, Cédric [CH/CH]; Rue du Chêne 36, CH-1315 La Sarraz (CH). SCORRANO, Lucio [CH/CH]; Chemin de Jolimont 9, CH-1400 Yverdon-les-Bains (CH). ZSOLT, Albert [HU/CH]; Ch. De la Cigogne 2, CH-1030 Bussigny (CH).
- (74) Agent: DUCREUX, Marie; Avenue Nestlé 55, CH-1800 Vevey (CH).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: BEVERAGE DISPENSER WITH IMPROVED REFILLING OPERATION

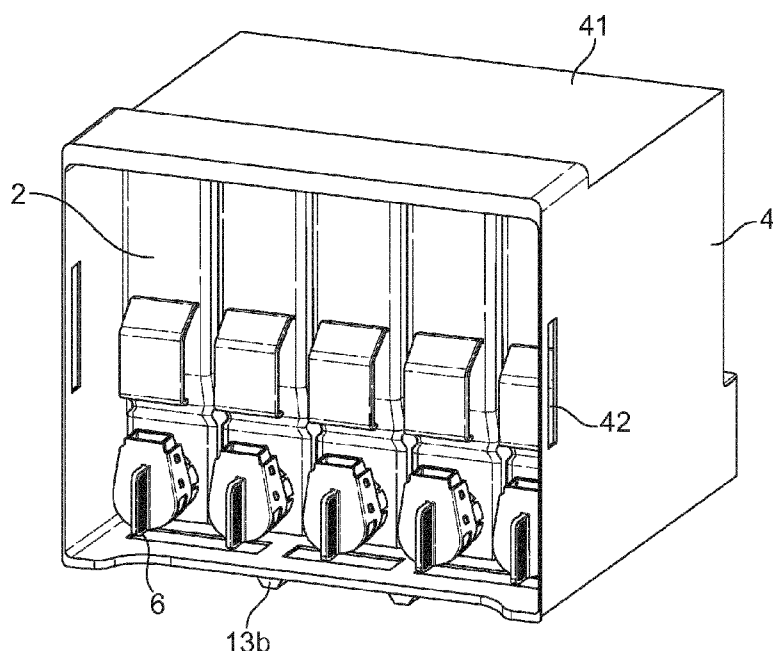


FIG. 2b

(57) Abstract: The invention concerns a beverage dispenser comprising : - a housing (1), - at least two refillable containers (2) for storing bulk beverage ingredients, - at least a beverage preparation unit (3) operatively linked to the containers for preparing a beverage from at least one of the stored bulk beverage ingredients, - a sub-housing (4) in which the containers are placed, said sub-housing being removable from the housing.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

BEVERAGE DISPENSER WITH IMPROVED REFILLING OPERATION

Field of the invention

5 The present invention relates to a beverage dispenser comprising means for storing and dosing a food ingredient which can be easily refilled.

Background of the invention

10 Many beverages like espresso and other coffee beverages, milk beverages, chocolate beverages, ... are often prepared by dosing and mixing a food soluble powder with a diluent. According to one type of beverage preparation machine the food soluble powder is stored in a non disposable canister that is part of the machine and that is regularly refilled. For the refilling operation the canister is pulled out of the machine, its top is opened and powder is empty inside.

15 For machines preparing various beverages like e.g. coffee and milk and chocolate and tea, several canisters must be regularly refilled and it takes time to carry out the refilling of all the containers. Yet this refilling operation must be as short as possible because the dispenser is not operable for producing beverages during that time.

20 Once the operator has refilled one container with a powder it is also often important that the operator always replaces the same container at the same place in the dispenser. Actually in most of the machines, the containers contain dosing means (e.g. screw or spring auger at the bottom of the container) and dosing means are activated differently by the machine motors depending on the nature of the powder inside the container. Moreover each dosing means generally delivers a dose of powder to a mixer or whipper that is specifically configured for mixing or whipping that powder – e.g. a whipper for a coffee powder is differently configured
25 from a whipper for a milk powder. If the operator does not correctly place the different containers in the machine, the beverages will not be correctly prepared and it will affect their taste.

30 One aim of the present invention is to solve these problems and to propose a beverage dispenser comprising several beverage powder containers that can be easily and rapidly refilled without mistake by the operator.

Summary of the invention

According to a first aspect, the invention concerns a beverage dispenser comprising :

- a housing,
- at least two refillable containers for storing bulk beverage ingredients,

- at least a beverage preparation unit operatively linked to the containers for preparing a beverage from at least one of the stored bulk beverage ingredients,
- a sub-housing in which the containers are placed, said sub-housing being removable from the housing,

5 wherein the top of the sub-housing is configured so that it closes access to the top of the containers, and

wherein each refillable container comprises a cover and a tank, the cover comprising a lid and four walls perpendicular to the lid, said walls being configured to slide along the tank walls, and wherein the height of the cover walls is greater than the distance between the top of the tank of
10 the container and the top of the sub-housing.

The beverage dispenser of the present invention comprises a housing in which the different functional elements for preparing the beverages are positioned. In particular at least two refillable containers for storing bulk beverage ingredients are positioned in the housing. These containers are usually non disposable. They are able to store bulk beverage ingredients
15 that are generally powders, pellets or granules. According to the preferred mode, the beverage ingredients are soluble ingredients like soluble coffee, tea, chocolate, milk, sugar, or other flavoured powders. A beverage preparation unit that prepares a beverage from at least one of the beverage ingredients is also usually positioned in the housing. The beverage preparation unit usually comprises one means for contacting the beverage ingredient with a diluent. It can be
20 a diluent jet(s) head, a mixing bowl, a whipper bowl, a brewing chamber. The beverage preparation unit is generally positioned or operatively linked to the containers so that it can receive a dose of ingredients therefrom and subsequently put it in contact with a diluent and prepare a beverage. According to the invention the dispenser comprises a sub-housing in which the at least two refillable containers are placed. The sub-housing can be removed from the
25 housing while the canisters are inside it. Consequently the operator can withdraw all the containers of the dispenser in only one movement.

The top of the sub-housing is configured so that it closes access to the top of the containers. In this configuration the operator cannot refill the containers without withdrawing each container from the drawer. This feature presents the advantage of limiting the cross-
30 contamination of the bulk ingredients stored in the containers : actually, if the containers can be well separated during refilling, the risk that one ingredient flies and falls in the next container is limited. It also avoids dirtying the inside of the sub-housing during refilling. Lastly, the top of the sub-housing cooperates with the lids closing the top of the containers so that no powder can escape from the containers even if the drawer falls upside down. In particular each refillable

container comprises a cover and a tank, the cover comprising a lid and four walls perpendicular to the lid. The walls are configured to slide along the tank wall and their height is greater than the distance between the top of the tank of the container and the top of the sub-housing.

According to one preferred mode the sub-housing is a drawer. This drawer is able to slide
5 in the housing which helps the placement of the sub-housing inside the housing.

The housing can present a compartment for receiving the sub-housing. This compartment can help for supporting the sub-housing inside the machine when all the containers are refilled.

According to a preferred mode the sub-housing presents handles on its lateral walls. By lateral, it is meant the left and right sides of the machine when the operator is placed in front of it
10 the machine. These handles help for pulling or pushing the sub-housing out or in the housing.

According to another preferred mode the sub-housing presents a handle on its top wall. Preferably this handle is retractable. In particular the handle can be folded along the sub-housing top wall near from the dispenser front side so that the operator can easily pull out the canister from the housing.

15 The dispenser can comprise means for locking the sub-housing in the housing. According to the embodiment in which the sub-housing presents handles on its lateral walls, the locking means can be positioned in the handles.

The sub-housing can also present guiding means complementary to housing guiding means and configured for guiding the positioning of the sub-housing in the housing during the
20 withdrawal from or the introduction in the dispenser.

Generally the sub-housing presents holes enabling the cooperation of dosing means positioned in the containers with actuating means positioned in the dispenser.

According to the preferred embodiment each of the containers comprises :

- a tank,
- 25 - a rotatable volumetric dosing means at the bottom of the tank,
- a discharge port at the outlet of the tank.

The rotatable volumetric dosing means can be a screw auger or a spring auger. The rotatable volumetric dosing means usually longitudinally extends along the bottom of the tank. The discharge port is generally a tube that cooperates with the outlet of the tank. It is usually
30 oriented downwards to deliver the beverage ingredient to the beverage preparation unit by gravitation. It can be vertically oriented or only inclined downwards.

According to a first mode of the invention the discharge port can be rotated. The rotation is usually made around the rotatable volumetric dosing means central axis. The sub-housing can present at least one bottom hole in which the discharge ports are able to rotate.

Preferably the rotation of a discharge port simultaneously actuates the closure of said discharge port. Actually a weir can partially obstruct the outlet of the tank and the rotatable discharge port can comprise a complementary weir so that when it is rotated the outlet of the tank is totally closed.

5 According to a second mode of the invention the discharge port can comprise :

- an internal delivery tube comprising a hollowing-out in its bottom part,
- an external movable means comprising a hollowing-out in its bottom part, said external movable means covering at least a part of the internal delivery tube and being movable between :

10 . a position in which the both hollowing-outs of the internal delivery tube and of the external movable means overlap each other, and

. a position in which the surface of the external movable means overlaps and closes the hollowing-out of the delivery tube.

The internal delivery tube of the discharge port is the outlet of the refillable container tank. It is usually a cylinder. The base of the cylinder is preferably closed near the outlet extremity. The ingredients that are delivered by the tube are evacuated by the hollowing out in the bottom of the cylinder. In the present application "bottom" has to be understood according to the sense of orientation of the discharge valve in the dispenser. Preferably the hollowing out is next to the base of the cylinder. According to an embodiment, the internal delivery tube can comprise a partial weir, preferably a half moon weir, obstructing the lower part of the circular tube in front of its hollowing-out.

The discharge port also comprises an external movable means. By external it is meant that this means surrounds the internal delivery tube delivering the ingredients from the container tank. This external means also comprises a hollowing out in its bottom part. This external means is movable so that according to its position its hollowing out can overlap or not the hollowing out of the delivery tube and consequently enable the opening or the closing of the discharge port for delivering ingredients. Preferably the external movable means is a cylinder.

According to the preferred embodiment a part of the external movable means is pushed by the internal face of the front door when said front door is closing. Consequently when the front door is closed, it maintains the movable external means in the position where the discharge port is opened.

According to the preferred embodiment the discharge port comprises at least one elastic member able to exert a force on the movable external means so as to push said means away from the container. The elastic member can be a spring or metal blades fixed on one end to the

refillable container and cooperating on the other end with the external movable means. Preferably the elastic member can cooperate with pins on the lateral sides of the external movable means. Generally the elastic member exerts a force sufficient to displace the external movable means to a position in which its hollowing-out does not overlap the hollowing-out of the internal cylinder.

Depending on the size of the dispenser, it can comprise several sub-housings according to the present invention.

According to a specific embodiment the back wall of the sub-housing can comprise identification means cooperating with identification means of each of the canisters. Preferably these cooperating identification means are mechanical identification means like embossed and hollowed geometrical shapes.

According to a second aspect the invention concerns a method for refilling a beverage dispenser such as described here above and comprising the steps of :

- optionally unlocking the sub-housing,
- optionally rotating the discharge ports of the containers,
- pulling the sub-housing out of the housing,
- refilling the containers by the top.

Brief description of the drawings

The characteristics and advantages of the invention will be better understood in relation to :

- Figure 1 depicts a perspective view of a beverage dispenser of the present invention in its operational state,
- Figure 2a depicts a perspective view of the beverage dispenser in its refilling state, the sub-housing being withdrawn from the housing,
- Figure 2b depicts a perspective view of the sub-housing withdrawn from the housing,
- Figure 3 is a perspective view of the sub-housing without the containers,
- Figure 4 is a perspective view of a container used in the dispenser of the present invention in its closed state,
- Figure 5 is a perspective view of the discharge port of the container of Figure 4,
- Figure 6 is a perspective view of the container of Figure 4 without the discharge port,
- Figure 7 is an exploded of the discharge port when it closes the container,
- Figure 8 is an exploded of the discharge port when it opens the container.

- Figure 9 depicts a perspective view of one of the refillable containers that could be alternatively used in the dispenser of Figure 1.
- Figure 10 depicts a perspective view of the discharge port of the container of Figure 9.
- Figures 11 and 12 depict two perspective views of the internal and external parts of the discharge port of Figure 10.
- Figure 13 is a cross section view of the discharge port of Figure 10 in its opened configuration.
- Figure 14 is a perspective view from the bottom of the discharge port of the container of Figure 9 in its closed configuration.
- Figure 15 is cross section view of the discharge port of Figure 14 in its closed configuration.
- Figure 16 is a front view of the sub-housing that has been withdrawn from the dispenser housing and in which one container cover has been made transparent.
- Figure 17 is a magnified view of Figure 16.
- Figure 18 illustrates a variant for the cover of the container of Figure 9.
- Figures 19 and 20 illustrate a sub-housing and a refillable container presenting cooperating identification means.

Detailed description of the drawings

Figure 1 illustrates a dispenser according to the present invention from which the front door has been made transparent for making its inside arrangement apparent. The dispenser comprises a housing 1 in which five containers 2 for storing bulk beverage ingredient are positioned. Each container presents a discharge port 6 at one extremity of the bottom of its tank. The discharge ports 6 are oriented so as to deliver the beverage ingredients to two units for contacting the beverage ingredients with a diluent. In the illustrated embodiment these units are whipping bowls yet any other mixing unit could be implemented. The outlets 31 of the whipper bowls deliver the beverage to the dispensing area 14 on which a recipient can be placed. Usually tubes are attached to the outlets 31 so as to lead the beverages to the dispensing area and the recipient. In its upper part the dispenser comprises a sub-housing 4 in which the five containers 2 are placed.

As illustrated in Figures 2a and 2b the sub-housing 4 is removable from the dispenser with the five containers 2 positioned in the sub-housing. The dispenser comprises a compartment 11 in which the sub-housing 4 can slide and be positioned. The sub-housing presents three longitudinal bumps 13b that can slide in two complementary slots 13a so as to guide the positioning of the sub-housing in the housing. Other type of guiding means on other surfaces of the housing and the sub-housing can be used to help the guiding during the operation of the

placement of the sub-housing in the housing. The sub-housing 4 presents back wall apertures 44 so that the dosing means in the containers 2 can cooperate with actuating means in the back wall of the dispenser housing 1 as illustrated in Figure 3. In the figures the dosing means in the containers 2 are screw or spring augers of which extremities are engaged by rotating shafts 5 such as shown in Figure 2a. Optionally the sub-housing 4 can comprise two handles 42 on its lateral walls so that the operator can easily handle the sub-housing 4. The sub-housing 4 comprises three bottom holes 45 cooperating with three correspondent holes 15 in the compartment 11 of the dispenser so that when the sub-housing is in the dispenser the holes 15, 45 are facing each other. As illustrated in Figure 1, during the operation state of the dispenser, the discharge ports 6 of the containers go through the holes 15, 45. Consequently for removing the sub-housing 4 with the containers 2 inside from the housing 1 the discharge ports 6 are rotated as illustrated in Figure 2b so that they do not go through the holes 15, 45. The discharge ports 6 are also conceived so that their rotations actuate the closure of the tanks outlets. Then the operator cannot withdraw the sub-housing 4 with the containers 2 inside without having closed the discharge ports which guarantees a clean refilling operation. Once the operator has withdrawn the sub-housing from the dispenser, it can place it on a table where he has sufficient place to put the containers and refill them without mixing them.

Figures 4, 5, 6 illustrate a refillable container 2 with a rotatable discharge port 6 according to the present invention. The container comprises a tank 22 in which the food ingredient is stored and closed at its top by a cover 21 for refilling. At its bottom it comprises a spring auger 7 illustrated in dotted lines which drives the bulk food ingredient to the tank outlet 23 and then to the discharge port 6. At the tank outlet the container comprises a half moon weir 61 obstructing the upper part of the circular outlet of the tank. The discharge port 6 is rotatable and comprises :

- a chute 62 that guides the beverage ingredient to the beverage preparation unit, and
- a half moon weir 64. Said weir 64 can either be set in front of the fixed half moon weir 61 (Figure 8) or below it (Figure 7) so as to respectively open or totally close the tank outlet 23. The chute 62 and the weir 64 are positioned one to the other so that when the chute is oriented downward the weir 64 is in front of the fixed half moon weir 61 (Figure 8) - and the discharge port is open – and when the chute is oriented upward the weir 64 is below the fixed half moon weir 61 (Figure 7) - and the discharge port is closed. The discharge port can comprise a handle 63 to help the rotation.

When the operator wants to refill the containers 2, he opens the dispenser and rotates the discharge port 6 upward so a simultaneously close the outlet of the containers 2 and liberate the discharge ports 6 from the holes 15 in the housing. Then he pulls the sub-housing 4 removing all

the five canisters 4 together from the housing 1. He is able to place the sub-housing 1 on a table and, he can refill each container 4 by pulling it out of the sub-housing 4, opening its cover and emptying a beverage ingredient inside. Once each container is refilled and replaced in the sub-housing 4, he places the sub-housing back in the housing 1 of the dispenser ; for the positioning
5 of the sub-housing he is guided by the bumps at the bottom of the sub-housing that must slide in the corresponding slots of compartment 11 in the housing. Then the operator opens the container by rotating the discharge ports 6 downwards.

Figure 9 illustrates a refillable container 2 with a discharge port 6 according to the present invention. The container comprises a tank 22 in which the food ingredient is stored and closed at
10 its top by a cover 21 for refilling. At its internal bottom it comprises a spring auger 7 illustrated in dotted lines which drives the bulk food ingredient to the tank outlet 23 and then to the discharge port 6. As illustrated in Figures 10, 11 and 12 the discharge port 6 comprises :

- an internal delivery tube 601 comprising a hollowing-out 602 in its bottom part,
- external movable means 603 comprising a hollowing-out 604 in its bottom part. When
15 assembled, the external movable means 603 covers at least a part of the internal delivery tube 601. The hollowing-outs 602, 604 are configured so that they can overlap each other or not. The external movable means 603 presents pins 607 on its lateral sides for cooperating with the end of flexible blades 606 attached by their other end 606a to the wall of the container tank. The flexible blades exert a force on the movable means 603 so as to push said means away from
20 the container that is in a direction corresponding to the opening direction of the front door.

Due to the movable capacity of the external movable means 603, this means can move between :

- . a position in which its hollowing-out 604 overlaps the hollowing-out 602 of the internal delivery tube, and
- 25 . a position in which the surface of the external movable means 603 overlaps and closes the hollowing-out 602 of the delivery tube.

In figures 9, 10 and 13 the external movable means 603 is in a position where the front door (not illustrated) is in contact with the end of the external movable means 603 and exerts a force F on it, pushing it against the force of the flexible arms 606 so that the hollowing out 604 of
30 the external movable means 603 overlaps the hollowing-out 602 of the delivery tube. In this position the ingredient can be delivered from the container 2 inside a preparation unit 3.

If the front door is opened, no force acts anymore on the end of the external movable means 603 against the force of the flexible blades as illustrated in Figures 14 and 15. Consequently these blades are free to push the external movable means 603 according to their

elastic force and to make it slide around the internal delivery tube 601 so that the hollowing-out 604 of the external movable means does not overlap anymore the hollowing-out 602 of the delivery tube and so that the discharge port 6 is closed.

Figure 16 illustrates a sub-housing 4 which has been removed from the dispenser with the five refillable containers 2 positioned in the sub-housing. Each container 2 comprises a tank 22 and a cover 21. For a better understanding of the invention, one of the containers has been represented without its cover. As magnified in Figure 17, when the refillable container is placed in the sub-housing 4, the top of the tank 221 is at a distance d from the sub-housing top 41. As illustrated in Figure 9 each cover 21 of the containers 2 comprises a lid 211 and four walls 202 perpendicular to the lid, said walls being configured to slide along the tank walls 220. The four walls 202 present a height h greater than the distance d . Consequently if the sub-housing is not oriented according to its current use, e.g. if it falls and is turned upside down during handling, the covers would still close the tanks openings and no bulk ingredients would escape. Figure 18 illustrates a variant of the cover illustrates in Figures 9, 16 and 17 where the four walls 202 of the cover that are perpendicular to the lid 211 are configured for internally sliding along the tank walls 220, whereas in Figures 9, 16 and 17, these four walls are configured for externally sliding along the tank walls 220. The terms "externally" and "internally" refer to the volume defined by the tank.

Figure 19 illustrates an empty sub-housing 4 of which back wall 46 comprises 4 different identification means 8 in the form of 4 different geometrical shapes embossed in the back wall. Figure 20 is a back view of a refillable container 2 presenting an identification means 80 hollowed in the back side of the container and cooperating with one of the identification means 8 of the back wall of the sub-housing. Thanks to these different identification means the risk that the operator mixes the different container during refilling and does not associate the good bulk ingredient with the good beverage preparation unit is decreased.

An advantage of the present invention is that the operator can rapidly refill all the containers since he does not have to repeat the movement of unloading each container from the dispenser : in the one movement he is able to remove all the containers.

Another advantage of the present invention is that the refill can be made without powder dirtying the machine and without cross contamination between the containers.

Claims

1. Beverage dispenser comprising :

- a housing (1),

5 - at least two refillable containers (2) for storing bulk beverage ingredients,

- at least a beverage preparation unit (3) operatively linked to the containers for preparing a beverage from at least one of the stored bulk beverage ingredients,

- a sub-housing (4) in which the containers are placed, said sub-housing being removable from the housing,

10 wherein the top (41) of the sub-housing is configured so that it closes access to the top (21) of the containers, and

wherein each refillable container (2) comprises a cover (21) and a tank (22), the cover comprising a lid (211) and four walls (202) perpendicular to the lid, said walls being configured to slide along the tank walls (220), and wherein the height (h) of the cover walls is greater than
15 the distance (d) between the top of the tank (221) of the container and the top (41) of the sub-housing.

2. Beverage dispenser according to Claim 1, wherein the sub-housing (4) is a drawer.

20 3. Beverage dispenser according to any one of the precedent claims, wherein the sub-housing (4) is able to slide in the housing (1).

4. Beverage dispenser according to any one of the precedent claims, wherein the sub-housing (4) presents handles (42) on its lateral walls.

25

5. Beverage dispenser according to any one of Claims 1 to 3, wherein the sub-housing (4) presents a handle on its top.

30 6. Beverage dispenser according to any one of the precedent claims, wherein it comprises means for locking the sub-housing (4) in the dispenser housing.

7. Beverage dispenser according to any one of the precedent claims, wherein the sub-housing (4) presents guiding means (13b) complementary to housing guiding means (13a) and configured for guiding the positioning of the sub-housing in the housing.

8. Beverage dispenser according to any one of the precedent claims, wherein the sub-housing (4) presents holes (44) enabling the cooperation of dosing means positioned in the containers with actuating means (5) positioned in the dispenser.

5

9. Beverage dispenser according to any one of the precedent claims, wherein each of the containers (2) comprises :

- a tank (22),
- a rotatable volumetric dosing means (7) at the bottom of the tank,

10 - a discharge port (6) at the outlet (23) of the tank.

10. Beverage dispenser according to the precedent claim, wherein the discharge port (6) is able to be rotated.

15 11. Beverage dispenser according to Claim 10, wherein the rotation of the discharge port (6) actuates the closure of the tank outlet (23).

12. Beverage dispenser according to the precedent claim, wherein the tank (22) comprises a half moon weir (61) obstructing the upper part of the circular outlet of the tank and the rotatable
20 discharge port (6) comprises a chute (62) able to guide the beverage ingredient to the beverage preparation unit, and a half moon weir (64).

13. Beverage dispenser according to the precedent claim, wherein the rotatable discharge port (6) is configured so that its half moon weir (64) obstructs the upper part of the outlet (23) of the
25 tank when the chute (62) is rotated upward.

14. Beverage dispenser according to any one of the precedent claims, wherein the back wall (46) of the sub-housing comprises identification means (8) cooperating with identification means (80) of each of the canisters.

30

15. Method for refilling a beverage dispenser according to any one of the precedent claims comprising the steps of:

- optionally unlocking the sub-housing (4),
- optionally rotating the discharge ports (6) of the containers,
- 5 - pulling the sub-housing out of the housing (1),
- refilling the containers by the top (21).

1 / 11

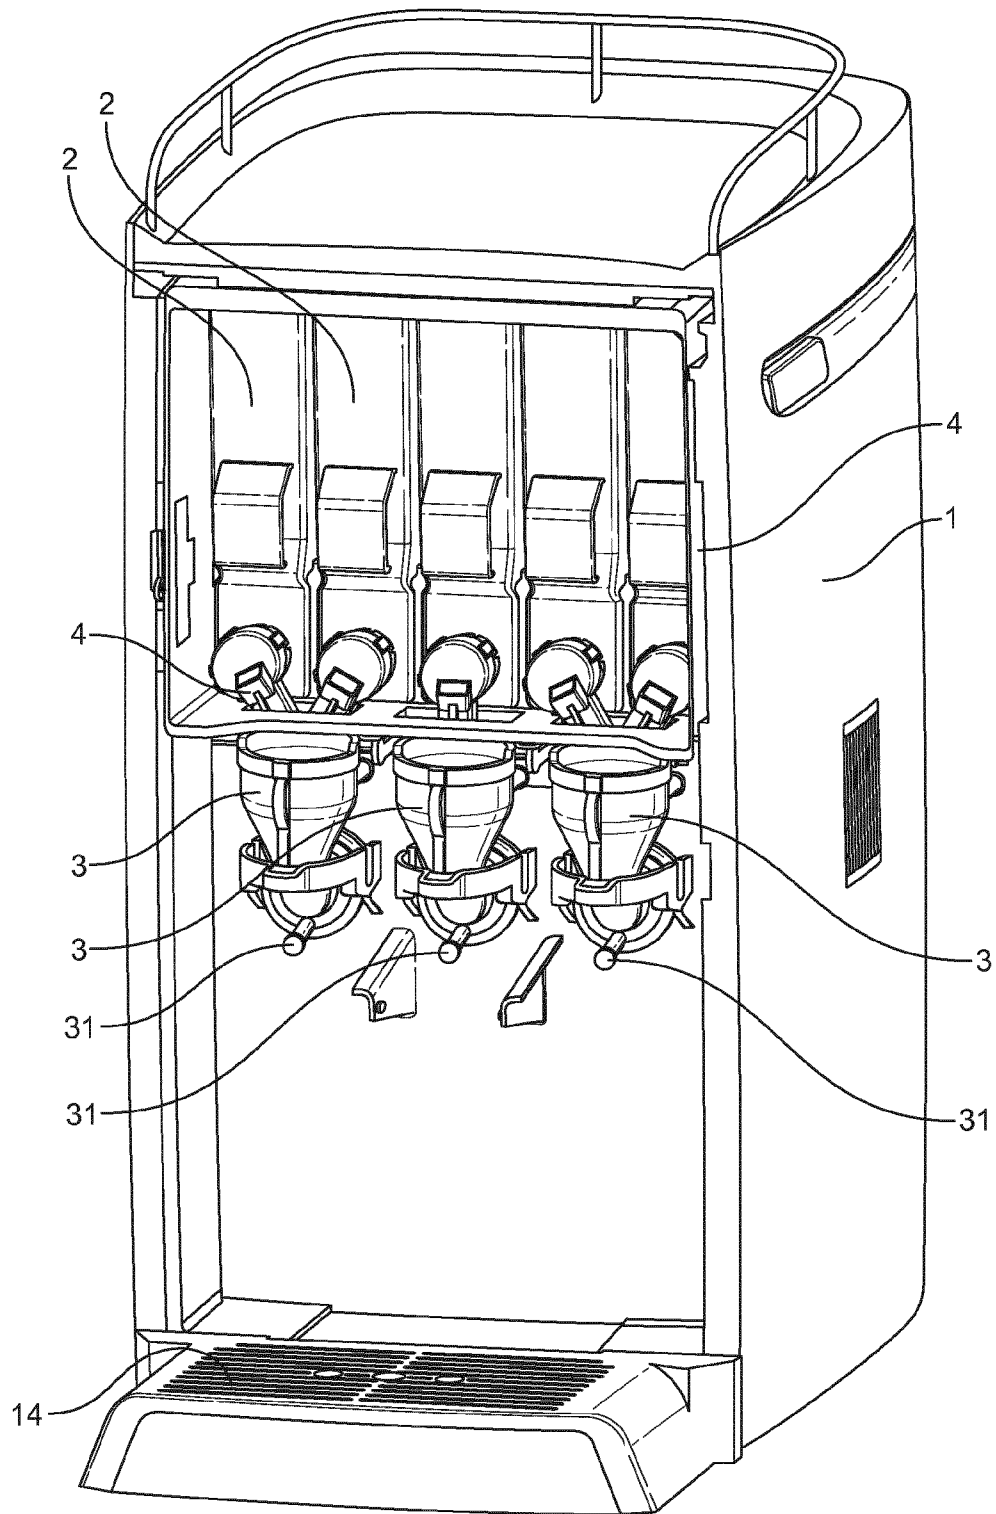


FIG. 1

2 / 11

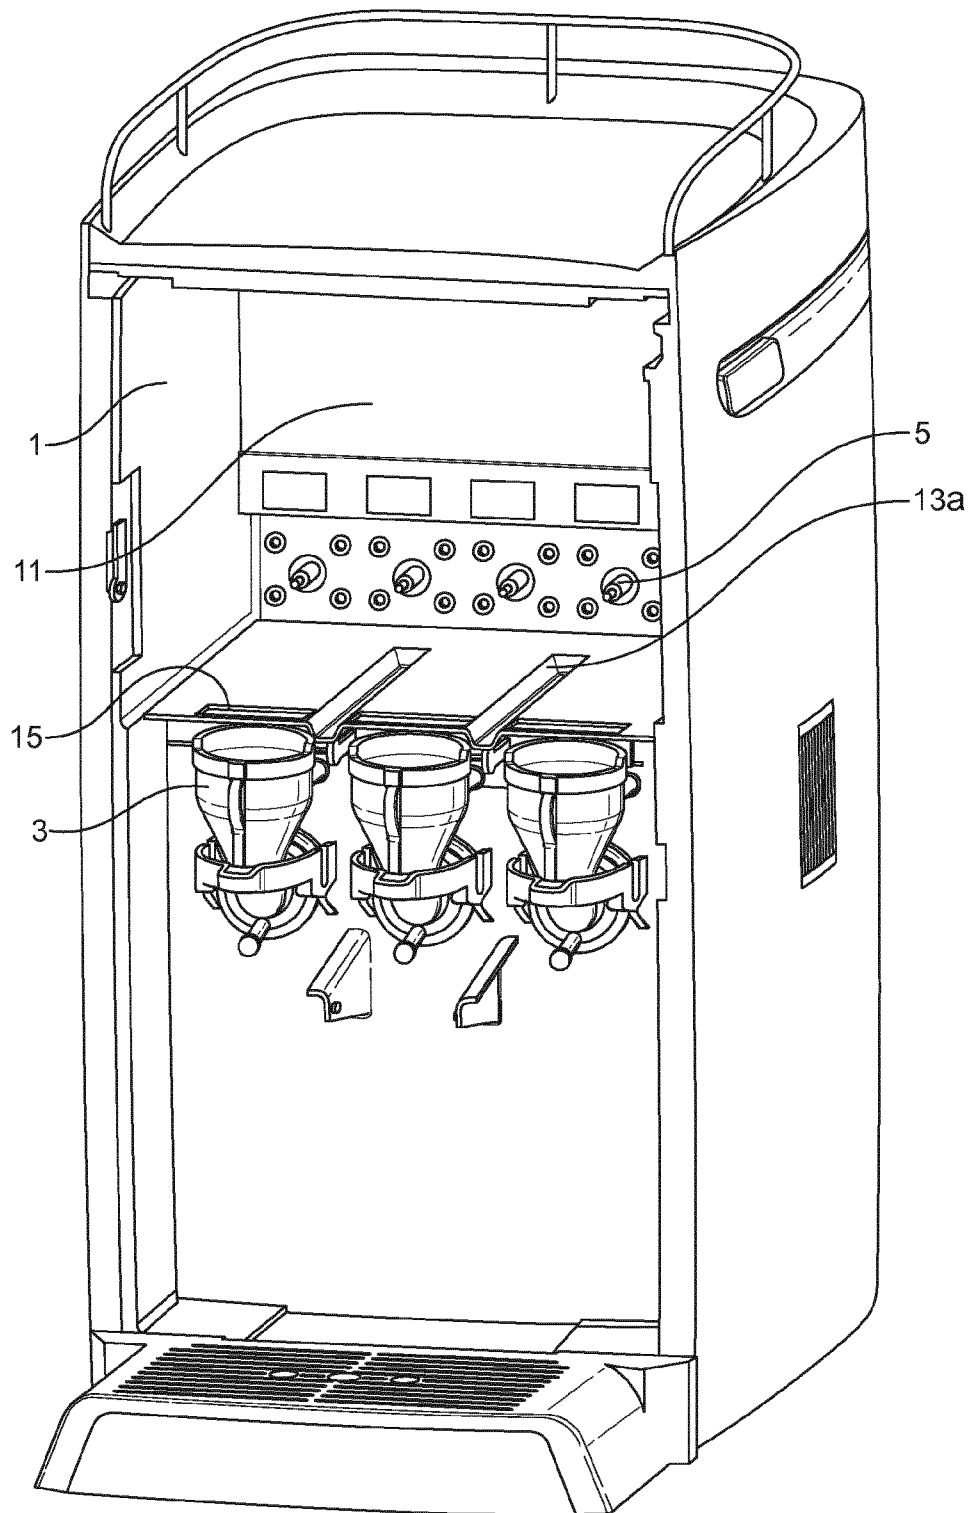


FIG. 2a

3 / 11

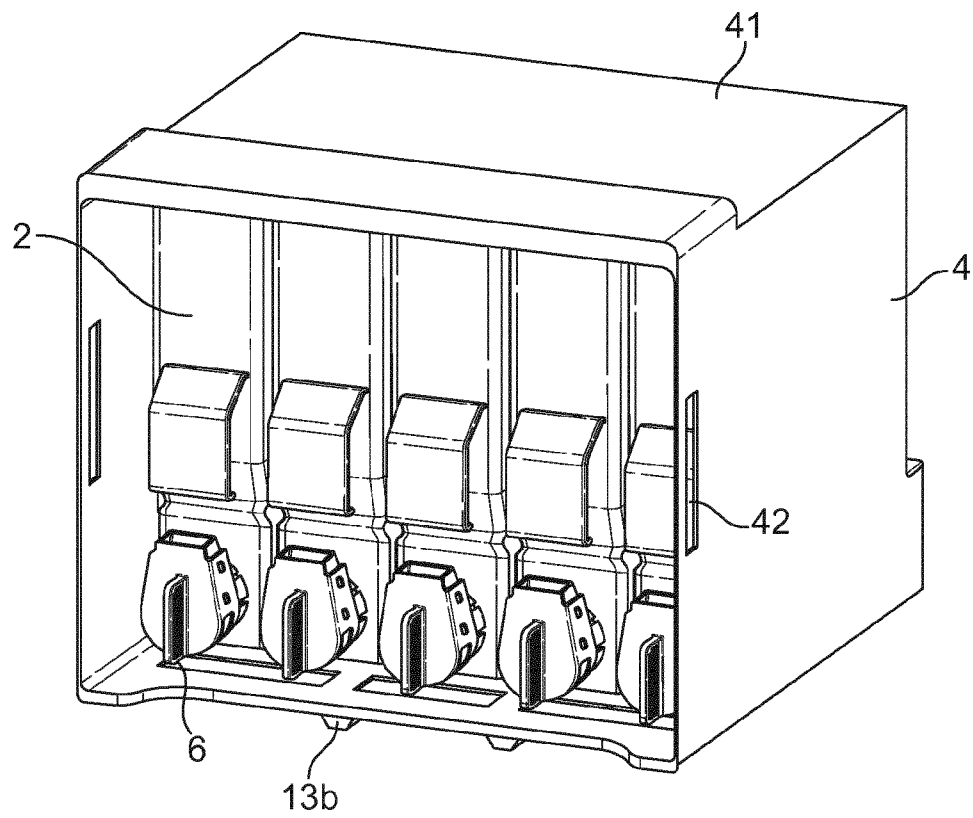


FIG. 2b

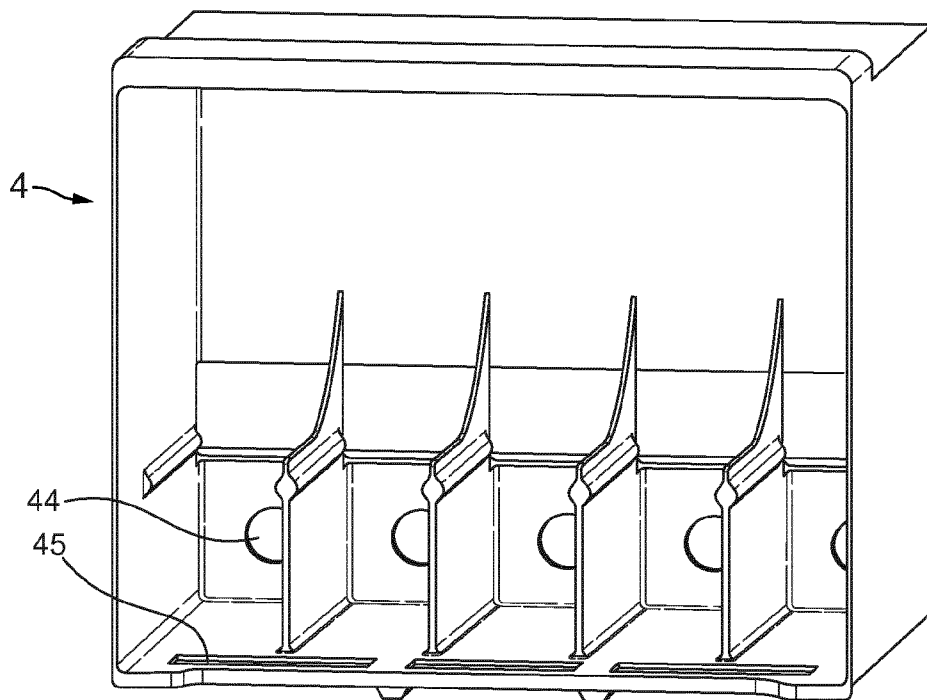


FIG. 3

4 / 11

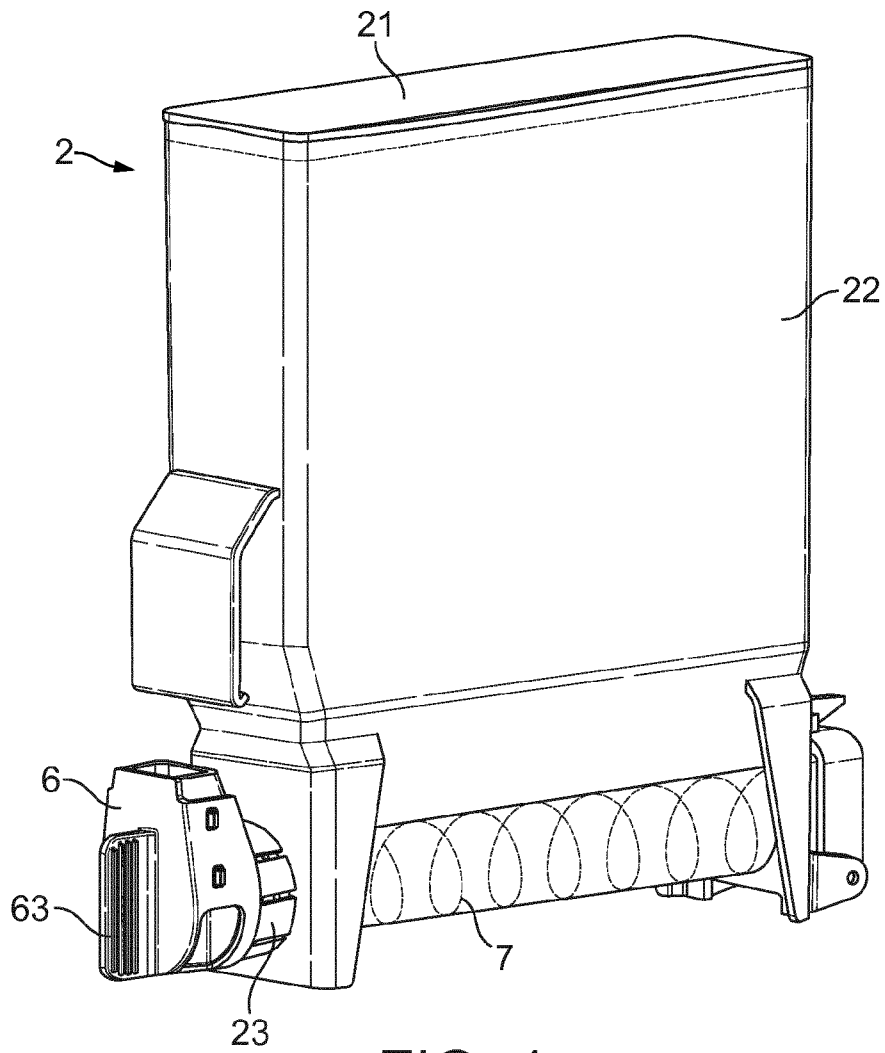


FIG. 4

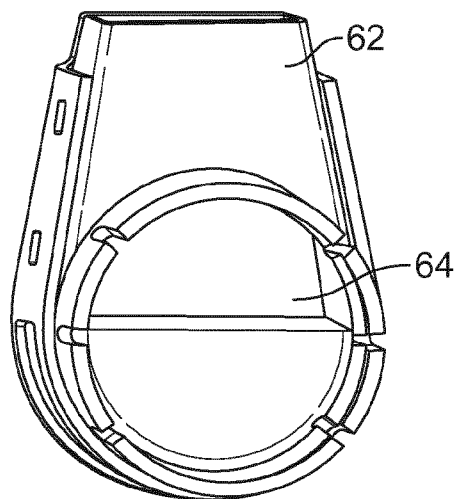


FIG. 5

5 / 11

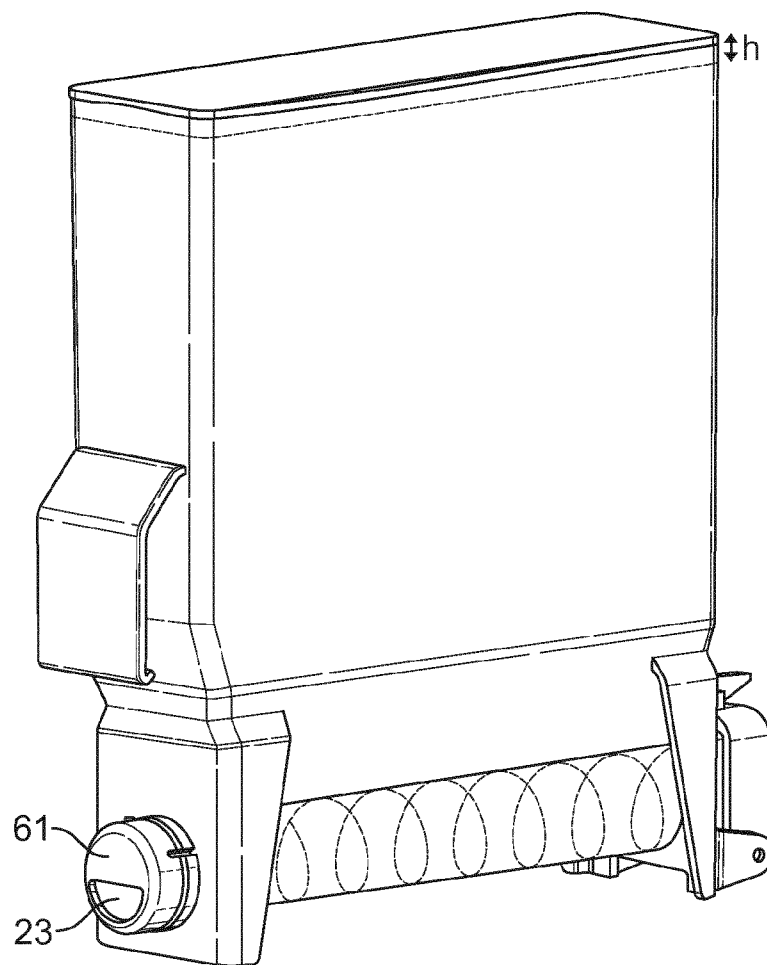


FIG. 6

6 / 11

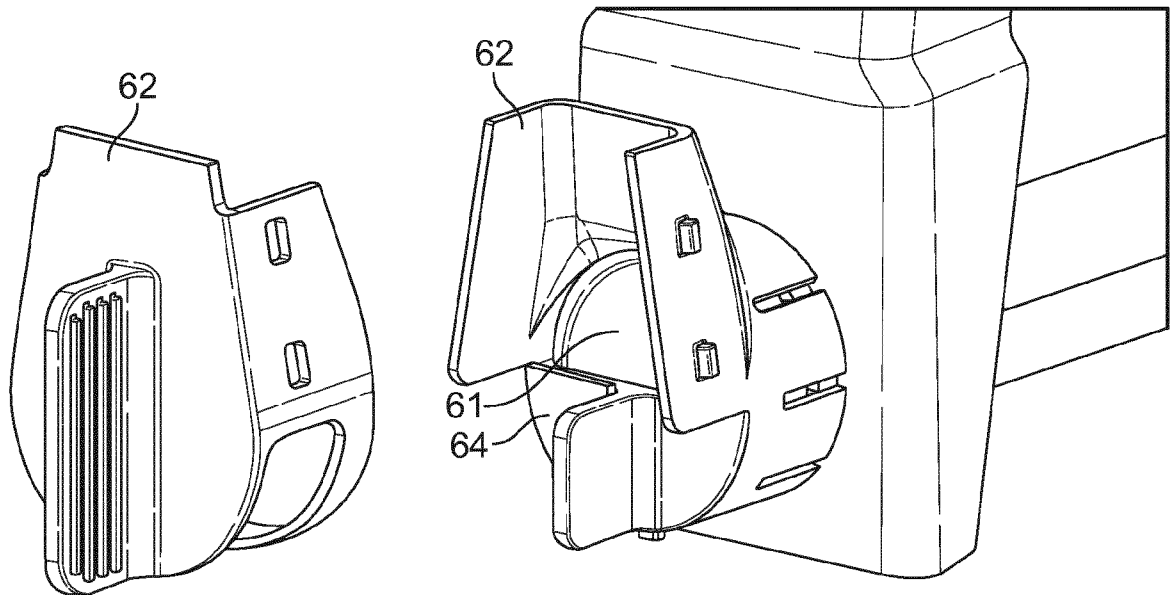


FIG. 7

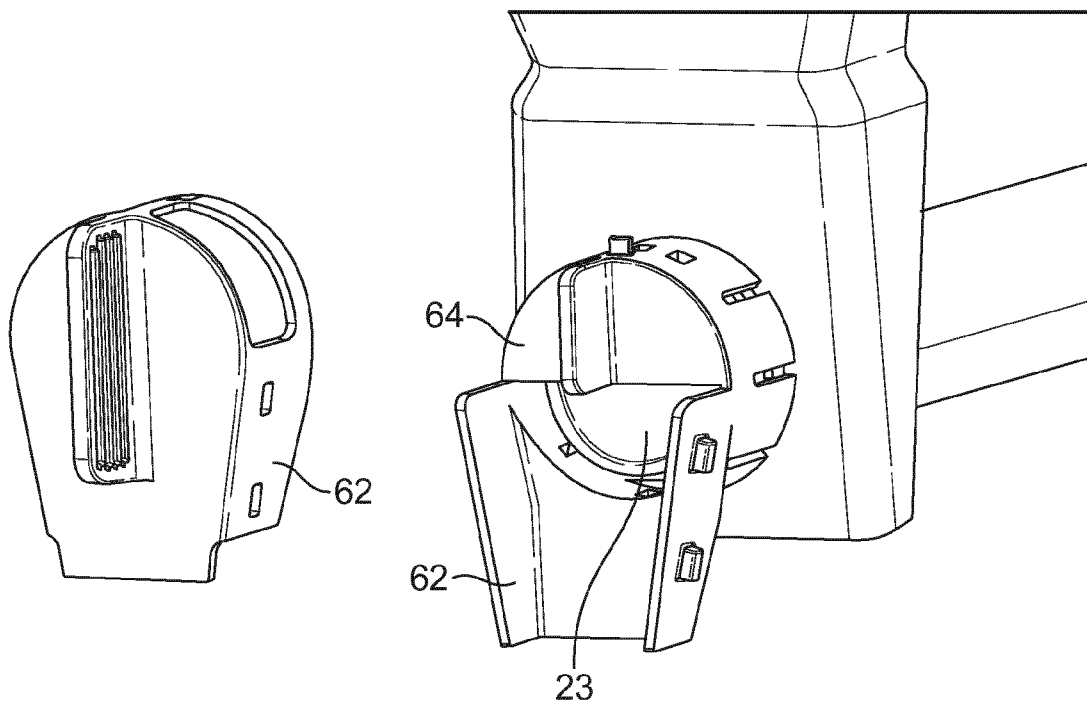


FIG. 8

7 / 11

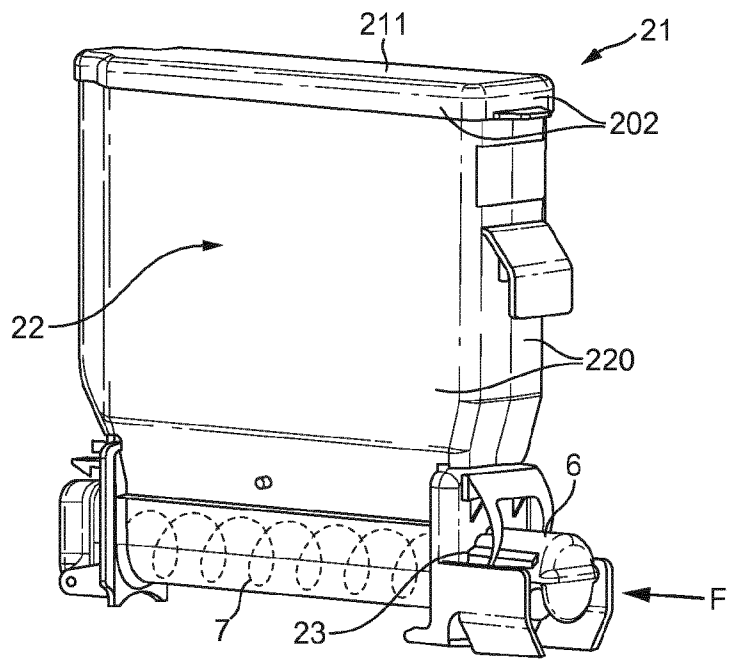


FIG. 9

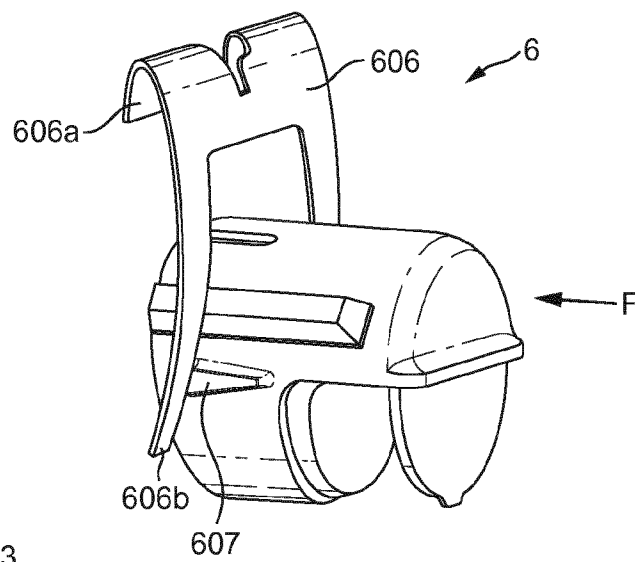


FIG. 10

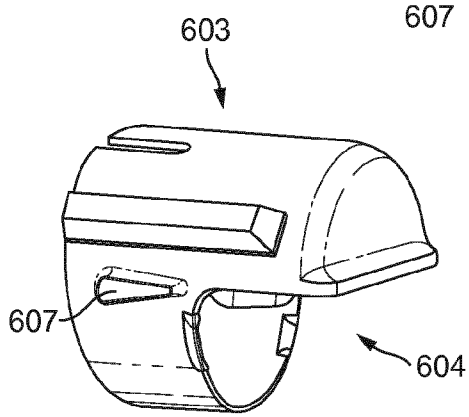


FIG. 11

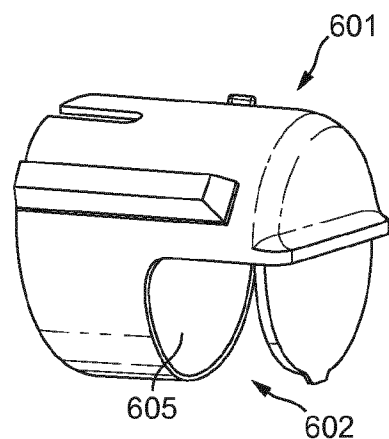


FIG. 12

8 / 11

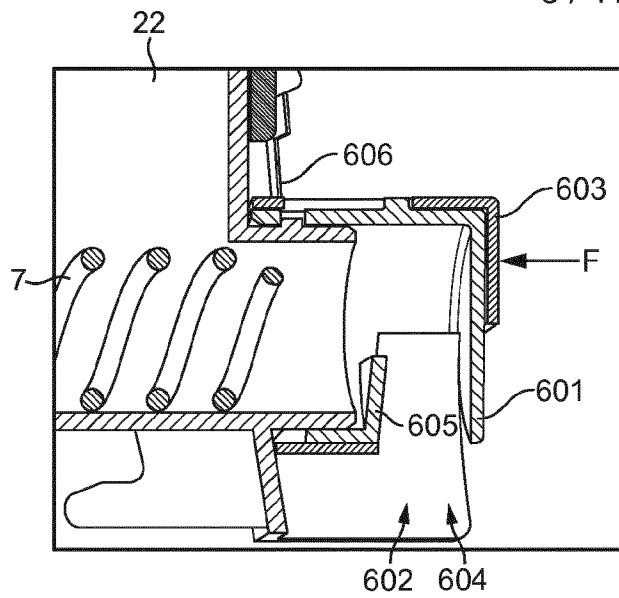


FIG. 13

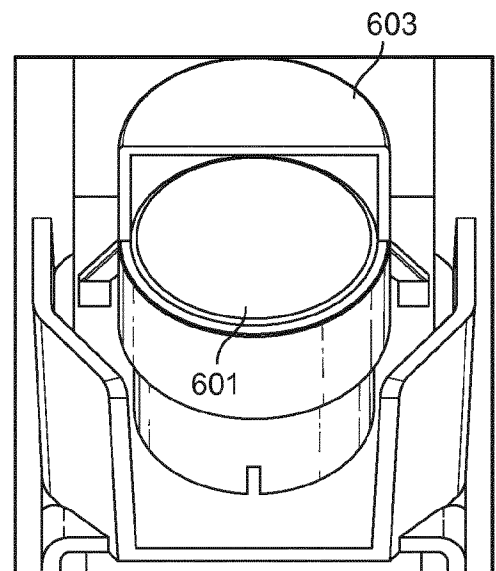


FIG. 14

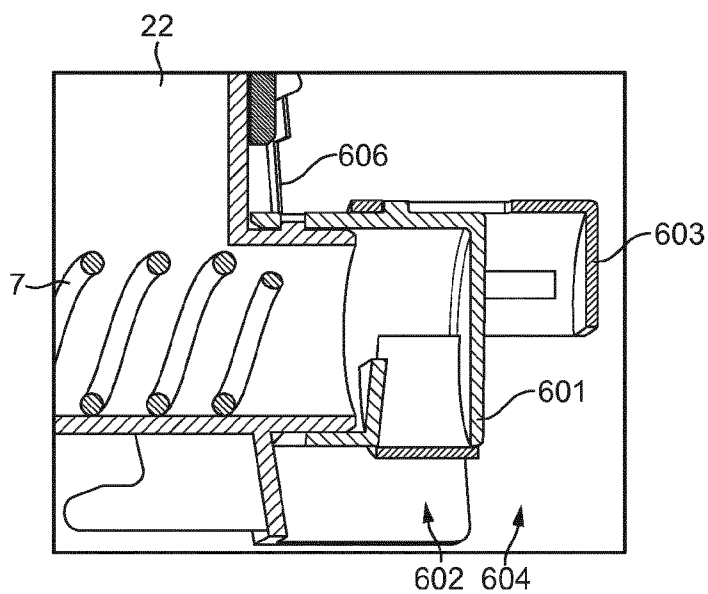


FIG. 15

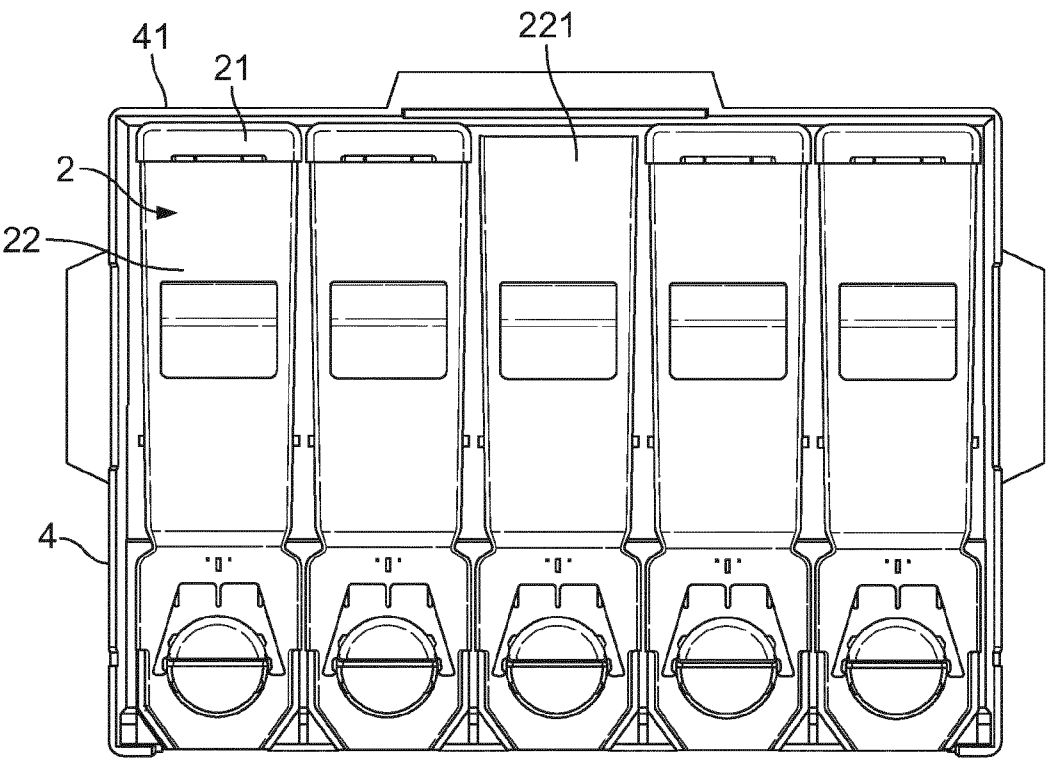


FIG. 16

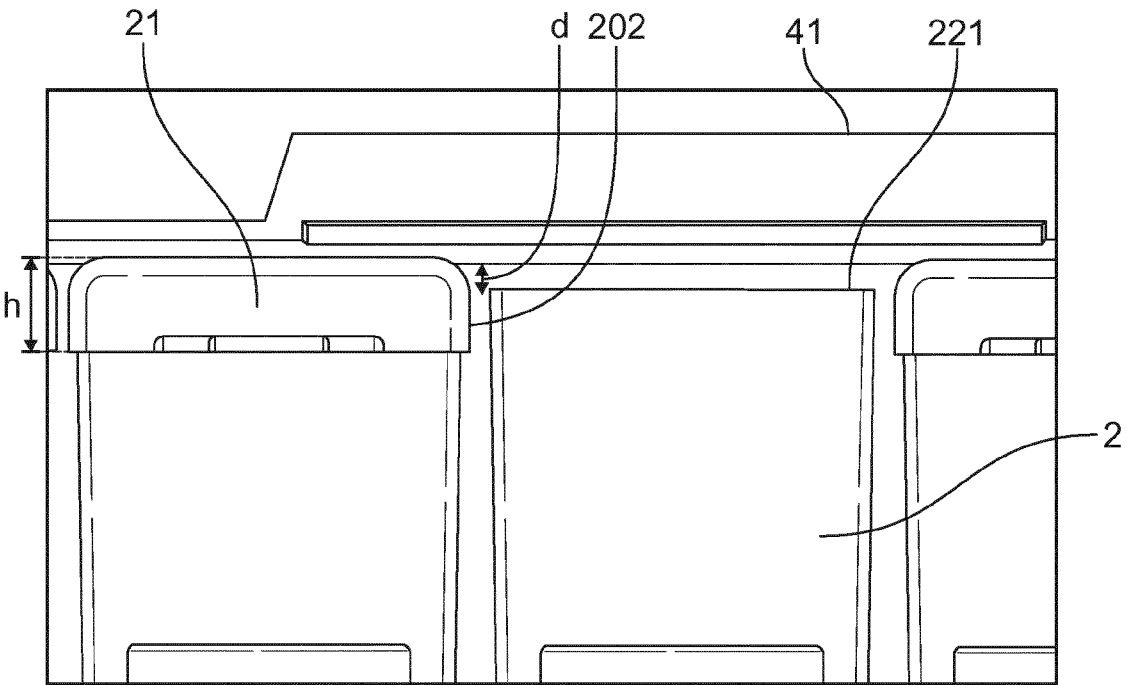


FIG. 17

10 / 11

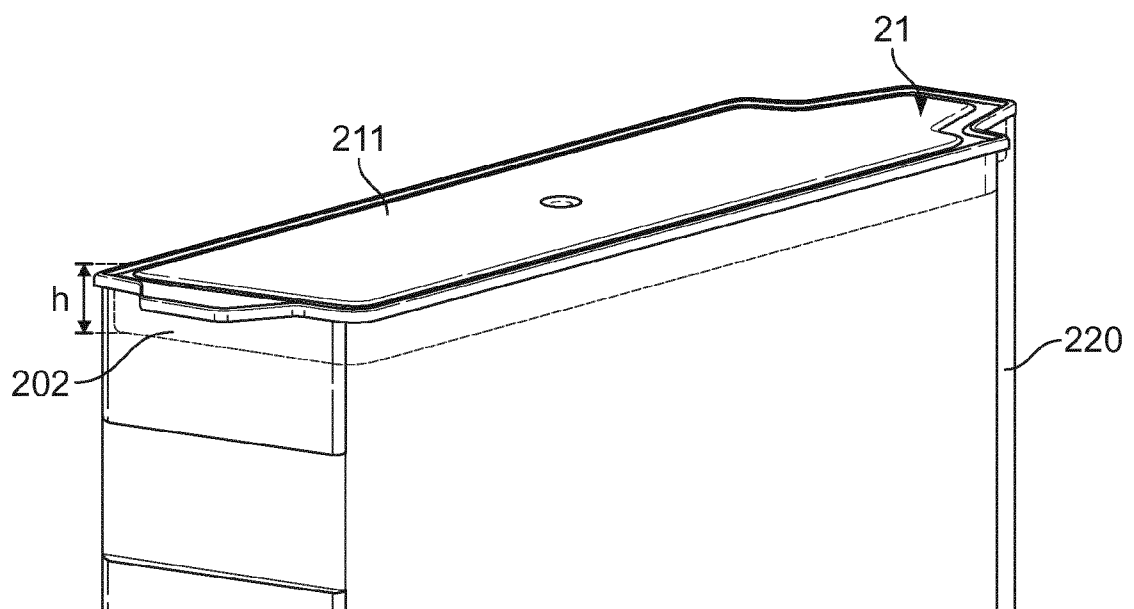


FIG. 18

11 / 11

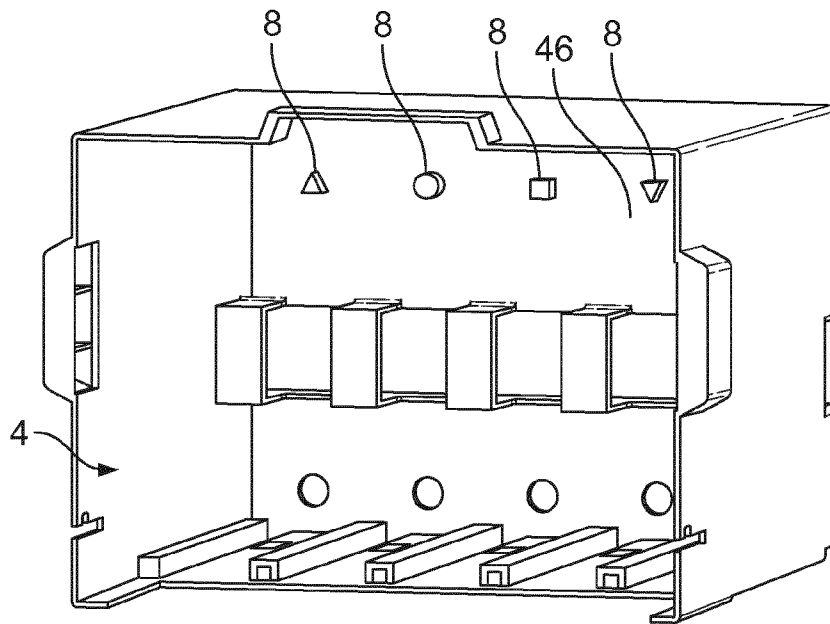


FIG. 19

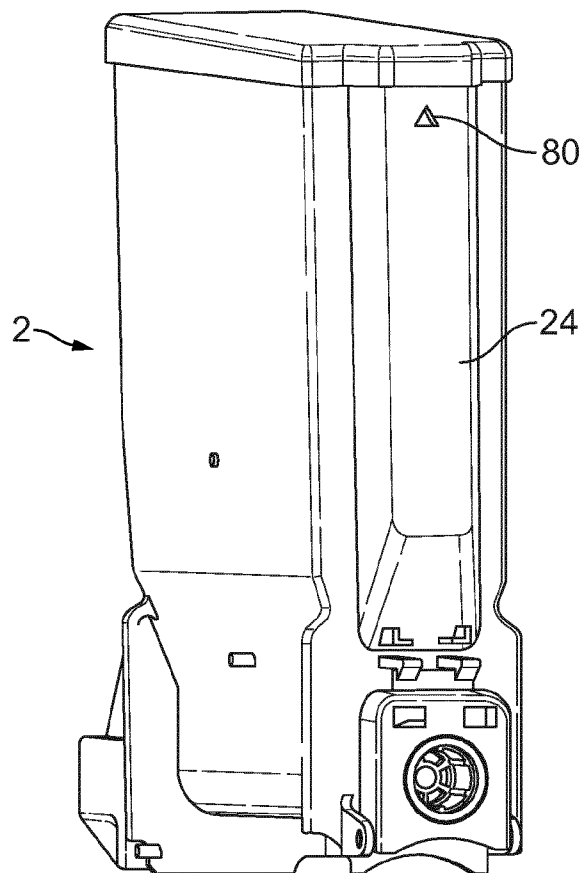


FIG. 20

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/064465

A. CLASSIFICATION OF SUBJECT MATTER

INV. A47J31/40 A47J31/44
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G07F A47J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 176 172 B1 (STETTES GREGORY GLEN) 23 January 2001 (2001-01-23) abstract; figures 1-5 column 1, lines 18-26 column 4, lines 12-22 -----	1
A	WO 02/30240 A1 (DAL TIO FRANCO) 18 April 2002 (2002-04-18) abstract; figures 1-2 -----	1
A	WO 2009/033087 A1 (DEKA PRODUCTS LP) 12 March 2009 (2009-03-12) abstract; figures 7,8 page 14, paragraph 51 - page 15, paragraph 52 page 17, paragraph 58 page 23, paragraph 82 - page 24, paragraph 87 -----	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 August 2012

Date of mailing of the international search report

17/08/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Tempels, Marco

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/064465

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6176172	B1	23-01-2001	CA 2308344 A1 14-03-2001
			EP 1086788 A2 28-03-2001
			JP 2001087137 A 03-04-2001
			US 6176172 B1 23-01-2001
			US 6298769 B1 09-10-2001
			US 6391360 B1 21-05-2002

WO 0230240	A1	18-04-2002	AU 9590701 A 22-04-2002
			IT RM20000547 A1 15-04-2002
			WO 0230240 A1 18-04-2002

WO 2009033087	A1	12-03-2009	AU 2008296060 A1 12-03-2009
			CN 101849320 A 29-09-2010
			EP 2188869 A1 26-05-2010
			JP 2010538402 A 09-12-2010
			US 2009069925 A1 12-03-2009
			WO 2009033087 A1 12-03-2009
