

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 August 2004 (12.08.2004)


PCT

(10) International Publication Number
WO 2004/067444 A1

- (51) International Patent Classification⁷: **B81B 1/00**
- (21) International Application Number: PCT/SE2004/000109
- (22) International Filing Date: 28 January 2004 (28.01.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0300225-0 30 January 2003 (30.01.2003) SE
60/444,212 30 January 2003 (30.01.2003) US
- (71) Applicant (for all designated States except US): **GYROS AB** [SE/SE]; Uppsala Science Park, S-751 83 Uppsala (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HELLERMARK, Cecilia** [SE/SE]; Norrstigen 1B, S-181 31 Lidingö (SE). **ENGSTRÖM, Johan** [SE/SE]; Artillerigatan 12B, S-752 37 Uppsala (SE).
- (74) Agent: **BERGANDER, Håkan**; Uppsala Science Park, S-751 83 Uppsala (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: INNER WALLS OF MICROFLUIDIC DEVICES

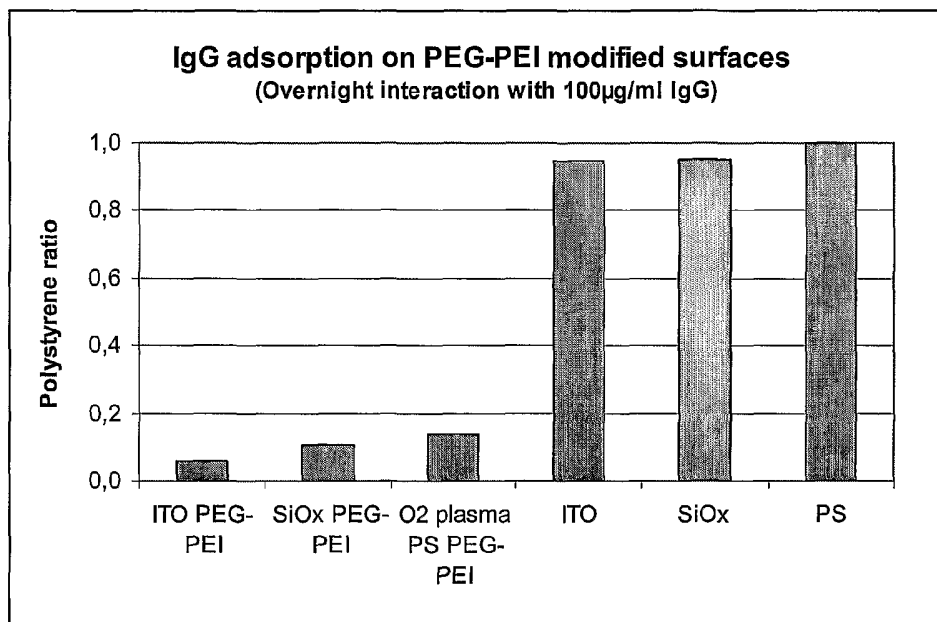

(57) Abstract: A microfluidic device comprising one, two, three or more enclosed microchannel structures, each of which comprises a) an inlet arrangement with an inlet opening for liquid, b) a reaction microcavity (RM₁) downstream to the inlet opening, and c) an upstream section that is located between the inlet opening and the reaction microcavity (RM₁) and is defined between two planar substrates made of plastic material which substrates are common for said microchannel structures. The characteristic feature is that the inner wall in said upstream section exposes a hydrophilic surface area with an underlying base layer comprising base comprising metal oxide. In one aspect the microfluidic device as such is covered.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INNER WALLS OF MICROFLUIDIC DEVICES.

TECHNICAL FIELD

The present invention relates to microfluidic devices that have novel designs of
5 coatings on inner walls, and methods for introducing these coatings.

A microfluidic device comprises one, two, three or more enclosed microchannel
structures. Each microchannel structure typically comprises a) an inlet arrangement
with an inlet opening to ambient atmosphere, b) a reaction microchamber downstream
10 to the inlet opening, and c) an outlet opening. In a typical variant the microchannel
structures are defined between the surfaces of two or more planar substrates that are
pair wise apposed and parallel. If different sections of a microchannel structure are
defined between different pairs of planar substrates, there typically are holes in the
substrates so that these sections are in communication with each other.

15

The term "microfluidic" means that reactants, analytes, washing agents (including
liquids as such), reaction products etc are transported between functional units of a
microchannel structure in microvolumes of liquid. Reactants may be linked to
particles.

20

The inlet opening is primarily for liquids and the outlet opening for excess of air and
possibly also for liquid.

A microfluidic device is typically used for performing a number of experiments in
25 parallel within biological and/or chemical sciences such as medicine, diagnostics,
biochemistry, drug development etc. Typically, each experiment comprises one or
more dispensation steps for introducing the reagents, samples and other liquids needed,
one or more reaction steps, and one or more detection steps. A reagent may be
predispensed. In principle each experiment requires one microchannel structure. The
30 experiments are performed for analytical and/or preparative purposes and may include
separation of particulates from a liquid or separation of various dissolved or suspended
entities from each other. Synthetic protocols may also be included.

Patent publications that are cited in this specification are incorporated by reference in their entirety. For WO publications this in particular means their US designation or corresponding US patent and corresponding US patent application.

5

BACKGROUND PROBLEMS

The invention concerns problems that are associated with

- a) obtaining proper transport of reagents, analytes, washing liquid, buffers etc from an inlet opening to a reaction microcavity in parallel in a plurality of microchannel
- 10 structures of a microfluidic device,
- b) obtaining good stability with respect to wettability of plastic material that are to be in contact with a liquid within the microfluidic format (storage stability and stability towards rewetting once, twice etc,
- c) obtaining reduced fouling of reagents, e.g. reagents exhibiting peptide structure,
- 15 carbohydrate structure, lipid structure, nucleotide structure, nucleic acid structure, hormone structure, steroid structure etc,
- d) release of residual monomers, initiators, softeners etc from plastic material,
- e) changes of chemical surface characteristics caused by molecular movements and conformational changes in plastics during storage,
- 20 f) providing cost effective surface treatment methods that can be used in the large scale manufacturing of microfluidic devices, and
- g) provide surfaces that are to be included as inner surfaces in microfluidic devices and which are good substrates for further patterning, attachment of reagents and other functionalisations such hydrophobization, introduction of ionic groups etc.

25

The miniaturization of the protocols that nowadays are performed in microfluidic systems started during the late eighties. The substrate material of choice was silicon or glass, which inherently have a good wettability (hydrophilicity) for aqueous liquids. In most cases there was no imperative need to separately make the surfaces wettable

30 (hydrophilic).

Later, plastic materials and replication techniques were exploited (e.g. WO 9116966 Amersham Pharmacia Biotech AB; WO 0114116 Åmic AB; WO 0119586 Åmic AB;

WO 0021728 Åmic AB). However, plastics inherently have poor wettability and are often hydrophobic. Proper hydrophilization protocols became important.

Downscaling as such will decrease the volume-to-surface ratio, which means a
5 significantly increased risk for undesired consumption/inactivation of reactants, for instance by fouling (non-specific adsorption and/or denaturation).

Fouling and storage stability with respect to hydrophilic/hydrophobic balance were truly overlooked in the initial work when miniturizing. However, these issues are
10 extremely important for the large scale commercialization of microfluidic concepts that utilize devices made in plastic material.

Most likely, the optimal coating of inner surfaces of microfluidic devices will depend on the protocol as such, reagents/reactants and/or liquids to be used, analyte to be
15 assayed, substrate material etc.

For the reasons given above, there is a need for a range of proper treatment protocols for surfaces to be used as inner surfaces in contact with aqueous liquids in microfluidic devices made of plastic material.

20

BACKGROUND PUBLICATIONS

Many recent publications in microfluidics present surface treatments in general terms without recognizing the actual problems. See for instance WO 9721090 (Gamera Biosciences) and WO 9958245 (Amersham Pharmacia Biotech AB) where both gas
25 plasma treatment and coating with hydrophilic compounds are mentioned in general terms.

Other recent publications suggest solutions to one or more of the problems discussed above:

30

WO 0056808 (Amersham Pharmacia Biotech AB) describes gas plasma treatment of plastic surfaces in order to achieve hydrophilic surfaces which have improved storage stability and which are able to withstand repeated contact with aqueous liquid media.

WO 0147637 (Gyros AB) describes coatings for plastic substrates. The coatings expose a non-ionic hydrophilic polymer to a liquid flow and are introduced in order to balance hydrophilicity versus non-specific adsorption. The hydrophilic polymer is typically covalently attached to a base skeleton that in turn binds to a plastic surface. In the case of charged base skeletons, it is suggested to pre-introduce the opposite charges on the naked plastic surface by e.g. gas plasma hydrophilization. Pre-coating of the plastics with a metal layer is also suggested.

US 6236083 (Caliper) describe coatings that are resistant towards non-specific adsorption of proteins. The coatings are used for facilitating controlled electro-osmotic flow in the microchannels. Certain variants are similar to those of WO 0147637 (Gyros AB). The supporting substrate is made of an organic polymer, glass or a silica-based polymer.

WO 02075775 (Gyros AB) and WO 0275776 (Gyros AB) describe among others a conductive layer of indium tin oxide in an outlet port for energy desorption ionization mass spectrometry.

WO 0004390 (Zyomyx) presents microfluidic sensor surfaces that have a layered structure comprising an upper organic thin layer resting on a supporting layer. A number of alternative support layers are given, for instance various metal and metal oxide layers including among others indium tin oxide.

The capacity of metal oxide surfaces, such as surfaces of titanium oxide, indium oxide, tin oxide and various mixtures thereof, for forming bonds with functional groups of organic compounds has been utilized for preparing monolayers exposing surfaces of predetermined chemical surface characteristics. The bonds concerned include covalent bonds and non-covalent bonds such as electrostatic interaction. Since metal oxide surfaces often are charged at moderate pH, they often have a pronounced tendency to nonspecifically adsorb compounds that exhibit groups of the opposite charge, such as proteins. The capacity of binding various compounds to this kind of surfaces has been utilized by:

- Cohen et al., "Surface modification of inorganic oxide surfaces by graft polymerization" in "Oxide Surfaces", ed. Wingrave, Marcel Dekker Inc, New York (2001) p. 321-343
- Doron et al., "Organization of Au colloids as monolayers films onto ITO glass
5 surfaces: Application of the metal gold colloid films as base interfaces to construct redox-active monolayers", *Langmuir* 11 (1995) 1313-1317
- Fang et al., "Soft-lithography-mediated submicrometer patterning of self-assembled monolayer of hemoglobin on ITO surfaces", *Langmuir* 16 (2000) 5221-5226
- Fang et al., "Anchoring of self-assembled hemoglobin molecules on bare indium-tin
10 oxide surfaces", *Langmuir* 17 (2001) 4360-4366,
- Hofer et al., "Alkyl phosphate monolayers. Self-assembled from aqueous solution into metal oxide surfaces", *Langmuir* 17 (2001) 4014-4020
- Mandler, "Preparation and characterization of octadecylsilane monolayers on indium-tin oxide (ITO) surfaces", *J. Electroanal. Chem.* 500 (2001) 453-460
- 15 • Oh et al., "Formation of a self-assembled monolayer of diaminododecane and a heteropolyacid monolayer on the ITO-surface", *Langmuir* 15 (1999) 4690-4692
- Oh et al., "Ionic charge-selective electron transfer at fullerene-multilayered architecture on an indium-tin oxide surface", *Langmuir* 16 (2000) 6777-6779
- Schwendel et al., "Temperature dependence of the protein resistance of poly- and
20 oligo(ethylene glycol) terminated alkanethiolate monolayers", *Langmuir* 17 (2001) 5717-5720
- Textor et al., "Structural chemistry of self-assembled monolayers of octadecylphosphoric acid on tantalum oxide surfaces", *Langmuir*
- Yan et al., "Preparation and characterization of self-assembled monolayers on indium
25 tin oxide", *Langmuir* 16 (2000) 6208-6215
- Zotti et al., "Self-assembly of pyrrolyl- and cyclopentadiyldithiophene-4-yl-n-hexyl-ferrocene on ITO electrodes and their anodic coupling to polyconjugated polymer layers", *Langmuir* 13 (1997) 2694-2698
- 30 Huang et al., *Langmuir* 17 (2001) 489-498, Huang et al., *Langmuir* 18 (2001) 220-230, and Kenausis et al., *J. Phys. Chem B* 104 (2000) 3298-3309 have described sensor surfaces based on a supporting layer of metal oxide coated with polycationic polylysine grafted with poly (ethylene oxide) possibly functionalized with a

biologically active molecule. This concept has been suggested for use in sensors of a particular kind of microfluidic apparatus. See poster by Vörös et al., "Controlled biosensor surfaces". The coating used significantly reduces the nonspecific adsorption of proteins.

5

Fang et al., *supra*, have generally suggested that the non-specific adsorption to indium tin oxide surfaces could be used for setting up sensor surfaces, for instance for assays in the biological field.

- 10 Yamamoto et al., "Cell-Free Protein Synthesis in PDMS-Glass Hybrid Microreactor in Microfluidic Devices and Systems III, Eds. Mastrangelo et al., Proceedings of SPIE, Vol 4177 (2000) 72-79) have suggested indium tin oxide as heating layer on a glass substrate of a microcavity intended for cell-free protein synthesis.
- 15 A capillary device made from plastic material with the inner wall of the capillary channel coated with aluminum oxide is described in AU 21583/99 (Boehringer Mannheim GmbH).

THE OBJECTS OF THE INVENTION

- 20 A first object of the invention is to provide an alternative method for the manufacture of a microfluidic device in which the microchannel structures are defined between planar plastic substrates as discussed above and which has hydrophilic inner surfaces that may or may not be permeable for liquid soluble components that may be present in the plastic substrates. This object primarily concerns at least an upstream section of a
- 25 microchannel structure, i.e. a section that is upstream a reaction microcavity, e.g. in microconduits that are involved in the transportation of liquid and reagents to the reaction microcavity. Subobjects are to provide new microfluidic devices with wettable inner surfaces that are capable of withstanding repeated contact with aqueous liquids and/or long-term storage, and that can be produced by cost effective methods.
- 30 The surfaces should in most variants have a pronounced reduction in fouling of biomolecules compared to the bare plastic surfaces. Long-term storage means storage for more than 2 weeks such as more than 1, 2, 3 or four months. For certain variants the goal is storage for ten months, twelve months or more.

A second object is to provide a microfluidic device in which the inner walls are transparent and comprise a metal oxide layer in an inlet arrangement, a transport microconduit or any other microconduit in an upstream section.

- 5 A third object is to provide alternative microfluidic devices as defined herein in which voltage can be locally applied for heating, conductivity measurement, driving liquid flow electrokinetically, electrophoresis etc in the liquid transport system of a microfluidic device while simultaneously observing the liquid through the plastic substrate at the location of heating, conductivity measurement etc.

10

A fourth object is to provide local microfluidic surface breaks and microfluidic boundaries between a hydrophilic surface area and a hydrophobic surface area that have an increased resistance for repeated passage of liquid.

- 15 These objects primarily aim at improvements of microfluidic devices intended for the transport of discrete aqueous liquid aliquots in the nl-range as defined elsewhere in this text, e.g. volumes ≤ 1000 nl.

DRAWINGS

- 20 The drawings illustrate results obtained in the experimental part.

Figure 1: Light transmission spectra for ITO films. The partial pressure of oxygen and number of scans have been varied during sputtering.

Figure 2: IgG adsorption on surfaces of inner walls comprising a metal oxide layer (indium tin oxide) compared to a nude polystyrene surface.

25

THE INVENTION

- The present inventors have recognized that the above-mentioned objects can be achieved by introducing a layer comprising a metal oxide that can be obtained in transparent form. The layer is present in the inner wall between the plastic material of a substrate and the inner surface of the wall. The inner surface is exposed for liquid
- 30 passing through the device.

METHOD OF MANUFACTURING A MICROFLUIDIC DEVICE (FIRST ASPECT)

The first aspect of the invention is a method for the manufacture of a microfluidic device in which there are one, two, three or more enclosed microchannel structures defined between two or more planar substrates as discussed above. Each of these microchannel structures comprises:

- 5 a) an inlet arrangement with an inlet opening to ambient atmosphere,
 b) a reaction microchamber downstream to the inlet opening, and
 c) an outlet opening to ambient atmosphere.

The method is based on earlier techniques in which two or more essentially planar substrates made of plastic material are apposed and joined to each other such that the
10 corresponding part in each of said enclosed microchannel structures of the device is defined between the same pair of substrates. See for instance WO 9721090 (Gamera Biosciences), WO 9958245 (Amersham Pharmacia Biotech AB), WO 0056808 (Amersham Pharmacia Biotech AB), and WO 0147637 (Gyros AB).

15 Parts of a microchannel structures that are not defined between pairs of substrates are present as holes or depressions in the substrates. These holes may provide communication to ambient atmosphere (inlet and/or outlet openings) or between sections of a microchannel structure that are defined by different pairs of substrates.

20 The innovative method is characterized in comprising the steps of:

- i) providing two essentially planar substrates I and II made of plastic material, each of which comprises on one of its sides (side a_I and side a_{II} , respectively) surface areas (inner surface areas) that will define at least an upstream section of each of the microchannel structures when side a_I and side a_{II} are apposed and properly
25 matched to each other;
 ii) introducing a layer (base layer) that is hydrophilic and comprises metal oxide on said surface areas of either one or both of side a_I and side a_{II} ; and
 iii) apposing and adhering side a_I to side a_{II} such that said upstream section of each of said enclosed microchannel structures is formed.

30

The metal oxide layer is preferably introduced on a part of side a_I and/or side a_{II} that is to become a part of the inner surface of an upstream section (= upstream part).

The metal oxide layer comprises a metal oxide that is capable of forming a transparent layer that possibly also may be electrically conductive when properly manufactured. The term “properly manufactured” in this definition includes, for instance, that the layer has the appropriate thickness and/or is doped with and/or contains the appropriate metal atom/metal ions/metal oxide to provide a desired transparency and/or electrical conductivity.

An upstream section is a part of a microchannel structure that is upstream a reaction microcavity (RM), for instance upstream the most downstream reaction microcavity if there are two or more reaction microcavities in a microchannel structure. Thus, the term “an upstream section” contemplates either the part located between an inlet opening and a reaction microcavity (RM) or any subpart of such a part.

The terms “inner surface” or “inner surface area” will mean all or a part of the inner surface of a microfluidic device/microchannel structure. Depending on the context, the terms will also refer to a surface part in side a_I and/or a_{II} that is to become an inner surface when the sides are joined together (apposed) to define a section of a microchannel structure.

The method also comprises the step of apposing and adhering one or more additional essentially planar substrates for defining the remaining sections, if any, of the enclosed microchannel structures. In this case one or more metal oxide layers of the type discussed above and one or more additional layers (see below) may or may not be introduced into the sections of the microchannel structures that may be created in this way.

The variant described in the previous paragraph contemplates the manufacture of a microfluidic device in which different sections of a microchannel structure is defined between different pair of substrates. For instance, the side opposite (= side a_{Iopp}) to side a_I in substrate I may be joined to side a_{III} of a third substrate (III) to define another section of the microchannel structure than the section defined between substrates I and II. In this variant, substrate I typically has one or more microconduits (holes) passing through the substrate for providing communication between surface parts in side a_I and a_{Iopp} that are to become inner surfaces in the final device, i.e. these microconduits

stretch between side a_I and a_{Iopp} (through substrate I). This variant includes that side a_{Iopp} of substrate I has been modified by being covered by an intermediary planar substrate before being joined to side a_{III} of substrate III, i.e. one of the sides of the intermediary planar substrate will in reality function as side a_{Iopp} in step (iii). This kind
5 of intermediary substrate thus may have through-passing holes/conduits in the same general manner as suggested for substrate I when there are sections of the microchannel structures that are defined between substrate I and a third substrate III.

10 STEP (i). SUBSTRATES

The substrates are made of plastic materials selected among polymers that can be obtained by condensation polymerisation, polymerisation of unsaturated organic compounds or other polymerisation reactions, and include also elastomers, such as silicone rubber polymers (for instance poly dimethyl siloxane) etc.

15

At the priority date of this invention the preferred plastics were polycarbonates and polyolefins that are based on polymerisable monomeric olefins that comprise straight, branched and/or cyclic non-aromatic structures. Typical examples are ZeonexTM and ZeonorTM from Nippon Zeon, Japan. This does not outrule the use of other plastics, for
20 instance based on styrenes, methacrylates and/or the like. The term polymer includes also copolymer.

When a pair of planar substrates are apposed to define a microchannel structure or a section of thereof, one side in one or both of the substrates has/have been pre-
25 fabricated to exhibit microstructures that will form at least a section of an enclosed microchannel structure when the two sides are apposed and properly matched. The microstructures may be created by various techniques such as etching, laser ablation, lithography, replication by embossing, moulding, casting etc, etc.

30 Each of substrate I and substrate II may be composed of two or more essentially planar substrates between which other sections of the microchannel structures than those defined between substrate I and II may or may not be defined. The manufacture of layered substrates that are to be used as starting substrates in the innovative method may or may not have involved introduction of a metal oxide layer as suggested by the

present innovative concept, i.e. the metal oxide layer is on the inner surfaces of such layered starting substrates.

The material of a substrate to be used in the innovative method may or may not be transparent. In some variants the material/substrate is transparent at least below or above the base layer comprising a metal oxide.

STEP (ii). INTRODUCING A LAYER COMPRISING METAL OXIDE.

As discussed above, one or more metal oxide components of the metal oxide layer (base layer) are selected amongst those metal oxides that can be manufactured to a transparent metal oxide layer (at least for visible light), with preference for those metal oxides that also can be manufactured to an electrically conductive layer. The exact choice of components in the layer depends on what it is to be used for. For instance if the layer should only provide a surface with sufficient hydrophilicity as discussed below or as a support for a top layer providing a sufficient hydrophilicity and reduced fouling, one does not need to optimize the components in relation to each other with respect to sufficiently high conductivity and/or transparency of the base layer. It then suffices to select a metal oxide component amongst those that are able to give a transparent and/or electrically conducting metal oxide layer. The opposite is true if the transparency and/or the electrical conductivity as such of the base layer is to be utilized, for instance as a detection window, an electrical connection, for heating etc.

In preferred variants of the invention the base layer is transparent for visible light and/or is electrically conducting within the limits discussed below.

In preferred variants the base layer/metal oxide layer consists essentially of metal oxide, for instance selected as outlined herein.

Metal oxide layers that may be transparent and/or electrically conductive are well-known in the field. Typically they contain indium and/or tin oxide, titanium oxide, zinc oxide etc. In the case the optical and/or electrical properties of a given oxide are not sufficient for a desired use it may be doped or consist of a mixture of different oxides. Typical examples of metal oxides that may be both transparent and electrically conductive are indium tin oxide and zinc oxide doped with aluminum. The metal

oxide, for instance titanium oxide, is typically in nano crystalline form, in particular if used alone. New alternatives for transparent and electrically conducting forms of metal oxides are under development. See for instance Cui et al., "Indium tin oxide alternatives – high work function transparent conducting oxides as anodes for organic light-emitting diodes", Adv. Mater. 13(19) (2001) 1476-1480.

The introduction of a metal oxide layer is done according to techniques well known in the field.

10 One main route is by depositing the appropriate metal layer or possibly the appropriate metal salt layer on the surface of the appropriate plastic substrate, and subsequently transforming the layer to the corresponding metal oxide layer. In the case of a metal layer, the transformation may be by treatment under oxidative conditions, for instance in an atmosphere containing oxygen or by wet chemical oxidation. The metal may be
15 in the form of a suitable alloy.

Another main route is by depositing directly the appropriate metal oxide layer on the surface of the appropriate plastic substrate.

20 In both routes the metal layer and the metal oxide layer, respectively, can be introduced by sputtering, ball milling, evaporation, spin-coating a dispersion containing nanoparticles etc of the metal/metal oxide onto the surface. This in particular applies in the case the goal is to obtain a metal oxide layer that is transparent and/or is electrically conducting. A review on tin doped indium oxide films including
25 electrical and optical properties as well as on their manufacture has been given by Ederth, Jesper "Electrical Transport in Nanoparticle Thin Films of Gold and Indium Tin Oxide". - Uppsala, 2003. - 86p. (p 1-35)- (Comprehensive Summaries of Uppsala Dissertations from the Faculty of Science and Technology, ISSN 1104-232X ; 790) ISBN 91-554-5499-2). An aerosol plasma fabrication method for the introduction of
30 indium tin oxide and tin oxide thin films has been presented by Lee et al. (J. Mater. Res. 11(4) 895-)

Dispersions of metal oxide nanoparticles, e.g. containing indium tin oxide can be produced by a sol-gel method and used in spin-coating methods (see above).

It is important to select the proper method and/or conditions for the introduction of the base layer for avoiding negative effects on the surface of the plastic substrates. Thus methods and/or conditions that require high-energy input, for instance leading to a
5 temperature increase of the plastic substrate close to or above its softening temperature should be avoided, in particular if the surface of the substrate has microstructures defining a microconduit. This applies to sputtering among others.

The metal oxide layer introduced may be post-treated to accomplish its final finish, for
10 instance in a desired gas plasma such as an oxygen plasma.

The metal oxide layer (base layer) may be introduced stepwise. This includes that the base layer is introduced as sub layers where the upper sub layer is different from the sub layer on which it rests. This also includes that the metal oxide layer is introduced
15 as a metal layer that subsequently is converted to the appropriate metal oxide layer.

In preferred variants so called sputtering is employed for the deposition by which is meant that a vapour of the appropriate oxide(s) is deposited on the intended part are of side a_I and/or side a_{II} of substrate I and II, respectively. The exact chemical
20 characteristics of the surface after deposition will depend on the technique used, source of metal ions, atmosphere (e.g. oxygen content).

Sputtering conditions typically include a sputtering atmosphere containing oxygen in the range $\geq 1\%$, such as $\geq 5\%$ or $\geq 10\%$ or $\geq 20\%$ and $< 100\%$, such as $\leq 70\%$, or \leq
25 50% or $\leq 40\%$.

The layer comprising metal oxide should exhibit characteristics within the following intervals:

a) Conductivity measured as surface resistivity should be: 1 Ohms/square – 1000
30 kOhms/square, e.g. < 1 kOhms/square or < 20 Ohms/square. This does not exclude that even lower surface resistivities may be accomplished, for instance within the interval down to 1 mOhms/square, such as down to 0.01 or down to 0.1

Ohms/square. Electrically conducting layers are typically those that have surface resistivity ≤ 50 Ohms/square or ≤ 40 Ohms/square or ≤ 20 Ohms/square.

- b) Suitable thickness may be found within the interval of 1 nm – 10 000 nm, in particular 10 nm - 1000 nm or 1 nm - 1000 nm. The thickness is also typically ≤ 10 % of the smallest cross-sectional dimension of a microconduit at the metal oxide layer (which is also applicable to base layers that are thicker than 1000 nm and thinner than 1 nm).
- c) Transparency is selected in the interval 0 - 100 % for a wavelength in visible light, for instance at 550 nm. Depending on the particular microfluidic device in which the layer is present the transparency for visible light, for instance at 550 nm, may be in an interval selected amongst 0-90 %, such as 0-80 % or 0-70 % or simply ≤ 50 %, and 30-100 %, such as 40-90 %, or ≥ 50 %.

Step (ii) may contain a pre-step during which the substrate side comprising surface areas to be treated according to step (ii) is masked so that the base layer will only be introduced on selected parts. Thus surface areas may be masked if they a) will not define inner surfaces of microchannel structures and/or b) will define surface areas of inner surfaces of microchannel structures and for one reason or the other shall be left unaffected during step (ii).

Depending on the method used for introducing the metal oxide layer the mask may rest directly on the surface of the plastic substrate or kept at a certain distance above thus surface during the appropriate sub steps of step (ii).

If appropriate, step (ii) may also comprise one or more pre-steps in which the surface of the substrate is cleaned, a layer that assists in adhering the metal oxide to the surface of the plastic substrate is introduced etc. These kinds of treatments are generally known in field of coating plastics with layers of metals and/or metal oxides.

30 STEP (iii). ADHERING OF SUBSTRATE I TO SUBSTRATE II.

There are a number of techniques suggested in the literature for adhering the surface of two plastic substrates to each other.

One alternative is to press the surfaces together while heating selectively the surface not containing microstructures above its transition temperature while maintaining the other surface below its transition temperature. This alternative in particular applies when the surface not containing the microstructures is a nude plastics surface.

- 5 Transition temperature refers to the transition temperature of the plastic material supporting the surface concerned.

In other alternatives, various kinds of adhesives or glues may be used. See WO 9424900 (Ove Öhman), WO 9845693 (Soane et al), US 6,176,962 (Soane et al), WO
10 9956954 (Quine), and WO 0154810 (Dérاند et al).

Thermolaminating may be used. See WO 0154810 (Dérاند et al).

In order to reduce the amount of adhesive that is pressed into a microchannel during
15 step (iii), the microchannel structures may be defined by microstructures in the form of relief patterns that are present in either one or both of the substrate surfaces. See WO 03055790 (Gyros AB) and US 2003/0129360 (Gyros AB).

Adhesives may be selected as outlined in US 6,176,962 and WO 9845693 (Soane et
20 al). Thus suitable bonding materials include elastomeric adhesive materials and curable bonding materials. These kinds of adhesive materials as well as others may be in liquid form when applied to a substrate surface. Bonding materials including adhesives thus comprises liquid curable adhesive material and liquid elastomeric material. After application to a substrate surface, the adhesive material is rendered more viscous or
25 non-flowable, for instance by solvent removal or partial curing, before the other substrate is contacted with the adhesive. The term "liquid form" includes material of low viscosity and material of high viscosity.

Curable adhesives include polymerizable adhesives and activatable adhesives. Thermo-
30 curable, moisture-curable, and bi-, three- and multi-component adhesives are also examples of curable adhesives.

If a mask has been introduced in connection with step (ii), it is typically removed before step (iii).

Additional surface layers that are introduced prior to step (iii) may negatively affect the joining of substrate I and II to each other. This kind of problems can be avoided by proper masking during the introduction of the layers, i.e. masking of surface areas that
5 are used for adherening the substrates to each other.

INTRODUCTION OF ADDITIONAL LAYERS ON THE METAL OXIDE LAYER.

The metal oxide layer introduced in step (ii) may have a pronounced fouling activity in spite of its hydrophilicity. It is therefore many times advisable to introduce one or more
10 additional layers. These extra layers may be introduced either before and/or after step (iii).

An additional layer that will be exposed to a liquid passing through the microchannel structure in the final device will be called the top layer. Additional layers between the
15 top layer and a base layer (typically the metal oxide layer) will be called intermediary layers and are typically used for supporting the adherence of the top layer to the base layer. Each of the additional layers will typically cover at least a part of or the same inner surface area as the metal oxide layer and/or other inner surface areas that are not covered by the metal oxide layer. If there are no additional layer the base layer will
20 also be a top layer.

The most extensive top layer is typically hydrophilic and exposes a plurality of non-ionic hydrophilic groups to a liquid passing through the microchannel structure. The top layer should have a low fouling activity. A plurality of the hydrophilic groups may
25 be attached to a base skeleton that may be polymeric and provide for multi-site attachment to the underlying support layer, for instance the base layer. Alternatively a limited number of hydrophilic functional groups (e.g. 1, 2, 3, 5, 6 etc, such as ≤ 10) is attached to one end of a hydrocarbon chain while the other end have a functional group that attaches to the underlying layer, for instance the base layer (metal oxide layer).
30 The hydrocarbon chain may be straight (unbranched) or branched possibly comprising a cyclic structure.

The term “non-ionic hydrophilic groups” excludes groups that have a pH-dependent charge at moderate pH (e.g. amino groups, carboxy groups etc), i.e. acid groups that have pKa within the interval 0-12 and corresponding base groups.

- 5 A hydrophobic top layer typically is capable of exposing a plurality of hydrophobic groups (e.g. hydrocarbon/hydrocarbyl group) to the interior of a microchannel structure.

The top layer may be a so-called mono-layer that may or may not be self-assembled as
10 illustrated in the publications cited under the heading “Background publications”, for instance from a solution comprising bifunctional compounds/reagents in which the two functions are separated by an hydrocarbon chain.

A hydrophilic top layer may be present in the inner surfaces provided by either one or
15 both of the planar substrates defining a particular section of a microchannel structure.

A hydrophilic top layer may extend throughout a microchannel structure with exception for locations where hydrophobic structures are needed (hydrophobic valves, anti-wicking means, microconduits that are solely used as air/gas vents etc). The
20 hydrophobic surface characteristics may be introduced by the appropriate combination of masking and introduction of hydrophobic and hydrophilic top layers. One alternative comprises the steps of a) masking the locations where a hydrophobic top layer is to be introduced before introduction of the hydrophilic top layer, b) introducing the hydrophilic top layer on unmasked areas, c) demasking, c) masking the hydrophilic
25 top layer selectively, d) introducing the hydrophobic top layer on unmasked portions, and e) demasking. Another alternative is the other way round, i.e. start with masking the surfaces that are to carry the hydrophilic top layer. Still another alternative comprises the steps of a) coating all surfaces of a substrate that are to become inner surface in the final device with a hydrophilic or a hydrophobic top layer, b) masking
30 the locations at which that there shall be a top layer having a hydrophilic/hydrophobic balance that is different from the first introduced top layer, c) introducing the different top layer on unmasked portions, and d) demasking.

- Each of the non-ionic hydrophilic groups in the top layer comprises a non-chargeable functional group attached to carbon that preferably is sp^3 -hybridised. The kind of functional groups concerned typically comprise one or more heteroatom selected from oxygen and nitrogen. Examples of preferred hydrophilic functional groups are hydroxy
- 5 (HO-) where the free valence binds to carbon; $-O(CH_2CH_2O)_n-$ where n is 1 and at least one of the free valences binds to carbon and at most one valence to hydrogen; amido ($-CON<$), where at least one of the free valences binds to carbon and at most two valences bind to hydrogen; ester ($-C(=O)O-$), where each of the free valences binds to carbon; sulphone ($-S(=O)_2-$) where each free valences binds to carbon; etc.
- 10 The hydrophilic group may be polymeric, i.e. comprise repetitive units in which there are hydrophilic functional groups. Typical non-ionic polymeric hydrophilic groups are e.g. $-O(CH_2CH_2O)_n-$, $-(CH_2CH(OH))_n-$, $-(CH_2CH(O\text{-alkylene-O-X}))_n-$, etc where n is integers > 1 , typically ≥ 25 or ≥ 100 , X is hydrogen or alkyl and may differ between the repetitive units within the same group/molecule, and at least one of the free
- 15 valences binds to carbon and at most one valence to hydrogen. Alkyl and alkylene refer to groups that have unbranched or branched hydrocarbon chains in which the carbon chain may be broken or ended with an oxygen atom such that there are at most two or three carbon atoms per oxygen atom in the alkyl/alkylene group. In many cases alkyl/alkylene primarily refers to pure C_{1-4} alkyl/alkylene groups. Carbon primarily
- 20 refers to sp^3 -hybridised carbon.

- Typical non-ionic hydrophilic polymeric groups are present in polymers such as polyhydroxy alcohols, e.g. polysaccharides (dextran, xylan, starch etc), polyvinyl alcohol, poly (vinyl hydroxyalkyl ethers) etc; polyethylene oxides and various ethylene
- 25 oxide alkylene oxide copolymers; polyamides such as polyacrylamide and poly methacrylamides, polyesters such as poly hydroxy lower alkyl methacrylates and acrylates etc.

- A non-ionic hydrophilic polymeric group may be covalently or non-covalently
- 30 associated with a non-ionic hydrophilic or ionic or ionizable poly electrolytic polymer base skeleton. A polyelectrolytic base skeleton may comprise positive and/or negative charges.

The layers may be attached to each other covalently or non-covalently. Non-covalent attachment comprises Van der Waals bonding, hydrogen bonding, electrostatic attraction etc. Thus in the case a layer has positively charged groups a neighboring layer may have negative charges, in the case a layer has hydrophobic groups a neighboring layer may have hydrophobic groups etc. Covalent attachment of layers to each other and intra-layer cross-linking are typically accomplished simultaneously with and/or subsequent to the formation of a layer on an inner surface (after step (iii)), or on a substrate surface that is to become an inner surface (before step (iii)). The techniques used are well known in the field.

10

Suitable techniques for the introduction of an additional layer can be illustrated with:

- a) Deposition from a gas plasma based on organic precursor molecules as described in WO 03086960 (Gyros AB) and US 2003/0213551 Gyros AB).
- b) Coating with non-ionic polymer, possibly linked to a base skeleton that may be charged or uncharged as outlined in WO 0147637 (Gyros AB). See also US 6236083 (Caliper).
- c) Reacting the surface of the metal oxide layer or of some other pre-introduced layer with an at least bifunctional reagent in which one functional group (I) is capable of linking the reagent via a covalent bond or some other stable link to the surface leaving some of the other functional groups (II) of the reagent exposed on the new surface created. The reagent will define a layer, possibly with the functional groups (II) defining the chemical characteristics of its surface.

15

20

25

30

35

40

45

50

55

60

65

70

75

80

85

90

95

100

105

110

115

120

125

130

135

140

145

150

155

160

165

170

175

180

185

190

195

200

205

210

215

220

225

230

235

240

245

250

255

260

265

270

275

280

285

290

295

300

305

310

315

320

325

330

335

340

345

350

355

360

365

370

375

380

385

390

395

400

405

410

415

420

425

430

435

440

445

450

455

460

465

470

475

480

485

490

495

500

505

510

515

520

525

530

535

540

545

550

555

560

565

570

575

580

585

590

595

600

605

610

615

620

625

630

635

640

645

650

655

660

665

670

675

680

685

690

695

700

705

710

715

720

725

730

735

740

745

750

755

760

765

770

775

780

785

790

795

800

805

810

815

820

825

830

835

840

845

850

855

860

865

870

875

880

885

890

895

900

905

910

915

920

925

930

935

940

945

950

955

960

965

970

975

980

985

990

995

1000

1005

1010

1015

1020

1025

1030

1035

1040

1045

1050

1055

1060

1065

1070

1075

1080

1085

1090

1095

1100

1105

1110

1115

1120

1125

1130

1135

1140

1145

1150

1155

1160

1165

1170

1175

1180

1185

1190

1195

1200

1205

1210

1215

1220

1225

1230

1235

1240

1245

1250

1255

1260

1265

1270

1275

1280

1285

1290

1295

1300

1305

1310

1315

1320

1325

1330

1335

1340

1345

1350

1355

1360

1365

1370

1375

1380

1385

1390

1395

1400

1405

1410

1415

1420

1425

1430

1435

1440

1445

1450

1455

1460

1465

1470

1475

1480

1485

1490

1495

1500

1505

1510

1515

1520

1525

1530

1535

1540

1545

1550

1555

1560

1565

1570

1575

1580

1585

1590

1595

1600

1605

1610

1615

1620

1625

1630

1635

1640

1645

1650

1655

1660

1665

1670

1675

1680

1685

1690

1695

1700

1705

1710

1715

1720

1725

1730

1735

1740

1745

1750

1755

1760

1765

1770

1775

1780

1785

1790

1795

1800

1805

1810

1815

1820

group) etc, and a hydrocarbon chain separating the two end groups. A monolayer exposing hydroxy groups can be accomplished, if one functional group of the reagent is hydroxy and the other end group has a higher tendency than hydroxy to coordinate to the underlying surface. A monolayer exposing a hydrophobic surface can be
5 accomplished if one end group is a hydrocarbon group and the other end group has a higher tendency than the hydrocarbon group to attach to the surface. By using a defined mixture of reagents that provide surfaces with pronounced hydrophilic and hydrophobic groups, respectively, top surfaces with defined intermediary hydrophilic/hydrophobic surface characteristics can be envisaged. Monolayers may be
10 used as top layers.

An additional layer may be introduced prior to step (iii) according to any of steps a) to c). This includes dipping and incubating the appropriate sides of substrates with the appropriate solutions and/or the use of printing or spray techniques, such as ink jet and
15 stamping techniques. Introduction of an additional layer after step (iii) requires that the proper solutions are dispensed through an inlet opening of a microchannel structure.

The additional layers may or may not be transparent.

20 The various kinds of additional layers discussed above, in particular a top layer, may also be present on inner surfaces that lack a base layer in the form of a metal oxide layer.

The fouling activity and wettability (hydrophilicity) of the top layer should be
25 essentially within the limits given under the heading "microfluidic device".

THE MICROFLUIDIC DEVICE (SECOND ASPECT)

This aspect is a microfluidic device comprising one, two, three or more enclosed
30 microchannel structures, each of which comprises

- a) an inlet arrangement with an inlet opening to ambient atmosphere,
- b) a reaction microcavity (RM_I) downstream to the inlet opening, and

- c) an upstream section that i) is located between the inlet opening and the reaction microcavity (RM_1) and ii) is defined between two planar substrates made of plastic material.

The two substrates that define an upstream section typically also define the

- 5 corresponding upstream section in the other microchannel structures of a microfluidic device.

The characteristic feature is that the inner wall in an upstream section of each of the microchannel structures exposes a hydrophilic surface area with an underlying

- 10 transparent base layer comprising metal oxide.

A reaction microcavity (RM, such as RM_1) is a microcavity in which a reaction is to take place. The reaction may involve two or more reactants one or more of which may be immobilized to a solid phase that is present in the reaction microcavity. The

- 15 reactants utilized may comprise affinity reactants of the kind illustrated below and/or one or more reactants that are converted to a structural new entity by breaking and/or formation of one or more covalent bonds. Reactants of catalytic systems such as enzymatic systems are often included (e.g. an enzyme, a substrate, a cofactor, a coenzyme, a cosubstrate etc).

20

The terms "upstream" and "downstream" in the various aspects of the invention refer to the flow direction in a microchannel structure and means that a liquid flow passes an upstream position before a downstream position. In the case the flow is passing back and forth between an upstream position, such as the upstream section, and a

- 25 downstream position, such as reaction microcavity RM_1 , the terms refer to the first time the liquid flow passes between the positions.

The microfluidic device may also comprise additional microchannel structures that may or may not have a section defined between the same pair of substrates as the

- 30 section of the microchannel structures referred to in the preceding paragraphs. These additional microchannel structures may or may not comprise an inner wall exposing a hydrophilic surface and/or a supporting base layer (metal oxide layer) as discussed above.

In addition to the base layer there may be a separate top layer and possibly also intermediary layers between the base layer and the top layer as discussed for the first aspect.

- 5 Details of the different layers have been discussed in the context of the first aspect.

The number of microchannel structures of the innovative kind per device is typically ≥ 10 , such as ≥ 25 or ≥ 90 or ≥ 180 or ≥ 270 or ≥ 360 .

- 10 The terms “microchannel”, “microconduit”, “microvolumes” etc., contemplate that a channel structure comprises one or more cavities and/or conduits that have a cross-sectional dimension that is $\leq 10^3 \mu\text{m}$, preferably $\leq 5 \times 10^2 \mu\text{m}$, such as $\leq 10^2 \mu\text{m}$. The lower limit for cross sectional dimensions is typically significantly larger than the size of the largest constituent of a liquid that is to pass through a microconduit of the
- 15 innovative device. The volumes of microcavities and liquids to be processed are in the μl -range, i.e. $\leq 5000 \mu\text{l}$, such as $\leq 1000 \mu\text{l}$ or $\leq 100 \mu\text{l}$ or $\leq 10 \mu\text{l}$, and includes the nanolitre (nl) range and picolitre (pl) range. The nl-range has an upper end of 5000 nl and relates in most cases to volumes $\leq 1000 \text{ nl}$, such as $\leq 500 \text{ nl}$ or $\leq 100 \text{ nl}$. The pl-range has an upper end of 5000 pl and relates in most cases to volumes $\leq 1000 \text{ pl}$, such
- 20 as $\leq 500 \text{ pl}$ or $\leq 100 \text{ pl}$.

A microcavity may have the same or different cross-sectional dimensions as any of the microconduits directly attached to the microcavity.

- 25 Microcavities that are in the upper part of the μl -range ($\geq 1 \mu\text{l}$) are typically directly connected to inlet ports and intended for application of sample and/or washing liquids.

- Each microchannel structure may comprise one, two, three or more functional parts selected among: a) inlet arrangement comprising for instance an inlet port/inlet
- 30 opening, possibly together with a volume-metering unit, b) microconduits for liquid transport, c) reaction microcavity (RM); d) mixing microcavity; e) unit for separating particulate matters from liquids (may be present in the inlet arrangement), f) unit for separating dissolved or suspended components in the sample from each other, for

instance by capillary electrophoresis, chromatography and the like; g) detection microcavity; h) waste conduit/microcavity; i) valve; j) vent to ambient atmosphere; etc. Many of these parts may have one or more functionalities. A reaction microcavity and a detection microcavity may for instance coincide. Another example is a reaction
5 microcavity that contains a solid phase bound reactant to which a soluble reactant, a product from a reaction taking place in the reaction microcavity or in an upstream microcavity, etc can bind may function as a combined reaction, separation and detection microcavity. There may also be collecting microcavities in which a substance, which has been separated, formed or otherwise processed in a microchannel
10 structure are collected and transferred to some other instrument, for instance an analytical instrument such as a mass spectrometer. Various kinds of functional units in microfluidic devices have been described by Gyros AB/Amersham Pharmacia Biotech AB: WO 9955827, WO 9958245, WO 02074438, WO 0275312, WO 03018198, WO 03024598 and by Tecan/Gamera Biosciences: WO 0187487, WO 0187486, WO
15 0079285, WO 0078455, WO 0069560, WO 9807019, WO 9853311.

An inlet arrangement may be linked to one single microchannel structure or be common for a subgroup of microchannel structures, e.g. for 2, 3, 4 etc up to 10 or up to 15 or up to 20 microchannel structures, and comprises an inlet port and typically one
20 volume-defining unit per microchannel structure associated with the inlet port. At the downstream end of each volume-defining unit, there is typically a valve function that will prevent leakage of liquid from the inlet arrangement/volume-defining unit into the downstream part of the microchannel structure associated with the volume-defining unit. This valve function is typically of the non-closing type such as a passive valve for
25 instance based on a hydrophobic break or barrier. See for instance WO 02074438, WO 0275312, WO 03018198, WO 03024598, US 2003/0044322 and US 2003/0053934.

The microfluidic device may also comprise common channels connecting different microchannel structures, for instance common distribution channels for introduction of
30 liquids and common waste channels including waste reservoirs. Common channels including their various parts such as inlet ports, outlet ports, vents, *etc.*, are considered part of each of the microchannel structures they are communicating with.

The above-mentioned units, microcavities and microconduits may have a hydrophilic inner surface with an underlying base layer comprising a metal oxide layer as outlined for the first aspect of the invention. These units are present in an upstream section as defined above or downstream reaction microcavity RM_1 . This kind of inner

- 5 surface/inner wall may also be present in reaction microcavity RM_1 , e.g. on one, two, three or four sides of the inner wall.

A reaction microcavity may comprise a solid phase to which a reactant is immobilized (covalently or by adsorption). Typical solid phases are porous monolithic beds, i.e.

- 10 porous plugs in a microconduit, packed beds in the form of porous and/or non-porous particles, and the inner surface of the reaction microcavity. Potentially also fluidised beds of porous and/or non-porous particles may be of interest. The reactant is typically selected from affinity reactants, for instance bioaffinity reactants, and other reactants.

- 15 The reactant may be immobilized directly to the solid phase without any coating or via a coating exposing non-ionic hydrophilic groups that may be selected among the same kinds as described for the top layer. The wettability and/or a reduced fouling activity of the surface of the coating may be as described elsewhere in this specification.

- 20 The immobilized reactant (ligand) is typically capable of affinity binding or covalently binding to a reactant that is dissolved or suspended as particulates in a liquid that is to pass the reaction microcavity. Covalent binding, if utilized may be reversible, for instance by thiol-disulfide exchange (e.g. the ligand is immobilized via a so-called reactive disulfide or a thiol group). Affinity binding (= affinity adsorption) can be
25 illustrated with:

- (a) electrostatic interaction that typically requires that the ligand and the entity to be bound have opposite charges,
- (b) hydrophobic interaction that typically requires that the ligand and the entity to be bound comprises hydrophobic groups,
- 30 (c) electron-donor acceptor interaction that typically requires that the ligand and the entity to be bound have an electron-acceptor and electron-donor group, respectively, or vice versa, and
- (d) bioaffinity binding in which the interaction is of complex nature, typically involving a mixture of different kinds of interactions and/or groups.

Ion exchange ligands may be cationic (= anion exchange ligands) or anionic (= cation exchange ligands). Typical anion exchange ligands have positively charged nitrogen, the most common ones comprising one or more groups selected amongst primary, 5 secondary, tertiary or quaternary ammonium groups, and certain amidinium groups. Typical cation exchange ligands have negatively charged oxygen, the most common ones comprising one or more groups selected amongst carboxylate groups, phosphate groups, phosphonate groups, sulphate groups and sulphonate groups.

- 10 Bioaffinity binding includes that the reactant (ligand) on the solid phase is a member of a so-called bioaffinity pair and the reactant to be bound by affinity binding is the other member of the pair. Typical bioaffinity pairs are a) antigen/hapten and an antibody/antigen binding fragment of the antibody; b) biotin and compounds that are capable of affinity binding biotin (e.g. streptavidin, avidin, neutravidin and other 15 compounds having comparable or stronger affinity and specificity for biotin); c) complementary nucleic acids; d) immunoglobulin-binding protein and immunoglobulin (for instance IgG or an Fc-part thereof and protein A or G), e) lectin and the corresponding carbohydrate, etc. The term "bioaffinity pair" includes affinity pairs in which one or both of the members are synthetic, for instance mimicking a native 20 member of a bioaffinity pair, being a metal ion chelate (IMAC) etc. The term antibody includes also other binding members that have comparative binding abilities for antigens/haptens, such as affibodies, single chain antibodies, chimeric antibodies etc.

Different principles may be utilized for transporting the liquid within the microfluidic 25 device/microchannel structures between two or more of the functional parts described above. Inertia force may be used, for instance by spinning the disc as discussed in the subsequent paragraph. Other forces are capillary forces, electrokinetic forces, non-electrokinetic forces such as capillary forces, hydrostatic pressure *etc.*

- 30 The microfluidic device typically is in the form of a disc. The preferred formats have an axis of symmetry (C_n) that for disc shaped variants is perpendicular to or completely within the disc plane. n is an integer ≥ 2 , 3, 4 or 5, preferably ∞ (C_∞). In other words the disc may be rectangular, such as square shaped, and other polygonal forms but may

also be circular. Once the proper disc format has been selected centrifugal force may be used for driving liquid flow. Spinning the device around a spin axis that typically is perpendicular or parallel to the disc plane creates the necessary centrifugal force. The spin axis does not necessarily intersect the disc. In the most obvious disc-shaped
5 variants at the priority date, the spin axis coincides with the above-mentioned axis of symmetry and or is parallel with the disc plane without being common with the plane of the disc. See for instance PCT/SE03/01850 (Gyros AB).

The inner surfaces should have a low fouling activity (= essentially devoid of fouling
10 activity), in particular the top surface introduced according to the first aspect of the invention (except for the case when the metal oxide layer as such is exposed in the surface of the top layer). The effect of a coating (primarily the top layer) on the fouling activity can be measured as the ratio between adsorption of a model protein to the top surface and to the naked plastic surface. This ratio should typically be ≤ 0.75 , such as \leq
15 0.50 or ≤ 0.25 and is called decrease ratio in the major part of the inner surfaces upstream a reaction microcavity in a microchannel structure for at least one selected model protein. Decrease ratio ≤ 0.75 for an inner surface means that the surface is essentially devoid of non-specific adsorption. A high ratio in a certain part of these inner surfaces may be compensated with a lowered value in one or more of the other
20 parts. The ratio can be even lower, for instance ≤ 0.10 . The measurement of decrease ratio can be performed as presented in WO 03086960 (Gyros AB) and US 2003/002134551 (Gyros AB). Typical model proteins may be selected amongst serum albumin from various species, such as bovine or human serum albumin, or immunoglobulin (Ig) of various types (IgG, IgA etc) and from various species (human,
25 bovine, rabbit etc).

In the context of the invention the term "wettable" (hydrophilic) with respect to a surface means that a surface has a water contact angle $\leq 90^\circ$. The term "non-wettable" (hydrophobic) refers to surfaces that have contact angles $\geq 90^\circ$. In order to facilitate
30 good transport of a liquid between different functional parts of the inventive microfluidic devices, the water contact angle in the individual parts should primarily be wettable, preferably with a contact angle $\leq 50^\circ$ such as $\leq 40^\circ$ or $\leq 30^\circ$ or $\leq 20^\circ$. In particular the wettability should be adapted such that an aqueous liquid will be able to

- fill up an intended microcavity by capillarity (self suction) once the liquid has started to enter the cavity (= hydrophilic microconduit/microcavity). A hydrophilic inner surface in a microchannel structure may comprise one or more local hydrophobic surface breaks in the hydrophilicity, for instance for introducing a passive valve, an anti-wicking means, a vent solely function as a vent to ambient atmosphere etc. The surface break thus comprises a boundary between a hydrophilic surface and a hydrophobic surface. The hydrophobic surface at the break typically is non-wettable with a water contact angle $\geq 90^\circ$, such as $\geq 100^\circ$ or $\geq 110^\circ$ or $\geq 120^\circ$. The difference in wettability across the boundary typically is $\geq 50^\circ$, such as $\geq 60^\circ$ or $\geq 70^\circ$. The boundary may stretch across the top surface between two length-going edges that delineate one side of an inner wall in a microconduit if it is used for valving, anti-wicking means, venting purposes etc. The boundary may similarly also be present at about the same position in one, two or other inner sides.
- All contact angles refer to values at the temperature of use, typically 25°C , are static and can be measured by the method illustrated in WO 0056808 (Gyros AB) and WO 0147637 (Gyros AB).

THE THIRD ASPECT OF THE INVENTION

- A separate aspect of the invention is a microfluidic device comprising one, two or more microchannel structures which each has a reaction microcavity (RM) comprising a solid phase with a solid phase bound reactant. The characteristic feature is that the solid phase and/or the inner wall of the reaction microcavity (RM) has/have a coating comprising a metal oxide layer (base layer) as discussed above. The coating may comprise a top layer and one or more intermediary layer as discussed for the other aspects of the invention. The top surface is defined by the metal oxide layer or as a separate top layer exposing non-ionic hydrophilic groups on its surface as discussed for the other aspects of the invention. The top surface has a wettability, and possibly also a reduced fouling activity, as discussed for the top surface of the coating according to the first and second aspect of the invention. The innovative coating may be present in one, two, three, or four of the inner sides of the inner walls of the reaction microcavity.

The device of the third aspect may or may not have the inventive coat in other parts of the microchannel structures. The reaction microcavity concerned in this aspect is typically the most downstream reaction microcavity.

- 5 Specific other features of this aspect are apparent under the heading "Microfluidic Device" and "Method of manufacturing a microfluidic device".

THE FOURTH ASPECT OF THE INVENTION (HYDROPHOBIC SURFACE AREAS DEFINING LOCAL SURFACE BREAKS).

- 10 Local hydrophobic surface breaks in hydrophilic inner walls of microfluidic devices for use as passive valves, vents, anti-wicking means etc have been introduced by spraying, printing or painting the appropriate hydrophobic pattern with a substance that poorly attach to plastic surfaces. This aspect of the invention relates to problems associated with the stability of local microfluidic hydrophobic surface breaks that are
- 15 to be passed repeatedly by liquid.

This aspect is represented by a hydrophobic surface break in a hydrophilic surface and is typically local. The break comprises a boundary between the hydrophilic surface and a hydrophobic surface. The boundary or break stretches between two length-going

20 edges delineating an inner side of an inner wall in a microconduit. For a definition of length-going edges see WO 0274438 (Gyros AB). The boundary may be present in one, two, three or more inner sides at the same essentially position in the microconduit. The innovative hydrophobic surface break is characterized in that the top layer comprising the hydrophobic surface area is covalently attached to the upper surface of

25 the layer on which the top layer is resting. The hydrophobic surface groups (primarily hydrocarbon groups) are thus part of an organic compound that bridges from the top surface to the layer beneath the top layer and typically attaches covalently to this latter layer. This underlying layer may be a) the plastic surface as such, b) the metal oxide layer (base layer) discussed above if present, c) an intermediary layer

30 located i) between the surface of the plastic substrate and the top layer, or ii) between the top layer and a metal oxide layer (base layer) if present. The intermediary layer may also be the top layer of the hydrophilic surface area on the other side of the boundary which layer then extends under the layer exposing the hydrophobic top surface.

Variants are characterized in that the water contact angles for the hydrophobic and hydrophilic surface areas defining the boundary are characterized to be within the ranges discussed above. The difference in water contact angles may be as discussed for
5 the second aspect.

The hydrophobic and hydrophilic surface areas that define the boundary of the innovative surface breaks may expose hydrophobic and hydrophilic groups, respectively, as discussed for the first aspect of the invention. The respective layer
10 may be introduced as discussed for the first aspect.

This aspect of the invention primarily concerns passive valves and/or anti-wicking means in microconduits used for liquid transport in microchannel structures of microfluidic devices.
15

EXPERIMENTAL PART

Sputtering of ITO

- 5 ITO (indium tin oxide, 90% In_2O_3 - 10% SnO_2), thin films on Zeonor (Zeon Corp, Japan) substrate have been deposited by a DC (MRC 902, ESC, Equipment Support Company Ltd, Cambridge, U.K.) magnetron sputter without heating. The optical and electronic properties of the film are highly dependent of the sputtering parameters and the physical properties of the starting material.

10

The parameters used in the experiments are according to Table 1. Gas 1 representing Argon and Gas 2 representing Oxygen. This particular case showing the sputtering conditions for 10% O partial pressure.

<u>Set Up Target 1 ITO</u>	
Pre Sput Time (secs)	20
Gas 1 Flow /sccm)	50
Gas 2 Flow /sccm)	5
Power Level (kw)	1
No. of Scans	4
Scan Speed (cm/min)	200

15

Table 1. Set up conditions for sputtering of ITO with the partial pressure of Oxygen being 10%.

20 *Optical properties of the ITO films*

High conductivity, or low resistance, in the visible region is balanced against high transmission, and are dominated by the ratio of O partial pressure and film thickness, given by number of scans and scan speed.

- 25 In Figure 1 the ratio of O partial pressure and number of scans (scan speed at 200 cm/min) were varied giving films with different thickness and optical transmission.

For the green light (550 nm) 90% transmission was achieved for O partial pressure of 40% and 20%, and 4 scans. The transmission is believed to increase if the number of scans is decreased to 2. In the figure A is untreated Zeonor[™]; B is 40 % oxygen 4 scans; C is 20 % oxygen 4 scans; D is 10 % oxygen 4 scans; E is 1 % oxygen 4 scans; 5 and F is 10 % oxygen 8 scans.

Electrical properties

The deposited layer must contain a high density of charge carriers for it to conduct electricity. These carriers are free electron and oxygen vacancies, and an excessive 10 population produces absorption. High conductivity, low resistance, is balanced against high transmission in the visible region. The ITO films with around 90% transmission have a resistance more than 100 Ohms/square. For films with transmission below 75%, resistance of 30 ohms/square was obtained.

15 *Contact angle of the ITO films*

For films sputtered according to Table 1 (partial O pressure of 10% and 4 scans) the static water contact angles direct after the deposition varied between around 20 – 30°. After storage for 4 weeks in Al-folio the static water contact angle was 21° after wash with 95% EtOH. This is a strong indication that acceptable storage stability for storage 20 at longer times such as more than one, two, three months are likely to be reached with this kind of surface modification.

Microfluidic test

A Mylar OL2 lid (Dupont) (substrate I) was laminated to the surface of a circular 25 plastic disc (substrate II) having CD-dimensions. The surface of the disc comprised open microchannel structures arranged annularly around the centre of the disc with inlet ends more close to the centre than the outlet ends. The lid had holes matching the inlet and outlet ends of the microchannel structures. Indium tin oxide was sputtered as outlined above on the substrate surface that comprised the open microchannel 30 structures. The laminated structure (= microfluidic device) thus comprised a number of enclosed microchannel structures having inner surfaces of ITO (hydrophilic).

The microfluidic test was performed by applying a drop of water at the inlet end of each microchannel structure. Each drop was momentarily sucked by capillarity into the corresponding microchannel structure. As comparison the same experiment was performed with the same kind of microfluidic device in which the inner surfaces were untreated plastics (hydrophobic). In this case the drops remained outside the microchannel structures.

Non-specific adsorption of protein to a non-ionic hydrophilic top layer with an underlying base layer of indium tin oxide

10 PEG-PEI/ITO surface

A conjugate (PEG-PEI) of polyethylene imine (PEI) and epoxy-methoxy-PEG was synthesized by reacting 0.43 g Lupasol Sk (BASF, Germany, 24 wt-% in PEI according to the manufacturer) with 5g epoxy-methoxy-PEG (Shearwater Polymers, Inc, Huntsville, AL, USA). The conjugate was then adsorbed from an aqueous solution (pH about 7.8) for 1h onto an ITO surface on polystyrene obtained as described above (partial O pressure of 10% and 4 scans). Subsequent to adsorption the surface was rinsed with water and dried under nitrogen. The adsorbed layer had a contact angle of 28°. The procedure was as outlined in WO 0147637 (Gyros AB).

20 Protein adsorption to the PEG-PEI /ITO-surface was studied by an ELISA-method. PEG-PEI/ITO surfaces were thus incubated with 100 µl rabbit immunoglobulin solution at three different concentrations (0.5; 5; 50 µg/ml) in PBS over night at room temperature. Thereafter each surface was washed three times with PBS/Tween (10mM phosphate and 0.15mM NaCl). For quantifying the amount of rabbit IgG adsorbed to the surfaces, each surface was incubated with 90 µl HRP conjugated anti-rabbit IgG antibody, concentration 1 µg/ml, during 90 min. To each mixture was then added 90 µl of TMB (tetra methyl benzidine) substrate and absorbance was followed at 640 nm. After 5 min incubation 90 µl TMB stop solution was added and absorbance at 405nm was detected.

30

PEG/PEI/SiOx surface

A glass like SiOx layer was created by hexamethyldisiloxane (HMDSO) plasma deposition on a polystyrene surface generating a hydrophilic glass like surface (SiOx)

according to a standard method recommended by the manufacturer of the instrument used (CVD Piccolo from Plasma Electornic (Neuenburg, Germany)). In a first step the polystyrene surface was treated in argon/oxygen plasma to clean the surface and to get good adhesion of a subsequently deposited layer. Subsequently SiO_x was deposited

5 from HMDSO plasma followed by an oxidizing step. The process parameters are:

	Precleaning and adhesion promoter	HMDSO Deposition	Post oxidation
Base pressure (mPa)	20	250	250
Homogen time (s)	20	90	0
Power generator (% / V)	45 / 270	40 / 240	65 / 390
Treatment time (s)	0	110	10
Flushing time (s)	0	0	3
Flow gas 1 (%)	32 % -O ₂	50 %-O ₂	50% -O ₂
Flow gas 2 (%)	18 % -Ar	0	0
Flow of HMDSO (%)	0	5 %	0

PEG-PEI obtained as described above was then adsorbed to the SiO_x surface. Protein

10 adsorption was studied in the same manner as for the PEG-PEI/ITO surface.

PEG-PEI surface

A polystyrene surface (PS) was hydrophilized in oxygen plasma and adsorbed with PEG-PEI as outlined in WO 0056808 (Gyros AB) and WO 0147637 (Gyros AB).

15 Protein adsorption was studied in the same manner as for the PEG-PEI/ITO surface.

Nude polystyrene surfaces

Protein adsorption directly to a polystyrene surface was studied in the same manner as for the PEG-PEI/ITO surface.

The result for the highest protein concentration is given in figure 2. Polystyrene ratio refers to the ratio between the amounts of protein adsorbed for a particular surface and a standard surface (in this case the nude polystyrene surface). The ITO surfaces with adsorbed PEG-PEI had the lowest protein adsorption. See figure 2.

5

Binding of silan-acrylate monomer to the ITO surface

The ITO obtained as described above (partial O pressure of 10% and 4 scans) was spin coated with MAPTS, 3-methacryloxypropyltrimethylsilane, and cured in oven.

- 10 The contact angles of the ITO surface before application of MAPTS was 20°, and after MAPTS as expected 66°. This shows that the OH group at the ITO surface has reacted with the silan reagent successfully. The introduced methacrylate group can be used for further derivatizing the surface, for instance by introducing an additional layer by polymerisation utilizing the polymerisable unsaturated monomers.

15

- In the case the unsaturated monomers gives a hydrophobic monomer hydrophobic surfaces that among others can be used as hydrophobic surface breaks as outlined for the fourth aspect of the invention. Hydrophobic surfaces may be obtained directly by utilizing a silanating reagent in which the acrylate group is replaced with a more
- 20 hydrophobic group. Proper masking is in both variants necessary to create a well-defined boundary between the hydrophilic and hydrophobic surfaces.

- Certain innovative aspects of the invention are defined in more detail in the appending claims. Although the present invention and its advantages have been described in
- 25 detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As
- 30 one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed that perform substantially the same function or achieve substantially the same result as the corresponding embodiments

described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

C L A I M S

1. A method for the manufacture of a microfluidic device comprises one, two, three or more enclosed microchannel structures, each of which comprises:
 - a) an inlet arrangement with an inlet opening to ambient atmosphere,
 - 5 b) a reaction microchamber downstream to the inlet opening, and
 - c) an outlet opening,by joining two or more essentially planar substrates made of plastic material to each other such that the corresponding part in each microchannel structure is defined between the same pair of substrates,
10 **characterized** in comprising the steps of:
 - i) providing two essentially planar substrates I and II made of plastic material, each of which comprises on one side (side a_I and side a_{II} , respectively) surface areas that together will define an upstream section of each of the microchannel structures;
 - 15 ii) introducing a layer (base layer) that is hydrophilic and transparent and comprises metal oxide on said surface areas of at least one of side a_I and side a_{II} ;
 - iii) apposing and adhering side a_I to side a_{II} to form said upstream section of each of said microchannel structures, and
 - 20 iv) optionally joining further planar substrates to complete the microchannel structures.
2. The method of claim 1, **characterized** in that said metal oxide comprises indium tin oxide and/or titanium oxide, both of which preferably are in nano-crystalline
25 form.
3. The method according to any of claims 1-2, **characterized** in that one or more additional layers are introduced on top of said base layer before or after step (iii) .
- 30 4. A microfluidic device comprising one, two, three or more enclosed microchannel structures, each of which comprises
 - a) an inlet arrangement with an inlet opening for liquid,
 - b) a reaction microcavity (RM_1) downstream to the inlet opening, and

- c) an upstream section that is located between the inlet opening and the reaction microcavity (RM₁) and is defined between two planar substrates made of plastic material which substrates are common for said microchannel structures, **characterized** in that the inner wall in said upstream section exposes a hydrophilic surface area with an underlying base layer comprising metal oxide.
- 5
5. The device of claim 4, **characterized** in that the metal oxide is indium tin oxide or titanium oxide, both of which preferably is in nano-crystalline form.
- 10 6. The device of any of claims 4-5, **characterized** in that the hydrophilic surface area is
- a) provided by the base layer, and/or
- b) a part of a top layer exposing a non-ionic hydrophilic groups on its surface.
- 15 7. The device of claim 6, **characterized** in that
- (i) the hydrophilic surface area is according to (b), and
- (ii) there are one or more intermediary layers between said base layer and said top layer.
- 20 8. The device of any of claims 6-7, **characterized** in that each of said layers is attached to another of said layers by non-covalent bonds and/or covalent bonds, non-covalent bonds.
9. The device of any of claims 6-8, **characterized** in that said top layer, if present, is
- 25 essentially devoid of non-specific adsorption of protein from an aqueous protein-solution in contact with the surface of the top layer.
10. The device of any of claims 4-9, **characterized** in that said section comprises a part of the inlet arrangement that in the downstream direction ends in a valve
- 30 function preventing uncontrolled leakage of liquid dispensed to the inlet unit further downstream into the microchannel structure,

the inner surfaces of said inlet arrangement is wettable, typically to the extent that the liquid front of an aqueous liquid dispensed to the unit is capable of reaching the valve function by capillarity.

- 5 11. The device of any of claims 4-10, **characterized** in that said section comprises a microconduit used for transport of an aqueous liquid between two functional units.
12. The device of any of claims 4-11, **characterized** in that said section comprises a reaction microcavity (RM₂) which is present upstream reaction microcavity RM₁
10 and/or that reaction microcavity RM₁ exposes a hydrophilic surface area with an underlying base layer comprising metal oxide.
13. The device of any of claims 4-12, **characterized** in that said section comprises a detection unit, which is present upstream reaction microcavity RM₁.
15
14. The device of any of claims 4-13, **characterized** in that said section comprises a heating unit, possibly combined and/or coinciding with a reaction microcavity.
15. The device of any of claims 4-14, **characterized** in that said base layer is
20 transparent.
16. The device of any of claims 4-15, **characterized** in that said base layer is electrically conductive.

25

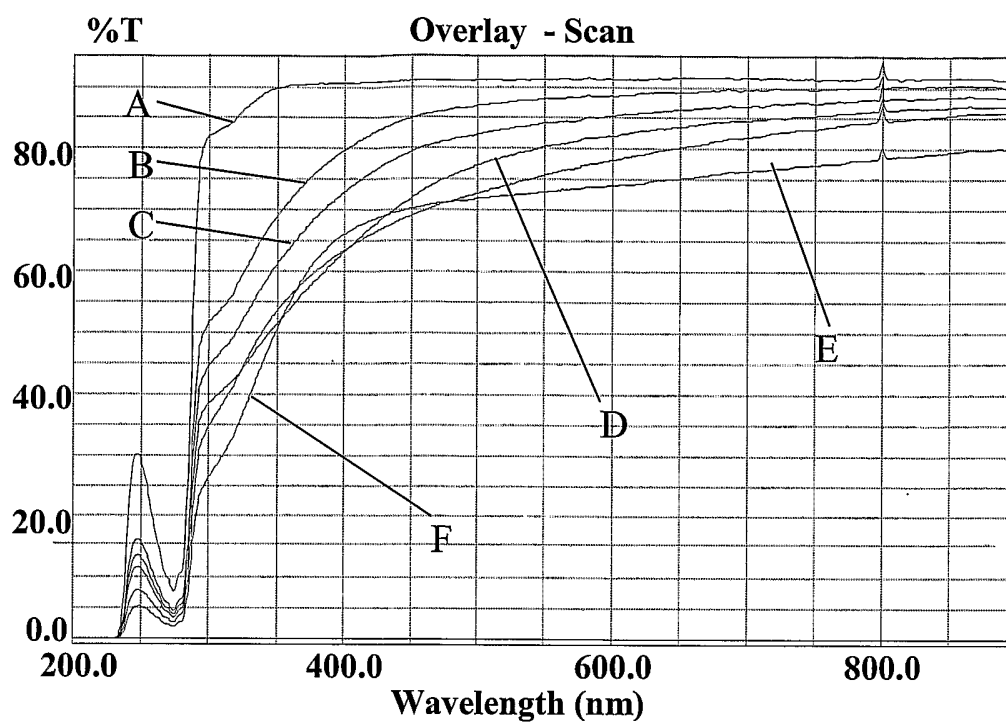


FIGURE 1

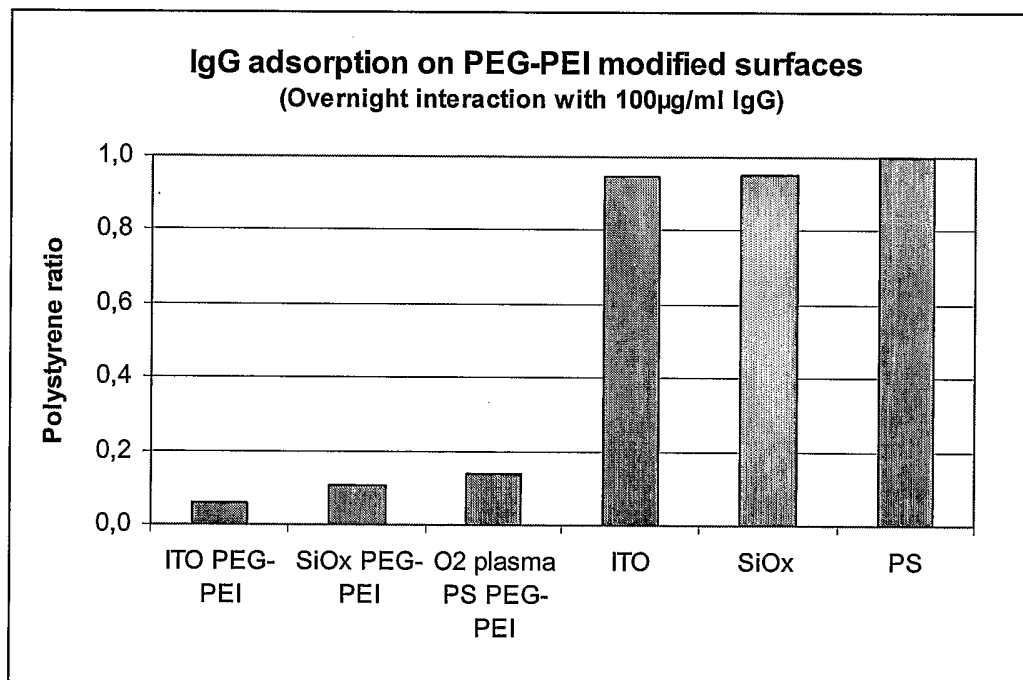


FIGURE 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000109

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B81L 1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01L, G01N, B81B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTENAL, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9929429 A1 (ROCHE DIAGNOSTICS GMBH), 17 June 1999 (17.06.1999), page 6, line 13 - page 7, line 26 --	1-16
A	WO 9958245 A1 (AMERSHAM PHARMACIA BIOTECH AB), 18 November 1999 (18.11.1999), claims 1-9 --	1-16
A	US 2002123134 A (M. HUANG ET AL), 5 Sept 2002 (05.09.2002), abstract -- -----	1-16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 April 2004

Date of mailing of the international search report

29 -04- 2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Mats Raidla / MRO

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

31/03/2004

International application No.

PCT/SE 2004/000109

WO	9929429	A1	17/06/1999	AT	216636	T	15/05/2002
				AU	733985	B	31/05/2001
				AU	2158399	A	28/06/1999
				CA	2311496	A	17/06/1999
				CN	1284012	T	14/02/2001
				DE	19753847	A	10/06/1999
				DE	59803940	D	00/00/0000
				EP	1035921	A,B	20/09/2000
				ES	2177129	T	01/12/2002
				HU	0100413	A	28/06/2001
				JP	3418174	B	16/06/2003
				JP	2001525554	T	11/12/2001
				PL	340881	A	12/03/2001
				TW	408037	B	00/00/0000

WO	9958245	A1	18/11/1999	AU	753395	B	17/10/2002
				AU	3624399	A	29/11/1999
				CA	2333618	A	18/11/1999
				EP	1077771	A	28/02/2001
				GB	0011318	D	00/00/0000
				GB	2341924	A	29/03/2000
				GB	2350678	A	06/12/2000
				GB	9809943	D	00/00/0000
				GB	9910613	D	00/00/0000
				JP	2003524145	T	12/08/2003

US	2002123134	A	05/09/2002	WO	02052045	A	04/07/2002
----	------------	---	------------	----	----------	---	------------