

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 February 2008 (21.02.2008)

PCT

(10) International Publication Number
WO 2008/020987 A1

(51) International Patent Classification:
G03G 15/16 (2006.01)

(21) International Application Number:
PCT/US2007/017023

(22) International Filing Date: 30 July 2007 (30.07.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/503,595 14 August 2006 (14.08.2006) US

(71) Applicant (for all designated States except US): **EASTMAN KODAK COMPANY** [US/US]; 343 State Street, Rochester, New York 14650-2201 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZARETSKY, Mark Cameron** [US/US]; 30 Shalimar Drive, Rochester, New York 14618 (US). **CODY, Craig Michael** [US/US]; 4599 River Road, Scottsville, New York 14546 (US). **TOMBS, Thomas Nathaniel** [US/US]; 35 San Gabriel Drive, Rochester, New York 14610 (US). **KITTLESON, Andrew Peter** [US/US]; 28 Portsmouth Terrace, Rochester, New York 14607 (US). **DEJESUS, M. Cristina B.** [BR/US]; 120 Crossover Road, Fairport, New York 14450 (US).

(74) Common Representative: **EASTMAN KODAK COMPANY**; 343 State Street, Rochester, New York 14650-2201 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: MANUFACTURING A LOW COST INTERMEDIATE TRANSFER MEMBER

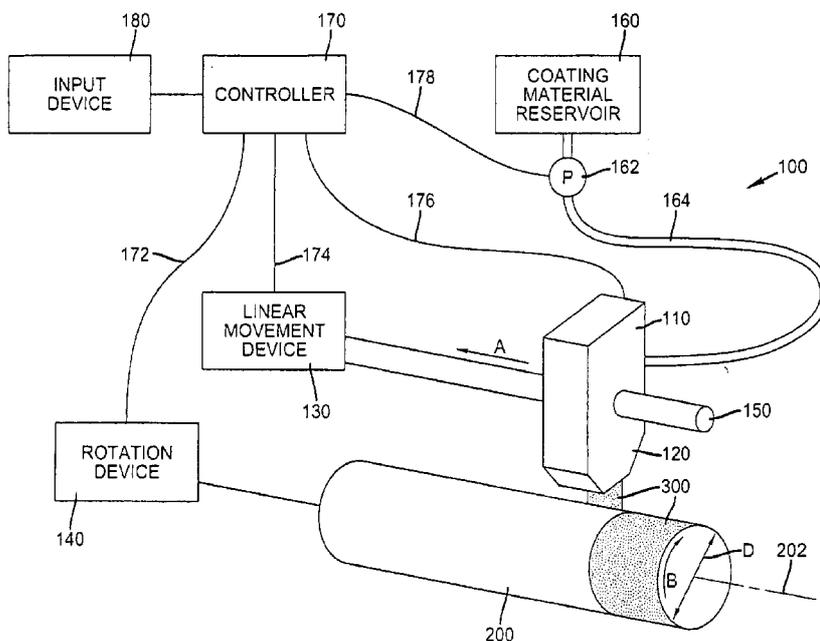

(57) Abstract: The present invention is a process for making an intermediate transfer member. The process includes forming an endless belt by seaming two ends of a substrate material to form a seam. A smoothing layer is applied on top of the endless belt using a rotary cast process wherein said intermediate transfer member has a continuous seamless top surface. In a preferred embodiment the endless belt is formed by adhering at least two layers of a substrate to form a belt having an inner and outer seam.

WO 2008/020987 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

5 **MANUFACTURING A LOW COST INTERMEDIATE
TRANSFER MEMBER**

FIELD OF THE INVENTION

10 The present invention relates to field of printing and copying. More particularly, it relates to a method of manufacture of intermediate transfer members that allows the use of low cost materials.

BACKGROUND OF INVENTION

15 Intermediate transfer members are well known and are widely used in electrostatographic imaging machines. A seamless intermediate transfer member (ITM) is desirable because it results in enhanced machine productivity for a wide variety of paper formats. Furthermore, a seamed ITM requires hardware for seam detection and increases the difficulty of cleaning the ITM. However, the cost associated with manufacturing a seamless ITM is high, especially for large circumference members.

20 The advantages of intermediate transfer members with more than one layer are discussed in the published literature. Multilayer ITMs can improve the quality of imaging because different layers can be designed to optimize specific functions of the imaging process. For example, a top layer may be optimized for toner release while the substrate layer may be optimized for its
25 mechanical and electrical properties. An additional layer between the top layer and the substrate may be compliant so as to reduce image artifacts and improve transfer to certain paper types that are rough or textured. The use of compliant layers and release layers to improve transfer are described in US Patents
30 5,084,735 and 5,370,961. Also disclosed is the mold cast system used to produce a multilayer ITM. In order to meet image quality requirements of a typical electrostatographic machine, the ITM often has tight mechanical tolerances on features such as thickness, run-out and/or roughness, so as to minimize variations in machine operation such as overdrive and nip widths. In addition, the surface of the ITM must have low roughness. The grinding operation needed to make a
35 multilayer ITM with the specified mechanical tolerances is a lengthy manufacturing step adding significant cost and time.

5 Mammino et al., in US Patents 5,298,956 and 5,409,557 disclose a process for manufacturing an intermediate transfer member having a reinforcing member embedded with filler material and electrical property regulating material. The reinforcing member described is composed of metal, synthetic material or fibrous material. The intermediate transfer member described has a thickness
10 between 2 and 7 thousandths of an inch (0.05 to 0.175 mm).

 U.S. Patent 5,761,595 mentions the use of a multiple layer, carbon filled transfer component for improved transfer but makes no claim of imaging or transferring toner on top of the seam.

 U.S. Patent 6457392 refers to the method of making a seamless
15 transfer belt using a puzzle cut punch and die system. The difficulties in manufacturing such a belt and the performance of such a belt are described in US Patent Publication 2006/0002746(A1).

 Very long sheets of plastic or metal can be manufactured inexpensively in roll form using a continuous, high speed process. Therefore, the
20 cost of a seamed substrate utilizing sheets cut from such a roll may be considerably less than the cost of manufacturing a seamless substrate (typically manufactured one piece at a time). For the reasons described above there exists a need for a low cost method to manufacture ITMs having a seamed substrate that can be used in electrostatographic machines where the seam area can be imaged
25 upon without causing imaging artifacts or other difficulties.

 One object of the present invention is to provide a process or manufacturing method to produce an intermediate transfer member that minimizes costly finishing steps such as grinding and conditioning. Another object of this invention is to provide a method of making an intermediate transfer member with
30 a seamed substrate layer that does not adversely affect the image being transferred to or from its surface in the region of the seam. This improved intermediate transfer member allows for a uniform, uninterrupted first electrostatic transfer of a toner image from a primary imaging device and a second electrostatic transfer from intermediate transfer member to a receiver utilizing the whole transfer
35 member including the seamed area. This improved intermediate transfer member

5 also allows for enhanced machine productivity over a wide range of receiver sizes due to the ability to utilize the whole transfer member including the seamed area.

SUMMARY OF THE INVENTION

The present invention is a process for making an intermediate
10 transfer member. The process includes forming an endless belt by seaming two ends of a substrate material to form a seam. A smoothing layer is applied on top of the endless belt using a rotary cast process wherein said intermediate transfer member has a continuous seamless top surface. In a preferred embodiment the endless belt is formed by adhering at least two layers of a substrate to form a belt
15 having an inner and outer seam.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 (a) is a schematic perspective view, not to scale, of a diagonal, butt-seamed and taped substrate in the form of a cylindrical belt where
20 the seam is viewed from the inside. The spacing between ends of the substrate is exaggerated for clarity.

Figure 1 (b) is a schematic perspective view, not to scale, of a diagonal, butt-seamed and taped, substrate in the form of a cylindrical belt where the seam is viewed from the outside. The spacing between ends of the substrate is
25 exaggerated for clarity.

Figure 2 is a schematic perspective, not to scale, of a double wrap substrate having two diagonal butt splice seams.

Fig. 3 is a schematic of a rotary casting system for coating an elastomeric layer onto a substrate.

30 Fig. 4 is a schematic of an electrophotographic apparatus for testing ITMs used as an endless belt.

For better understanding of the present invention, together with other advantages and capabilities thereof, reference is made to the following detailed description in connection with the above-described drawings.

35

5

DETAILED DESCRIPTION OF THE INVENTION

The object of the present invention is a process for making a low cost, multilayer, intermediate transfer member (ITM) for use in an electrostatographic machine. The process of this invention produces a multilayer
10 ITM that has a continuous seamless top surface formed on a seamed substrate. Applying a smoothing layer of specified thickness on top of the seamed substrate allows it to be used in an electrostatographic machine as if it were seamless.

The process of the present invention for making an intermediate transfer member for use in an electrostatographic machine includes the following
15 steps: 1) forming an endless belt by seaming two ends of a substrate material; 2) applying a smoothing layer on top of the endless belt so that it forms a continuous layer across the surface of the belt such that the belt thickness far from the seam is equal to the belt thickness at the seam without any need for a finishing step; 3)
20 applying a release layer on top of the smoothing layer; wherein the top surface of the intermediate transfer member above the region of the seamed substrate has a roughness approximately equal to the roughness in regions where the seam is not present. The method of making the intermediate transfer member can be utilized in making intermediate sleeves, endless intermediate belts, or intermediate drums.

The first step in making the ITM is to seam two ends of a substrate
25 material. The substrate layer acts as a supporting layer for subsequent functional layers. The substrate material may be of any of a variety of flexible materials such as a fluorinated copolymer (such as polyvinylidene fluoride), polycarbonate, polyurethane, polyethylene terephthalate, polyimides (such as Kapton™), polyethylene naphthalate, or silicone rubber. For some applications the substrate
30 can also comprise a metal such as nickel, aluminum, or steel. When non-metals are used the substrate material may contain an additive, such as an anti-stat (e.g. metal salts), conductive polymers (e.g. polyaniline or polythiophene), conductive metal oxides (e.g. tin oxide) or small conductive particles (e.g. carbon), to impart the desired conductivity. The preferred support layer is a polymeric material such
35 as polyester, polycarbonate, or polyamide but the specifics of the substrate will vary depending on the application. Preferably, the substrate is conductive or

5 semi-conductive either along its surface and/or through its bulk. Suitable materials for use as surface conductive layers include, but are not limited to, vapor deposited aluminum, nickel, or indium tin oxide, or solution coated polythiophene, tin oxide, carbon black, carbon nanotubes, or polyaniline.

Fibrous material may be used to reinforce the substrate layer. A
10 reinforcing member of fibrous material can be prepared by weaving fibrous material into a mat or sheet as practiced in the art or the fibrous material may be held together in non-woven form with or without a bonding agent as practiced in the art.

The optimum thickness of the substrate will depend on the specific
15 application and can range between 10 and 400 micrometers with a preferred thickness between 50 and 175 micrometers.

The ends of the support layer are brought together and seamed to create a continuous loop. While a variety of methods could be used to form the seam, an appropriate method must be chosen such that a smoothing layer coated
20 on its surface can effectively hide the seam. The seam must also stay functional following the manufacturing processes of subsequent layers, e.g. thermal curing and polishing.

A preferred seam is in a configuration other than a straight line that is perpendicular to edge of the seamed member and also to the process direction of
25 movement of the belt in an electrostatographic machine. The benefits associated with forming the seam on an angle other than 90 degrees is increased mechanical strength of the ITM, improved flexibility of the seam when the belt is wrapped on rollers and reduced perception of image artifacts. Forming the seam of the belt at a diagonal with respect to its length or direction of its intended movement allows
30 for a longer interface at which to join the ends of the material. The longer interface allows for a stronger seam. A 45 degree angled seam increases the seam strength by 41% relative to a 90 degree seam; i.e., one which is perpendicular to the edge of the member. The angle of the seam can range from 20 degrees to 60 degrees and is preferably 45 degrees relative to the lengthwise dimension
35 direction of the belt. The angled seam also minimizes the effect of stiffness change due to the seam on uniform flexibility of the belt by distributing the

5 stiffness change over a greater length of the belt. Perturbations in the imaging
system due to the seam passing by or over components in an imaging system are
therefore reduced. The geometry to which the two ends are cut could include
straight, chevron, or finger joints, also known as a puzzle cut seam. Other
seaming approaches could also be used such as a lap seam with square or beveled
10 ends. The optimum type of seam is based on the cost to manufacture, the specific
application of the ITM, the materials chosen, and the mechanical properties
desired. U.S. Patent 6,016,415 discloses imaging improvements and other details
and benefits associated with seams that are not perpendicular to the edge of an
electrostatographic member.

15 A schematic of a substrate with a taped butt seam is shown in
Figure 1 (a) and Figure 1 (b). A butt seam is a well-known, low cost method for
seaming. A belt with a well-controlled circumference can be made with a butt
seam by wrapping the support material around a device with a known diameter,
such as a mandrel. Vacuum can be used to hold the support material in place.
20 The support material is overlapped in an area on the mandrel where a cutting
groove exists and is then cut with a sharp tool. A preferred seam is cut at an angle
other than perpendicular to the ends of the sheet. To make such a cut, the cutting
groove must be at a diagonal, and will appear as a helical or spiral cut on a
cylindrical splicing mandrel. An alternative method to cut the substrate to the
25 precise dimension is to use a die. Die-cutting is preferred for some types of cuts,
such as finger joints.

The preferred low cost method of bonding the seam together is a
tape splice. The tape should meet the requirements of subsequent manufacturing
processes as well as the electrical and mechanical specifications of the printing
30 apparatus. A preferred tape material is polyester. Another preferred tape material
would be made from the same material as the substrate material by applying an
adhesive coating to one of its surfaces. In either case the adhesive properties of
the tape should be such that the tape adequately adheres to the support material.
The width of the tape material should cover the seam and could range from 4 mm
35 to 30 mm, with a preferred width of 6 to 15 mm. The thickness of the tape could
range from 0.012 to 0.075 mm with a preferred with of 0.025 to 0.050 mm.

5

Suitable materials for adhesive include, but are not limited to, hot melt adhesives such as polyamides, urethanes, or polyesters, or UV-curable adhesives such as acrylic epoxies, polyvinyl butyrals, or the like. Electrical conductivity may be imparted to the adhesive by incorporating a conductive component such as silver, indium tin oxide, cuprous iodide, tin oxide, 7,7',8,8'-tetracyanoquinonedimethane (TCNQ), quinoline, carbon black, NiO and/or ionic complexes such as quaternary ammonium salts, metal oxides, graphite, or like conductive fillers in particulate, flake or fiber form and conductive polymers such as polyaniline and polythiophenes.

15

Once the substrate ends are bonded together any applied vacuum may be removed from the mounting device to allow removal of the seamed continuous loop of support material. Other suitable means for joining the ends of intermediate transfer substrate include, but are not limited to, adhesive bonding, adhesive tape, welding, mechanical interlocking, sewing, wiring, or stapling. A thermal or ultrasonically welded lap joint has a preferred overlap range of 1 to 6 mm. This amount of overlap is substantially uniform across the seam and is formed by cutting both ends of the belt material at an appropriate angle and positioning the ends so that one end lies on top of the other end. Regardless of the seaming method it is preferred that the seam remain flexible.

25

For some applications it may be desired to use post-finishing steps prior to coating the smoothing layer to smooth the seam area of the substrate and to reduce the step height at the seam, i.e., by grinding and polishing. The entirety of the belt may also be ground to a uniform surface roughness.

30

An alternate method of forming a seamed substrate utilizes two sheets of substrate material on top of each other bonded together to form an endless loop as shown in Figure 2. A preferred angled seam is shown in Figure 2 but other seam geometries as mentioned above could also be used. The preferred substrate material is a polymeric material such as polyester or polyamide but other materials as described above could also be used. The methods and materials described above may also be used for imparting the desired electrical properties to the substrate. A thin conductive coating may be used on one or both sides of each

35

5 sheet if the substrate material is insulating. In the case of the single sided
conductive coating, the two substrates are laminated together with the conductive
coatings on the opposing sides. The ends of the two sheets form two butt seams,
one seam on the inside of the member and one seam on the outside as shown in
Figure 2. The two substrates are laminated together, with their respective seams
10 preferably non-overlapping, to minimize the effect of the seams on the mechanical
performance of the ITM, having a diagonal seam oriented at 20 to 60 degrees is
preferred. The two substrate sheets are preferably adhered together using an
adhesive resistant to the heat and chemicals used in subsequent steps in the
process of making the ITM. The most preferred substrate material in this
15 embodiment is a 50 to 125 micrometer thick polyester sheet manufactured with a
conductive coating such as aluminum on one side of the sheet and a temperature
resistant adhesive on the opposite side of the sheet.

In any of the embodiments that comprise conducting coatings on an
insulating substrate it may be desired to make an electrical connection between the
20 inside (bottom) conducting surface and the outside (top) conducting surface.
Specific approaches, their use and importance to ensuring electrical continuity
from one surface of the substrate to another surface of the substrate when the bulk
of the substrate is insulating, are contained in the accompanying disclosure Docket
No. 92459. For example, an electrical connection could be made with conductive
25 tape or with the addition of a hole filled with a conductive filler containing carbon
or silver.

Additional seaming methods are known by those skilled in the art
and are envisioned as alternative methods for forming the endless loop that acts as
the substrate for the ITM.

30 A smoothing layer is formed on top of the seamed substrate so that
it forms a continuous layer across the surface of the belt. The smoothing layer
thickness is specified to be thick enough to hide the mechanical and electrical
discontinuities of the seamed substrate. The smoothing layer thickness will vary
depending on the specific application of the ITM but will typically range from
35 0.03 mm to 5 mm and is preferably 0.08 mm to 0.8 mm. The smoothing layer is
preferred to be a compliant elastomeric material such as polyurethanes, neoprenes,

5 silicones, fluoropolymers, silicone-fluoropolymer hybrids, nitriles, or silicon-nitriles.

The preferred material for the smoothing layer is an elastomer that is compliant, preferably a polyurethane elastomer, the elastomer being doped with sufficient conductive material (such as antistatic particles, ionic conducting
10 materials, or electrically conducting dopants) to have a relatively low bulk or volume electrical resistivity, which resistivity is preferably in a range of approximately 10^7 to 10^{11} ohm-cm, and more preferably 10^9 ohm-cm. A preferred smoothing layer has a Young's modulus less than 50 MPa, more preferably in a range of approximately 2-10 MPa.

15 The method used to form the smoothing layer is an important aspect of the invention. A smooth continuous top surface precludes the need for a finishing step that is typically needed to achieve dimensional tolerances. Such finishing steps are expensive and require long periods of conditioning when precision tolerances are specified.

20 The method of applying the smoothing layer utilizes a rotary cast process, such as ribbon coating, spray coating, transfer coating, or gravure coating. The preferred method of casting is ribbon casting as described in detail below. A smoothing layer made by the rotary cast method can effectively mask the mechanical discontinuity of the seamed substrate and yield an intermediate
25 transfer member with exceptional dimensional tolerances, thus eliminating the need for grinding to a final thickness. The roughness of the ITM in the region of the seamed substrate can be produced so that it is similar to the roughness in other functional areas of the ITM.

Using the methods described in this invention, the rotary cast
30 device can produce an ITM having a volume resistance in the region of the seamed substrate approximately equal to the volume resistance in regions where the seam is not present. The ITM can also be made so that the surface resistance above the region of the seamed substrate is approximately equal to the surface resistance in regions where the seam is not present.

35 This rotary cast method of applying the compliant layer requires a coating apparatus with a well-controlled solution delivery device. The coating

5 apparatus includes a rotational device such as a lathe and well-controlled linear movement device such as found on some metal or woodworking lathes.

A preferred solution delivery method is to use a mix and metering device capable of accurately controlling the rate of flow and also capable of degassing the material to be coated. An alternative solution delivery system
10 would use a variable speed pump to draw coating material from a material reservoir into the coating head and onto a substrate. A suitable control device to control the solution delivery flow rates can compensate for changes in any variable that affects the coated thickness and uniformity, such as temperature, viscosity, and speed.

15 A schematic of a typical rotary cast apparatus is shown in Figure 3. The support layer or substrate material is mounted on the cylindrical mandrel (200), which is held horizontally on a rotational device (not shown) such as a lathe. Alternatively, the cylindrical mandrel could be replaced with two or more rollers to hold the support substrate in tension during the application of the
20 smoothing layer. The speed at which the horizontally mounted mandrel rotates can be well maintained using a controller 170 or a computer with the proper programming software such as Labview™. The solution delivery system could include a variable speed pump 162 that draws the material from the solution pot at a well-controlled flow rate and onto the substrate 200. The variable speed pump
25 could be replaced with a mix and metering solution delivery device. A mix and metering device allows one to mix, meter, control viscosity, monitor temperature, and degas the compliant layer materials as they come out of the mix head onto the substrate. A metering delivery device typically uses a controller to control the flow rate and volume mix ratio for precise materials delivery and desired materials
30 characteristics.

The variable pump delivery or the mix and metering delivery device would be connected to a linear movement device (130). Rubber or metal lined tubing 164 could be used to connect the pump to the lateral moving device. The width of the compliant layer ribbon delivered onto the substrate mounted
35 mandrel can be controlled by using different width nozzles (120) in both the variable pump speed delivery device as well as the mix metering device. The

5 nozzles could incorporate stationary or static mixers for additional mixing. Also, a variety of different nozzle configurations are possible, such as tapered, round, and ribbon depending on the specific application. Nozzle size diameters range from .075 mm to 40 mm.

10 Preferably, an in-line viscometer and temperature sensor is used to monitor the smoothing layer materials during the coating process.

The method of applying the smoothing layer comprises several steps. The rotation device 140 rotates the substrate to be coated about a rotation axis 202, in the direction shown by arrow B. A nozzle 120 is attached to the coating device 110. A pump 162 pumps coating material 300 from the coating material reservoir 160 through tubing 164. The coating material 300 then flows through the coating device 110 to the nozzle 120 and is dispensed onto the substrate 200 while the rotation device 140 rotates the mandrel 200 and the linear movement device 130 moves the coating device 110 in the direction shown by arrow A. It is preferable that the nozzle 120 is removable so that it can be cleaned or replaced with another nozzle.

20 A controller 170 is connected to one or more elements in apparatus to control various aspects of their operations. Figure 3 shows the controller connected to the to the rotation device 140 by a link 172, to the linear movement device 130 by a link 174, to the coating device 110 by a link 176 and to the pump 162 by a link 178. The controller 170 can control driving of the substrate 200 by the rotation device 140, and can control movement of the coating device 110 by the linear movement device 130. Various control data may be input to the controller 170 via an input device 180. The controller 170 may follow instructions of a program created in ways that are known by those skilled in the art. Also known in the art are means to interact with the operator of the apparatus by using a type of message output device such as a monitor or the like (not shown) connected to the controller 170 to prompt and confirm user input, and to output any relevant messages before, during or after processing (e.g., "coating finished", etc.). Also, the controller 170 may detect various conditions, such as "coating material reservoir needs to be filled" and/or the like, and appropriately inform the operator via the message output device.

5

The quality and processing time associated with the smoothing layer material can be optimized with additives to the smoothing layer material that improve the rotary cast process. For example, a catalyst could help to control the reaction rate of the material, aiding in flow and the healing process of each individual ribbon so that a smooth uniform surface is achieved. Example catalysts could include metal based catalysts such as DABCO K-15, DABCO T-120, or DABCO T12N. Other examples of catalysts would include the amine containing catalysts such as DABCO 33-LV, DABCO TMR and Curithane 52. Controlling the temperature of the coating material can also improve its uniformity.

15

A release layer can be applied, if needed, as a top layer subsequent to the formation of the smoothing layer also using techniques that produce no noticeable seam at the outer surface. A top release layer is preferred and is used to further improve overall performance and life of the ITM. The preferred method of applying a uniform top release layer is ring coating. The ITM is mounted onto a rigid mandrel or between two end caps for support. The mounted ITM is centered vertically within a coating gasket such that the coating gasket has some interference with the outside of the ITM. The interference between the coating gasket and the ITM forms a coating solution well for holding the release layer material. An operator fills the solution well and allows the ITM to travel vertically up through the gasket resulting in a uniform coating. The coating thickness and uniformity are controlled by adjusting the viscosity of the coating solution as well as the vertical speed at which the ITM is drawn up through the coating gasket. Although ring coating is the preferred method for application of a release layer, one could use alternative methods such as spray coating, dip coating, rotary casting, gravure coating and transfer coating. All of the above manufacturing methods are suitable for providing a release layer that is uniform and consistent.

35

The release layer is an integral, uniform coating or outer-skin of a material such as a thermoplastic, silicone, polyurethane, sol-gel, ceramer, or a fluorinated material such as PTFE, but other materials having good release properties including low surface energy materials may also be used.

5 Alternatively, the coating can also be comprised of fine particles spaced closely enough together so as to substantially cover the surface of the smoothing layer. The release layer thickness is preferred to be between 1 and 20 micrometers but will vary depending on the application.

The ITM may include indicia such as a bar code or an RFID
10 device. The indicia may be placed on the surface of the substrate prior to coating the smoothing layer, the surface of the smoothing layer or on top of the release layer. The details of the indicia have previously been disclosed in US Patent 6,377,772.

EXAMPLES

15 **Example 1**

The above-described coating apparatus as shown in Figure 3 has been successfully used to coat a seamed substrate with a circumference of 569 mm and a length of 360 mm to make an intermediate transfer member with a dimensionally uniform, compliant, smoothing layer. A static dissipative
20 polyimide sheet 85 micrometers thick was used as the substrate. Prior to coating the substrate it was first spliced to form a cylindrical shape. The substrate material was wrapped around a well-defined, cylindrical, splicing mandrel and vacuum was applied to holes in the splicing mandrel to hold the substrate tight to the mandrel surface. The splicing mandrel provided a well controlled inside
25 diameter of the resulting seamed substrate. The ends of the substrate were overlapped and a sharp cutting tool was used to cut down its length so that the ends of the sheet were accurately aligned. The excess scrap material was removed and 0.05 mm thick polyester tape was applied to adhere the two ends of the sheet to form a taped butt seam perpendicular to the edges of the seamed substrate.

30 The seamed substrate material was then air-mounted on a well-defined, cylindrical, coating mandrel with approximately 0.025 mm of interference between the inside diameter of the seamed substrate and the outside diameter of the coating mandrel. The air mounting was accomplished by forming an air bearing between the coating mandrel and the substrate by applying
35 pressurized air to holes surrounding one end of the coating mandrel's surface. The air bearing expanded the substrate so that it could be easily mounted on the

5 mandrel in the appropriate location. The air was then removed so that the initial small amount of interference between substrate and mandrel prevented the substrate material from moving during application of the smoothing layer and also prevented any of the smoothing layer material from seeping between the substrate and mandrel.

10 Polyurethane doped with a metal salt antistatic material was used for the smoothing layer material. The polyurethane material comprised 1) a diisocyanate-terminated prepolymer, obtained from Uniroyal Chemical Company; 2) a diol-terminated prepolymer obtained from Sigma Aldrich; 3) an anti-stat material from Eastman Kodak Company; and 4) an ethoxylated
15 trimethylolpropane obtained from Perstorp Polyols Inc. The temperature of the polyurethane material components was controlled to improve the uniformity of the smoothing layer. The polyurethane material was pre-mixed in a well-controlled mix metering device and delivered into a beaker that served as the coating reservoir. A variable speed pump was used to transfer the polyurethane material
20 from the reservoir to the metering head and also to control the speed at which it was delivered onto the substrate. A 5 mm wide metering head nozzle was used. Control of the flow rate at which the smoothing layer solution was delivered, coupled with control of both the rotational speed of the coating mandrel and the translation speed of the linear movement device, allowed precise control of the
25 smoothing layer thickness. Monitoring the rheology of the smoothing layer material as it was being delivered onto the substrate aided in the delivery and healing of each individual ribbon into its neighboring ribbon.

After the smoothing layer material was applied the mandrel remained rotating for a period of one hour, allowing the centrifugal forces of the
30 rotating mandrel to aid in additional leveling of the smoothing layer and to partially cure the material. The substrate with the smoothing layer was then placed in an oven for 16 hours at 100°C to fully cure the material.

After full cure, the part was removed from the oven and measured dimensionally for smoothing layer uniformity. A zero degree mark was placed on
35 one end of the intermediate transfer member allowing the ITM to be broken down into four different quadrants. Smoothing layer wall thickness measurements were

5 taken at one-inch lengths in each of the four quadrants, totaling fifty-two
measurements in all, using a large pair of calibrated calipers. The thickness of the
ITM was measured to be 0.625 mm thick and was both uniform and smooth. The
cylindrical run-out calculated from the measured data was 8 micrometers in the
functional portion of the part, thus no finishing step was needed to achieve the
10 specified tolerances.

Next, a release layer was applied. The material of the release layer
was a sol-gel ceramer as described in US Patent 5,968,656. The sol-gel ceramer
material was applied with a ring coating method to achieve a thickness of 6.0 +/-1
micrometers. After application of the release layer, the ITM was placed into an
15 oven for 24 hours at 80°C to fully cure the release layer.

The average roughness of the ITM surface in the area of the
seam was approximately equal to the roughness of other areas of the ITM. The
average roughness was measured both inside and outside the seamed area and in
both areas the average roughness was found to be 0.07 micrometers. The
20 maximum height of profile and the average profile peak height was also
approximately equal in areas both above the seam and away from the seam: 0.54
micrometers and 0.36 micrometers, respectively.

Example 2

The same manufacturing process as described in Example 1 was
25 utilized and the same materials were used for the smoothing and release layers.
Example 2 differs from Example 1 in that the substrate used was a 100µm thick
insulating polyester material, seamed in the same manner and configuration as
described in Example 1. After application and curing of the smoothing layer the
thickness of the ITM was measured to be 0.625 mm thick and was both uniform
30 and smooth. The cylindrical run-out calculated from the measured data was 8
micrometers in the functional portion of the part, thus no finishing step was
needed to achieve the specified tolerances. After application and curing of the
release layer, the average roughness was measured both inside and outside the
seamed area and in both areas the average roughness was found to be 0.07
35 micrometers. The maximum height of profile and the average profile peak height

5 was also approximately equal in areas both above the seam and away from the seam: 0.54 micrometers and 0.36 micrometers, respectively.

Example 3

The same materials and manufacturing process as described in Example 2 were utilized. Example 3 differs from Example 2 in that the substrate, a 100 μ m thick insulating polyester material, had a nickel metallization layer on one surface, providing a surface resistivity of 5 log ohm/square. The smoothing and release layers were coated on top of this conductive surface. After application and curing of the smoothing layer the thickness of the ITM was measured to be 0.653 mm thick and was both uniform and smooth. The cylindrical run-out calculated from the measured data was 5 micrometers in the functional portion of the part, thus no finishing step was needed to achieve the specified tolerances. After application and curing of the release layer, the average roughness was measured both inside and outside the seamed area and in both areas the average roughness was found to be 0.06 micrometers. The maximum height of profile and the average profile peak height was also approximately equal in areas both above the seam and away from the seam: 0.24 micrometers and 0.36 micrometers, respectively.

Comparative Example 1

The same substrate material (static dissipative polyimide sheet 85 μ m thick) and substrate seaming process was utilized as described in Example 1. Comparative Example 1 differs from Example 1 in that no smoothing layer was applied. Instead, a ceramer release layer, as described in Example 1, was coated directly on top of the seamed substrate.

The ITMs described in Examples 1 to 3 and Comparative Example 1 were tested as endless belt members in the electrophotographic apparatus shown in Figure 4, operating at a process speed of 300mm/sec. A primary image-forming member (PIFM) in the form of a tube 40 has a photoconductive surface upon which a pigmented marking particle image is formed as the PIFM rotates about its respective rotational axis shown as shown by the arrow in Figure 4. In order to form an image, the outer surface of the PIFM is first uniformly charged by a corona charging device 42. Then the uniformly charged surface is exposed

5 by an LED 44 to selectively alter the charge on the surface of the PIFM 40,
creating an electrostatic image corresponding to an image to be reproduced. Note
that the electrostatic image creation process occurs independent of the location of
the seam in ITM 48. This allows evaluation of image quality both on the seam as
well as away from the seam. The electrostatic image is developed by application
10 of pigmented marking particles to the latent image bearing photoconductive tube
40 by development station 46. The marking particle image on the
photoconductive tube 40 is then electrostatically transferred to the outer surface of
the ITM 48 at transfer nip 50, formed by the engagement of transfer backup roller
52 and photoconductive tube 40. Roller 52 is electrically biased using high
15 voltage power supply 53. Subsequently, photoconductive tube 40 is cleaned of
any residual toner image by cleaner 54 to prepare the surface for reuse.

ITM 48 is conveyed in a clockwise fashion by driven roller 56
around steering roller 58 which also provides tension to ITM 48. The marking
particle image residing on the outer surface of ITM 48 is now electrostatically
20 transferred to receiver member 60 at transfer nip 64, formed by the engagement of
backup roller 66 and drive roller 56. Receiver member 60 has been previously
electrostatically tacked to transport web 62 (not shown). Subsequently, receiver
member 60 is transported by a transport mechanism to a fuser where the marking
particle image is fixed to receiver member 60 by the application of heat and
25 pressure (also not shown). In addition, ITM 48 is transported to cleaner 68 to
remove any residual toner image and prepare the surface for reuse.

As shown in Table 1 the ITM belts described in Examples 1, 2, and
3 exhibited good image quality even on the seam. In contrast, the ITM belt
described in comparative example 1 had significant degradation in image quality
30 at the seam.

5

TABLE 1

Example	Substrate	Coating	Seam Image Quality
1	Carbon loaded polyimide	Polyurethane and creamer	+
2	Insulating polyester	Polyurethane and creamer	+
3	Insulating polyester with surface metallization	Polyurethane and creamer	+
Comparative 1	Carbon loaded polyimide	None	-

+: no seam discernable in image on receiver

-: seam artifact visible in image on receiver

5 CLAIMS:

1. A process for making an intermediate transfer member comprising:
forming an endless belt by seaming two ends of a substrate material to
10 form a seam;
applying a smoothing layer on top of the endless belt using a rotary cast process wherein said intermediate transfer member has a continuous seamless top surface.
2. The process of claim 1 wherein a thickness of the member
15 far from the seam is approximately equal to a thickness of the member at the seam.
3. The process of claim 1 wherein a top surface of the intermediate transfer member above the seam has a roughness approximately equal to a roughness above a region far from the seam.
- 20 4. The process of claim 1 wherein a top surface of the intermediate transfer member above the seam has a surface resistance approximately equal to a surface resistance above a region far from the seam.
5. The process of claim 1 wherein a volume resistance in a region of the seam is approximately equal to a volume resistance in a region far
25 from the seam.
6. The process of claim 1 further comprising:
applying a release layer on top of the smoothing layer
7. The process of claim 1 wherein the seaming is performed
by taping.
- 30 8. The process of claim 1 wherein the seaming is performed by ultrasonically welding.
9. The process of claim 1 wherein the seaming is performed by mechanical interlocking.
10. The process of claim 1 wherein the seaming is performed
35 by applying adhesive to the seam.

- 5 11. The process of claim 1 wherein the seam is perpendicular to
an edge of the member.
12. The process of claim 1 wherein the seam is at an angle
other than perpendicular to an edge of the member.
13. The process of claim 1 wherein the smoothing layer
10 comprises polyurethane.
14. The process of claim 1 wherein the smoothing layer
comprises a thickness of from 0.03 mm to 5 mm.
15. The process of claim 1 wherein the substrate is selected
from the group consisting of fluorinated copolymers, polycarbonates,
15 polyurethanes, polyethylene terephthalates, polyimides, polyethylene naphthalates,
silicone rubbers.
16. The process of claim 1 wherein an indicia is placed on the
intermediate transfer member.
17. A process for making an intermediate transfer member
20 comprising:
 forming an endless belt by adhering at least two layers of a substrate to
form a belt having an inner and outer seam;
 applying a smoothing layer on top of the endless belt using a rotary cast
process wherein said intermediate transfer member has a continuous seamless top
25 surface
18. The process of claim 16 wherein the inner seam and outer
seam are not aligned.
19. The process of claim 16 further comprising adhesive
interposed between the two layers of the substrate.
- 30 20. The process of claim 16 wherein a thickness of the member
far from the outer seam is equal to a thickness of the member at the outer seam.
21. The process of claim 16 wherein a top surface of the
intermediate transfer member above the outer seam has a surface resistance
approximately equal to a surface resistance above a region far from the outer
35 seam.

- 5 22. The process of claim 16 wherein a volume resistance in a region of the outer seam is approximately equal to a volume resistance in a region far from the outer seam.
23. The process of claim 16 further comprising:
 applying a release layer on top of the smoothing layer.
- 10 24. The process of claim 16 wherein the smoothing layer comprises polyurethane.
25. The process of claim 16 wherein the smoothing layer comprises a thickness of from 0.03 mm to 5 mm.
26. The process of claim 16 wherein the substrate is selected
15 from the group consisting of fluorinated copolymers, polycarbonates, polyurethanes, polyethylene terephthalates, polyimides, polyethylene naphthalates, silicone rubbers.
27. The process of claim 16 wherein an indicia is placed on the
intermediate transfer member.

20

1/5

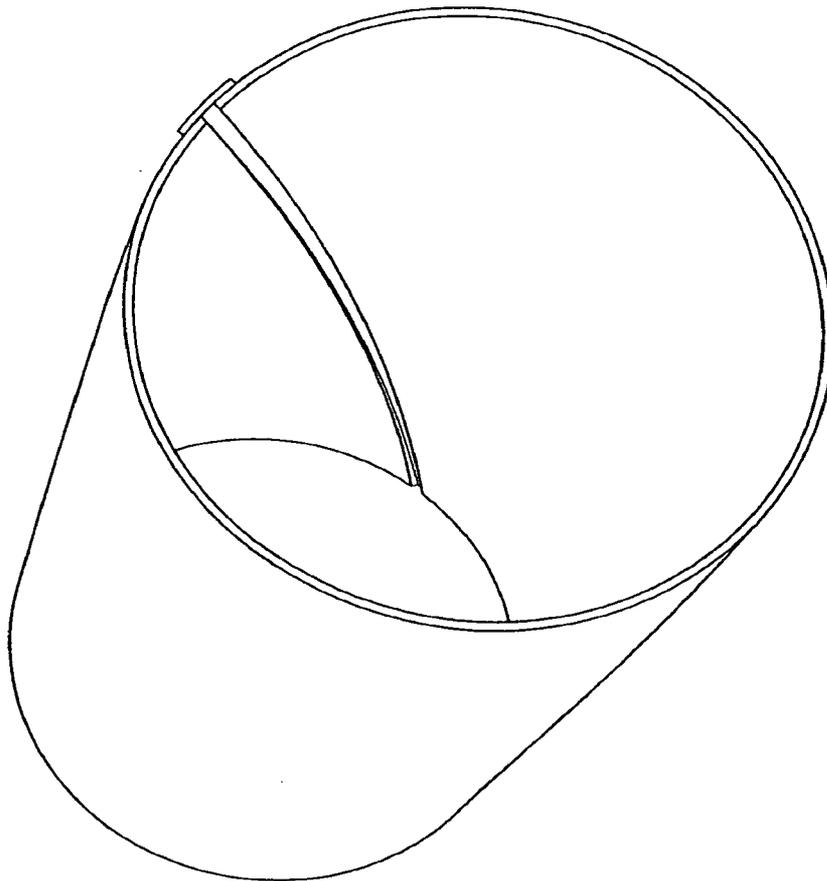


FIG. 1A

2/5

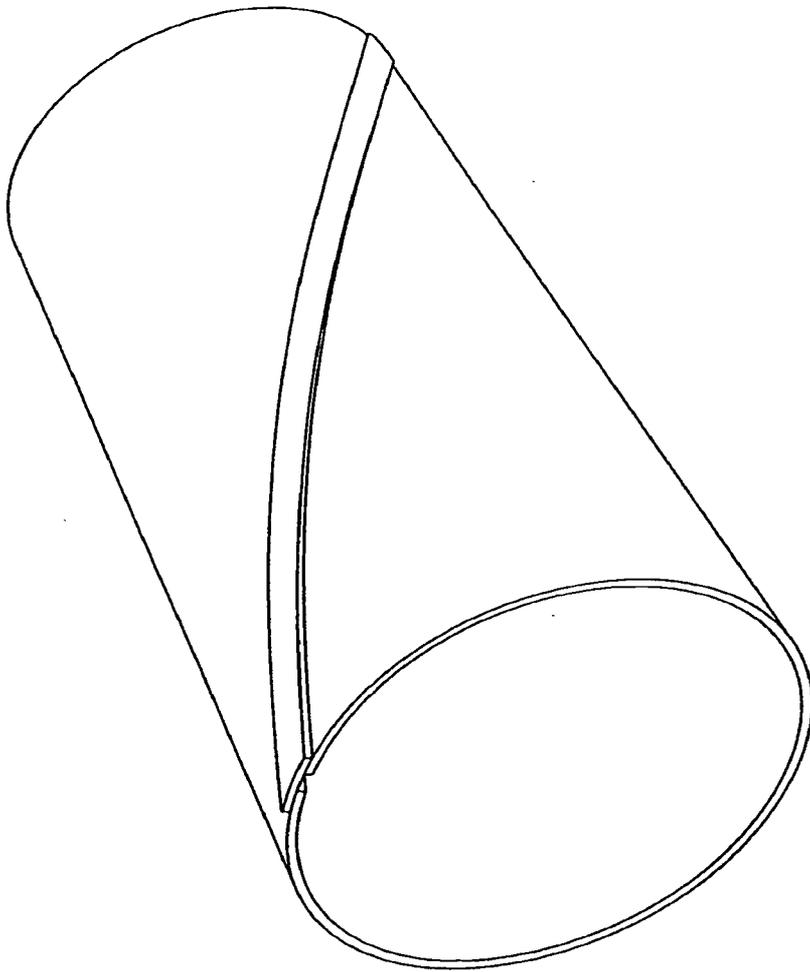


FIG. 1B

3/5

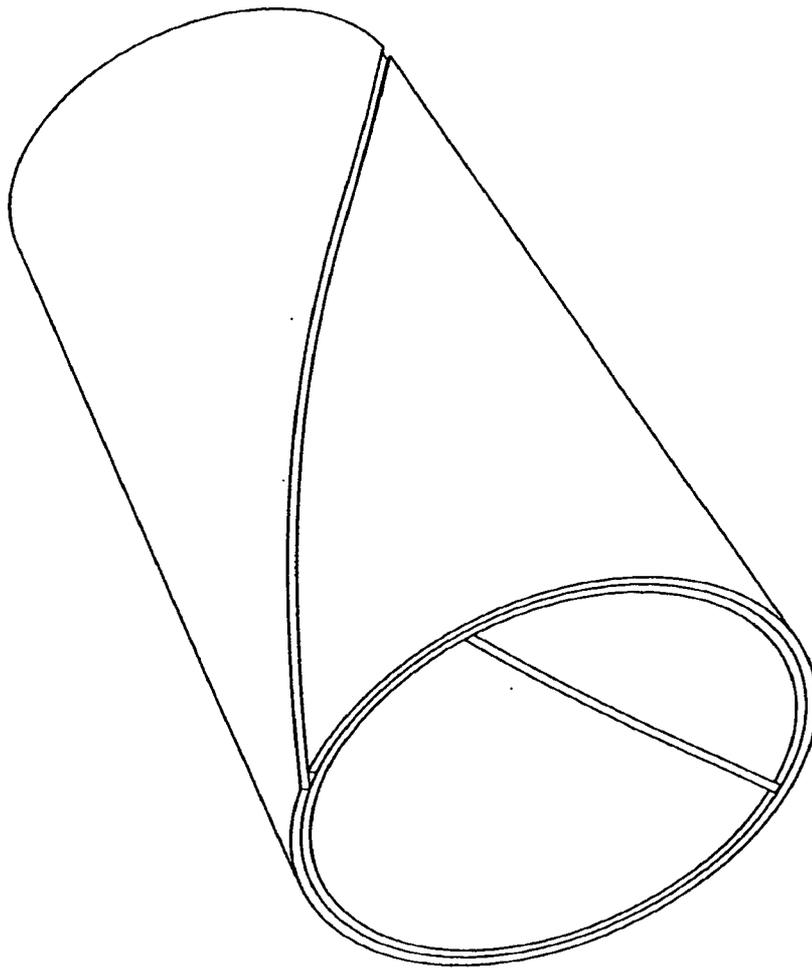


FIG. 2

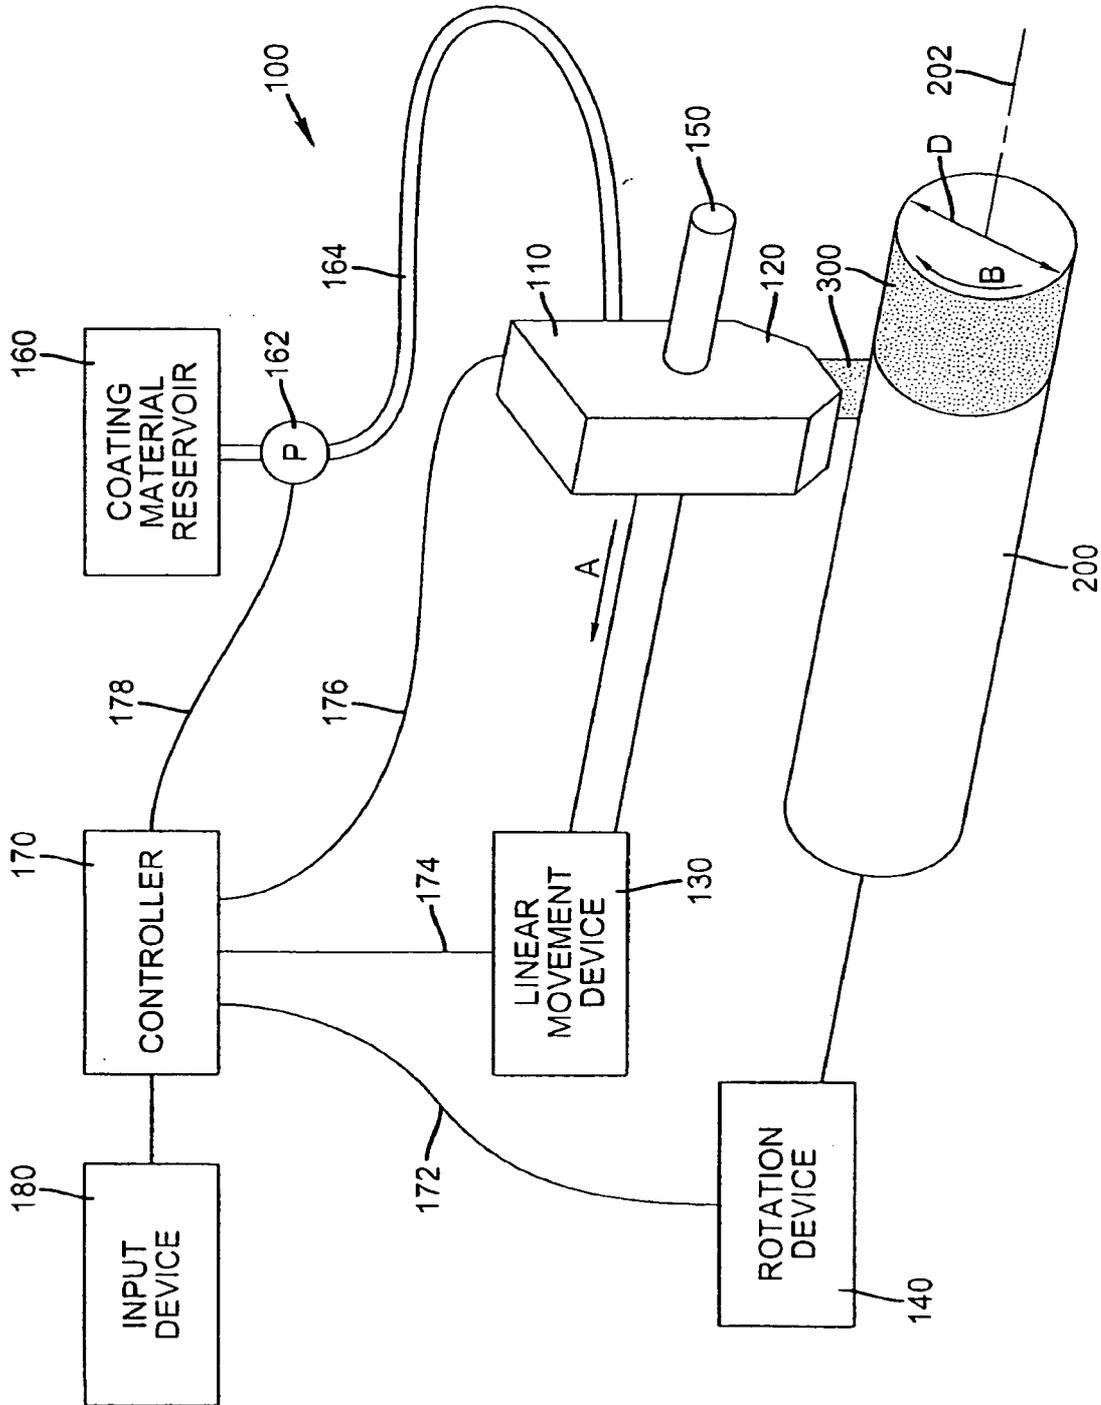


FIG. 3

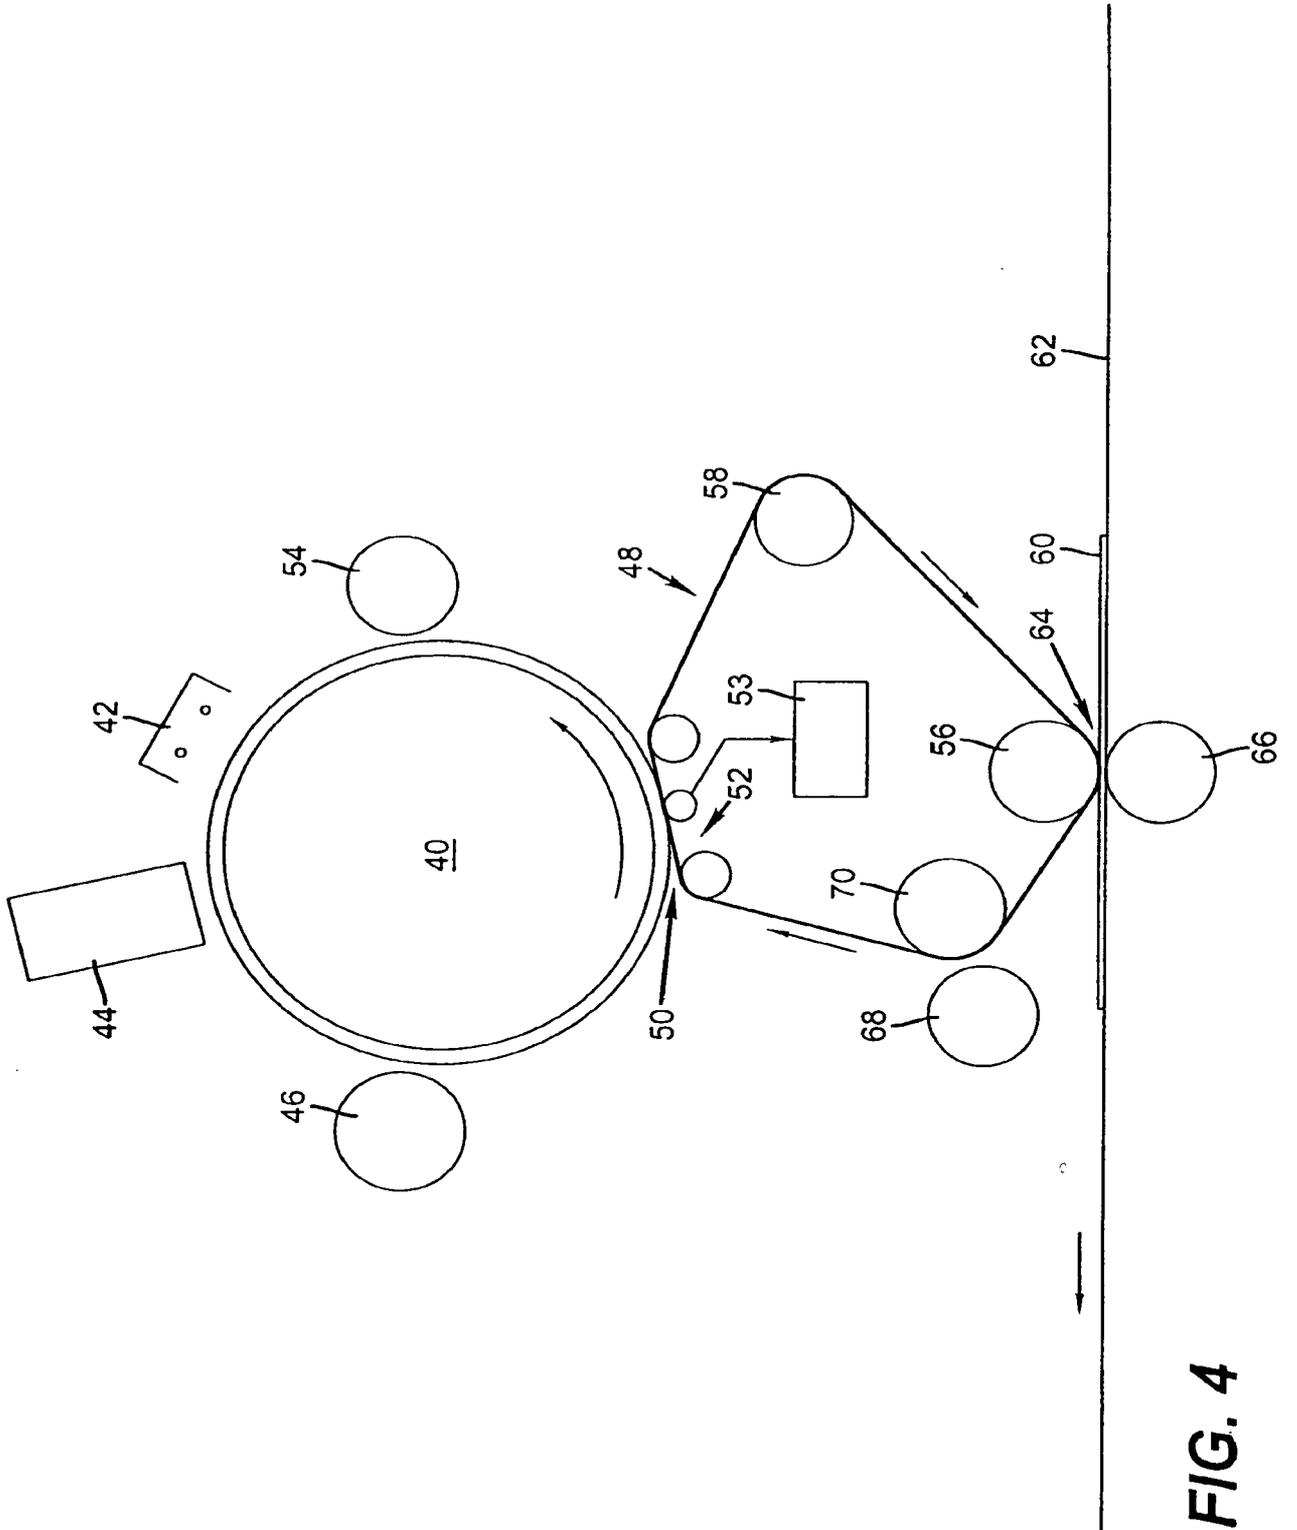


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/017023A. CLASSIFICATION OF SUBJECT MATTER
INV. G03G15/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 899 626 A (XEROX CORP [US]) 3 March 1999 (1999-03-03) paragraphs [0038], [0053], [0054]; figure 4	1-27
X	EP 0 929 011 A (XEROX CORP [US]) 14 July 1999 (1999-07-14) paragraphs [0001], [0007], [0022], [2356], [0069]	1
A	US 2005/232662 A1 (MISHRA SATCHIDANAND [US] ET AL) 20 October 2005 (2005-10-20) paragraphs [0016], [0042]; figures 3,4 -/--	1,7,8,11

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

28 December 2007

Date of mailing of the international search report

07/01/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Ouytsel, Krist'1

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/017023

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/002746 A1 (DARCY JOHN J III [US] ET AL DARCY III JOHN J [US] ET AL) 5 January 2006 (2006-01-05) cited in the application paragraph [0046]; figure 5 -----	1, 17
A	JP 2001 289823 A (FUJI XEROX CO LTD) 19 October 2001 (2001-10-19) abstract; figures 5, a, b paragraphs [0042], [0048] -----	1-27
A	JP 2004 163503 A (SEIKO EPSON CORP) 10 June 2004 (2004-06-10) abstract; figure 1 -----	12
A	JP 2005 234445 A (NITTO DENKO CORP) 2 September 2005 (2005-09-02) abstract; figure 3 -----	1, 17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/017023

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0899626	A	03-03-1999	BR 9803734 A	07-12-1999
			DE 69820174 D1	15-01-2004
			DE 69820174 T2	27-05-2004
			JP 11119560 A	30-04-1999
			US 6397034 B1	28-05-2002
EP 0929011	A	14-07-1999	DE 69932367 T2	23-11-2006
			JP 2000075695 A	14-03-2000
			US 5998010 A	07-12-1999
US 2005232662	A1	20-10-2005	CN 1684008 A	19-10-2005
			JP 2005301272 A	27-10-2005
US 2006002746	A1	05-01-2006	BR PI0502478 A	14-02-2006
			JP 2006018272 A	19-01-2006
JP 2001289823	A	19-10-2001	NONE	
JP 2004163503	A	10-06-2004	NONE	
JP 2005234445	A	02-09-2005	NONE	