

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2005236643 B2**

(54) Title
Portable information carrier having transponders

(51) International Patent Classification(s)
G06K 19/077 (2006.01) **G06K 19/073** (2006.01)

(21) Application No: **2005236643** (22) Date of Filing: **2005.04.26**

(87) WIPO No: **WO05/104024**

(30) Priority Data

(31) Number	(32) Date	(33) Country
00732/04	2004.04.27	CH

(43) Publication Date: **2005.11.03**

(44) Accepted Journal Date: **2009.01.08**

(71) Applicant(s)
NagraID SA

(72) Inventor(s)
Droz, Francois

(74) Agent / Attorney
FB Rice & Co, Level 23 44 Market Street, Sydney, NSW, 2000

(56) Related Art
US 6121544 A;
DE 19721057 A;
DE 10233927 A;

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)

(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international



(43) Date de la publication internationale
3 novembre 2005 (03.11.2005)


(10) Numéro de publication internationale
WO 2005/104024 A1

- (51) Classification internationale des brevets⁷ : **G06K 19/077**
- (21) Numéro de la demande internationale : PCT/IB2005/051352
- (22) Date de dépôt international : 26 avril 2005 (26.04.2005)
- (25) Langue de dépôt : français
- (26) Langue de publication : français
- (30) Données relatives à la priorité :
00732/04 27 avril 2004 (27.04.2004) CH
- (71) Déposant (pour tous les États désignés sauf US) : **NA-
GRAID SA** [CH/CH]; Crêt-du-Loche 10, CH-2322 Le
Crêt-du-Loche (CH).
- (72) Inventeur; et
- (75) Inventeur/Déposant (pour US seulement) : **DROZ,
François** [CH/CH]; Prairie 46, CH-2300 La Chaux-de-
Fonds (CH).
- (74) Mandataire : **LEMAN CONSULTING SA**; Route de
Clémenty 62, CH-1260 Nyon (CH).
- (81) États désignés (sauf indication contraire, pour tout titre de
protection nationale disponible) : AE, AG, AL, AM, AT,
AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO,
CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,
KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

[Suite sur la page suivante]

(54) Title: PORTABLE INFORMATION CARRIER HAVING TRANSPONDERS

(54) Titre : SUPPORT D'INFORMATION PORTABLE AVEC TRANSPONDEURS

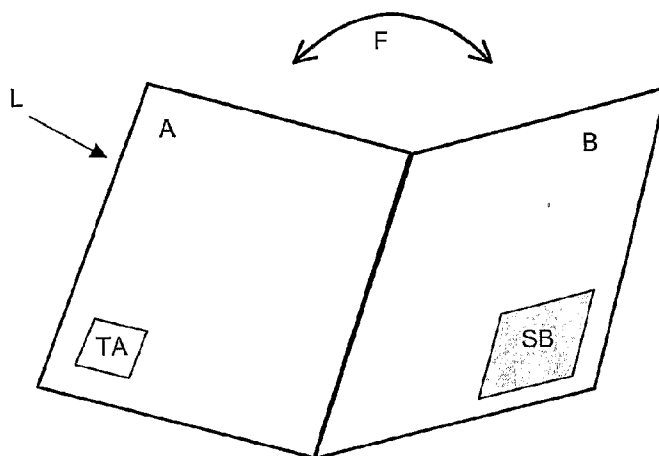

(57) Abstract: The aim of the invention is to provide a portable information carrier equipped with a transponder that can be activated and deactivated during the use of said carrier without requiring the actuation of a specific device. To this end, a portable information carrier is provided that has at least two essentially planar parts (A, B) that are joined to one another in an articulated manner while forming an assembly of which one part can be placed over the other. The first part (A) comprises a transponder (TA) situated in the plane of said part (A). The second part (B) comprises a shielding element (SB) extending over all or a portion of said part (B). The transponder (TA) is designed for being read by means of an appropriate reader while transmitting an electromagnetic signal that activates the emission of a response by the transponder (TA). The invention is characterized in that the transponder (TA) of the first part (A) is positioned opposite the shielding element (SB) of the second part (B) when the two parts are placed one above the other while preventing the activation of the transponder (TA) by absorbing the signal transmitted by the reader. This activation is effected only when the parts are located at a distance from one another whereby permitting the transponder (TA) located at a distance from the shielding (SB) to appear.

[Suite sur la page suivante]



WO 2005/104024 A1



(84) États désignés (sauf indication contraire, pour tout titre de protection régionale disponible) : ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasién (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), européen (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— avant l'expiration du délai prévu pour la modification des revendications, sera republiée si des modifications sont reçues

En ce qui concerne les codes à deux lettres et autres abréviations, se référer aux "Notes explicatives relatives aux codes et abréviations" figurant au début de chaque numéro ordinaire de la Gazette du PCT.

Publiée :

— avec rapport de recherche internationale

(57) **Abrégé :** Le but de la présente invention est de proposer un support d'information portable équipé d'un transpondeur pouvant être activé et désactivé lors de l'utilisation dudit support sans recourir à un dispositif spécifique à actionner. Ce but est atteint par un support d'information portable comprenant au moins deux parties (A, B) sensiblement planes articulées l'une à l'autre formant un ensemble dont une partie est superposable sur l'autre, la première partie (A) comporte un transpondeur (TA) disposé dans le plan de ladite partie (A), la seconde partie (B) comporte un élément de blindage (SB) s'étendant sur tout ou partie de ladite partie (B), ledit transpondeur (TA) étant destiné à être lu au moyen d'un lecteur approprié transmettant un signal électromagnétique activant l'émission d'une réponse par ledit transpondeur (TA), caractérisé en ce que ledit transpondeur (TA) de la première partie (A) est positionné en regard de l'élément de blindage (SB) de la seconde partie (B) lorsque les deux parties sont superposées empêchant l'activation du transpondeur (TA) par absorption du signal transmis par le lecteur, ladite activation ne s'effectuant que lorsque lesdites parties sont écartées l'une de l'autre et laissant apparaître le transpondeur (TA) éloigné de l'élément de blindage (SB).

am the translator of the English language document attached and I state that the attached document is a true translation of

as filed on April 26, 2005 (with amendments)

filed in _____ on _____

filed in _____ on _____

filed in _____ on _____

Signature of Translator *Phanet*

F.B. RICE & CO PATENT ATTORNEYS

PORTABLE INFORMATION CARRIER WITH TRANSPONDERS

Field of the Invention

- 5 The object of this invention is a particular application where transponders are integrated into a portable information carrier such as a document including several sheets such as, for example, a passport, a permit, an attestation for a member of an association or other types of identity documents.

10 Background of the invention

A transponder or "RFID Tag" is an electronic element comprising at least one chip connected to an antenna including a memory in which digital data is stored. The content of this memory can be consulted or read with the help of a suitable reader that
15 transmits an electromagnetic signal intended to be picked up by the antenna of the transponder. This signal provides the energy necessary for the activation of the chip that returns to the reader, via the same antenna, a response signal containing the data stored in the memory of the chip.

- 20 Except the contactless chip cards, a conventional transponder application consists in integrating them into labels that can be stuck or attached to any object (goods in a store, spare parts in warehouse, luggage, etc.).

Thanks to their reduced thickness and in an aim to provide protection against
25 counterfeiting, transponders can also be directly imbedded into the material forming the objects such as valuable documents, banks notes, compact discs, badges, cards etc.

When several transponders are fixed or inserted into an object, their reading can become more difficult because, being supplied simultaneously by the electromagnetic
30 field of the reader, they also respond simultaneously. In order to distinguish the response of one transponder from that of another, it is necessary to isolate them electromagnetically by means of shielding elements.

The document U.S. Pat. No. 6,176,425 describes a system where a set of transponders
35 located on an object is managed by a reader that is capable of sequentially picking up the data originating from each transponder. Said transponders have an individual

reading zone in which it is possible to read the data stored in the transponder in question.

5 In order to select a given transponder, movable shielding elements placed in the vicinity of the transponder can be positioned in different ways. According to their position, these shielding elements allow either to direct the signal emitted by the antenna of the transponder in a given direction without overlapping into the reading area of another transponder, or to mask the transponders to let inactive during the reading of one transponder alone.

10 These shielding elements known in the form of electromagnetic conductive sheets have the capacity to absorb the electromagnetic energy transmitted by the reader in order to block the activation of the transponder chip. Embodiment examples of such sheets and their composition are described in the documents U.S. Pat. Nos. 4,774,148 and
15 6,344,155.

Summary of the invention

20 The aim of this invention is to propose a portable information carrier equipped with a transponder capable of being activated and deactivated during the use of said information carrier without having recourse to a specific device for actuation.

This aim is reached by a portable information carrier comprising at least two substantially planar parts articulated to each other forming an assembly in which one
25 part can be superimposed on the other, the first part includes a transponder arranged on the plane of said part, the second part includes a shielding element that extends over all or part of said part, said transponder intended to be read by means of a suitable reader that transmits an electromagnetic signal activating the transmission of a response from said transponder, characterized in that said transponder of the first part is positioned
30 facing the shielding element of the second part when both parts are superimposed to prevent the activation of the transponder by absorption of the signal transmitted by the reader, said activation is carried out when said parts are moved aside from each other, letting appear the transponder distant from the shielding element.

35 .

In a preferred embodiment, the portable information carrier according to the invention consists in a booklet formed by a sheet folded into two equal parts, one of which includes a transponder that is usually integrated into said sheet. The other part includes a shielding element that occupies an area whose surface corresponds at least to that occupied by the transponder on the first sheet. This shielding element is made up of an electromagnetic conductive sheet that forms a layer integrated into the sheet for example. When both sheets are folded, that is to say superimposed one on the other, the transponder of the first sheet faces the shielding element of the second sheet.

10 An electromagnetic conductive sheet represents here a homogeneous or inhomogeneous sheet (wire netting for example) absorbing both the electric field and the magnetic field transmitted by the transponder reading device. The material of this sheet will be chosen according to the frequency of the electromagnetic field. In fact, the more the frequency increases, the greater the ratio of the magnetic field to be absorbed will be in relation to the electric field and inversely.

When the booklet is closed, the transponder cannot be activated since the shielding situated under the transponder absorbs the energy transmitted by the reader, while, when the booklet is opened, the shielding is placed beside the transponder that can thus easily be read.

20 According to an embodiment of the invention, each sheet of the booklet includes a transponder and a shielding element positioned in such a way that when the booklet is closed, the transponders are placed on a corresponding shielding element of the sheet opposite to that carrying said transponder. In this case, when the booklet is opened, each transponder can be read independently one from the other, the shielding elements being distant from the transponders.

According to another embodiment, the booklet includes a plurality of sheets joined in the same way as the pages of a book or of a review. Each sheet includes a transponder that can be read individually without the transponders of the preceding sheets being activated. This reading is carried out when the booklet is opened in order to present the transponder of the sheet to be read in a like in the minimal embodiment with two sheets. The hidden transponders of the superimposed sheets

are deactivated by a shielding element integrated into the sheet covering said transponders.

Brief description of the drawings

5 The invention will be better understood thanks to the following detailed description that refers to the enclosed drawings that are given as a non-limitative example, in which:

- Figure 1 shows a view in perspective of an opened booklet with two articulated sheets in which one includes a transponder and the other a shielding element.
- 10 - Figure 2 illustrates the booklet of Figure 1 closed showing the transponder placed on the shielding element.
- Figure 3 shows a view in perspective of an opened booklet with three sheets each including a transponder and the corresponding shielding elements.
- Figure 4 shows a plan view of the booklet of Figure 3 with the two first sheets
15 opened.
- Figure 5 shows a plan view of the booklet of Figure 3 with the two last sheets opened.
- Figure 6 illustrates the booklet of Figure 3 closed showing the different transponders placed on their respective shielding elements.
- 20 - Figure 7 represents an alternative where two parts of an information carrier are articulated according to a rotating axis perpendicular to said parts.
- Figure 8 shows the information carrier of Figure 7 with its two articulated parts superimposed.
- Figure 9 shows an example of an information carrier where two sheets of
25 different sizes are articulated according to a rotating axis.

- Figure 10 shows an example of an information carrier where four sheets of different shapes and sizes are articulated according to axes of different orientation and types.

Detailed description of the invention

- 5 Figure 1 shows a general view of a booklet (L) comprising two sheets (A) and (B). The first sheet (A) includes a transponder (TA) and the second sheet (B) includes a shielding element (SB). The sheets (A, B) are joined either by a fold or any other type of hinge allowing an easy articulation to open and close the booklet (L) according to the arrow (F).
- 10 The transponder (TA) and the shielding element (SB) can either be adhered onto one of the faces of the sheets, or integrated or imbedded into the material according to a preferred variant offering increased security. Their position on the sheets (A, B) depends on one hand on the characters and/or designs printed on said sheets (A, B) and on the other hand on their respective functions. In fact, the transponder (TA) is
- 15 positioned on the sheet (A) in such a way that the shielding element (SB) situated on the sheet (B) is superimposed when the booklet (L) is closed as shown in Figure 2. In other words, the transponder (TA) and the corresponding shielding element (SB) are symmetrically placed on both parts of the axis formed by the hinge that links the sheets (A) and (B) when the booklet (L) is flat opened out.
- 20 The surface occupied by the shielding element on the sheet (B) depends on that occupied by the transponder on the sheet (A) and on the electromagnetic energy absorption power of the materials which constitute said shielding element.
- The role of this shielding element (SB) is to block the reading of the transponder (TA) when the booklet is closed. In this case, the shielding element (SB) is under the
- 25 transponder (TA) at a small distance from the latter. The electromagnetic signal transmitted by a transponder reader thus absorbed or strongly attenuated by the shielding element (SB) becomes insufficient to supply the transponder (TA) with the energy necessary for the issue of its response. Therefore, it is impossible to read the transponder (TA) as long as the booklet (L) remains closed. Once the opened
- 30 booklet is placed flat out, the shielding element is outside the reading area of the transponder and thus has no effect on the signal transmitted by the reader that in this

way can supply normally the transponder (TA) allowing it to respond in the appropriate way.

According to an embodiment of the invention, both sheets (A, B) can be provided with a transponder. In this case, a corresponding shielding element is placed on both
5 parts of the hinge linking the two sheets in such a way that, when the booklet is closed, each transponder is covered by its corresponding element. It is only on the opening of the booklet that it is possible to read each transponder one after the other without the signal of the reader being altered by one of the shielding elements.

According to another embodiment, the booklet can have a plurality of sheets as
10 shown in Figure 3 where three sheets (A), (B) and (C) are linked together by a hinge. According to the number of sheets of the booklet, this hinge can be arisen in several forms such as paper-clips, rings, a spiral or gluing in the same way that a book bounding, etc.

In the example disclosed in Figure 3, each of the three sheets (A, B, C) includes a
15 transponder (TA, TB, TC). The shielding elements (SB, SC) are arranged in such a way as to allow the selective reading of the transponders (TA, TB, TC) when the booklet is opened by presenting two sheets at a time. On the contrary, when the booklet is closed none of the transponders (TA, TB, TC) can be read because of the shielding elements (SB, SC) that are superimposed on said transponders (TA, TB,
20 TC).

The first sheet (A) of the booklet (L) includes a transponder (TA), the second sheet (B) includes a transponder (TB) and a shielding element (SB) positioned symmetrically to the transponder (TA) of the first sheet (A) regarding the axis of the hinge linking the sheets. The third sheet (C) includes a transponder (TC) positioned
25 symmetrically to the shielding element (SB) of the second sheet (B) and a shielding element (SC) also placed symmetrically to the transponder (TB) of the second sheet (B).

Figure 4 shows the booklet (L) in Figure 3 opened in a flat position at the first two sheets (A) and (B). The transponder (TA) of sheet (A) can only be read because the
30 transponder (TB) of sheet (B) is placed on the shielding element (SC) situated on the third sheet (C) covered by the second sheet (B). The transponder (TC) of the third

sheet (C) cannot be read either since it is covered by the shielding element (SB) of the second sheet (B).

Figure 5 shows the booklet (L) opened in a flat position at the second and third sheets (B, C). Here, the transponders (TB) and (TC) of sheets (B) and (C) respectively can be read as they are not placed on the shielding elements. Only the transponder (TA) of the first sheet (A) cannot be read as it is covered by the shielding element (SB) of the second sheet (B).

Therefore to read successively the transponders (TA; TB, TC) carried by each sheet (A; B; C) of the booklet (L), it is sufficient to turn the pages made up of said sheets one after the other in order to present them opened two at a time to the reader.

Figure 6 shows the booklet (L) closed where none of the transponders (TA, TB, TC) can be read from either of the outer faces of the booklet (L). In fact, each transponder (TA, TB, TC) is covered by a shielding element (SB, SC). The transponder (TA) of the first sheet (A) is positioned on the shielding element (SB) of the second sheet (B) just as the transponder (TC) of the third sheet (C). The transponder (TB) of the second sheet (B) is positioned on the shielding element (SC) of the third sheet (C).

This invention can be applied to all documents that include several sheets secured by transponders such as a passport or a valuable document. The transponders containing the digital data related to the written content of the document, for example, allow the prevention of any type of fraud or falsification. The selective reading of the transponders simply by turning the pages of the document becomes advantageous in the automated systems in charge, for example, to compare an optical reading of the content of the pages of the document with that stored in the memories of transponders.

According to an embodiment with an additional security level, the document can also be provided with an identification marking on the shielding elements that extend on all or part of a sheet. This marking can consist in a bar code, perforations, printed graphics or characters, a hologram or a kinegram, etc or also a combination of these types of marking.

The sheets of the information carrier according to the invention can be made of several kinds of material, preferably not metallic, which do not affect the functioning of the transponders when they are activated. Their shape and size, length, width and thickness can also be variable and adapted according to the use of the information carrier as for example, a card, a valuable document, a portfolio, a badge or any other object including at least two articulated parts that can be superimposed on all or part of their surface.

Figure 7 shows an example of an information carrier in the form of a card or a badge for example constituted of two parts or sheets (A, B) articulated according to a rotation axis (R) perpendicular to said parts. This axis (R) is preferably placed in the vicinity of the edge of the sheets (A, B) and can be constituted, according to the thickness of the sheets, by an eyelet, a screw or a joining pin or any other attachment means. This allows the rotation of two sheets (A, B) one on top of the other in order to move aside or superimpose them.

When both parts (A, B) or sheets are moved aside (Figure 7) the transponder (TA) of the first sheet (A) can be read. When the second part or sheet (B) superimposes the first (A), as shown in Figure 8, the transponder (TA) is covered by the shielding element (SB) of the second sheet (B) thus preventing the reading of said transponder (TA).

This embodiment can be applied to a credit card or an identification card in order to avoid the reading of the transponder without the knowledge of the user carrying the card and passing into the vicinity of a reader. In fact, to activate the reading, the carrier of the card must take his card and open it by turning one of two sheets in order to free the transponder before presenting it to the reader.

Of course, regardless of the configuration of the articulation between the two sheets (hinge type or joining pin type) the latter can be of different shapes and sizes by being adapted to the size and the positioning of the transponder and/or the shielding element. Figure 9 shows an example in which the sheet B carrying the shielding element has a smaller surface than that of the sheet A carrying the transponder.

According to an embodiment, the information carrier can include several sheets of different shapes and sizes articulated according to axes either of the hinge type

parallel to each other or not or of the rotation type with joining pin, allowing the superimposing or moving aside of a transponder from a corresponding shielding element or vice versa. Figure 10 shows an example of an information carrier with four articulated sheets (A, B, C, D) where the three first sheets A B and C are articulated according to two perpendicular hinges, and in which the last sheet D is articulated according to a rotating axis.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. Portable information carrier comprising at least two substantially planar parts articulated to each other forming an assembly in which one part can be superimposed on the other, the first part includes a transponder arranged on the plane or said part, the
5 second part includes a shielding element made up of an electromagnetic conductive sheet that extends over all or part of said part, said transponder intended to be read by means of a suitable reader that transmits an electromagnetic signal activating the transmission of a response from said transponder, wherein said transponder of the first
10 part is positioned facing the shielding element of the second part when both parts are superimposed preventing the activation of the transponder by absorption of the signal transmitted by the reader, said activation being carried out when said parts are moved aside from each other, letting appear the transponder distant from the shielding element.
2. Information carrier according to claim 1, wherein the articulation between two
15 parts consists in an axis forming a hinge, a first part superimposing a second part by putting said first part down by means of said hinge, said two parts form a booklet, each part being of comparable size constituting a sheet of said booklet.
3. Information carrier according to claim 1, wherein the shielding element of the second part occupies a surface at least equivalent to that occupied by the transponder
20 on the first part.
4. Information carrier according to claim 2, wherein the first sheet includes a transponder positioned symmetrically to a shielding element included in the second sheet relatively to the hinge linking the two sheets when said sheets are moved aside and arranged in the same plane.
- 25 5. Information carrier according to claim 2, wherein each sheet includes a transponder and a shielding element positioned in such a way that when both sheets are superimposed, the transponders are positioned on a corresponding shielding element of the sheet opposite to that carrying said transponder.
6. Information carrier according to claim 2, comprising a booklet including a
30 plurality of sheets, each sheet including a transponder and a shielding element positioned symmetrically on both side of the hinge, said shielding elements covering the transponders of the superimposed sheets when the booklet is opened by presenting the sheets two at a time and allowing the selective reading of each transponder carried by each opened sheet.

7. Information carrier according to claim 1, wherein the articulation between the two parts is made up of a rotating axis perpendicular to the surface formed by said parts and situated in an area adjacent to the edge of said parts.

8. Information carrier according to claim 7, wherein the first part comprising the
5 transponder rotating around said rotation axis and when superimposed on the second part comprising the shielding element prevents the activation of said transponder and vice versa.

9. Information carrier according to claim 7, wherein the first part comprising the
10 transponder rotating around said rotation axis and when moved aside from the second part comprising the shielding element allows the activation of said transponder and vice versa.

10. Information carrier according to claim 1, comprising several parts of different sizes and shapes articulated each other according to axes forming hinges, which are oriented in different directions.

15 11. Information carrier according to claim 1, comprising several parts of different sizes and shapes articulated each other according to rotation axes perpendicular to the plane formed by said parts and situated in an area adjacent to the edge of said parts.

12. Information carrier according to claim 1, comprising several parts of different sizes and shapes articulated each other on one hand according to axes forming hinges
20 which are oriented in different directions and on the other hand according to rotation axes perpendicular to the plane formed by said parts and placed in an area adjacent to the edge of said parts.

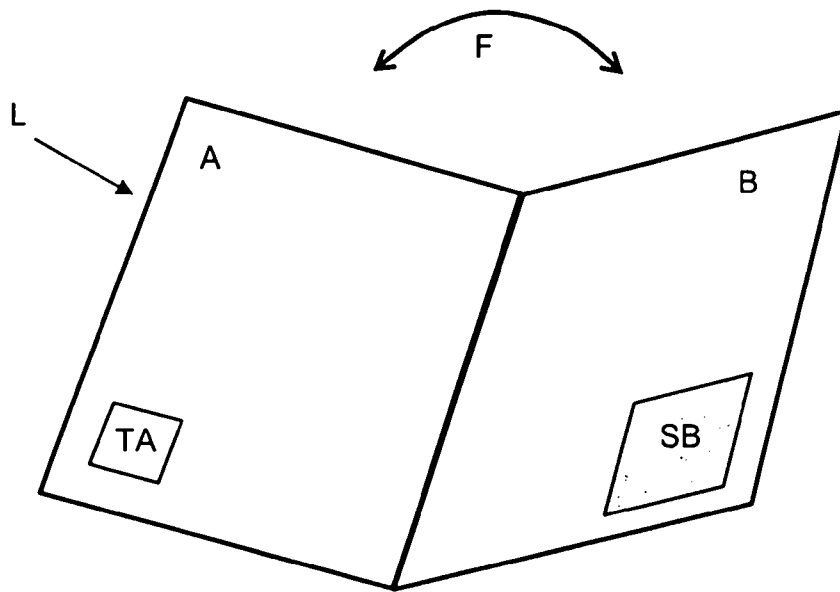


Fig. 1

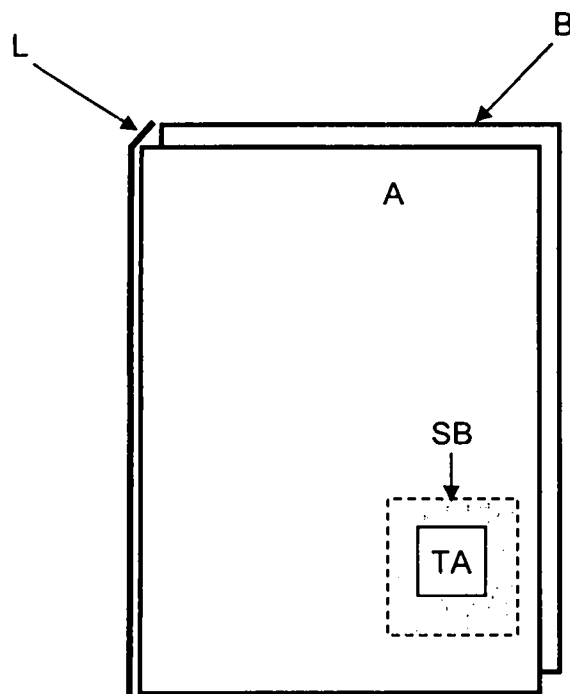


Fig. 2

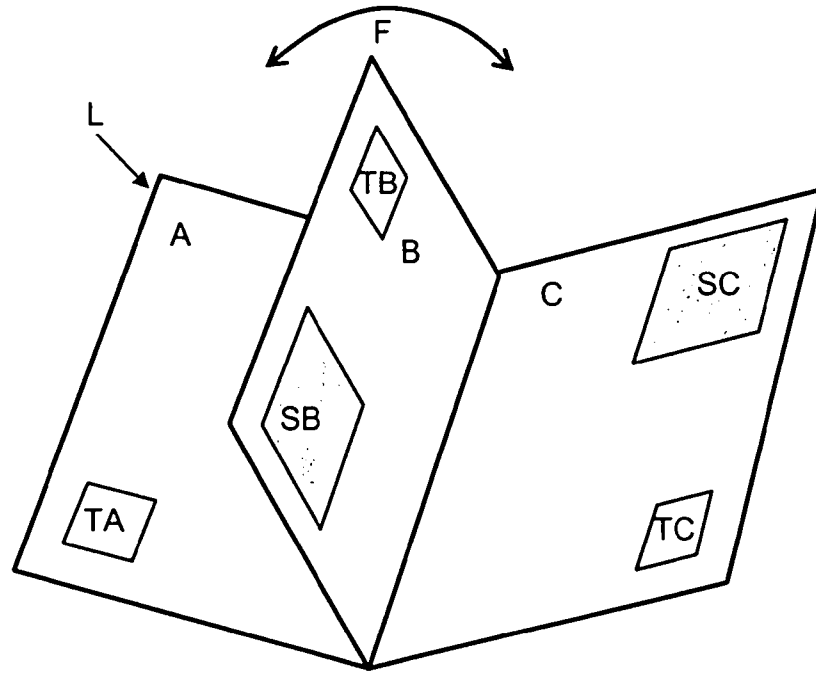


Fig. 3

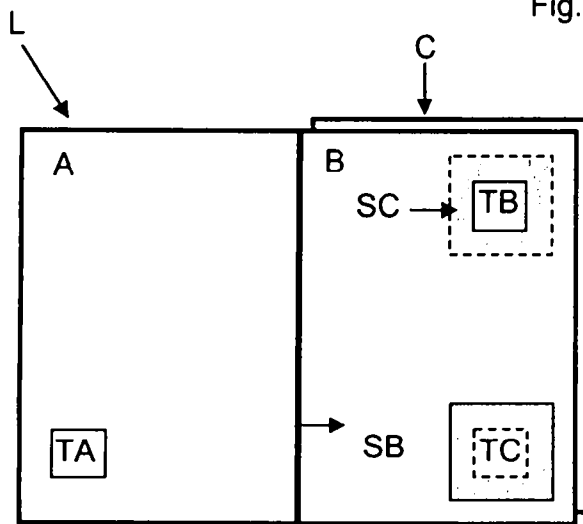


Fig. 4

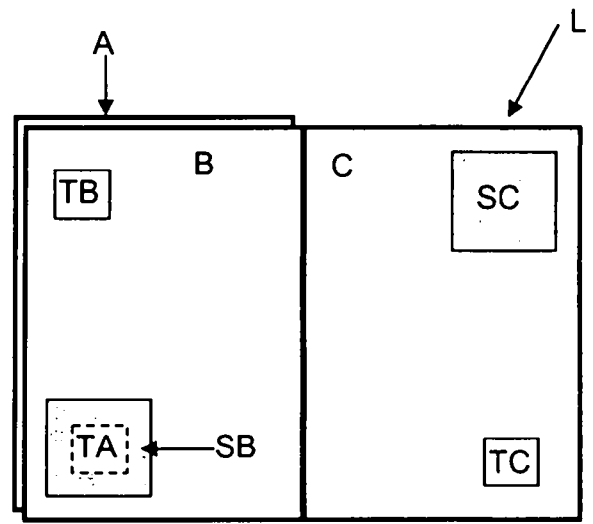


Fig. 5

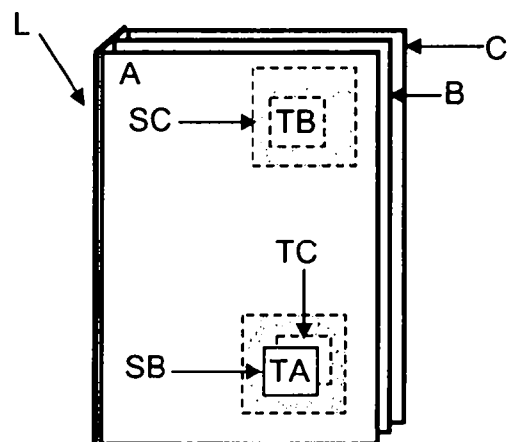


Fig. 6

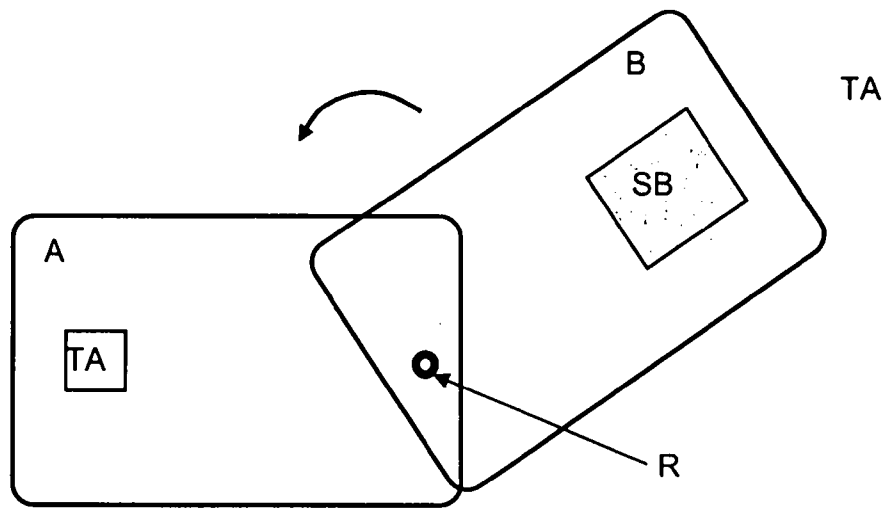


Fig. 7

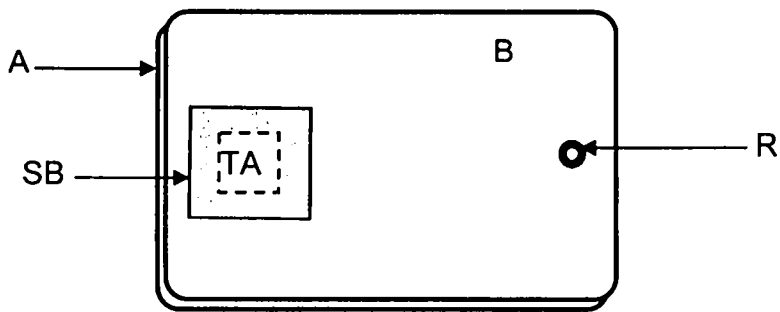


Fig. 8

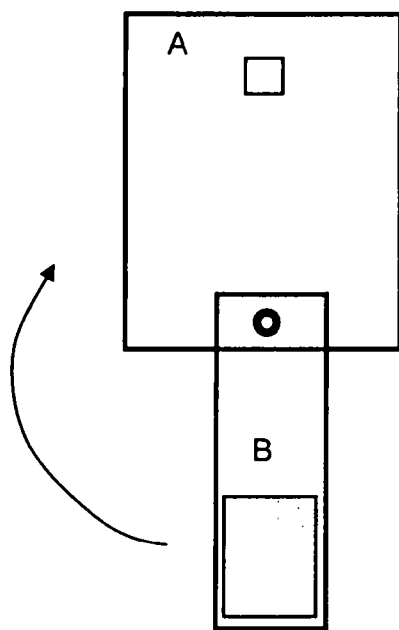


Fig. 9

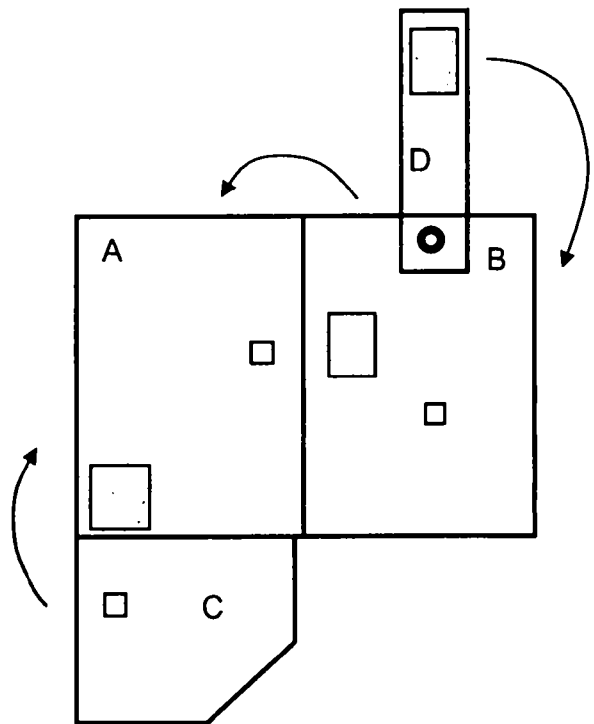


Fig. 10