



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2477873 A1 2003/09/18

(21) **2 477 873**

**(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2003/03/07
(87) Date publication PCT/PCT Publication Date: 2003/09/18
(85) Entrée phase nationale/National Entry: 2004/08/30
(86) N° demande PCT/PCT Application No.: US 2003/007026
(87) N° publication PCT/PCT Publication No.: 2003/076483
(30) Priorité/Priority: 2002/03/07 (60/362,703) US

(51) Cl.Int.⁷/Int.Cl.⁷ C08F 210/02, C08J 5/18, D01F 6/32,
D01D 5/11

(71) **Demandeur/Applicant:**
E.I. DU PONT DE NEMOURS AND COMPANY, US

(72) **Inventeurs/Inventors:**
CHOU, RICHARD T., US;
SAMUELS, SAM L., US;
SIEMIONKO, ROGER K., US

(74) **Agent:** BENNETT JONES LLP

(54) Titre : COPOLYMER ETHYLENIQUE CONTENANT DU FLUOR
(54) Title: FLUORINE-CONTAINING ETHYLENE COPOLYMERS

(57) Abrégé/Abstract:

The present invention is a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the fluorine-containing comonomer compound is present at a concentration of up to 40% by weight, based on the total weight of the ethylene copolymer. FCEC described herein can be useful in a variety of applications, for example: as a release resin in low surface energy release films; as melt blown fibers; in composite or multilayer structures as a low surface energy outer layer; as microporous membranes; as flashspun plexifilamentary products; and as melt spun fibrous products.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 2003/076483 A3

(51) International Patent Classification⁷: **C08F 210/02**,
C08J 5/18, D01F 6/32, D01D 5/11
Landenberg, PA 19350 (US). **SIEMIONKO, Roger, K.**
[US/US]; 14107 Dorsetshire Court, Midlothian, VA 23113
(US).

(21) International Application Number:

PCT/US2003/007026

(74) Agent: **DOBSON, Kevin, S.**; E.I. Dupont De Nemours
and Company, Legal Patent Records Center, 4417 Lan-
caster Pike, WILMINGTON, DE 19805 (US).

(22) International Filing Date: 7 March 2003 (07.03.2003)

(25) Filing Language:

English

(81) Designated States (national): CA, JP, US.

(26) Publication Language:

English

(84) Designated States (regional): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(30) Priority Data:

60/362,703

7 March 2002 (07.03.2002) US

Published:

— with international search report

(71) Applicant (for all designated States except US): **E.I. DU
PONT DE NEMOURS AND COMPANY** [US/US]; 1007
Market Street, Wilmington, DE 19898 (US).

(88) Date of publication of the international search report:
5 February 2004

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHOU, Richard,
T.** [US/US]; 173 Thompson Drive, Hockessin, DE 19707
(US). **SAMUELS, Sam, L.** [US/US]; 34 Pelham Drive,

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.



A3

WO 2003/076483 A3

(54) Title: FLUORINE-CONTAINING ETHYLENE COPOLYMERS

(57) Abstract: The present invention is a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the fluorine-containing comonomer compound is present at a concentration of up to 40% by weight, based on the total weight of the ethylene copolymer. FCEC described herein can be useful in a variety of applications, for example: as a release resin in low surface energy release films; as melt blown fibers; in composite or multilayer structures as a low surface energy outer layer; as microporous membranes; as flashspun plexifilamentary products; and as melt spun fibrous products.

TITLE

FLUORINE-CONTAINING ETHYLENE COPOLYMERS

This application claims the benefit of U.S. 5 Provisional Application No. 60/362,703, filed March 7, 2002.

BACKGROUND OF THE INVENTION**Field of the Invention**

The present invention relates to ethylene 10 copolymers. This invention particularly relates to fluorine-containing ethylene copolymers and products made therefrom.

Description of the Related Art

Fluoropolymer compositions are widely used for 15 surface modification, as agents to impart desirable surface properties to various types of surfaces. For example, fluoropolymer compositions can impart or enhance the water and oil repellency of certain surfaces, including fabrics and upholstery. However, 20 surface treatment using fluoropolymers can involve complex processing steps to ensure that the fluoropolymer is applied and bonded to the surface being treated. The process can be difficult and expensive. Organic solvent vapors can be released to 25 the atmosphere during the processing. Surface treatment can involve high temperature curing of the fluoropolymer to the substrate surface.

To impart water and oil repellency, 30 fluoroochemicals or fluoropolymers can be dissolved or dispersed either in organic solvents or in water. For example, mixtures of fluorinated copolymers, mainly comprising perfluoroalkyl methacrylate, and vinyl

copolymers are disclosed in U.S. Pat. No. 3,277,039. U.S. Pat. No. 2,803,615 discloses acrylate/methacrylate esters of N-alkyl or N-alkanol perfluoroalkanesulfonamides used to impart grease and 5 oil repellency. Fluorochemical compositions for treating textile fibers and fabrics comprising an aqueous solution or dispersion of a fluorochemical acrylate and a polyalkoxylated polyurethane having pendant perfluoroalkyl groups is described in U.S. Pat. 10 No. 5,350,557. U.S. Pat. No. 5,536,304 describes a composition for imparting water and oil repellency comprising a fluoroaliphatic radical containing agent, and a cyclic carboxylic acid anhydride-containing polysiloxane.

15 Fluorochemicals can be melt-blended with thermoplastic polymers, and thereby impart water and oil repellency to the polymer by migrating to the polymer surface as described in, for example, U.S. Pat. No. 5,025,052, wherein the preparation of 20 fluoroaliphatic radical-containing oxazolidinone compositions for blending with thermoplastic polymers is described. U.S. Pat. No. 5,380,778 describes thermoplastic compositions comprising fluoroaliphatic radical containing aminoalcohols and a thermoplastic 25 synthetic organic polymer.

Ethylene copolymers are useful polymeric materials in many applications. Ethylene copolymers can find use in applications such as packaging, laminate films, and adhesives for example. Conventional polyolefins such 30 as polypropylene, polyethylene, and conventional ethylene copolymers have high surface tension relative to fluoropolymers such as polytetrafluoroethylene, for

example. As a result, for applications wherein water and oil repellency is important, articles made from polyolefins must be treated to attain a satisfactory level of repellency. However, due to their relatively 5 low melting point and lack of reactive functional groups, treatment of polyolefins with fluorochemicals or fluoropolymers is, in general, much more difficult than treating other thermoplastic polymers.

Copolymers of ethylene and fluorine-containing 10 monomers are known. For example, Tefzel®, manufactured by E.I. DuPont de Nemours and Company, is a copolymer of ethylene and tetrafluoroethylene. Copolymers of this type are very different from conventional polyethylene copolymers in many aspects. For example, 15 fluorine-containing ethylene copolymers are typically melt-processable only at much higher temperature than conventional ethylene polymers and ethylene copolymers, and the properties of fluorine-containing ethylene copolymers differ from conventional ethylene 20 copolymers. Copolymers of this type are not amenable to manufacture or processing under the type of conditions used to manufacture and process conventional ethylene copolymers. Ethylene/fluoromonomer copolymers of this type are not compatible in systems that 25 currently use polyethylene copolymers. For example, known conventional ethylene/tetrafluoroethylene copolymers have no adhesion to polyethylene.

It would be desirable to have a fluorine-containing ethylene copolymer that can be processed in 30 the same way as conventional ethylene copolymers.

It would be desirable to have a melt-processable fluorine-containing ethylene copolymer.

It would be desirable to have a fluorine-containing ethylene copolymer that has a low surface tension.

It would be desirable to have a fluorine-containing ethylene copolymer that can be compatible with, or used in place of conventional ethylene copolymers.

It would be desirable to have a laminate film having at least one layer of a fluorine-containing ethylene copolymer.

It would be desirable to have at least a composite fiber having at least one component of a fluorine-containing ethylene copolymer.

SUMMARY OF THE INVENTION

15 In one aspect the present invention is a film comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 20 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene.

In another aspect the present invention is a fiber comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 25 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene wherein the fiber is obtained by a melt-blown process.

30 In another aspect the present invention is an article having a composite or multilayer structure comprising an outer layer comprising: a fluorine

SUBSTITUTE PAGE 5

5 containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene.

10 In another aspect, the present invention is a microporous membrane comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 15 wt% to about 99.5 wt% ethylene, wherein the membrane is useful as protection against permeation of liquids through the membrane.

20 In still another aspect, the present invention is a flash spun plexifilamentary product comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a 25 fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene.

30 In yet another aspect, the present invention is a melt spun fibrous article comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene, wherein the fibrous

products are obtained by melt spinning or multicomponent fiber spinning a FCEC or a blend thereof.

DETAILED DESCRIPTION OF THE INVENTION

5 FCE copolymers of the present invention can be useful in a variety of applications. For example, copolymers of the present invention can be used: as a release resin in low surface energy release films; as melt blown fibers; in composite or multilayer 10 structures as a low surface energy outer layer; as microporous membranes; as flashspun plexifilamentary products; and as melt spun fibrous products.

In one embodiment, the present invention is an article comprising a fluorine-containing ethylene 15 copolymer (FCEC). Ethylene copolymers of the present invention include up to about 40% by weight, based on the total weight of the copolymer (wt%), of a suitable fluorine-containing monomer. Preferably the fluorine-containing comonomer is from about 2 to about 30 wt% of 20 the copolymer. More preferably, the fluorine-containing comonomer is from about 10 to about 25 wt% of the copolymer.

The copolymer comprises from about 30 wt% to about 99.5 wt% ethylene comonomer. Preferably the copolymer 25 comprises from about 40 wt% to about 95 wt% ethylene comonomer, more preferably from about 50 wt% to about 90 wt% ethylene comonomer, and most preferably from about 70 wt% to about 90 wt% ethylene comonomer.

The copolymer can optionally comprise other 30 comonomers. A copolymer, as the term is used herein, is a polymer obtained by the polymerization of at least two comonomers. A comonomer, as the term is used

SUBSTITUTE PAGE 7

herein, is any monomer that is polymerized in the presence of at least one other monomer to produce a copolymer of the present invention. For example, a 5 copolymer can be the product of polymerization of two, three, four, or five comonomers, or more. Where the concentration of all but one of the comonomers is specified, the concentration of the remaining comonomer can be deduced by subtraction of the known constituents 10 from 100 wt%, that is, the total wt% of the copolymer.

Suitable fluorine containing comonomers are described in U.S. Pat. No. 2,803,615; U.S. Pat. No. 2,642,416; US. Pat. No. 2,826,564; U.S. Pat. No. 15 3,102,103; US. Pat. No. 3,282,905; and US. Pat. No. 3,304,278, for example. Suitable fluorine-containing comonomers are fluorinated acrylate or methacrylate esters of the general formula: Cf-L-O-CO-CR=CH₂, wherein:

20 (i) Cf is a fluorinated aliphatic group having at least 4 carbon atoms wherein the aliphatic group can be: straight chain or branched; acyclic or cyclic; and can include heteroatoms such as nitrogen, oxygen, and/or sulfur. It is preferable that Cf is a perfluorinated aliphatic group of the 25 formula

$C_n F_{2n+1}$, wherein n is an integer from 4 to 20;









30 (ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, wherein L can contain from 1 to 10 carbon atoms, and can optionally include oxygen, nitrogen, or sulfur-containing groups, or combinations thereof; L can be straight-chain or branched, cyclic alkylene, arylene, arylalkylene,

AMENDED SHEET
IPEA/EP



sulfonyl, sulfoxy, sulfonamide, carboxyamino, carbonyloxy, urethylene, or combinations thereof.

For example, a fluorine-containing monomer 5 suitable for use in the present invention can include:

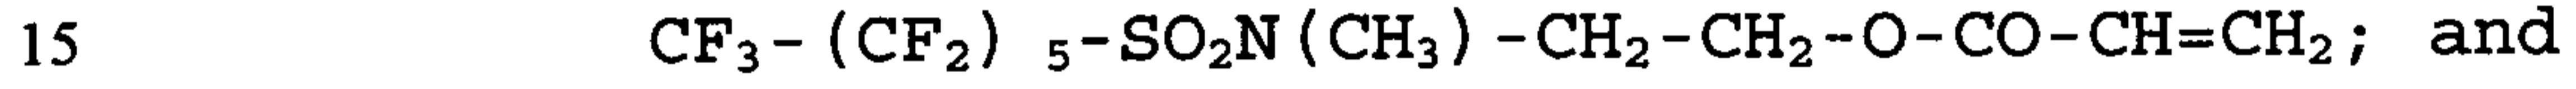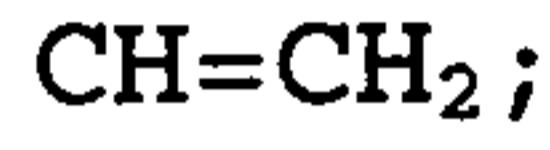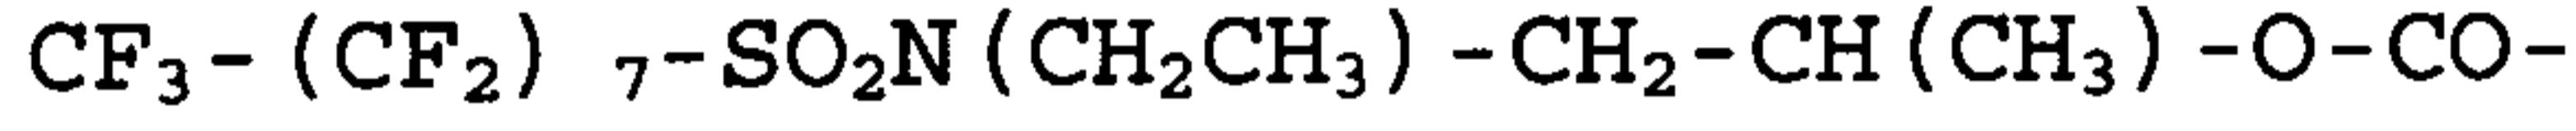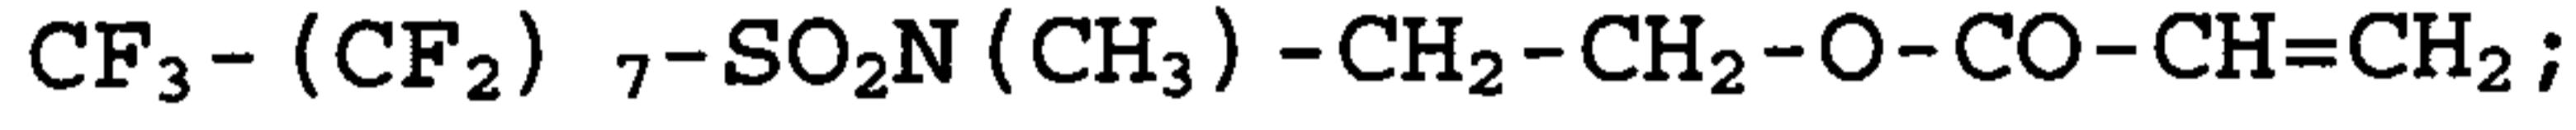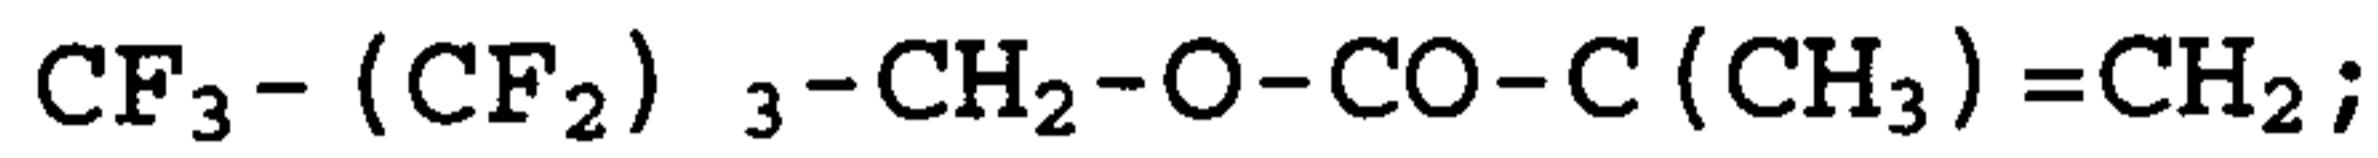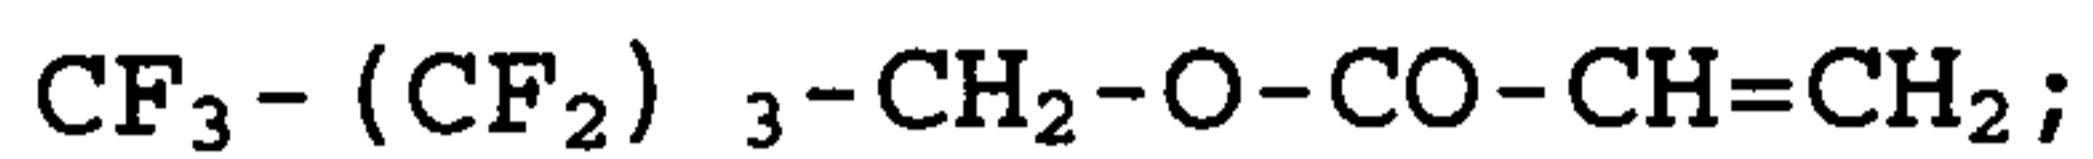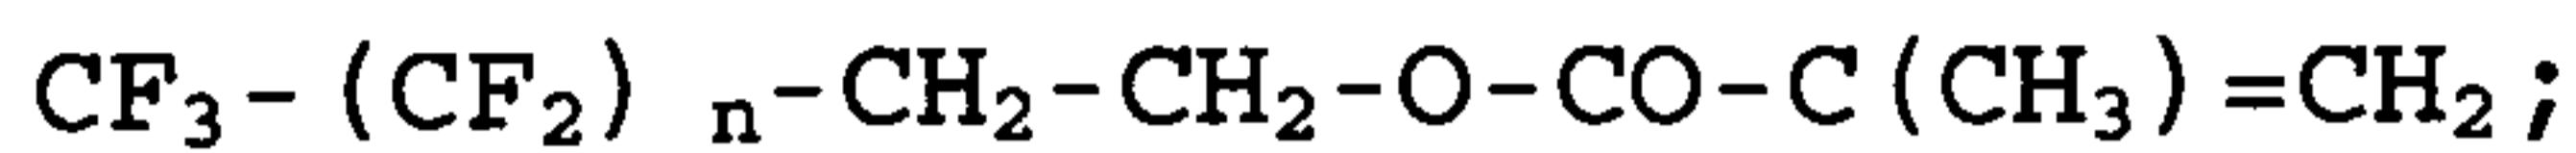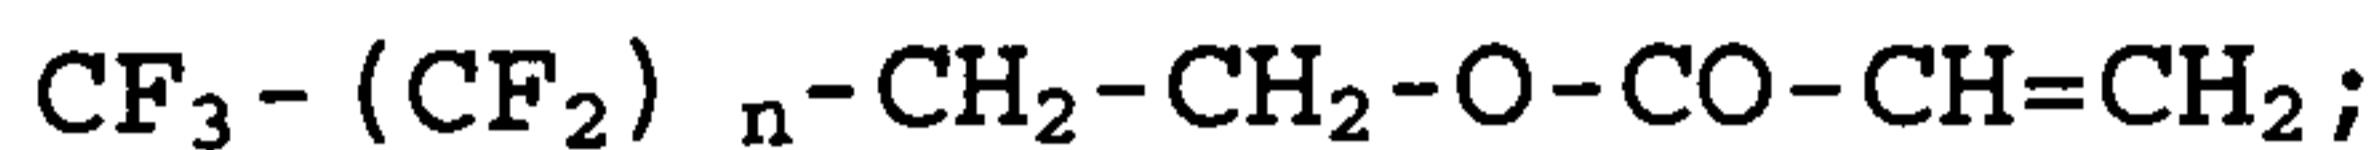

wherein n is an integer from 3 to about 20. Mixtures or physical combinations of comonomers described by the general formulas above are contemplated to be within 20 the scope of the present invention. Furthermore, non-acrylic fluoroalkyl monomers can be used in the practice of the present invention, particularly when using transition metal catalysts.

Copolymers of the present invention can be 25 prepared by conventional methods for polymerization or copolymerization of polyethylene polymers and copolymers. For example, copolymers of the present invention can be prepared by copolymerization of ethylene with fluorine containing comonomers described herein by high pressure free radical polymerization or, alternatively, by using low pressure transition metal catalysis. Using high pressure free radical

SUBSTITUTE PAGE 9

5 polymerization is preferred herein. Conventional methods for preparing ethylene copolymers are described in patented literature and reference textbooks. For example, an ethylene copolymerization process is described in U.S. Pat. No. 4,351,931.

10 Copolymers of the present invention are melt-processable polymers and can be processed by methods used with conventional ethylene copolymers. For example, copolymers of the present invention can be molded, extruded, blown, or spun to yield molded parts, fibers, or films, for example, in the same manner as conventional polyethylene polymers and copolymers.

15 Unlike conventional ethylene copolymers, polymers of the present invention have low surface tension. Copolymers and copolymer blends of the present invention have surface tensions of less than those of conventional polyethylene and/or polypropylene polymers and copolymers. Copolymers (including blends) of the present invention have surface tensions of less than about 32 dyne/cm. Preferably, the surface tension is less than about 28 dyne/cm, and more preferably less than about 24 dyne/cm.

20 In another embodiment, the present invention is a terpolymer comprising in addition to the above comonomers, from about 0.5 wt% to about 5 wt% of a termonomer X, wherein X is a reactive functional comonomer. For example, X can be glycidyl methacrylate, maleic anhydride, or a half-ester of maleic anhydride and/or derivatives thereof. Preferably, the terpolymer 25 includes from about 1 wt% to about 4.5 wt% of X, more preferably from about 1.5 wt%

AMENDED SHEET
IPEA/EP

SUBSTITUTE PAGE 10

to about 4 wt% of X. Most preferably the terpolymer comprises from about 2 wt% to about 4 wt% of X.

5 In still another embodiment, the present invention is a terpolymer comprising, in addition to the ethylene and fluoroalkyl comonomers described hereinabove, from about 0.5 wt% to about 50 wt% of a termonomer Y, wherein Y is a vinyl acetate or an acrylate comonomer, such as methyl acrylate and butyl acrylate. Preferably Y is included in an amount of from 10 about 2 wt% to about 45 wt%, and more preferably from about 5 wt% to about 40 wt%. Most preferably, Y is included in an amount of from about 5 wt% to about 35 wt%. Preferably Y is a vinyl acetate monomer.

15 In another embodiment, the present invention is a terpolymer comprising, in addition to the ethylene and fluoroalkyl comonomers described hereinabove, from about 1.0 to about 20 wt% of a termonomer Z, wherein Z is acrylic acid or methacrylic acid comonomer.

20 Preferably Z is included in an amount of from about 1.5 wt% to about 18 wt%, and more preferably from about 2.5 wt% to about 17 wt%. Most preferably Z is included in an amount of from about 3 wt% to about 15 wt%.

25 In still another embodiment, the present invention is a fluorine-containing ethylene copolymer comprising, in addition to at least 40 wt% ethylene and from 0.5 wt% to about 40 wt% fluoroalkyl comonomer, any combination of at least two comonomers selected from the group consisting of X, Y, and Z in a total amount of 30 from about 0.5 wt% to about 59.5 wt%. Preferably the two comonomers are present in a total amount of from about 2 wt% to about 50 wt%, more preferably in an

AMENDED SHEET
IPEA/EP

amount of from about 5 wt% to about 45 wt%, and most preferably in an amount of from about 7 wt% to about 40 wt%. Preferably the combination includes Y.

In another embodiment, the present invention is a composite film that includes at least one layer of an ethylene/fluoroalkyl copolymer of the present invention. A composite film of the present invention can be obtained in the same manner as composite films comprising conventional polyethylene polymer or copolymer layers with other polymer layers. For example, U. S. Pat. No. 3,589,976 describes a process suitable for making the composite films of polystyrene polyolefins made by a coextrusion process. Composite films of the present invention can include laminate composite films, with or without adhesive layers.

In another embodiment, the present invention is a composite fiber that includes at least one component of an ethylene/fluoroalkyl copolymer of the present invention. A composite fiber of the present invention can be obtained in the same manner as composite fibers comprising conventional polymers. U.S. Pat. No. 3,329,557 describes a preparation of composite fibers of nylon and poly(ethylene terephthalate) for making antistatic filaments.

Copolymers of the present invention can be used alone or in blends with other polymers, for example, thermoplastic materials and thermoplastic elastomers. Polymers suitable for blending with copolymers of the present invention include, for example: polyamides, polyethylene terephthalate, polyurethane, polystyrene, polyethylene, ethylene copolymers, and polypropylene. Blends of the present invention include from about 1

wt% to about 99 wt% of the fluorine containing ethylene copolymer of the present invention. Preferably blends of the present invention comprise from about 5 wt% to about 95 wt% of the fluorine-containing ethylene copolymer, more preferably from about 10 wt% to about 90 wt%, and most preferably from about 20 wt% to about 80 wt%.

In another embodiment, the present invention is a release resin useful for making low surface energy release films. The copolymers of the present invention can be converted into a film layer that has good release from adhesives, for example. A copolymer of the present invention can be co-extruded with low-density polyethylene to form an outer pouch for packaging merchandise. Alternatively, the resin can be co-extrusion coated onto paper to form a release backing for tapes and labels.

In another embodiment, the present invention is a melt-blown fiber comprising a fluorine-containing ethylene copolymer (FCEC) as described herein. For example, a FCEC or a FCEC polymer blend can be made into melt-blown fibers possessing high water repellency, and can be useful for medical and hygiene applications. A FCEC can be blended with polyethylene or polypropylene, for example. Polyolefin-based melt-blown non-woven materials can require a coating of fluorochemical for water and oil repellency. The coating process can involve using an organic solvent for the fluorochemical, a heat treatment step and a curing step to adhere the fluorochemical to the non-woven surface. This process can be of concern for

environmental reasons, and also may adversely affect the delicate polyolefin fibers.

In another embodiment, the present invention is a composite or multilayer structure having an outer layer 5 comprising a FCEC. A composite structure of the present invention can be used in applications that require periodic cleaning of the surface of the composite structure, such as on cooking utensils, or on the heated surface of an iron, for example. Composites 10 of the present invention can be used in packaging applications to provide an easy cleaning, water repellent, oil repellent, non-staining low friction package surface, or in cladding applications - particularly architectural cladding - to provide the 15 same type of surface.

In still another embodiment, the present invention is a microporous membrane obtained from a FCEC described herein. A microporous membrane of the present invention can be prepared, for example, by 20 drawing particulate-laden FCEC films or particulate-laden films of FCEC/polymer blends. The drawing process causes said film to separate from the particulate thereby creating microvoids which are small enough to prevent liquid water transport but large enough to 25 allow water vapor transport through the film. The low surface energy microvoids created when using FCEC or FCEC/polymer blends have superior resistance to liquid (e.g. water, organic, blood) penetration making them suitable for use in performance outerwear, protective 30 apparel, operating room apparel and furnishings, and a variety of home and construction applications such as

housewrap, roof liners, and undercarpet spill barriers, for example.

In still another embodiment, the present invention is a flash spun plexifilamentary nonwoven or yarn 5 product comprising a FCEC or FCEC/polymer blend.

Consolidated webs of plexifilaments have superior liquid penetration resistance due to the low surface energy inherent in fluorine-enriched surfaces making superior "housewrap" and protective apparel candidates. 10 Applications include housewrap, roof liners, and undercarpet spill barriers, for example.

In still another embodiment, the present invention is a melt spun fibrous product, for example fibers, spun yarns, spunbonded nonwovens, obtained from blends 15 of FCEC and/or by multicomponent fiber spinning (e.g., sheath-core) to enhance the surface properties by fluorine enrichment. FCEC and blends thereof can further be used as carriers for color concentrates which, when blended with other olefins prior to melt 20 spinning, yield not only producer-colored but also fluorine-enriched low surface area fibers. Melt spun fibers from polymers of this invention have reduced coefficient of friction. Fabrics therefrom have reduced:

25 tendency to chafe or abrade skin, reducing irritation and blister formation (e.g., athletic socks), wind resistance, improving sport performance (e.g., speed sports apparel for 30 bicycling, skating, skiing) surface stickiness, improving filtration performance (e.g., reduced backpressure, enhanced dust cake release).

35 Fibers and fabrics including nonwoven fabrics of these polymers exhibit improved stain resistance. Reduced surface reactivity makes these materials more suitable for biomedical applications (e.g., sutures, vascular grafts, patches) than standard polyolefins.

EXAMPLES

The following examples are merely illustrations of the present invention, and not intended to limit the scope of the present invention in any way.

5 Testing

Melt Index (MI) was measured using ASTM D1238 using a 2160 gram weight, and measured at 190°C. Melting Point was measured using Differential Scanning Calorimetry (DSC), using a DuPont Thermal analyzer.

10

Surface tension (surface energy) was measured on blown films of the Examples and the Comparison Examples using a Video Contact Angle System instrument, for AST PRODUCT, Inc. The film samples of 3-4 mil were made 15 from a laboratory blown film equipment. Surface tension was calculated base on the Harmonic-Mean Method as described in Polymer Interface and Adhesion, Sougeng Wu, Marcel Dekker, Inc., 1982. Deionized water having a surface tension of 71.8 dynes/cm and methylene iodide 20 having a surface tension of 50.8 dynes/cm were used in the contact angle measurements.

Analysis of fluorine content was by Ion Chromatography (IC). The samples were combusted in oxygen-filled sealed flasks. The combustion gases were 25 collected in a weakly basic catch solution. The catch solution was taken to a known volume and analyzed by IC.

Compositions of ethylene/perfluoroalkyl (meth)acrylate copolymers were measured and calculated 30 by fluorine content alone. Compositions that include vinyl acetate and methyl acrylate were measured by a

combination of fluorine content analysis and infrared spectroscopy (IR).

Ethylene copolymers listed in Table 1 were prepared according to the following procedures.

5 Ethylene was copolymerized in the presence of fluoroalkyl (meth)acrylate monomers. The free radical polymerizations were carried out at high pressure (27,000 psi) and a temperatures ranging from 160°C to 250°C, in the presence of a peroxide free radical 10 initiator.

Example C1 is not an example of the present invention, and is a copolymer of ethylene and methacrylic acid, prepared under the same conditions as the examples of the present invention.

15 Example 1 is a terpolymer of ethylene, methacrylic acid, and Zonyl® TA-N

Examples 2-6, Example 9 and Examples 11-19 are copolymers of ethylene and either Zonyl® TA-N or Zonyl® TM.

20 Examples 7 and 8 are terpolymers of ethylene, vinyl acetate, and Zonyl® TM.

Example 10 is a terpolymer of ethylene, methyl acrylate and Zonyl® TM. It is an amorphous polymer without a melting point.

25 The blends of fluorine-containing copolymers, Examples 20-26, are listed in Table 2. The blends were prepared in a 30 mm twin screw extruder.

Example C2 is not an example of this invention, and is a low density polyethylene with a MI of 4.4 and 30 a melting point of 115 °C.

Examples 20-21 and Examples 23-24 are blends of LDPE described in C2, and either Zonyl® TM or Zonyl® TA-N.

Example 22 is a blend of PP and Zonyl® TM. The PP 5 is a polypropylene with a MI of 1.5 and a melting point of 166 °C.

Examples 25-26 are blends of HDPE and Zonyl® TA-N. The HDPE is a high-density polyethylene with a MI of 0.6 and a melting point of 139 °C.

10 Zonyl® TA-N and Zonyl® TM are both available from E.I. DuPont de Nemours and Company. Zonyl® TA-N is a perfluoroalkylethyl acrylate of the general formula: $C_nF_{2n+1}CH_2CH_2O(CO)CH=CH_2$, wherein n is an integer from 5 to about 20. Zonyl® TM is a perfluoroalkylethyl 15 methacrylate of the general formula: $C_nF_{2n+1}CH_2CH_2O(CO)C(CH_3)=CH_2$, wherein n is an integer from 3 to about 20.

Table 1
 Examples (Ex.) 1 - 19
 Copolymers of Ethylene and
 Perfluoroalkyl (meth)acrylate

Ex.	Composition (wt%)	F content (wt%)	MI at 190°C	Melting Point (°C)	Surface Tension (dynes/ cm)	Polymer ization Temp (°C)
C1	E/MAA (90/10)	0.0093	122	96	34.8	250
1	E/MAA/TAN (89/10/0.6)	0.4	96	96	31.3	250
2	E/TAN (99.4/0.6)	0.38	69	110.4	30.6	250
3	E/TAN (99.2/0.8)	0.52	29	110	28.63	250
4	E/TM (99.5/0.5)	0.3	82	111	30.1	250
5	E/TM (98.9/1.1)	0.63	81	111	29.5	250
6	E/TM (97.6/2.4)	1.45	123	110	25.2	250
7	E/VA/TM (71.9/24.5/ 3.6)	1.98	43	72	26.2	210
8	E/VA/TM (80/17.2/2. 8)	1.48	37	87	29	210
9	E/TM (93.3/6.7)	4.0	144	109	23.1	260
10	E/MA/TM (34/62/3)	1.78	14	Amorpho us	NA	165
11	E/TM (93.8/6.2)	3.69	22	117.6	23	210
12	E/TM (91.9/8.1)	4.84	28	117.2	22	210
13	E/TM(93.3/6 .7)	4	14	118.3	24.5	190
14	E/TM(93.7/6 .3)	3.76	20	114	24.6	230
15	E/TM(93.5/6 .5)	3.9	35	112	24.2	250
16	E/TAN (93.4/6.6)	4.2	16	114.3	24.6	210
17	E/TAN (92.9/7.1)	4.5	52	114	25	210
18	E/TAN (88.4/11.6)	7.4	80	112.7	22.3	210
19	E/TAN (84.7/15.3)	9.7	110	110	21	210

5 E = ethylene; TAN = Zonyl® TA-N; TM = Zonyl® TM; MAA = methacrylic acid;
 VA = vinyl acetate
 MA: methyl acrylate; F = fluorine.

Table 2. Surface Properties of Blends of
Ethylene/Perfluoroalkyl (meth)acrylate Copolymers

<u>Examples</u>	<u>Blend Composition (wt.%)</u>	<u>Surface Tension (dyne/cm)</u>
C2	LDPE	33.6
20	LDPE/Example 9 (80/20)	25.5
21	LDPE/Example 9 (60/40)	24.2
22	PP/Example 9 (80/20)	27.0
23	LDPE/Example 12 (60/40)	24.1
24	LDPE/Example 13 (60/40)	23.7
25	HDPE/Example 12 (60/40)	26.2
26	HDPE/Example 13 (60/40)	24.7

SUBSTITUTE CLAIMS

1. A film comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene, wherein:

(1) the fluorine-containing comonomers are fluorinated acrylate or methacrylate esters of the general formula: $C_f-L-O-CO-CR=CH_2$, wherein:

(i) C_f is a fluorinated aliphatic group having at least 4 carbon atoms;

(ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, selected from the group consisting of arylene, arylalkylene, sulfonyl, sulfoxy, sulfonamide, carboxyamino, carboxyloxy, urethylene, and combinations thereof ; and

(iii) R is H or CH_3 .

2. A fiber comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene, wherein:

(1) the fluorine-containing comonomers are fluorinated acrylate or methacrylate esters of the general formula: $C_f-L-O-CO-CR=CH_2$, wherein:

(i) C_f is a fluorinated aliphatic group having at least 4 carbon atoms;

(ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, selected from the group consisting of arylene, arylalkylene, sulfonyl, sulfoxy, sulfonamide, carboxyamino, carbonyloxy, urethylene, and combinations thereof ; and

(iii) R is H or CH₃; and wherein the fiber is obtained by a melt-blown process.

3. An article having a composite or multilayer structure comprising an outer layer comprising: a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene, wherein:

(1) the fluorine-containing comonomers are fluorinated acrylate or methacrylate esters of the general formula: Cf-L-O-CO-CR=CH₂, wherein:

(i) Cf is a fluorinated aliphatic group having at least 4 carbon atoms;

(ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, selected from the group consisting of arylene, arylalkylene, sulfonyl, sulfoxy, sulfonamide, carboxyamino, carbonyloxy, urethylene, and combinations thereof ; and

(iii) R is H or CH₃.

4. A microporous membrane comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC

AMENDED SHEET
IPEA/EP

comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene, wherein:

(1) the fluorine-containing comonomers are fluorinated acrylate or methacrylate esters of the general formula: $C_f-L-O-CO-CR=CH_2$, wherein:

(i) C_f is a fluorinated aliphatic group having at least 4 carbon atoms;

(ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, selected from the group consisting of arylene, arylalkylene, sulfonyl, sulfoxy, sulfonamide, carboxyamino, carbonyloxy, urethylene, and combinations thereof ; and

(iii) R is H or CH_3 ; and wherein the membrane is useful as protection against permeation of liquids through the membrane.

5. A flash spun plexifilamentary product comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about 30 wt% to about 99.5 wt% ethylene, wherein:

(1) the fluorine-containing comonomers are fluorinated acrylate or methacrylate esters of the general formula: $C_f-L-O-CO-CR=CH_2$, wherein:

(i) C_f is a fluorinated aliphatic group having at least 4 carbon atoms;

(ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, selected from the group consisting of arylene, arylalkylene, sulfonyl, sulfoxy, sulfonamide,

AMENDED SHEET
IPEA/EP

carboxyamino, carbonyloxy, urethylene, and combinations thereof ; and

(iii) R is H or CH₃.

6. A melt spun fibrous article comprising a fluorine containing ethylene copolymer (FCEC) obtained by the copolymerization of ethylene with suitable fluorine-containing comonomer compounds, wherein the FCEC comprises from about 0.5 wt% to about 40 wt% of a fluorine-containing comonomer compound and from about ~~fluorinated acrylate or methacrylate~~ general formula: Cf-L-O-CO-CR=CH₂, wherein:

(i) Cf is a fluorinated aliphatic group having at least 4 carbon atoms;

(ii) L is a linking group that connects the fluorinated aliphatic group with the (meth)acrylate group, selected from the group consisting of arylene, arylalkylene, sulfonyl, sulfoxy, sulfonamide, carboxyamino, carbonyloxy, urethylene, and combinations thereof ; and

(iii) R is H or CH₃; and wherein the fibrous products are obtained by melt spinning or multicomponent fiber spinning a FCEC or a blend thereof.