Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2542848 A1 2005/05/12

(21) 2 542 848

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2004/10/28
(87) Date publication PCT/PCT Publication Date: 2005/05/12
(85) Entrée phase nationale/National Entry: 2006/04/18
(86) N° demande PCT/PCT Application No.: CA 2004/001889
(87) N° publication PCT/PCT Publication No.: 2005/042869
(30) Priorités/Priorities: 2003/10/28 (US60/514,622);
2003/11/25 (US10/721,610)

(51) Cl.Int./Int.Cl. *E04C 3/08* (2006.01),
E04B 5/10 (2006.01), *B21D 53/00* (2006.01)

(71) Demandeur/Applicant:
BEST JOIST INC., CA

(72) Inventeurs/Inventors:
STRICKLAND, MICHAEL, RICHARD, CA;
XU, LEI, CA

(74) Agent: HILL & SCHUMACHER

(54) Titre : POUTRELLES EN ACIER FORMEES A FROID
(54) Title: COLD-FORMED STEEL JOISTS

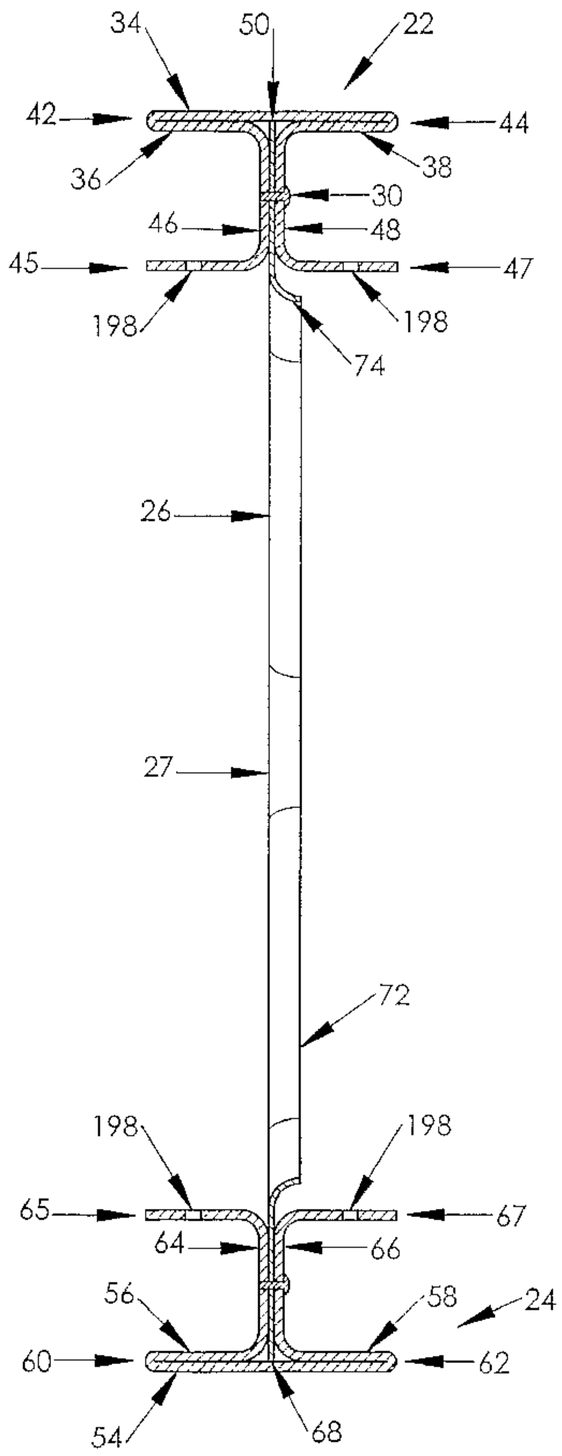

(57) Abrégé/Abstract:
A joist comprised of at least one cold-formed steel elongated chord member; a cold-formed steel web having a plurality of web members and means for securing said web to said chord member. A plurality of joists are generally for use in a support system for

CA 2542848 A1 2005/05/12

(21) 2 542 848

(13) A1

(57) Abrégé(suite)/Abstract(continued):
a platform or a deck in the construction of floors and roofs. The support system is of particular use in a composite floor and roof systems.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/042869 A1

(51) International Patent Classification[7]: E04B 5/10, B21D 53/00 **E04C 3/08**,

(21) International Application Number: PCT/CA2004/001889

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/514,622	28 October 2003 (28.10.2003)	US
10/721,610	25 November 2003 (25.11.2003)	US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US	10/721,610 (CIP)
Filed on	25 November 2003 (25.11.2003)

(71) Applicant *(for all designated States except US)*: **BEST JOIST INC.** [CA/CA]; 95 Church Street South, Richmond Hill, Ontario L4C 1W4 (CA).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **STRICKLAND, Michael, Richard** [CA/CA]; 95 Church Street South, Richmond Hill, Ontario L4C 1W4 (CA). **XU, Lei** [CA/CA]; 475 Cabot Trail, Waterloo, Ontario N2K 4C8 (CA).

(74) Agent: **HILL & SCHUMACHER**; 87 Falcon Street, Toronto, Ontario M4S2P4 (CA).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: COLD-FORMED STEEL JOISTS

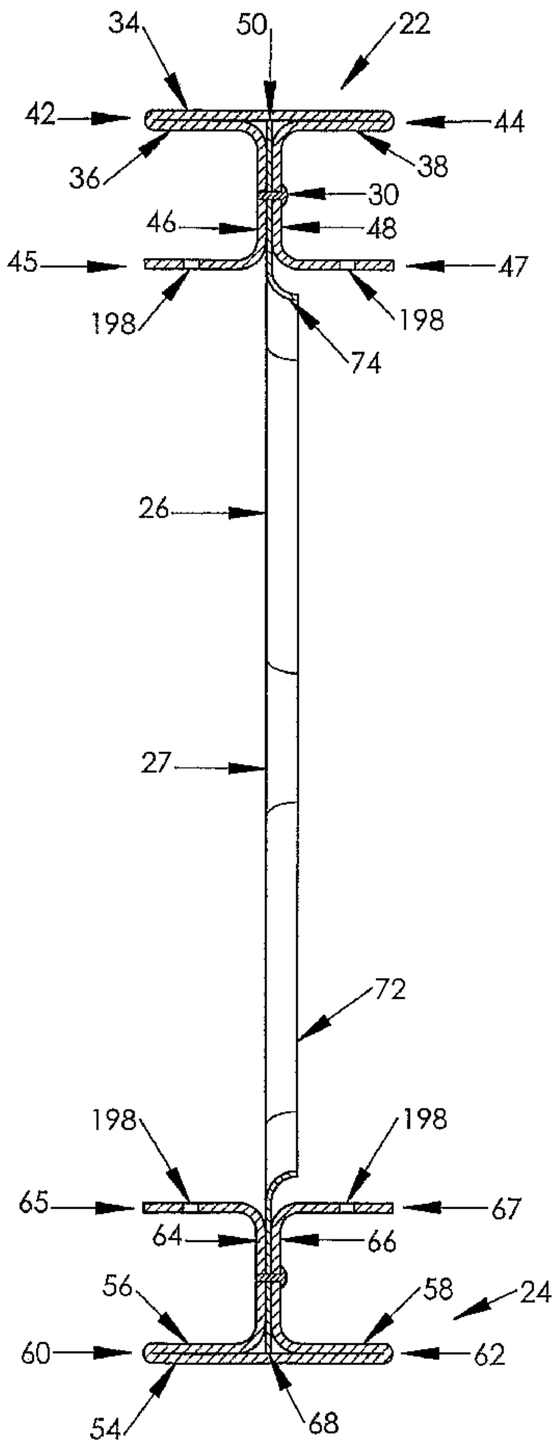

(57) Abstract: A joist comprised of at least one cold-formed steel elongated chord member; a cold-formed steel web having a plurality of web members and means for securing said web to said chord member. A plurality of joists are generally for use in a support system for a platform or a deck in the construction of floors and roofs. The support system is of particular use in a composite floor and roof systems.

WO 2005/042869 A1

WO 2005/042869 A1

PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US (patent), UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COLD - FORMED STEEL JOISTS

Field of Invention

This invention relates to cold-formed steel joists and to assemblies of such joists to provide structural support for floors and roofs in the building construction industry, such as support including fire rated steel-concrete composite structures. Both top chord and bottom chord supported joists are included as aspects of the said invention.

Background of Invention

Joists are commonly used in the construction industry to span a distance between opposing walls and provide a structural support for a floor, roof or the like. Joists can be comprised of a variety of materials including softwood, wood based laminates, and metal, particularly steel.

Steel joists can be constructed in an open web configuration, which generally consists of spaced apart upper and lower chord members which extend longitudinally thereof and are fastened together by a zig-zag web. Such open web joists are typically manufactured from hot-rolled steel structural members namely the upper and lower chords and the webs. The webs typically can be comprised of hot-rolled steel rods, which are formed into a zig-zagged pattern and welded to the upper and lower chords. Integral parts of the web are the end angled supports that connect the ends of the lower chord to the upper chord to counter load stresses at the ends of the joist. Open web joists are normally top chord bearing meaning that they are supported by the underside of the top chord, so that the top chord extends longitudinally beyond the bottom chord and the end angle supports to provide bearing interface with the opposing walls.

Open web joists are by their nature highly customizable in terms of their load bearing capabilities. Both chords and the zig-zag web can be made from different thickness of steel, and the members constituting the zig-zag web can vary in

thickness along the length of the joist. The webs are open in the sense that there is a space between the rods longitudinally along the central web section that can receive utilities such as wires, pipe work, air ducts or the like. Open web joists can be concentric, meaning that the load being supported exerts forces that substantially pass through the centres of gravity of the joists. If the joists are loaded otherwise, they are termed eccentric.

The joist industry has introduced various types of composite steel-concrete non-combustible floor and roof systems for the construction industry, in whch the top chords are embedded into a concrete slab, such a slab having both load bearing and fire resistant properties. Examples of composite joists can be found in U.S. Patent Nos. 5,941,035, 4,741,138, 4,454,695 and U.S. Publication No. 2002/0069606 A1. A composite joist design permits the top chord member of a joist to be designed with less steel in comparison with non-composite systems since the concrete slab when properly bonded to the upper steel joist provides additional load support for the floor or roof system.

Generally speaking, for a structural joist member to be composite it must have means to mechanically interlock with the concrete to provide sheer bonding. It is generally difficult and costly to design steel and concrete composite floors using steel joists. Simply affixing vertical studs to the top chord is forbidden by safety regulations in many jurisdictions which state that structural members cannot have objects extending above a structural floor member that will encumber the walking path of a worker.

The methods for providing sheer bonding between the joist and the concrete in a composite joist are generally expensive to produce in the prior art.

Furthermore, camber (defined as a slight arch added to the joist) has been introduced into the open web joist technology to offset the deflection associated with dead loads such that only the live load deflection of the joist needs to be accounted for in designs of the joist. However large machines or jigs are needed

to impart the camber to the chords of the joist where typically the web resists the cambering process.

Moreover, hot-rolled open web joists are typically coated or finished with a coloured primer. Steel joists manufacturers typically use large tanks of paint into which completed welded joist assemblies are dipped to receive a coating of primer paint. However, the process has become more expensive due to environmental considerations when using dipped tanks containing volatile solvents.

Furthermore construction with open web joists is dependent on skilled labour which in many instances sets the critical path schedule on many construction projects during busy construction season periods when skilled labour is in highest demand. Because both the manufacture and usage in construction are labour intensive, open web steel joists are costly, so that their use is viable only in larger commercial and industrial structures requiring spans near 40 feet and above.

An alternative approach to the open web steel joist is the cold-formed steel joist. Cold-formed steel structural designs have been used in floor and roof joists in the building construction trade for some time. However prior art cold-formed steel joists have found limited application due to the high costs of construction assembly , and are not cost effective for span lengths much above 24 feet usage is restricted to single and multi-family housing, and to commercial low rise structures.

Provided that light gauge steel is used, cost effective mass manufacture of cold-formed steel joists is practical because highly automated cold forming operations such as roll-forming are commercially available. Joists in the prior art are produced by cold-forming a single piece of sheet metal into a joist comprising a top chord, a web and a bottom chord forming a continuous single structure, and are predominately used in bottom chord bearing conditions. These joists are generally eccentric in that the load forces do not pass through the centre of gravity of the joist. The most common example from prior art is the C-shaped joist

which has a cross sectional profile like the letter C. Other examples of cold rolled constructions are shown in U.S. Patent Publication Nos. 2002/0020138 A1 and 2003/0084637 A1.

Composite fire rated floor structures constructed using cold-formed joists are commercially available. Examples are Hambro D510 and Speed Floor both of which have end attachments that are welded, bolted or screwed onto a single strip cold-formed section to provide a top chord bearing joist. However these provide only limited load capacity due to the nature of the localized connection of the end attachments to the cold-formed joist member. Further, they are costly to produce. Cold-formed joist manufacturers provide holes longitudinally along the central web section that are sized to receive utilities for follow-up trades. Since cold-formed joist material can be pre-finished (i.e. the coils of steel can be galvanized or painted) the manufacturing process is less harmful to the worker and environment than the open web coating process described above.

Although cold-formed joists possess superior surface finishes, and can be mass manufactured in a cost-effective manner because there is very little dependency on manpower involved relative to the open web joist technology, current state of the art cold-formed joist technology does not fully exploit the inherent strength to mass ratio of steel, nor does it optimize material usage throughout the length of the joist. The same thickness of steel is used in both of the chords and the web, this thickness being constant along the length of the joist. Eccentric designs have a tendency to be unstable under load due to a mechanical moment about the longitudinal axis. Consequently substantial bracing is required between joists to counteract this effect.

These properties compare unfavourably with the open web steel joist where the chords and the web may be of different thickness and the web member thickness may be varied over the span length in response to loading requirements.

Accordingly, a joist and method of producing said joist that can utilize the beneficial attributes while avoiding the drawbacks from each of the open web joist

technology and cold-formed joist technology is desirable. Further, it is desirable to manufacture the joist using automated cold-forming methods as opposed to the labour intensive welding and handling methods employed in open web steel joist construction. It is also desirable to have cost effective fire rated composite floors and roofs based on cold- formed steel joists integrally attached to a concrete slab.

Also both open web and cold-formed steel joist floor and roof structures normally require bridging systems, comprising steel members spanning the gap between joists in a floor or roof assembly, to stabilize the assembly from any lateral movement or rotational movement about the longitudinal direction in response to applied loading. It is common practice to weld bridging in place between open web joists, while cold-formed joist systems have bridging structures that commonly use screws or welding for fastening. Consequently a cost effective means to provide bridging between joists is highly desirable.

Summary of the Invention

It is an aspect of this invention to provide a joist comprising at least one elongate chord member, each chord member cold-formed from a unitary piece of sheet steel, the chord member having a flange portion and a web receiving portion orthogonal thereto and the web receiving portion having two web receiving tabs; and a generally planar steel web attached to the web receiving portion between the two tabs.. Without any limitations to the invention, such joist may be concentric or substantially concentric to provide improved stability.

It is another aspect of this invention to provide both upper and lower chord bearing embodiments of the said joist such that the upper chord bearing joist also incorporates end angle support members.

It is another aspect of this invention to provide a support system that comprises a plurality of joist wherein the joists are constructed in accordance this invention. Without any limitation to this invention, such a support system may form part of a

composite floor system.

It is a further aspect of this invention to provide a composite floor system comprising a plurality of metal joists, each joist including an upper elongate chord member formed from a unitary piece of cold-formed steel and having flange portion and a concrete engaging portion extending upwardly therefrom and the concrete engaging portion having two thicknesses of steel; a deck resting on the upper chord member; and a concrete slab disposed on the upper chord of the plurality of joist and the deck with the concrete engaging portion of the upper chord embedded in the concrete slab to define the composite floor.

It is a further aspect to this invention that the said web may be replaced by a segmented web, comprised of segments which may be cold-formed from different thicknesses of sheet steel fastened together.

Another aspect of this invention is to provide bridging means comprising bridging members and receiving holes in the joists such that said members may be snap fastened to the said joists without the use of tools.

Another aspect of this invention resides in a method of producing a joist comprising the steps of; cold-forming an upper chord member from sheet steel, the upper chord member having a flange portion and a web receiving portion orthogonal thereto and the web receiving portion having two tabs; forming at least one web member from sheet metal; and fastening the web between the two tabs of the web receiving portion of the chords with mechanical fasteners.

These and other objects and features of the invention shall now be described in relation to the following drawings:

Brief Description of Drawings

Fig. **1** illustrates a prior art open web steel joist (OWSJ);

Fig. **2** illustrates a prior art cold-formed C-shaped joist;

Fig. **3** illustrates one embodiment of the invention, a concentric top chord bearing segmented web steel joist;

Fig. **4** illustrates segments of a segmented web;

Fig. **5** is a perspective view of a second embodiment of the invention showing a concentric top chord bearing, cold-formed joist having three web segments;

Fig. **6** is a side elevation view of Fig. 5;

Fig. **7** is a cross sectional view along the line 7-7 of Fig. 5;

Fig. **8** illustrates a side-view of a plurality of joists having bridging members;

Fig. **9** is a side elevation view of a plurality of joists having both horizontal bridging and crossed bridging members;

Fig. **10** is a perspective view of a concentric top chord bearing segmented web cold-formed joist to be used in a composite floor or roof structure;

Fig. **11** is a side elevation view of Fig. 10;

Fig. **12** is a cross sectional view along the lines 12-12 of Fig. 10 and also showing a concrete slab attached thereto;

Fig. **13** is a side elevation view of a composite floor system having a plurality of joists;

Fig. **14** and enlargement **14a** are perspective views showing a bottom chord bearing version of another embodiment of the invention;

Fig. **15** is a perspective view showing a top chord bearing version of another embodiment of the invention;

Fig. **16** is a cross sectional view of the web only through line 16-16 of Fig. 6;

Fig. **17** is a cross sectional view of the web only along the line 17-17 of Fig. 6;

Fig. **18** is a partial side elevation view of a segmented web;

Fig. **19** is a top view of Fig. 18;

Fig. **20** is a top expanded view of region 20-20 in Fig. 18 showing a rivet joining two segments of a web;

Fig. **21** is a partial side elevation view of the reinforcing member 84 shown in Fig. 5;

Fig. **22** is a partial view of Fig 21;

Fig. **23** is a partial top plan view of the reinforcing member. **Clarify this drwg**

Fig. **24** is a cross-sectional view of further embodiments of the joist wherein the web and the bottom chord are cold-formed from the same sheet of steel;

Fig. **25** is a cross-sectional view of further embodiments of the joist wherein the web and the bottom chord are cold-formed from the same sheet of steel;

Fig. **26** and enlargement 26a are perspective views of a bottom chord bearing composite version of another embodiment of the invention;

Fig. **27** is a perspective view of a top chord bearing composite version of another embodiment of the invention;

Fig. **28** is a schematic view of an automated assembly line for the manufacture of cold-formed joists;

Fig. **29** is a cross section view through the line 116 – 116 of Fig.14;

Fig. **30** is a side elevation view of an embodiment of one end of a bottom chord bearing composite cold-formed joist bonded to a concrete slab and integrated into a side wall;

Fig. **31** is a partial enlarged view of Fig 30;

Fig. **32** is a cross sectional view through line 112 - 112 of Fig. 26;

Fig .**33** is a side elevation view of a plurality of another embodiment of the invention with horizontal bridging between joists;

Fig. **34.** is a side elevation view of a plurality of another embodiment with diaphragm bridging;

Fig. **35** is a side elevation view of one end of a bottom chord bearing cold-formed joist supported by a foundation wall and supporting a stud wall;

Fig. **36a** is a top plan view of the reinforcing flap of figure 35;

Fig. **36b** is a perspective view of the reinforcing flap of figure **35;**

Fig. **37** shows top and plan views of a further reinforcing flap of figure 35;

Fig. **38** is a bottom chord bearing embodiment of the invention illustrating the reinforcing end flaps;

Fig. **39** is a side elevation view of Fig. 38; and

Fig. **40** is a cross sectional view of an alternate embodiment of a cold formed joist in a composite floor or roof structure

DETAILED DESCRIPTION OF THE INVENTION

In the description that follows, like parts are marked throughout the specification and the drawings with the same respective reference numbers. The drawings are not necessarily to scale and in some instances proportions may have been exaggerated in order to more clearly depict certain features of the invention.

Fig. 1 illustrates a prior art open web joist construction **2** consisting of an upper chord assembly **4** spaced from a lower chord assembly **6**. The chords are joined together by a zigzag web **8** which is generally connected to the upper and lower chord assemblies **4, 6** by a number of means including welding or the like.

Fig. 2 illustrates a prior art cold formed joist construction **10** roll-formed from a single strip of light gauge steel, having a web portion **12** having a plurality of holes **14** disposed therethrough for receiving utilities such as wire or the like, and having upper and lower chords **11** and **13** respectively.

Figs. 3 and 5 illustrate two similar embodiments of the invention, namely top chord bearing concentric joists, which comprise an assembled joist **20** having a first or upper chord member **22** spaced from a second or lower chord member **24**.

A steel web member **26** is also disclosed. The web member **26** is fastened to the upper and lower chord members **22** and **24** by fastening means **28.** The fastening means can comprise of a variety of fastening means such as bolts and nuts, screws, welding or spot clinches (not shown) or rivets **30** as shown in Fig.7

The upper and lower chord members **22** and **24** are produced from single sheets of steel. The joist can be formed in a concentric fashion as shown in Fig. 7 where the upper and lower chord members **22** and **24** are substantially symmetrically disposed about web **26.**

In these embodiments the upper chord member **22** is cold-formed to present a substantially flat upper load bearing surface **34** which is formed as shown in Fig. 7 to present lower load bearing wings or extensions **36** and **38**. The upper load bearing surface **34** is in contact with the lower load bearing extensions **36** and **38** so as to produce a rigid and structurally solid member which may be fastened together by the spot clinch **32**. The spot clinch process is conducted in the manner well known to those persons skilled in the art and generally consists of a mechanism which pushes material by a plunger (not shown) to present a mushroomed head **40** as shown so as to secure the members together.

The upper load bearing surface **34** and lower load bearing extensions **36** and **38** are disposed in this case symmetrically about the web **26** ,the direction of which defines the "Y" axis **27** as shown in Fig. 7. Accordingly, the upper load bearing surface **34** in concert with the lower load bearing extension **36** on one side of the axis **27** defines a horizontal extension **42** while the upper load bearing surface **34** to the right of the Y axis **27** in concert with the lower load bearing extension **38** defines a horizontal extension **44** disposed on the other side of the axis **27**. The lower load bearing extensions **36** and **38** are cold-formed spaced apart web receiving tabs **46** and **48** as shown. The upper portion **50** of the web **26** may include a plurality of holes **52** which are adapted to receive the fastening means **28**. Fig, 7 shows an example of a fastening means **28** comprising a rivet **30** that fastens the web **26** to the upper chord **22** at the tabs **46** and **48**.

The spot clinches **32** in combination with the cold-formed chords connect the two folded portions **34** and **36** and **34** and **38** to reduce the width to thickness ratio of the section to avoid local buckling. The spot clinch **32** in combination with the cold work forming increases the yield strength of the steel part.

As shown in Fig. 7 the lower chord **24** is similarly constructed by forming sheet metal to present a lower chord surface **54** bent so as to present lower chord extensions **56** and **58** symmetrically disposed about axis **27**. The lower chord **54** with the lower chord extensions **56** and **58** define lower chord horizontal extensions **60** and **62** in this case symmetrically disposed about the web **26**. The lower chord extensions **56** and **58** present two spaced apart web receiving tabs **64** and **66** which are adapted to receive the lower portion **68** of the web **26**. The lower chord is also fastened to the lower part of the web 26 by rivets or other means

The web **26** can include a plurality of utility holes **72** which provide an access for utilities such as electrical wires, air ducts or the like. The holes **72** as shown are circular although any configuration can be produced including square holes or the like. Furthermore, the holes **72** can include a cold-formed lip **74** as shown in Fig. 16. The holes **72** lighten the total weight of the joist **20** while the cold-formed lip **74** adds rigidity to the web structure **26** particularly in the direction of the "Y" axis **27**.

The web **26** may also include a plurality of stiffening means **80** to stiffen of the web member **26** as shown in figure 17.

The stiffening means **80** comprises a first stiffening means **82** and a second stiffening means **84**. The first stiffening means **82** generally consists of the ends of the web segment **26** being bent to form a stiffening tab **82** which is disposed at approximately a 90 degree angle from the web **26**. The second stiffening means **84** may consist of a hollow embossed rib structure **86** as illustrated in Fig. 21.

The hollow rib structure **86** can be produced by a variety of means and in one example is produced by a punch (not shown) which pushes the web material **26** to present the stiffening structure **84** .The stiffening structure has two spaced side walls **88** and **90** as well as upper and lower walls **92** and **94** and stiffening front wall **96**. The stiffening front wall **96** has stiffening holes **98** which are adapted to receive bridging members **170 and 171** in a manner to be more fully particularized herein.

Furthermore, the web **26** can comprise a plurality of web segments **104**, **106** and **108,** as shown in Fig. 4, in which, as an example, three segments are shown. Each of the web segments **104, 106** and **108** are adapted to be fastened to one another. In particular, the web segments **104, 106, 108** include a first stiffening means **82** which comprise sheet metal flaps which are bent at substantially 90 degrees from the web material **26**. The first stiffening flaps **82** may include a plurality of holes **110** which are adapted to receive fasteners such as rivets, nuts and bolts, or may receive spot clinches to secure the plurality of web segments **104, 106,** and **108** together to form a web **26**. The web segments **104, 106**, and **108** also include second stiffening means **84**, shown in figure 3.

The web segments can either all have the same thickness or have different selected thickness. For example the web segments can be thicker at the ends of the joist than segments in the middle of the joist since the shear stresses under load are greater at the ends than in the middle.

The joist shown in Figs. 3 and 5 include angled end support members **140** that secure the ends of the lower chord **24** and upper chord **22**.

A structural assembly comprising a plurality of joists **20** partially shown at Figs. 8 and 9 can define a supporting surface **160** to support a platform **162** such as a roof or floor. Each of the joists **20** as shown in cross section comprises spaced apart cold-formed steel upper and lower chord members **22** and **24** and a steel web **26** intermediate between upper and lower chord members **22** and **24**.

Fasteners **28** are utilised to fasten the web to the upper and lower chords and the top surface of upper chords **22** define the supporting surface**160**.

A plurality of bridging members **170** and **171** may be used to connect adjacent joists **20** together as shown so as to stiffen the said joist assembly. Parallel bridges **170** may be used as shown in Fig. 8, or may be accompanied by criss-crossed bridges **171** that are appropriately fastened to the horizontal bridges **170** at **173** as shown in Fig. 9. The fastening of the bridges **170** to the joists **20** through holes in the embossed features **84** is shown in greater detail in Figs.**21, 22** and **23**, effectively creating a snap in place connection without the use of tools.

The bridge members such as **170** may be formed in an L-shaped cross section from sheet steel to produce a first surface **172** and a second surface **174**. The second surface **174** is slotted at **176** as shown and the width W of surface **174** is less than the depth D of the hole **98** to permit the end **178** of the bridging member **170** to be inserted into the hole **98** and then rotated so as to lock the edges of the slot **176** against the reinforcement face **96** adjacent the hole **98**. Criss-crossed bridging members **171** may then be added and fastened as shown in Fig. 9.

Figs. 10 and 13 illustrate another embodiment of the invention defining a composite floor or roof structure. In particular, the upper chord **22** can be cold-formed so as to present horizontal extensions **190** symmetrically disposed about the central web **26** and presents spaced apart vertical extensions **192** and **201** adapted to receive the top portion **50** of the web **26** to define a vertical extension **194**. A rivet **196** may be utilized to fasten the upper chord **22** to the web **26** as shown.

A steel deck **198** is adapted to rest on the top surface of the horizontal upper chord extensions **190** as shown in Figs. 12 and 13. A wire mesh **205** is added. Thereafter concrete **206** can be poured onto the deck **198** so as to produce a floor or ceiling. Since the vertical extensions **194** are embedded into and bonded with the concrete **200**, a very solid composite floor system is produced. The

vertical extension **194** can also include a generally horizontal concrete engaging extension **202** that runs along the length of the chord **22**. Since the horizontal concrete engaging extension **202** runs along the length of the chord **22**, the possibility of snagging a worker's foot or clothing is minimized thereby adding to the safety feature of the joist prior to pouring of the concrete **206** over the deck **198**.

The shear bond between the extensions **194** and **202** and the concrete may be increased by using rivets spot clinches or the like to increase the surface area of contact between the concrete and the top chord. Despite the asymmetry provided by the horizontal engaging extension **202,** this embodiment of the joist is substantially concentric since the extensions **194** and **202** are bonded to the concrete and the steel-concrete composite effectively distributes the applied load to each joist through its centre of gravity

Fig. 24 illustrates another embodiment of the invention which includes an upper cold-formed steel chord **22** fastened to a steel web **26** by fasteners **30**. In the embodiment shown, the bottom chord **24** is a cold-formed extension of the web formed so as to present a horizontal extension **250** and **252** which may be of double thickness as shown and may be hole clinched (not shown) and may be disposed symmetrically or asymmetrically about the plane of the web.

Fig. 25 illustrates another embodiment of the invention, similar that shown in fig. 24 where the upper chord **22** has a single layer of sheet metal which is bent to produce the horizontal extensions **190** spaced apart to accommodate the end **50** of web **26** so as to define an upper vertical extension **194** having a horizontal concrete engaging extension **202**. The horizontal concrete engaging extension **202** can include a plurality of hole clinches to further strengthen the bond between the concrete and the upper chord **22** and thereby increase the shear strength of the composite. Clearly different further embodiments are possible wherein the bottom chord, being a cold-formed extension of the web, may have different forms being symmetric or asymmetric about the web axis, and in parts being of different multiples of the web thickness.

In the following, methods to locate and affix the joist to the opposed supporting walls are described. The joist **20** can be supported along the bottom chord **24** as shown in Figs. 30 and 31 illustrating a bottom chord bearing composite joist embodiment **20** supported by the bottom chord **24**.

In particular the ends **400** of the joist are disposed within the lower stud wall **402** and upper stud wall **404** as shown. The lower stud wall **402** includes a stud wall track **406** which is generally a flat piece of sheet steel **408** bent at its ends so as to present a solid surface to the joist. The upper stud wall **404** includes a similar stud wall track **406**. The stud walls **402** and **404** also includes a floor joist track **412** adjacent the end **400** of joist **20**.

The view of the joist **20** seen in Fig. 30 can have a number of configurations as described in the context of the composite joist including that shown in Figure 12. The composite joist is constructed in the manner previously described. An erection clip **414** can be utilized so as to locate the joist **20** prior to pouring the concrete to produce the composite joist. In particular the erection clip **414** comprises a general J-shaped clip in cross-section which is secured to the bottom of the stud wall track **406** and extension **202**. Once the concrete **200** is poured, the composite cold formed steel joist is supported by the bottom chord 24 at the ends **400** of the joist **20**.

Fig. 35, together with the enlargements depicted in Figs. 36a and 36b, illustrates another bottom chord bearing embodiment of the invention supported by the foundation walls and supporting the stud walls in a residential home.

In particular the joist **20** rests on a foundation **401** having a bearing support **410**. The end **400** of the joist **20** includes a reinforcing flap **82**, which provides support against the compressive forces arising from loads applied through the stud wall **404**, and is further particularized in Fig. 36a and 36b. In particular the flap **82** is cut along cut lines **600, 602** and **604** so as to present portions **620** and **622**. In particular portions **620** and **622** are folded along fold lines **606** and **608**.

Thereafter portions **620** and **622** are further folded along fold lines **621** and **623** so as to present wing portions **624** and **626** which are adapted to contact respectively the lower surface of upper chord member **22** and upper surface of lower chord member **24** as best shown in Fig. 35. Fastening means may be utilized to fasten the reinforcing wings **624** and **626** to upper and lower chord members **22** and **24** so as to further rigidify and strengthen the joist **20**.

Wooden or metal backing plates **412** are also utilized as shown in Fig. 35. Wooden pieces **414** may also be disposed as shown. The upper chord **22** provides a support surface for supporting plywood **416** or the like.

Further end reinforcing members **700** may be utilized which comprises an elongated section of sheet metal having web contacting portions **702** and rigidifying portions **704** extending generally perpendicular to the web contacting portions **702**. The ends of the rigidifying portions **704** are bent at **706** and **708** and adapted to contact the upper chord **22** and lower chord **24** respectively. Furthermore fastening means may be utilized to fasten the rigidifying section **700** to web **26** and upper and lower chords **22** and **24.**

Moreover Fig. 38 illustrates an embodiment of a bottom chord bearing cold-formed joist utilizing the reinforcing structure **700** shown in Fig. 37.

Fig. 28 generally illustrates a method of producing the said embodiments of the cold-formed joist. The upper chord **22** can be produced by unrolling a coil of sheet steel **112** along path **114** to a roll forming machine **116** such as sold by Samco machinery located in Toronto, Canada. The roll forming machine **116** can include a station to flatten and cut a selected length of the upper chord member **22**. Similarly, the lower chord member **24** can be produced by unrolling a coil of sheet steel **118** and flattening same along a path **120** to a roll forming machine **116** and then cutting to the desired length. Furthermore, the web **26** can also be produced by unwinding a coil of sheet steel **122** and flattening same at flattening station **123**. A shear **125** can be used to shear the web member **26** to its desired

length. Thereafter, the web **26** approaches stiffening section **128** so as to produce the first and second stiffening means **82** and **84** as described.

The shear **125** can be used to produce the plurality of segmented webs **104, 106** and **108**. Each web segment **104, 106, 108** can have the left hand and right hand stiffening flaps **82** produced by stiffening station **130** and **132**. An appropriate punch **133** is used to produce the second stiffening means **84** as described above in a drawing operation. As well, punch 133 is used to produce holes 72 and area embossments 184.

The sheet steel at stations **112, 118** and **122** can be galvanized or painted as desired prior to the forming process. Furthermore the roll forming machine **116** may include punches to punch the appropriate holes **52** in the upper and lower chord members **22** and **24** so as to accommodate the appropriate fastening means **28**.

Alternatively the roll forming machine **116** can include apparatus to spot clinch **32** the members together.

Accordingly the joist fabricated herein can be coated with a variety of paint colours which are painted prior to fabrication so as to produce a variety of joists having different colours and avoiding the dip painting characteristic of open web joist construction. The invention as described herein presents a number of advantages over the prior art. For example, many open web steel joists in the prior art include a cambering of the upper and lower chords **4** and **6** so as to present a slight arch to increase load bearing capabilities of the joist. Such prior art cambering techniques required working against the web during the cambering process. Applicant's invention on the other hand presents an advantage since the upper and lower chord members **22** and **24** can be cambered individually and separately from the web **26**. Once the upper and lower chord members **22** and **24** are cambered they can be attached to the web **26** as described since the depth of the said camber is adequately contained within the web receiving tabs **46, 48** of the upper chord and **64, 66** of the lower chord as depicted in Fig.7. Since the

web **26** is not part of the upper and lower chord members **22** and **24** during the cambering process there is substantially less resistance to the cambering. Alternate versions of the invention are shown in Figs. 14 and 14a, Fig.15, Figs. 29 representing bottom and top chord bearing versions; and Fig 26 and 26a, and Fig. 27, representing bottom and top chord bearing versions of a composite joist. In Fig. 14 and Fig. 29 a top chord **22** and a bottom chord **24** are attached by web receiving tabs to a generally planar web **26** that defines a Y-axis **27** of the joist by self piercing rivets **30** or other fastening means such as screws or rivets. Said web has longitudinally spaced holes **72** formed therein each with a cold-formed lip **74** for increased rigidity under load to allow the routing of pipes, wiring, ductwork and such of other trades. Further web stiffening may be provided by cold-formed area embossments **184** as shown disposed along the length of the web at locations chosen to counteract applied loads or may be provided by vertical stiffening embossments such as **84** as previously described. Further stiffening at the ends of the joist are provided by embossed plates **101** attached by fasteners **130** to the end portions of the web, and are sized to counter both compressive and shear stresses near the ends of the joist. Such embossed plates may be fastened on both sides of each end of the joist, and may terminate longitudinally in cold-formed flaps **182** that provide increased stiffness and provide a means of attaching joists at their ends.

As shown in Fig.29, the construction of the top chord **22** and the bottom chord **24** of this embodiment may be simplified compared with previously described embodiments. However additional features to those shown previously in Fig.7 say are disclosed. In particular the web receiving tabs **46** and **48** of the top chord are shown extended and cold-formed to provide outward protruding inner flanges **45** and **47** respectively disposed generally orthoganally to the web **26**. Said flanges contribute to the overall strength of the joist; and said flanges are formed with holes **198** regularly spaced along the length of the chord and designed to receive snap-in bridging members as shown in Figs. 33 and 34. The bottom chord **24** also shows inner flanges **65** and **67** as cold-formed extensions to the receiving tabs **64** and **66**. Without loss of generality, Fig. 29 also serves as a

cross section view of a top chord bearing version of this embodiment shown in perspective in Fig.15

Perspectives of bottom and top chord bearing composite joist versions of this embodiment are shown in Figs. 26, 26a and Fig.27, and a cross section view through line 112-112 is shown in Fig. 32. In Fig.32, top chord **22** is attached to the web **26** by fastening tabs **192** and **201** of vertical section **194** by self piercing rivets **196** or other means. The double thickness of steel forming horizontal extension **202** are fastened by rivets **199** as shown or by other fastening means, with the head of said rivet disposed above the top surface of extension **202** in order to increase the surface area on the top surface of extension **202** and so enhance shear bonding with concrete. The bottom chord inner flanges **65** and **67** are formed with regularly spaced holes 198 to receive snap-in bridging members as shown generally in Figs. 33 and 34.

An alternate embodiment is shown in figure 40 which is similar to the embodiment shown in figure 12. In this embodiment the joist **700** only includes a top chord **22** and does not include a web or a bottom chord. It will be appreciated by those skilled in the art that this joist would only have application in relatively short spans. Joist **700** includes a concrete engaging extension **202** which includes a vertical extension **194** that extends upwardly from horizontal upper chord extensions **190**. As described above steel deck **198** is adapted to rest on the top surface of the horizontal upper chord extensions **190**. A wire mesh **205** is added and thereafter concrete **200** is poured onto the deck **198**.

A structural assembly comprising a plurality of joists **20** partially shown at Fig. 33 can define a supporting surface **160** to support a platform **162** such as a roof or floor. Each of the joists **20** as shown in cross section comprises of spaced cold-formed steel upper and lower chord members **22** and **24** and a steel web **26** fastened between upper and lower chord members **22** and **24**. A plurality of bridging members **170** is used to stiffen the assembly **20**, said bridging members being disposed parallel to the support surface; and said flanges may be connected to adjacent joists at the holes **198** provided by the inner flanges **45**

and **47** of the top chord **22** and by the inner flanges **65** and **67** of the bottom chord **24**. Bridging members may be constructed from a length of steel of angled cross section terminated at each end by a feature **270** that fits the holes **198** and allows the bridging member to be snap fastened to inner flanges of adjacent joists.

A further aspect of this invention is illustrated in Fig. 34 partially showing a structural assembly of joists **20** defining a support surface **160** supporting a platform **162** such as a floor or roof when both parallel and criss-cross bridging is required. Such combined bridging may be provided by a diaphragm assembly **370** comprising a steel plate **470** affixed by fasteners **670** to upper and lower bridging members **170** each terminated by a snap-in feature **270** at either end. Said steel plate may provide a hole **570** having a cold-formed lip to allow the passage of wiring, pipes and ducting from other trades. Diaphragm assembly **370** providing both parallel and criss-cross bridging may be snap-fastened to adjacent joists by engaging the snap-in feature **270** with the holes **198** provided in the inner flanges of the upper and lower chords.

The snap-in bridging illustrated in Figs. 33 and 34 advances the prior art by substantially reducing the labour and cost involved in the manual assembly of bridging on the construction site. And although Figs. 33 and 34 refer to conventional floor or roof structures, the same bridging means may be used without any loss of generality to the construction of composite steel-concrete floors and roofs.

The support structures described in this invention can be utilized either as floor joists or roof joists for single family residential, multi-family residential, commercial or industrial building construction. Further it will be appreciated by those skilled in the art that the system described herein may be used as a stay in place forming system. Analysis and testing of said structures demonstrate that the prior art is advanced in several regards including:

- more economical bottom chord bearing cold-formed steel joists with spans up to 40 feet

- more economical top chord bearing joists capable of mass manufacture and customization
- more effective and economical composite floor and roof structures.

Although the joist embodiments as well as the manufacturing operations and use in construction have been specifically described in relation to the drawings, it should be understood that variations in these embodiments could be achieved by a person skilled in the art without departing from the spirit of the invention as claimed herein.

As used herein, the terms “comprises” and “comprising” are to be construed as being inclusive and opened rather than exclusive. Specifically, when used in this specification including the claims, the terms “comprises” and “comprising” and variations thereof mean that the specified features, steps or components are included. The terms are not to be interpreted to exclude the presence of other features, steps or components.

It will be appreciated that the above description related to the invention by way of example only. Many variations on the invention will be obvious to those skilled in the art and such obvious variations are within the scope of the invention as described herein whether or not expressly described.

WHAT IS CLAIMED AS THE INVENTION IS:

1. A joist comprising:

at least one elongate chord member, each chord member being cold-formed from a unitary piece of sheet steel, each chord member having a flange portion and a web receiving portion orthogonal thereto, the web receiving portion having two tabs and a pair of inner flange portions each extending outward perpendicularly from one of the web receiving tabs; and

a generally planar steel web attached to the web receiving portion of the chord member between the two tabs.

2. A joist as claimed in claim 1 wherein the flange portion of the at least one chord member has two thicknesses of steel and is generally orthogonal to the web receiving portion.

3. A joist as claimed in one of claim 1 or 2 wherein the at least one elongate chord member is a upper chord member and further comprising a lower chord member and wherein the generally planar steel web is attached intermediate to the web receiving tabs of the upper and lower chord members between the two thicknesses of steel.

4. A joist as claimed in claims 3 wherein the joist is a upper chord bearing joist and wherein the upper chord member extends outwardly with reference to each end of the lower chord member.

5. A joist as claimed in claim 3 wherein the joist is a lower chord bearing joist and the wherein the upper chord member and the lower chord member are generally the same length.

6. A joist as claimed in one of claim 1 or 2 wherein the at least one chord member is an upper chord member and the web further includes a cold formed lower chord extending generally orthogonally at the bottom thereof.

7. A joist as claimed in claim 6 wherein the lower chord extends outwardly from both sides of the web and forms a generally planar bottom surface.

8. A joist as claimed in claim 6 wherein the lower chord extends outwardly from one side of the web and forms a generally planar bottom surface.

9. A joist as claimed in any one of claims 3 to 8 wherein the lower chord member has a generally planar bottom surface.

10. A joist as claimed in any one of claims 3 to 9 wherein the upper chord member has a generally planar top surface.

11. A joist as claimed in any one of claims 1 to 10 wherein the at least one chord member is an upper chord member and the flange portion and the web receiving portion of the upper chord member are cold-formed to provide a concrete engaging portion extending upwardly and laterally from the inner flange portion, and the concrete engaging portion is adapted to bond to concrete when the joist is used as a composite joist.

12. A joist as claimed in claim 11 wherein the concrete engaging portion is generally an inverted L-shape having a generally vertical portion and a generally horizontal portion and wherein the vertical portion is the two web receiving tabs and wherein the concrete engaging portion has two thicknesses of steel.

13. A joist as claimed in any one of claims 1 to 12 wherein the inner flange members have a plurality of spaced apart holes formed therein.

14. A joist as claimed in any one of claims 1 to 13 wherein the web includes a plurality of web members attached together.

15. A joist comprising:

at least one elongate chord member, each chord member being cold-formed from a unitary piece of sheet steel, each chord member having a

flange portion and a web receiving portion orthogonal thereto, the web receiving portion having two tabs; and

a generally planar steel web attached to the web receiving portion of the chord member between the two tabs and the web having a plurality of web members attached together.

16. A joist as claimed in one of claims 14 and 15 wherein the web members are web segments and at least one web segment has a different thickness than the other web segments.

17. A joist as claimed in any one of claims 14 to 16 wherein the web members at opposed ends of the joist have a greater thickness than the web members therebetween.

18. A joist as claimed in any one of claims 1 to 17 wherein the web further includes stiffening means.

19. A joist as claimed in claim 18 wherein the stiffening means includes a plurality of shapes embossed therein wherein the shapes are chosen from a group consisting of vertical ridges and shapes having horizontal and vertical dimension.

20. A joist as claimed in claim 18 wherein the web includes a plurality of segments and wherein the stiffening means includes stiffening tabs being elongate tabs at either end of each segment.

21. A joist as claimed in any one of claims 3 and 4 further including a pair of angled end support members attached between the ends of the lower chord member and the upper chord member at each end thereof.

22. A joist as claimed in any one of claims 1 to 20 further including a pair of generally L-shaped end plates each attached to opposed ends of the joist

AMENDED SHEET

wherein a first leg of each L-shaped end plate is attached to the web of the joist, and a second leg of L-shaped end plate is attachable to a second joist.

23. A joist as claimed in claim 22 wherein the L-shaped member is sized to withstand both compression loads and shear loads near the end of the joist.

24. A joist as claimed in any one of claims 1 to 23 wherein the joist is cambered.

25. A joist as claimed in any one of claims 1 to 24 wherein the joist is configured to be loaded concentrically.

26. A joist as claimed in any one of claims 1 to 25 wherein the web has a plurality of holes formed therein.

27. A joist as claimed in claim 26 wherein each hole has a lip extending around the periphery thereof.

28. A joist as claimed in any one of claims 1 to 27 wherein each chord member and each web is coated with coating material.

29. A joist as claimed in any one of claims 1 to 28 wherein the web is attached to each chord using rivets.

30. A joist as claimed in any one of claims 1 to 28 wherein the web is attached to each chord using self piercing rivets.

31. A supporting system comprising a plurality of joists as claimed in claims 1 to 30 supported by and spanning a separation between opposing supporting members.

32. A supporting system as claimed in claim 31 wherein the supporting members are walls.

33. A supporting system as claimed in claims 31 or 32 further including a plurality of bridging members between adjacent joists and attached thereto.

34. A supporting system as claimed in claim 32 wherein the plurality of bridging members are adapted to snap in place.

35. A supporting system as claimed in claim 34 wherein the joists include joists having a chord having a pair of inner flange portions each extending perpendicularly from one of the web receiving tabs, the inner flange portions having a plurality of holes formed therein, wherein the bridging members have ends formed therein adapted to engage the holes in the inner webs such that the bridging members are snapped in place by the ends engaging the holes.

36. A supporting system as claimed in any one of claim 33 to 35 wherein the bridging members include at least one top bridge attached to the inner flanges of the upper chord of the joists adjacent thereto and at least one bottom bridge attached to the inner flanges of the lower chord of the joists adjacent thereto..

37. A supporting system as claimed in any one of claims 33 to 35 wherein the bridging members include a top bridge attached to an upper chord of joists and a bottom bridge attached to a lower chord of the joists.

38. A supporting system as claimed in one of claims 36 or 37 further including criss-crossed bridges attached to the top and bottoms bridges.

39. A supporting system as claimed in any one of claims 33 to 37 wherein the bridging members are diaphragm assemblies.

40. A supporting system as claimed in claim 39 wherein the diaphragm assemblies have holes formed therein.

41. A supporting system comprising a plurality of joists as claimed in any one of claims 1 to 14 wherein the upper chord members are adapted to support one of a platform and a deck.

42. A supporting system as claimed in claim 41 wherein the deck supports a composite concrete slab and wherein the deck the plurality of joists and the concrete slab together act as a stay in place forming system.

43. A supporting system comprising a plurality of joists as claimed in claim 11 wherein the inner flange portion of the upper chord members are adapted to support a deck, the deck supports a composite slab having the concrete engaging portion embedded therein and wherein the deck, the plurality of joists and the concrete slab together act as a stay in place forming system.

44. A supporting system as claimed in any one of claims 42 and 43 wherein the concrete slab has a wire mesh embedded therein.

45. A composite floor system comprising:

a plurality of metal joists, each joist including an upper elongate chord member formed from a unitary piece of cold-formed steel and having an inner flange portion and a concrete engaging portion extending upwardly therefrom and the concrete engaging portion having two thicknesses of steel;

a deck resting on the upper chord member; and

a concrete slab disposed on the upper chord member of the plurality of joists and the deck with the concrete engaging portion of the upper chord member embedded in the concrete slab to define the composite floor.

46. A composite floor system as claimed in claim 45 wherein the concrete slab has a wire mesh embedded therein.

47. A composite floor system as claimed in claim 45 or 46 wherein the deck rests on the inner flange portion of the upper chord member.

48. A method of producing a joist comprising the steps of:

cold-forming an upper chord member from sheet metal, the upper chord member having a flange portion and a web receiving portion orthogonal thereto, the web receiving portion having two tabs and a pair of inner flange portions each extending outward perpendicularly from one of the web receiving tabs;

forming at least one web member from sheet metal; and

fastening the web member between the two tabs of the web receiving portion of the upper chord member with mechanical fasteners.

49. A method as claimed in claim 48 further including the step of forming a lower chord member from sheet metal, the lower chord member having a flange portion and a web receiving tab orthogonal thereto and the web receiving tab having two thicknesses of steel.

50. A method as claimed in claim 49 wherein the lower chord member further includes a pair of inner flange portions each entending outward perpendicularly from one of the web receiving tabs.

51. A method as claimed in claim 50 wherein the flange portions of the upper and lower chord members each have two thicknesses of steel.

52. A method as claimed in claim 51 wherein the upper chord member further includes a concrete engaging portion extending upwardly from the flange portion.

53. A method as claimed in any one of claims 49 to 51 wherein the web, and upper and lower chord members are coated prior to the fastening step.

54. A method as claimed in any one of claims 49 to 51 wherein the web, and upper and lower chord members are coated prior to the forming steps.

55. A method as claimed in any one of claims 49 to 54 for producing lipped holes in the sheet metal forming the web and for producing regularly spaced holes in the upper and lower chord members.

56. A method as claimed in any one of claims 48 to 55 including a step of forming a plurality of web members fastened together to define a web.

57. A method as claimed in claim 56 wherein the web members are selected with different web thicknesses.

58. A method as claimed in any one of claims 48 to 57 wherein the chord members include reinforced sections to accommodate greater loads.

59. A method of producing a joist comprising the steps of:

cold-forming an upper chord member from sheet metal, the upper chord member having a flange portion and a web receiving portion orthogonal thereto and the web receiving portion having two tabs; and

forming a web, the web having a plurality of web members each formed from sheet material; and

fastening the web members between the two tabs of the web receiving portion of the chord with mechanical fasteners.

60. A method as claimed in claim 59 further including the step of forming a lower chord member from sheet metal, the lower chord member having a flange portion and a web receiving tab orthogonal thereto and the web receiving tab having two thicknesses of steel.

61. A method as claimed in claim 60 wherein the flange portions of the upper and lower chord members each have two thicknesses of steel.

62. A method as claimed in claim 61 wherein the upper chord member further includes a concrete engaging portion extending upwardly from the flange portion.

63. A method as claimed in any one of claims 60 to 62 wherein the web, and upper and lower chord members are coated prior to the fastening step.

64. A method as claimed in any one of claims 60 to 62 wherein the web, and upper and lower chord members are coated prior to the forming steps.

65. A method as claimed in any one of claims 61 to 63 for producing lipped holes in the sheet metal forming the web and for producing regularly spaced holes in the upper and lower chord members.

66. A method as claimed in any one of claims 60 to 65 including a step of forming a plurality of web members fastened together to define a web.

67. A method as claimed in claim 66 wherein the web members are selected with different web thicknesses.

68. A method as claimed in any one of claims 60 to 67 wherein the chord members include reinforced sections to accommodate greater loads.

69. A method as claimed in any one of claims 48 to 68 wherein the web member is attached to each chord member by rivets.

70. A method as claimed in any one of claims 48 to 68 wherein the web member is attached to each chord member by self piercing rivets.

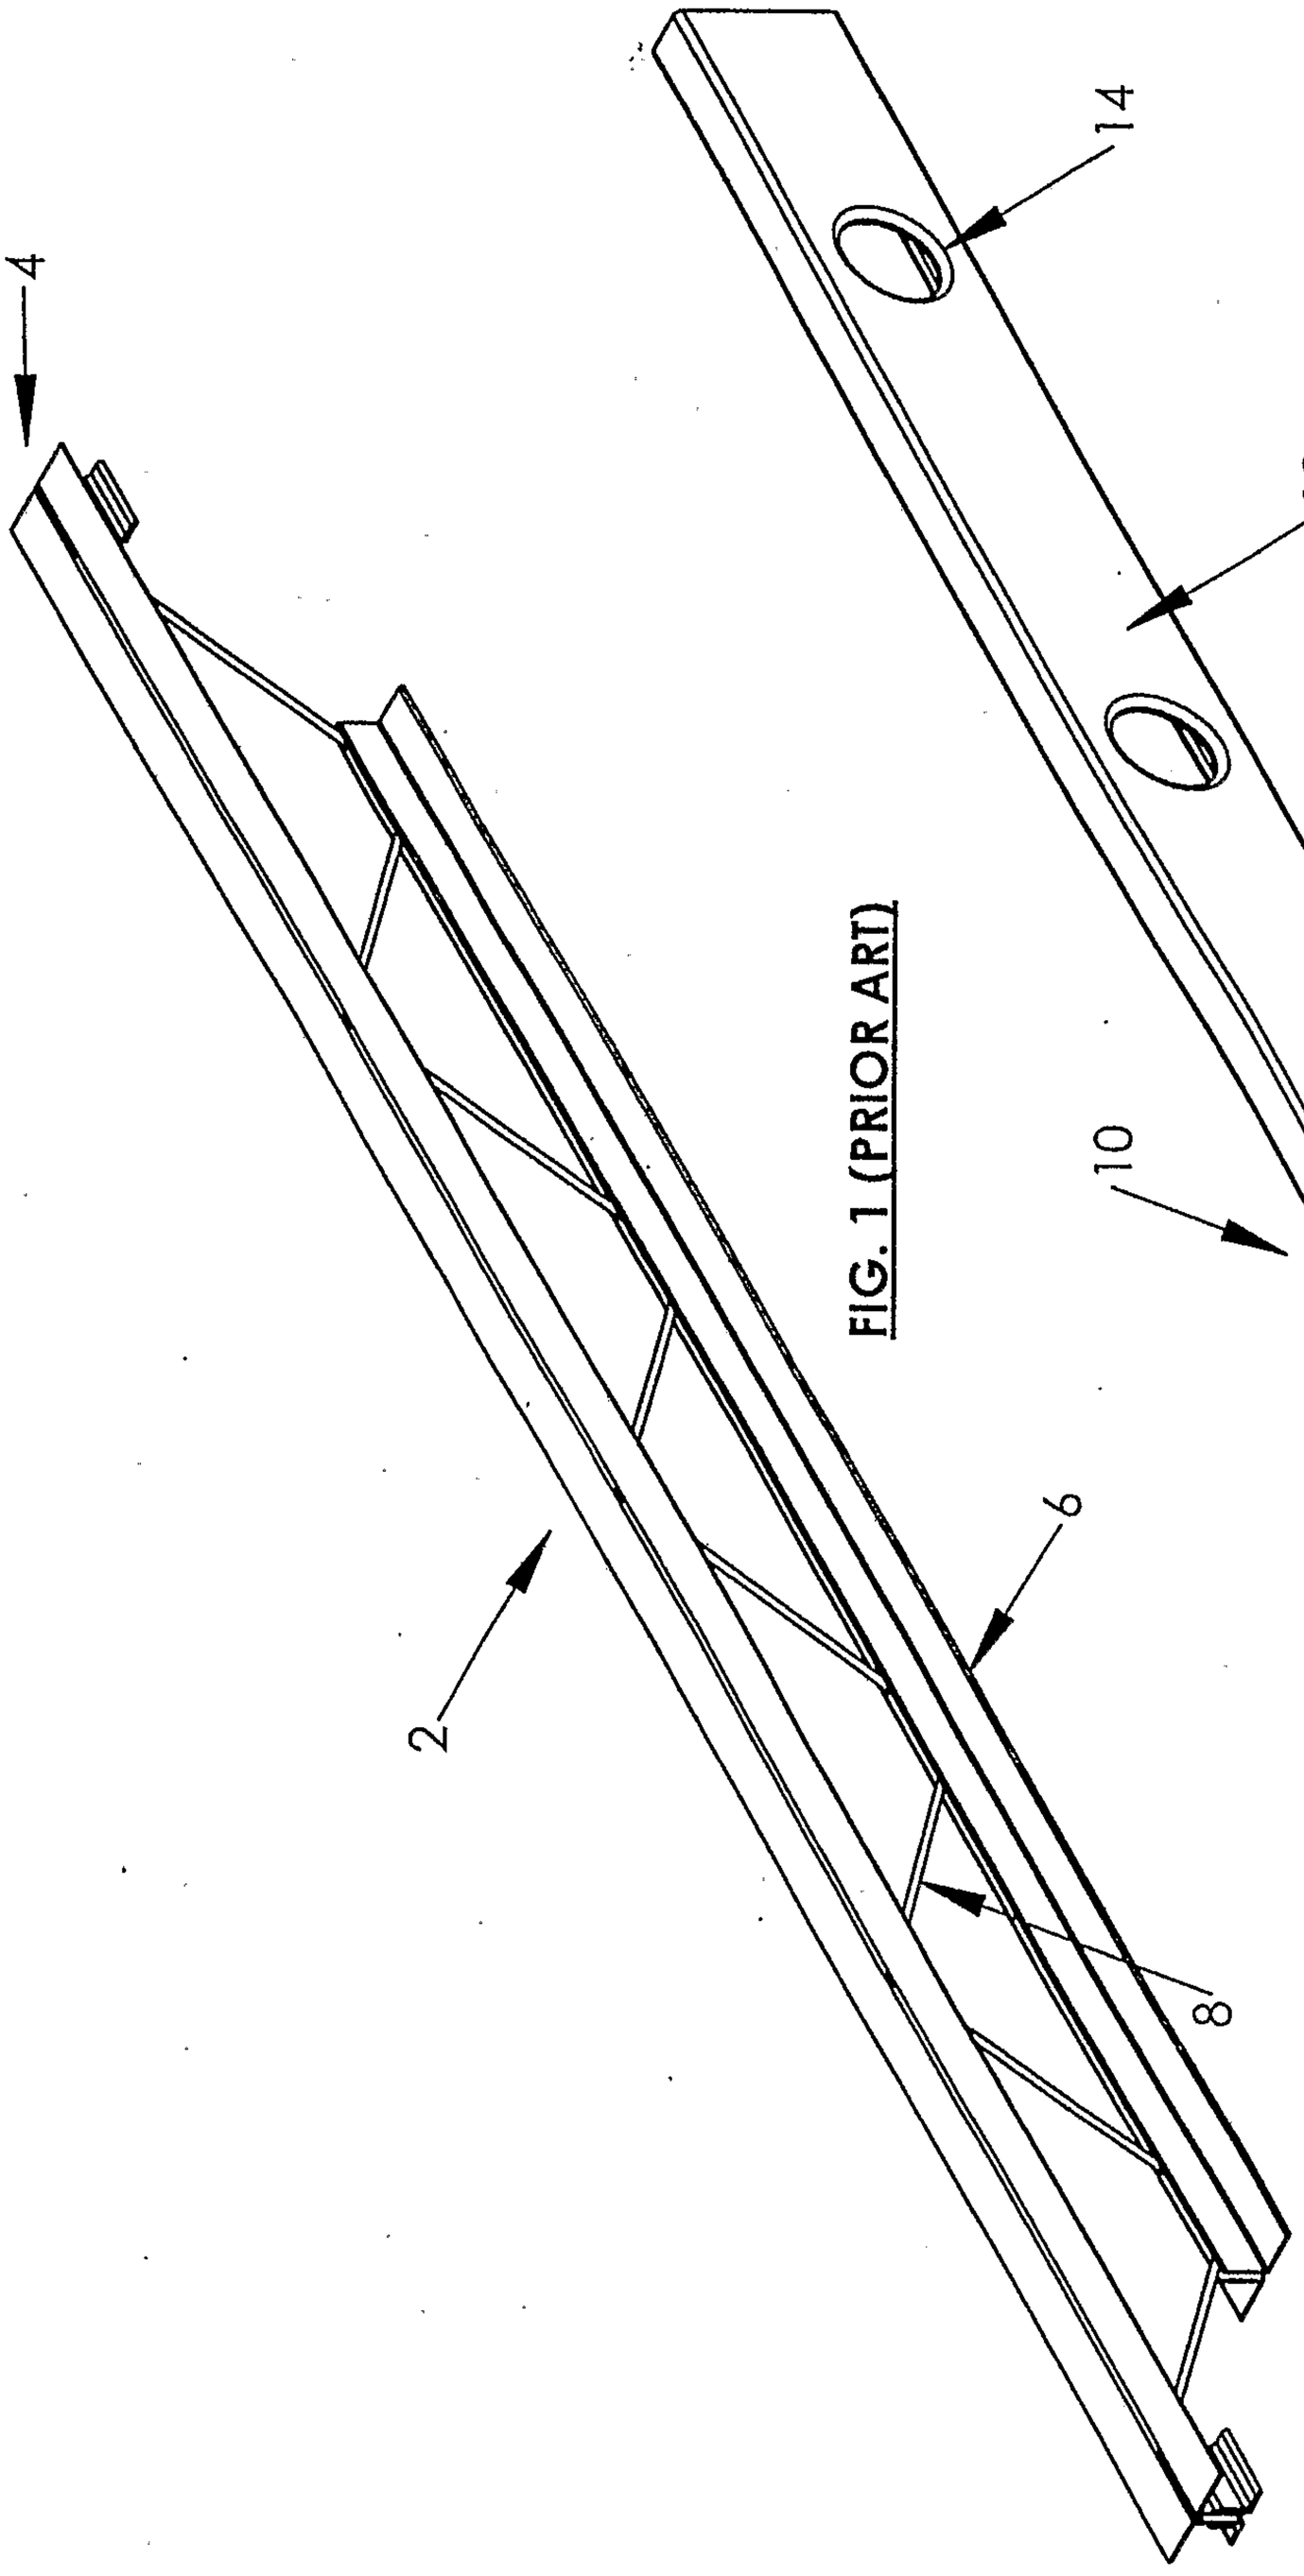

FIG. 1 (PRIOR ART)

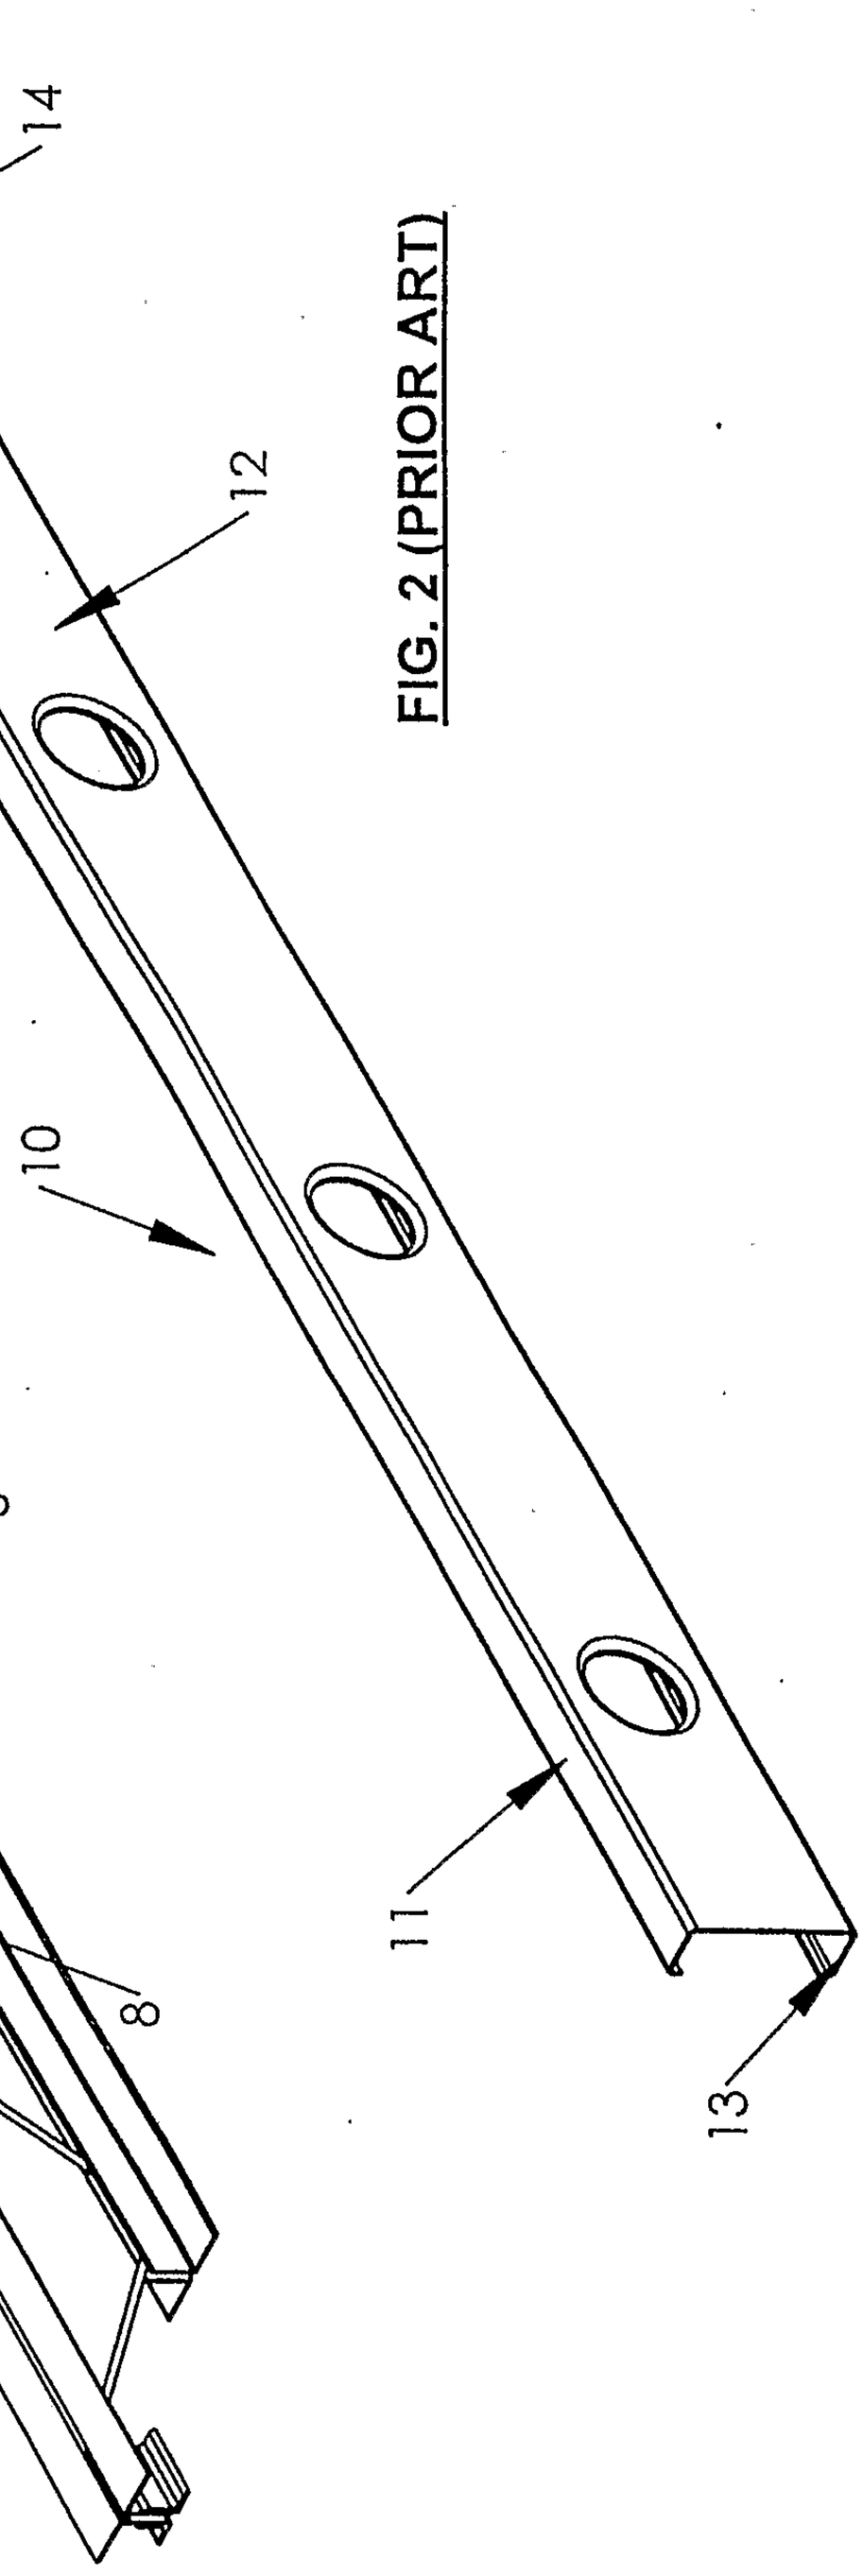

FIG. 2 (PRIOR ART)

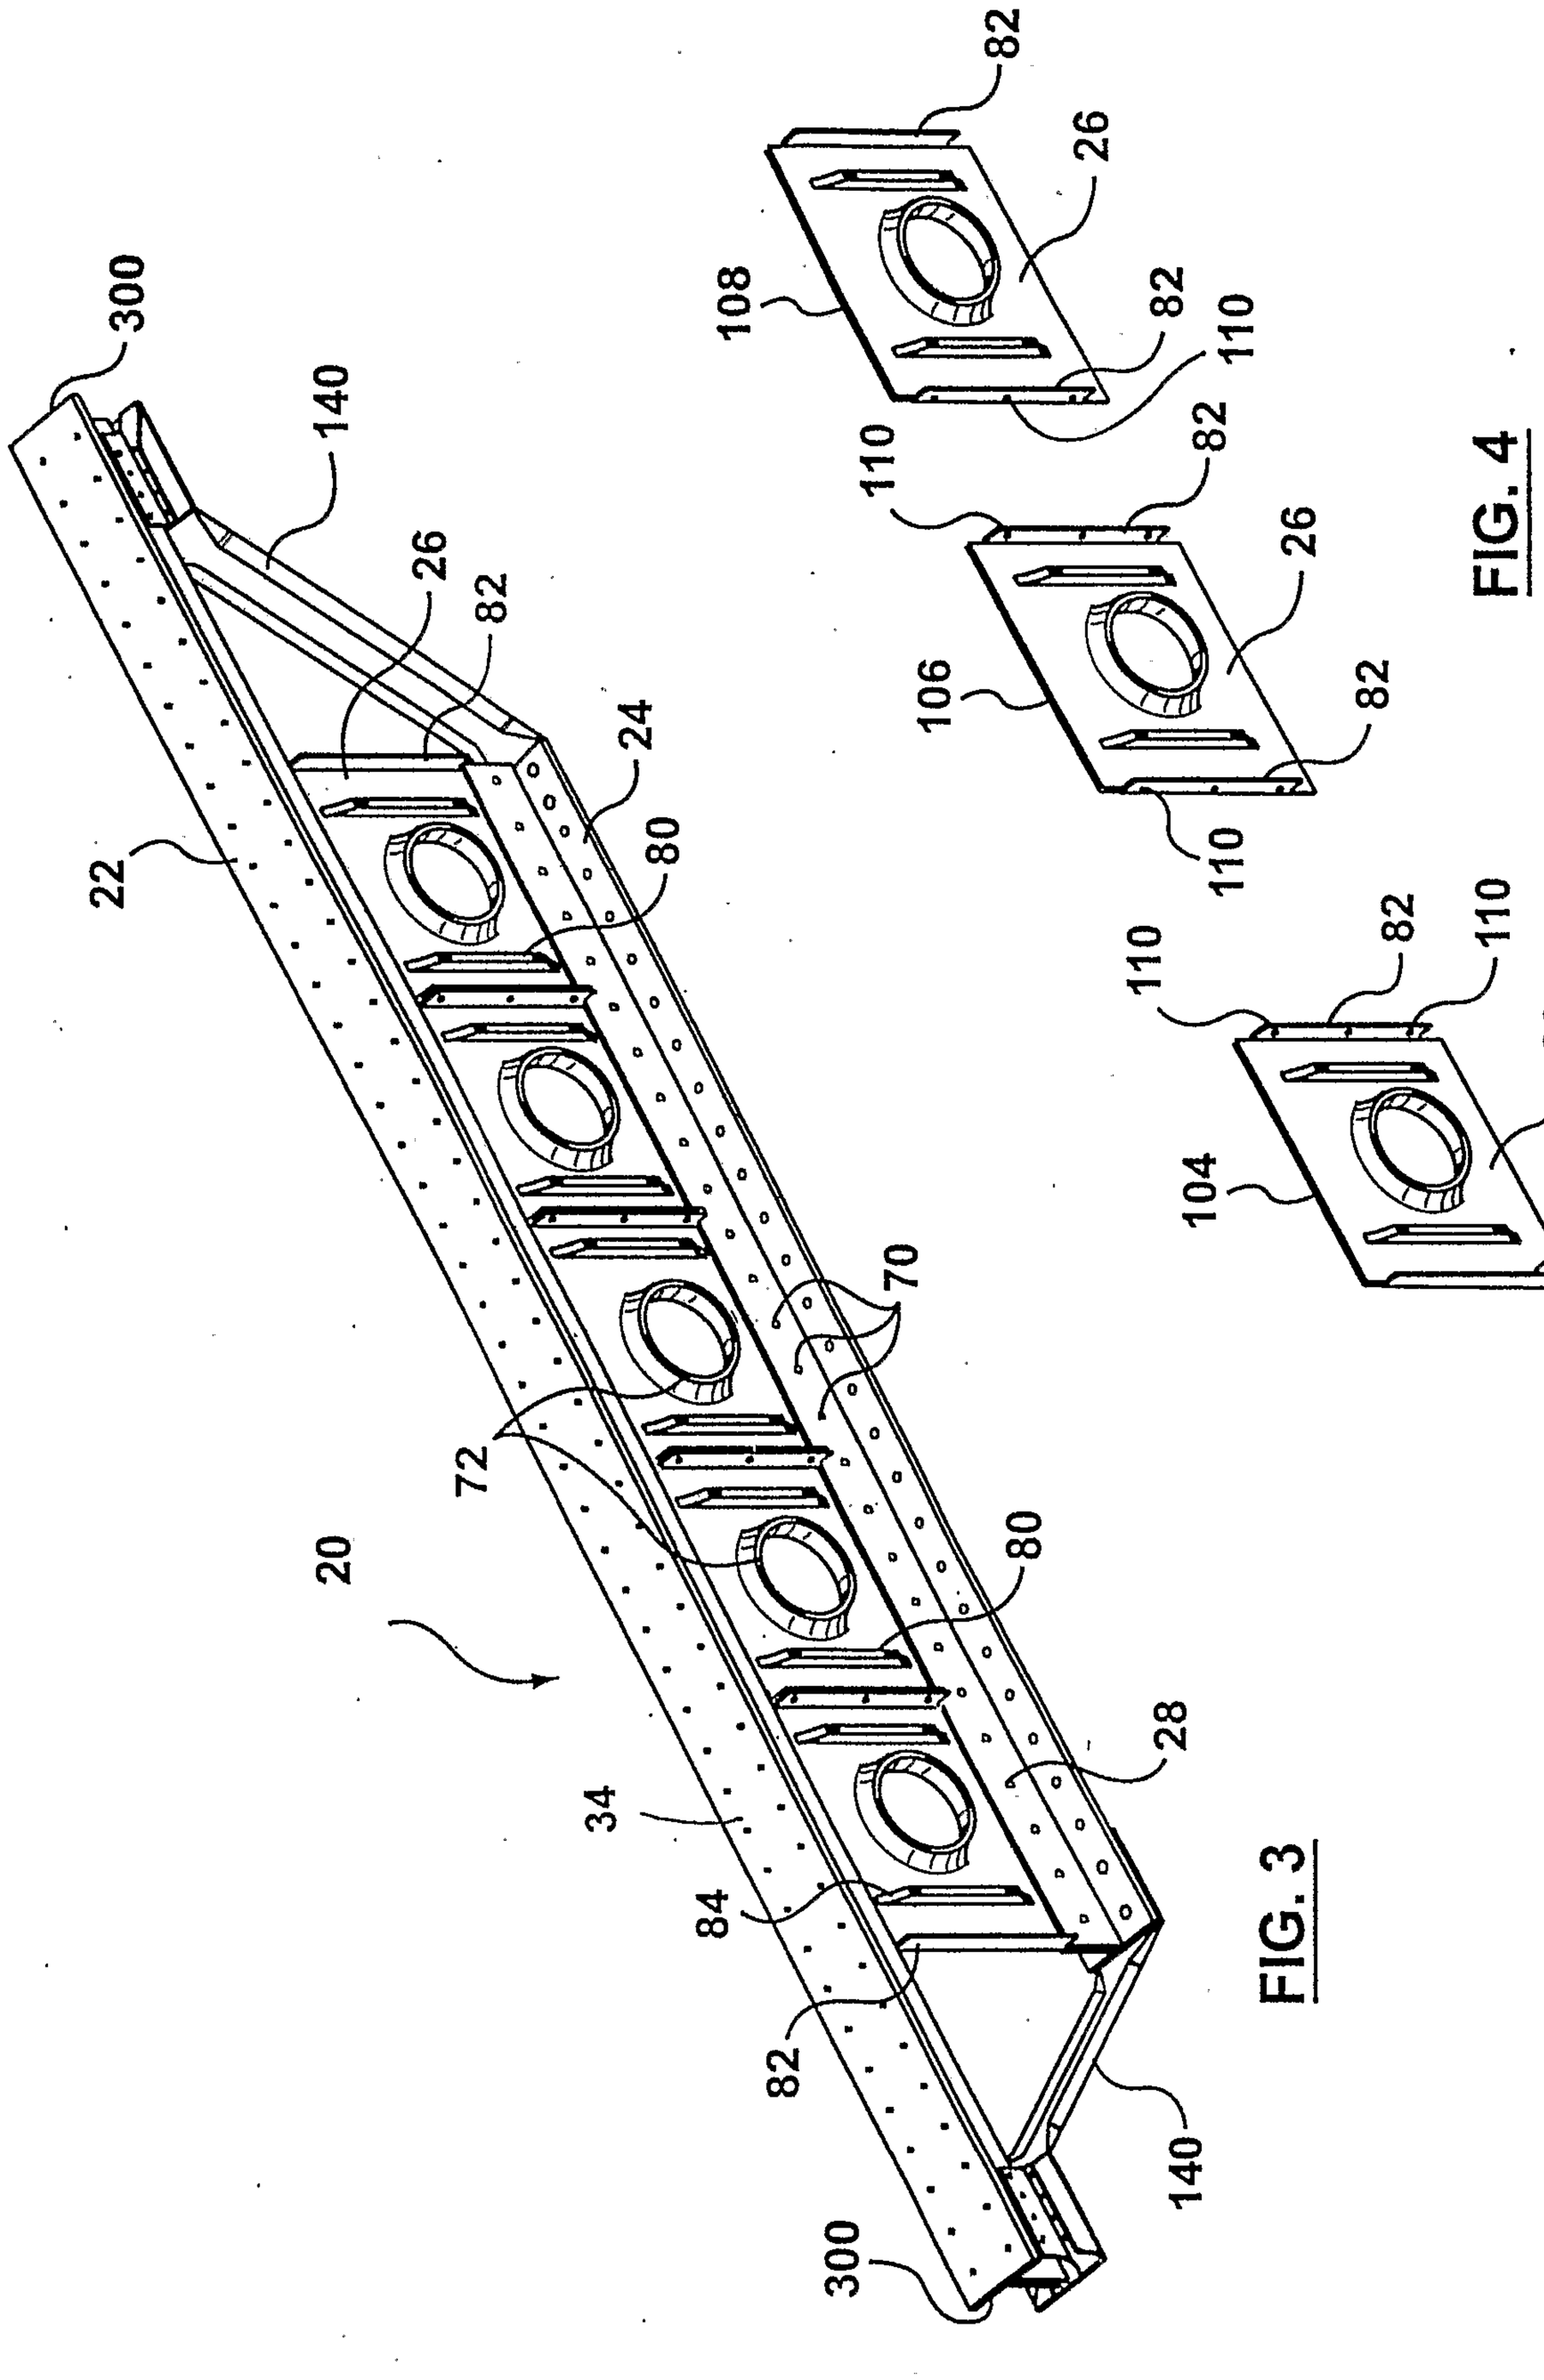
300
140
26
82
24
22
80
70
72
20
34
28
84
82
140
300
82
26
108
110
82
110
82
26
106
82
110
110
82
26
104
82

FIG. 4

FIG. 3

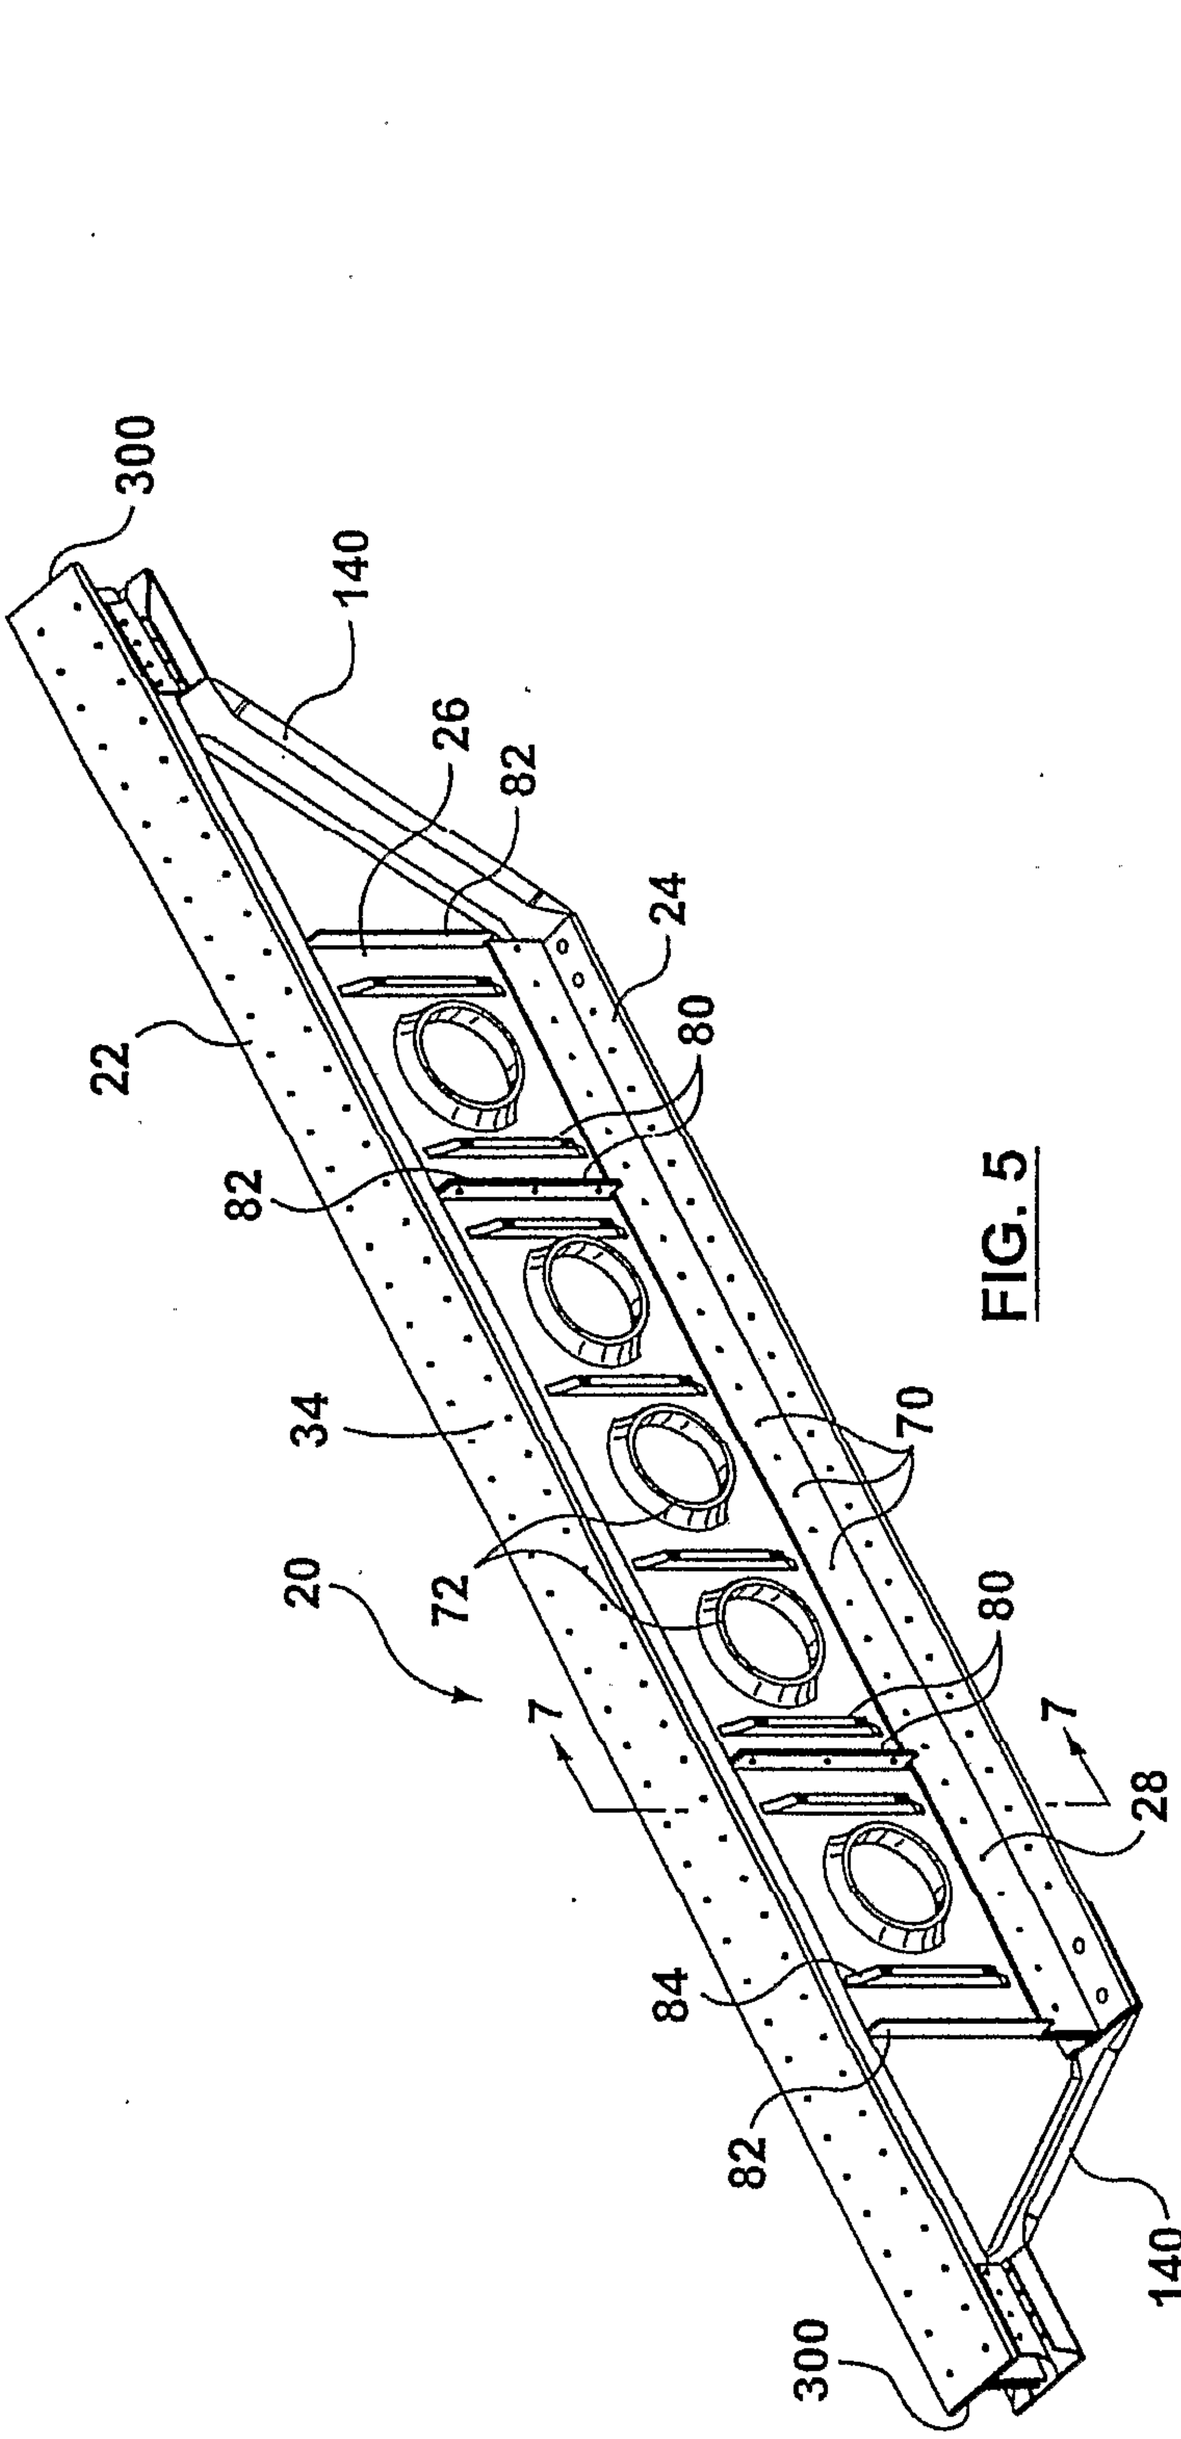
300
140
26
82
24
30
22
80
82
34
70
72
20
80
7
7
28
84
82
140
300

FIG. 5

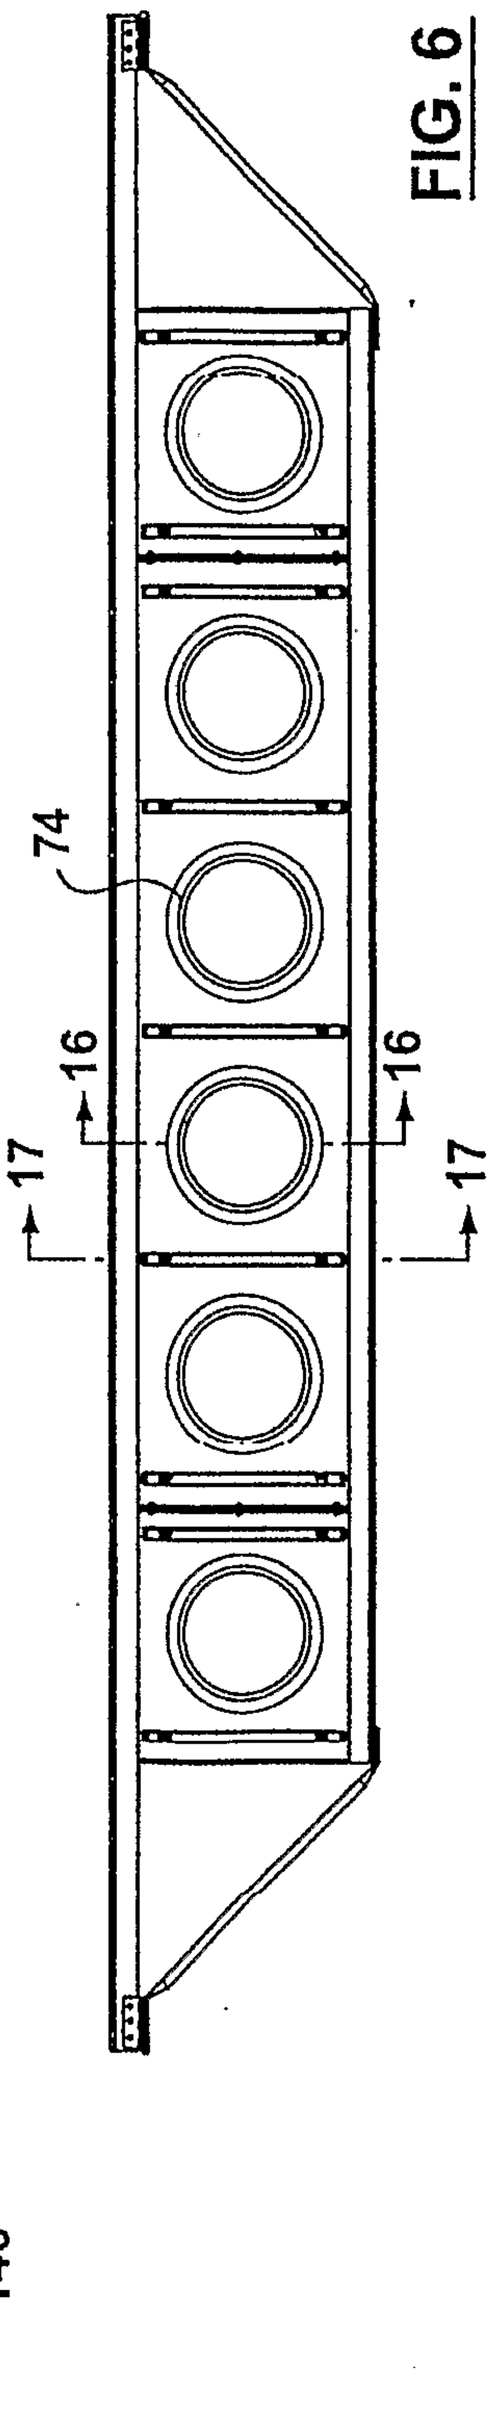
74
16
16
17
17

FIG. 6

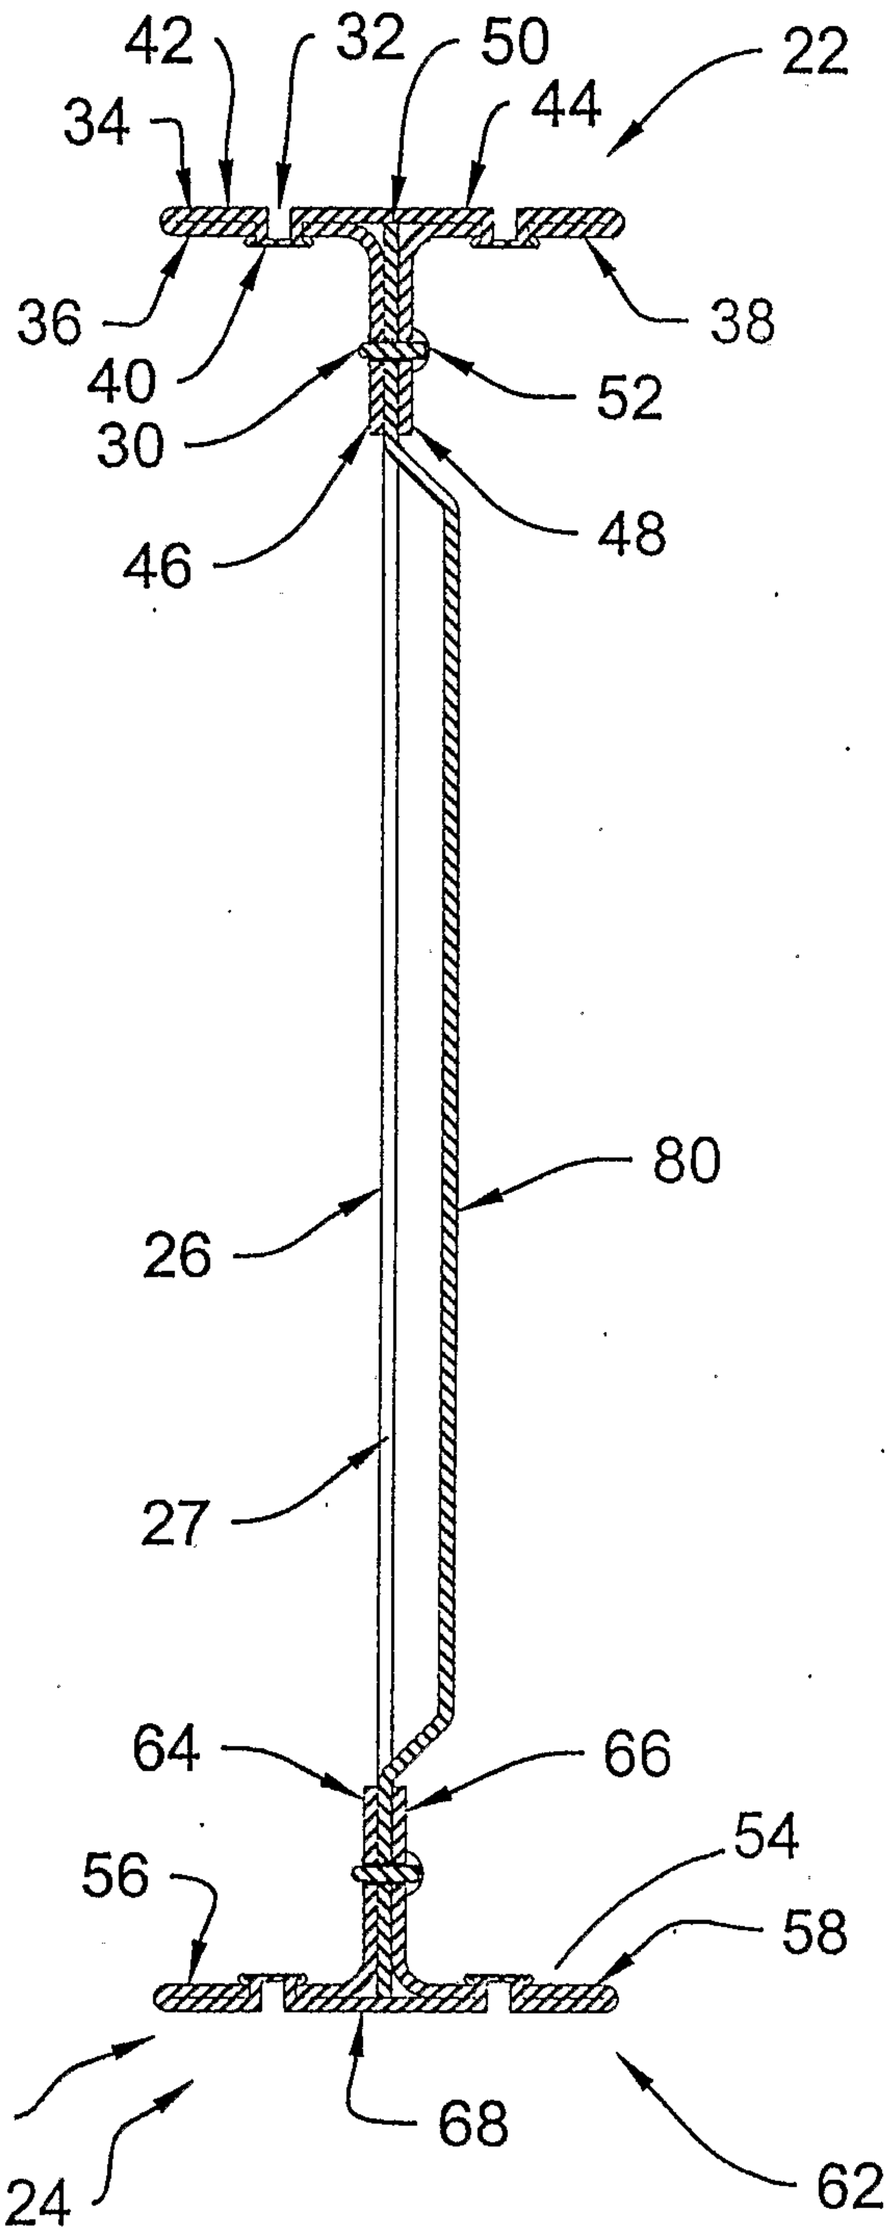
42
32
50
22
34
44
36
38
40
52
30
48
46
80
26
27
64
66
54
56
58
60
68
24
62

FIG. 7

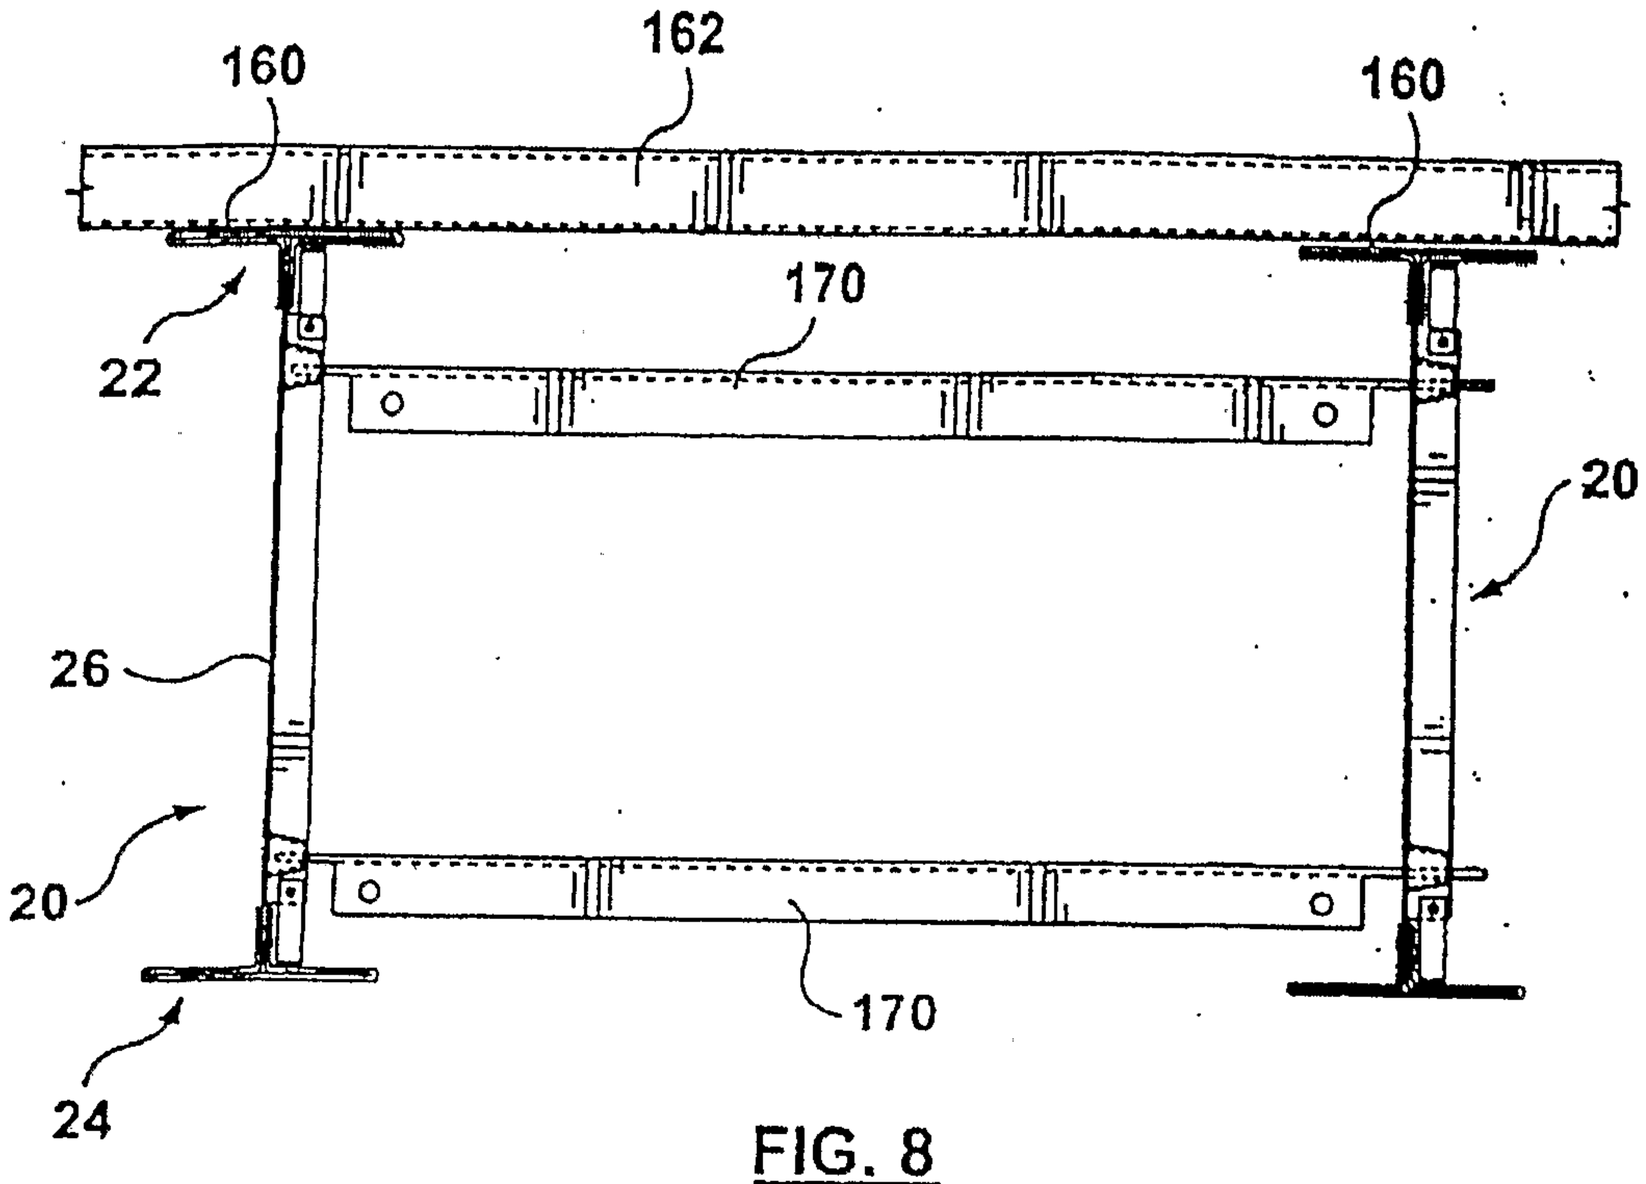

FIG. 8

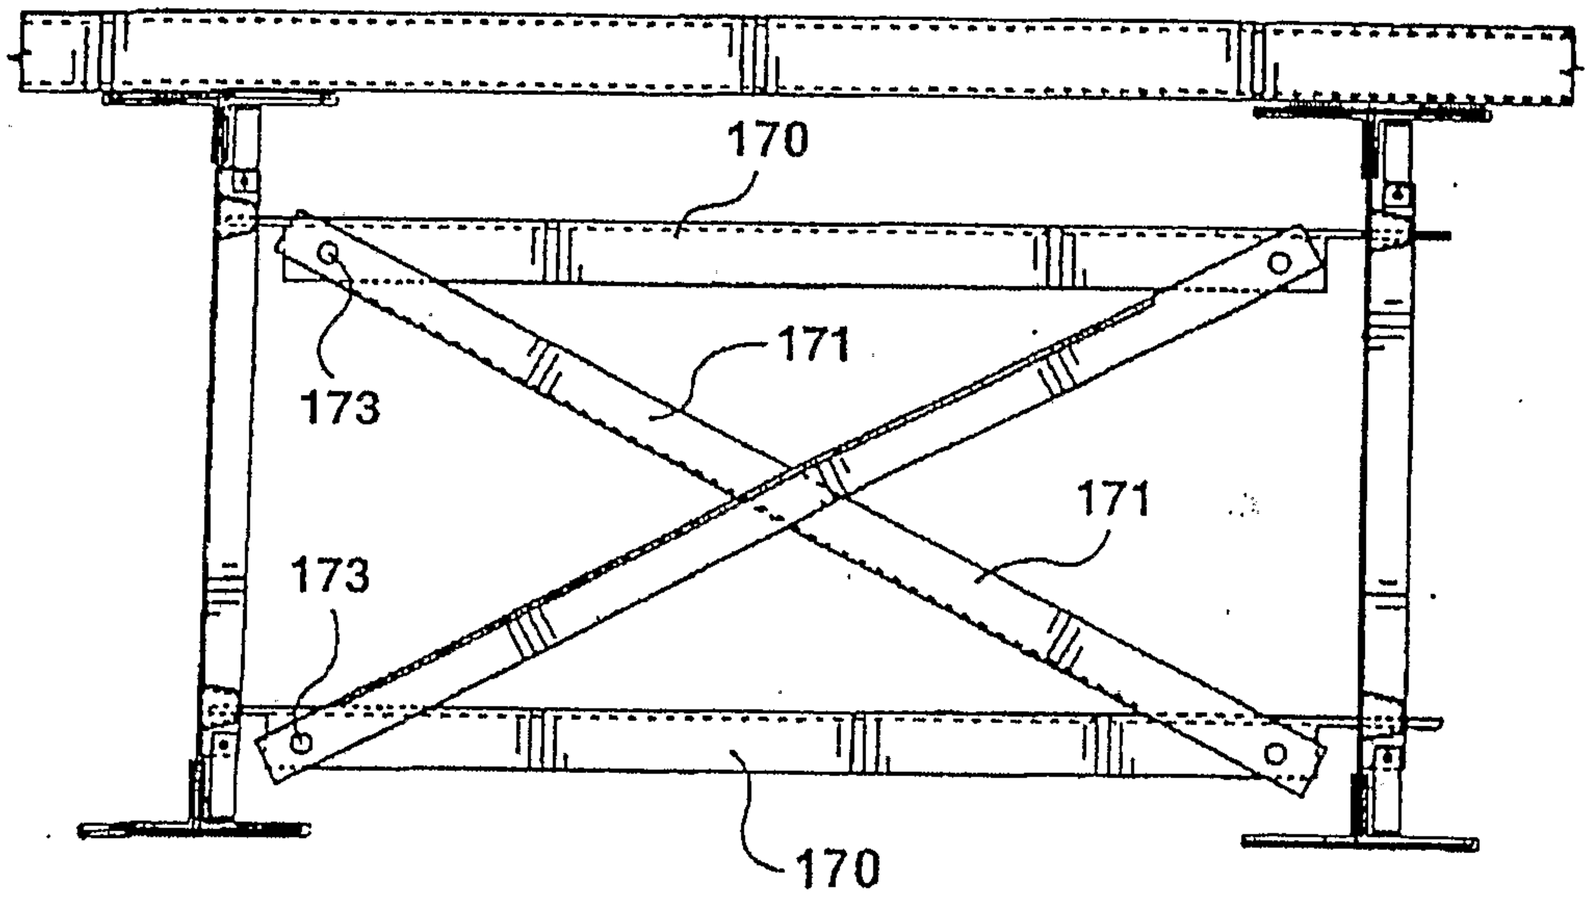

FIG. 9

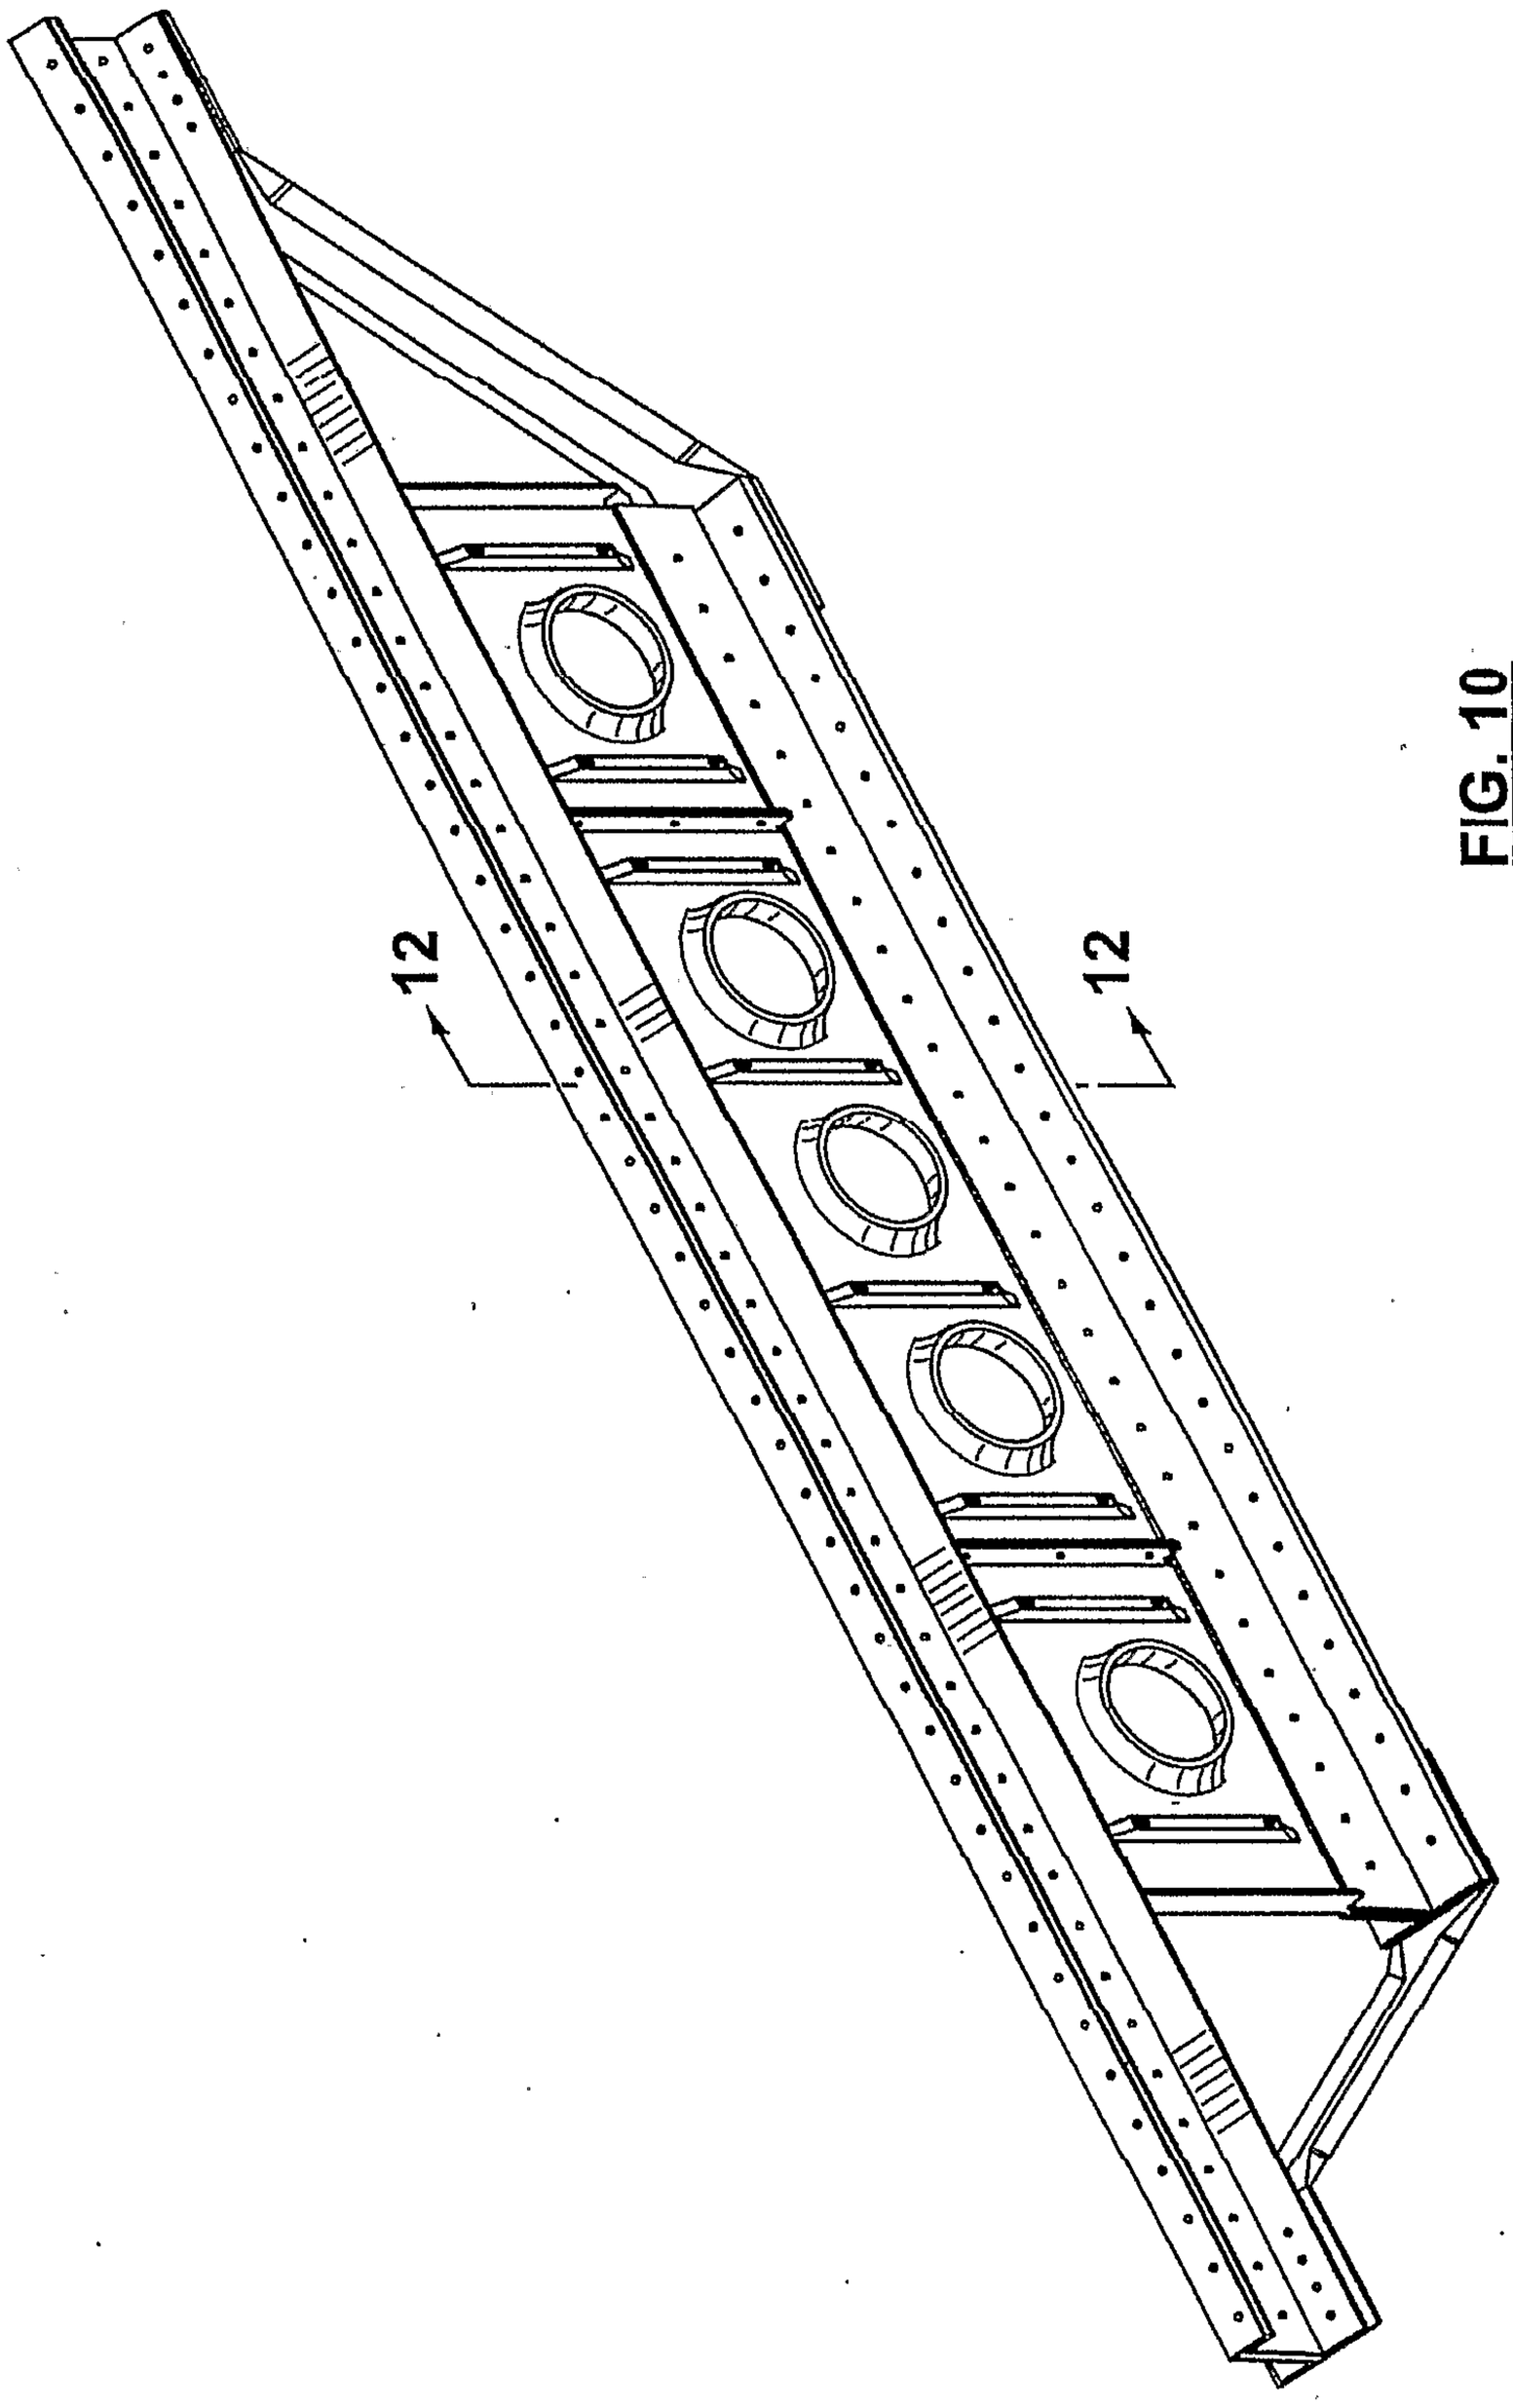

FIG. 10

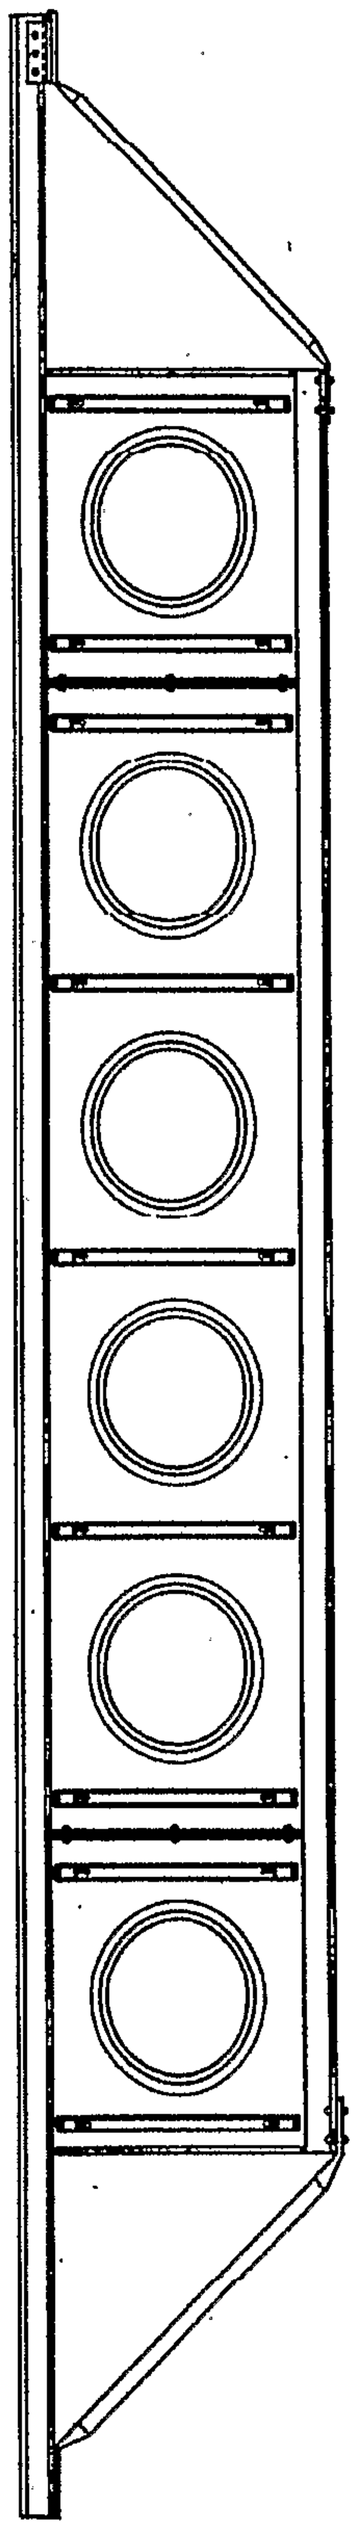

FIG. 11

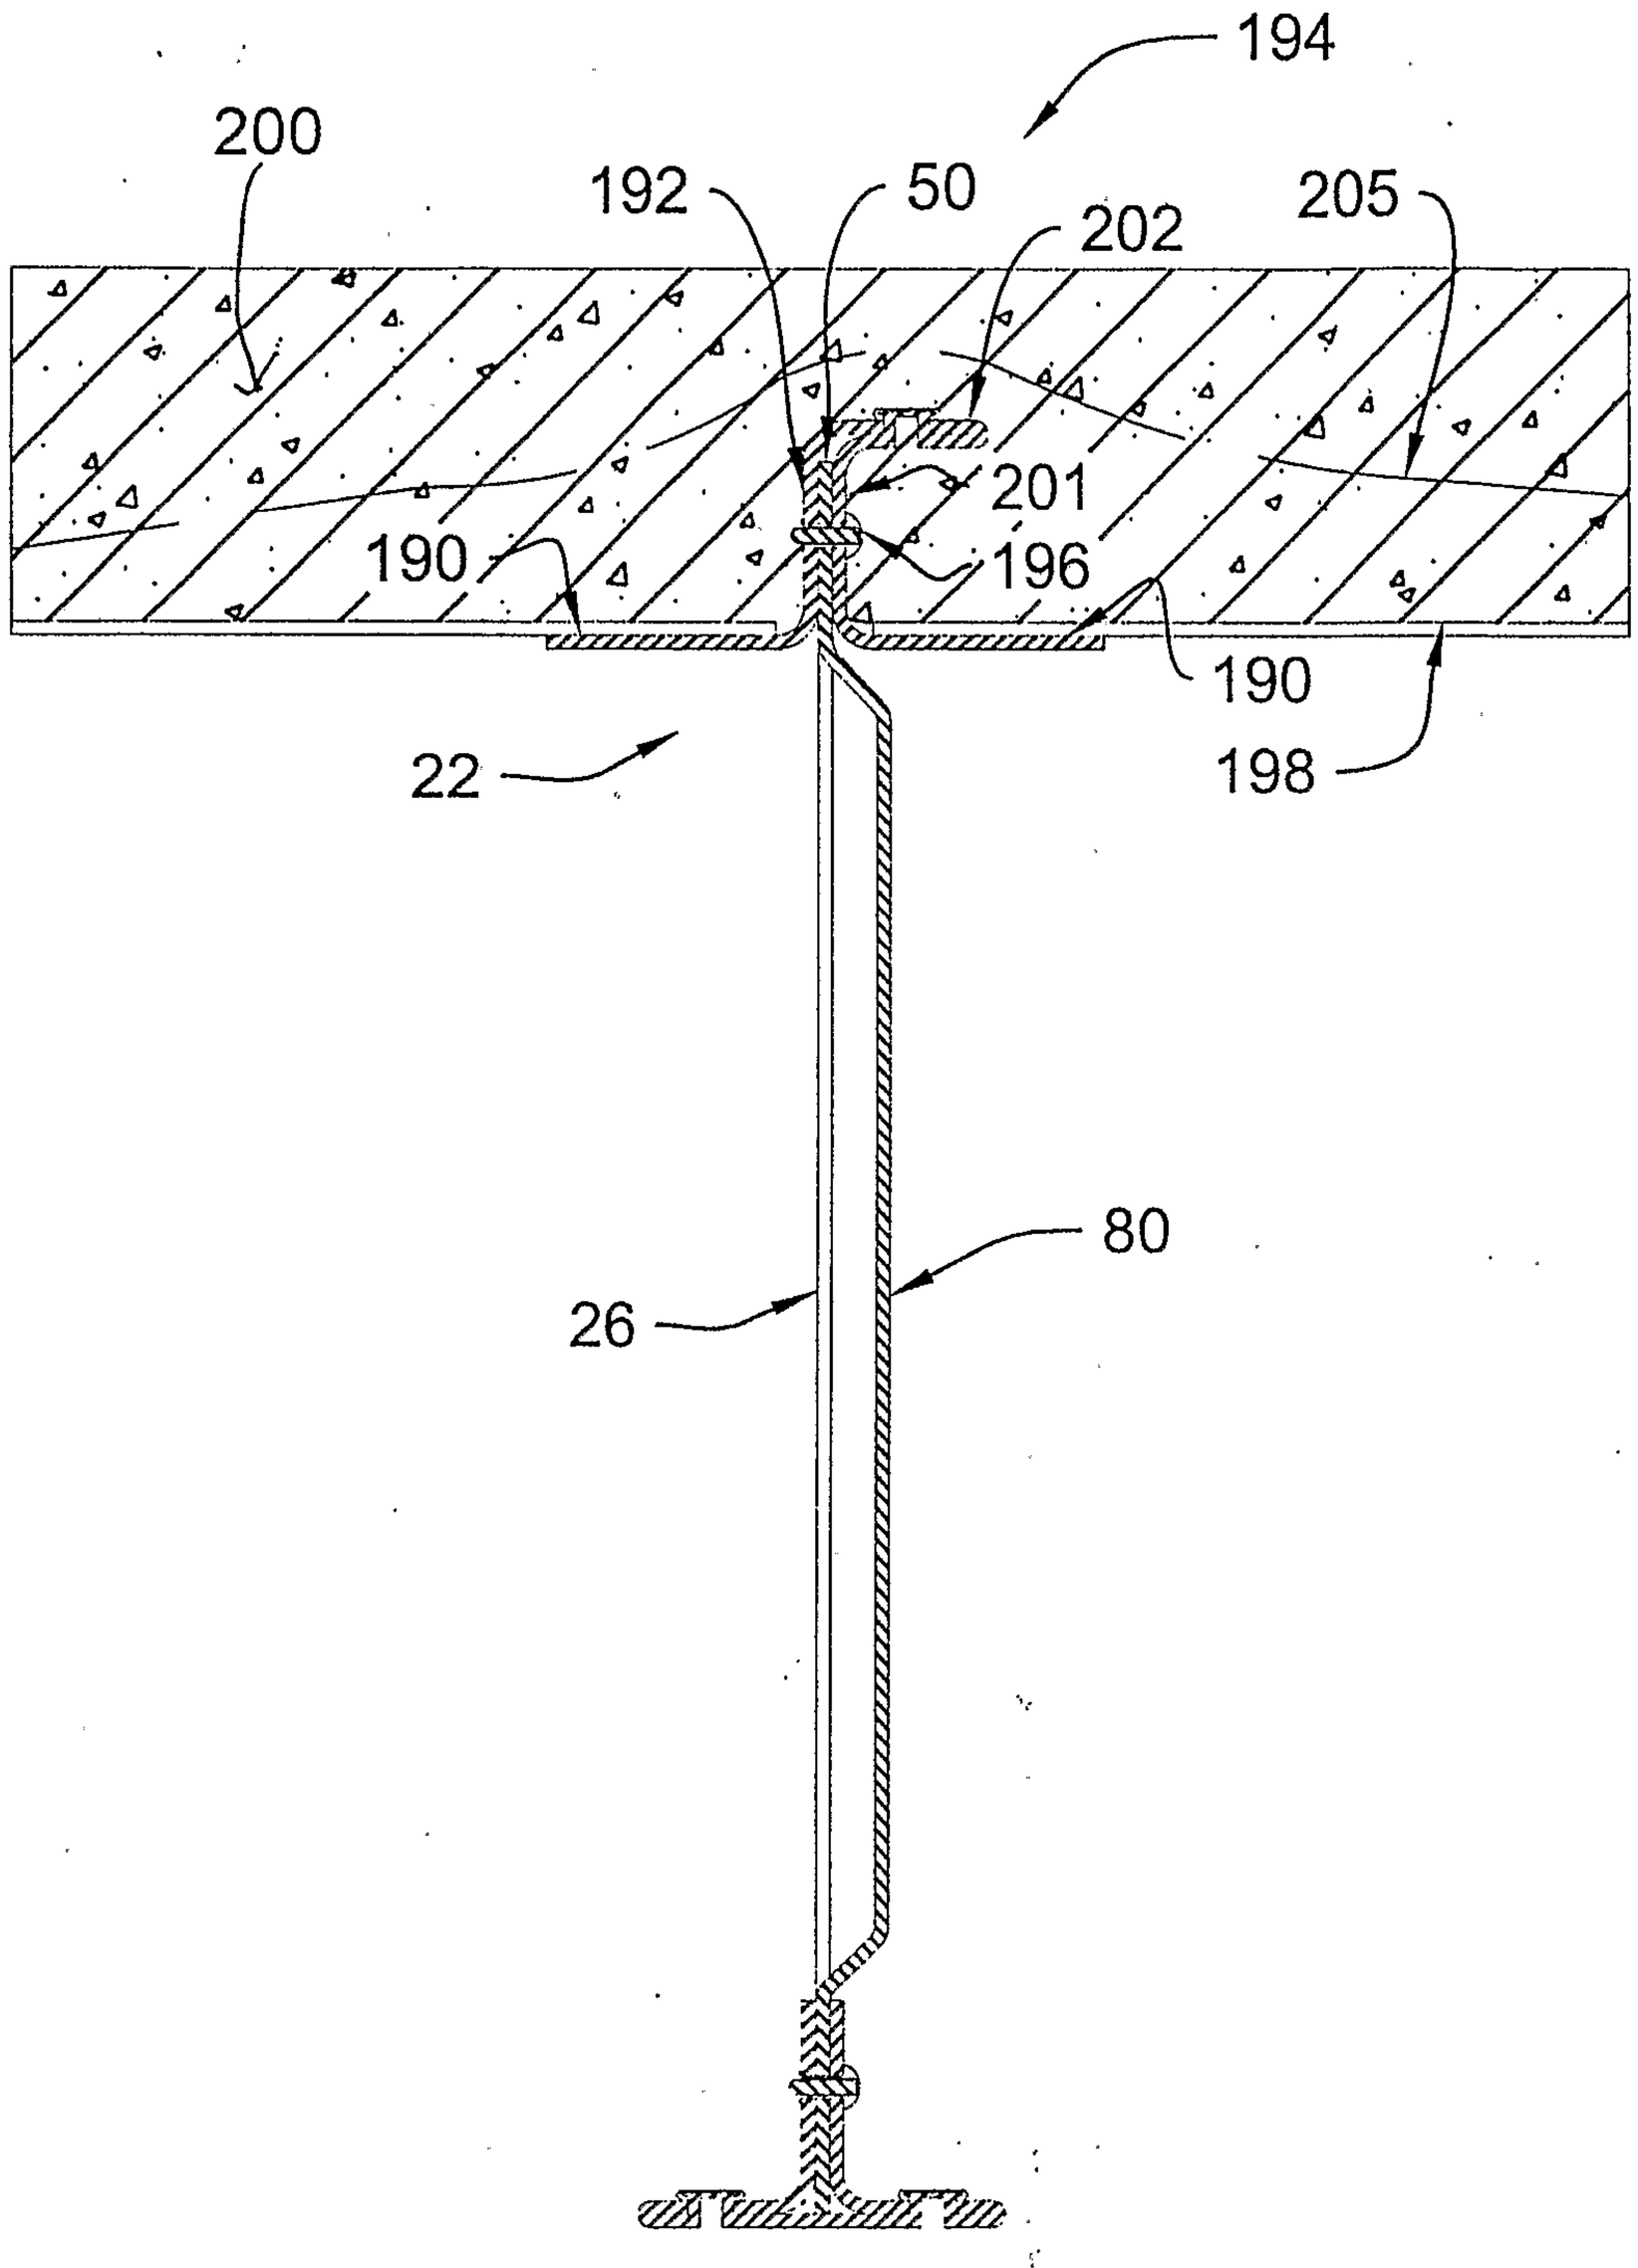

FIG. 12

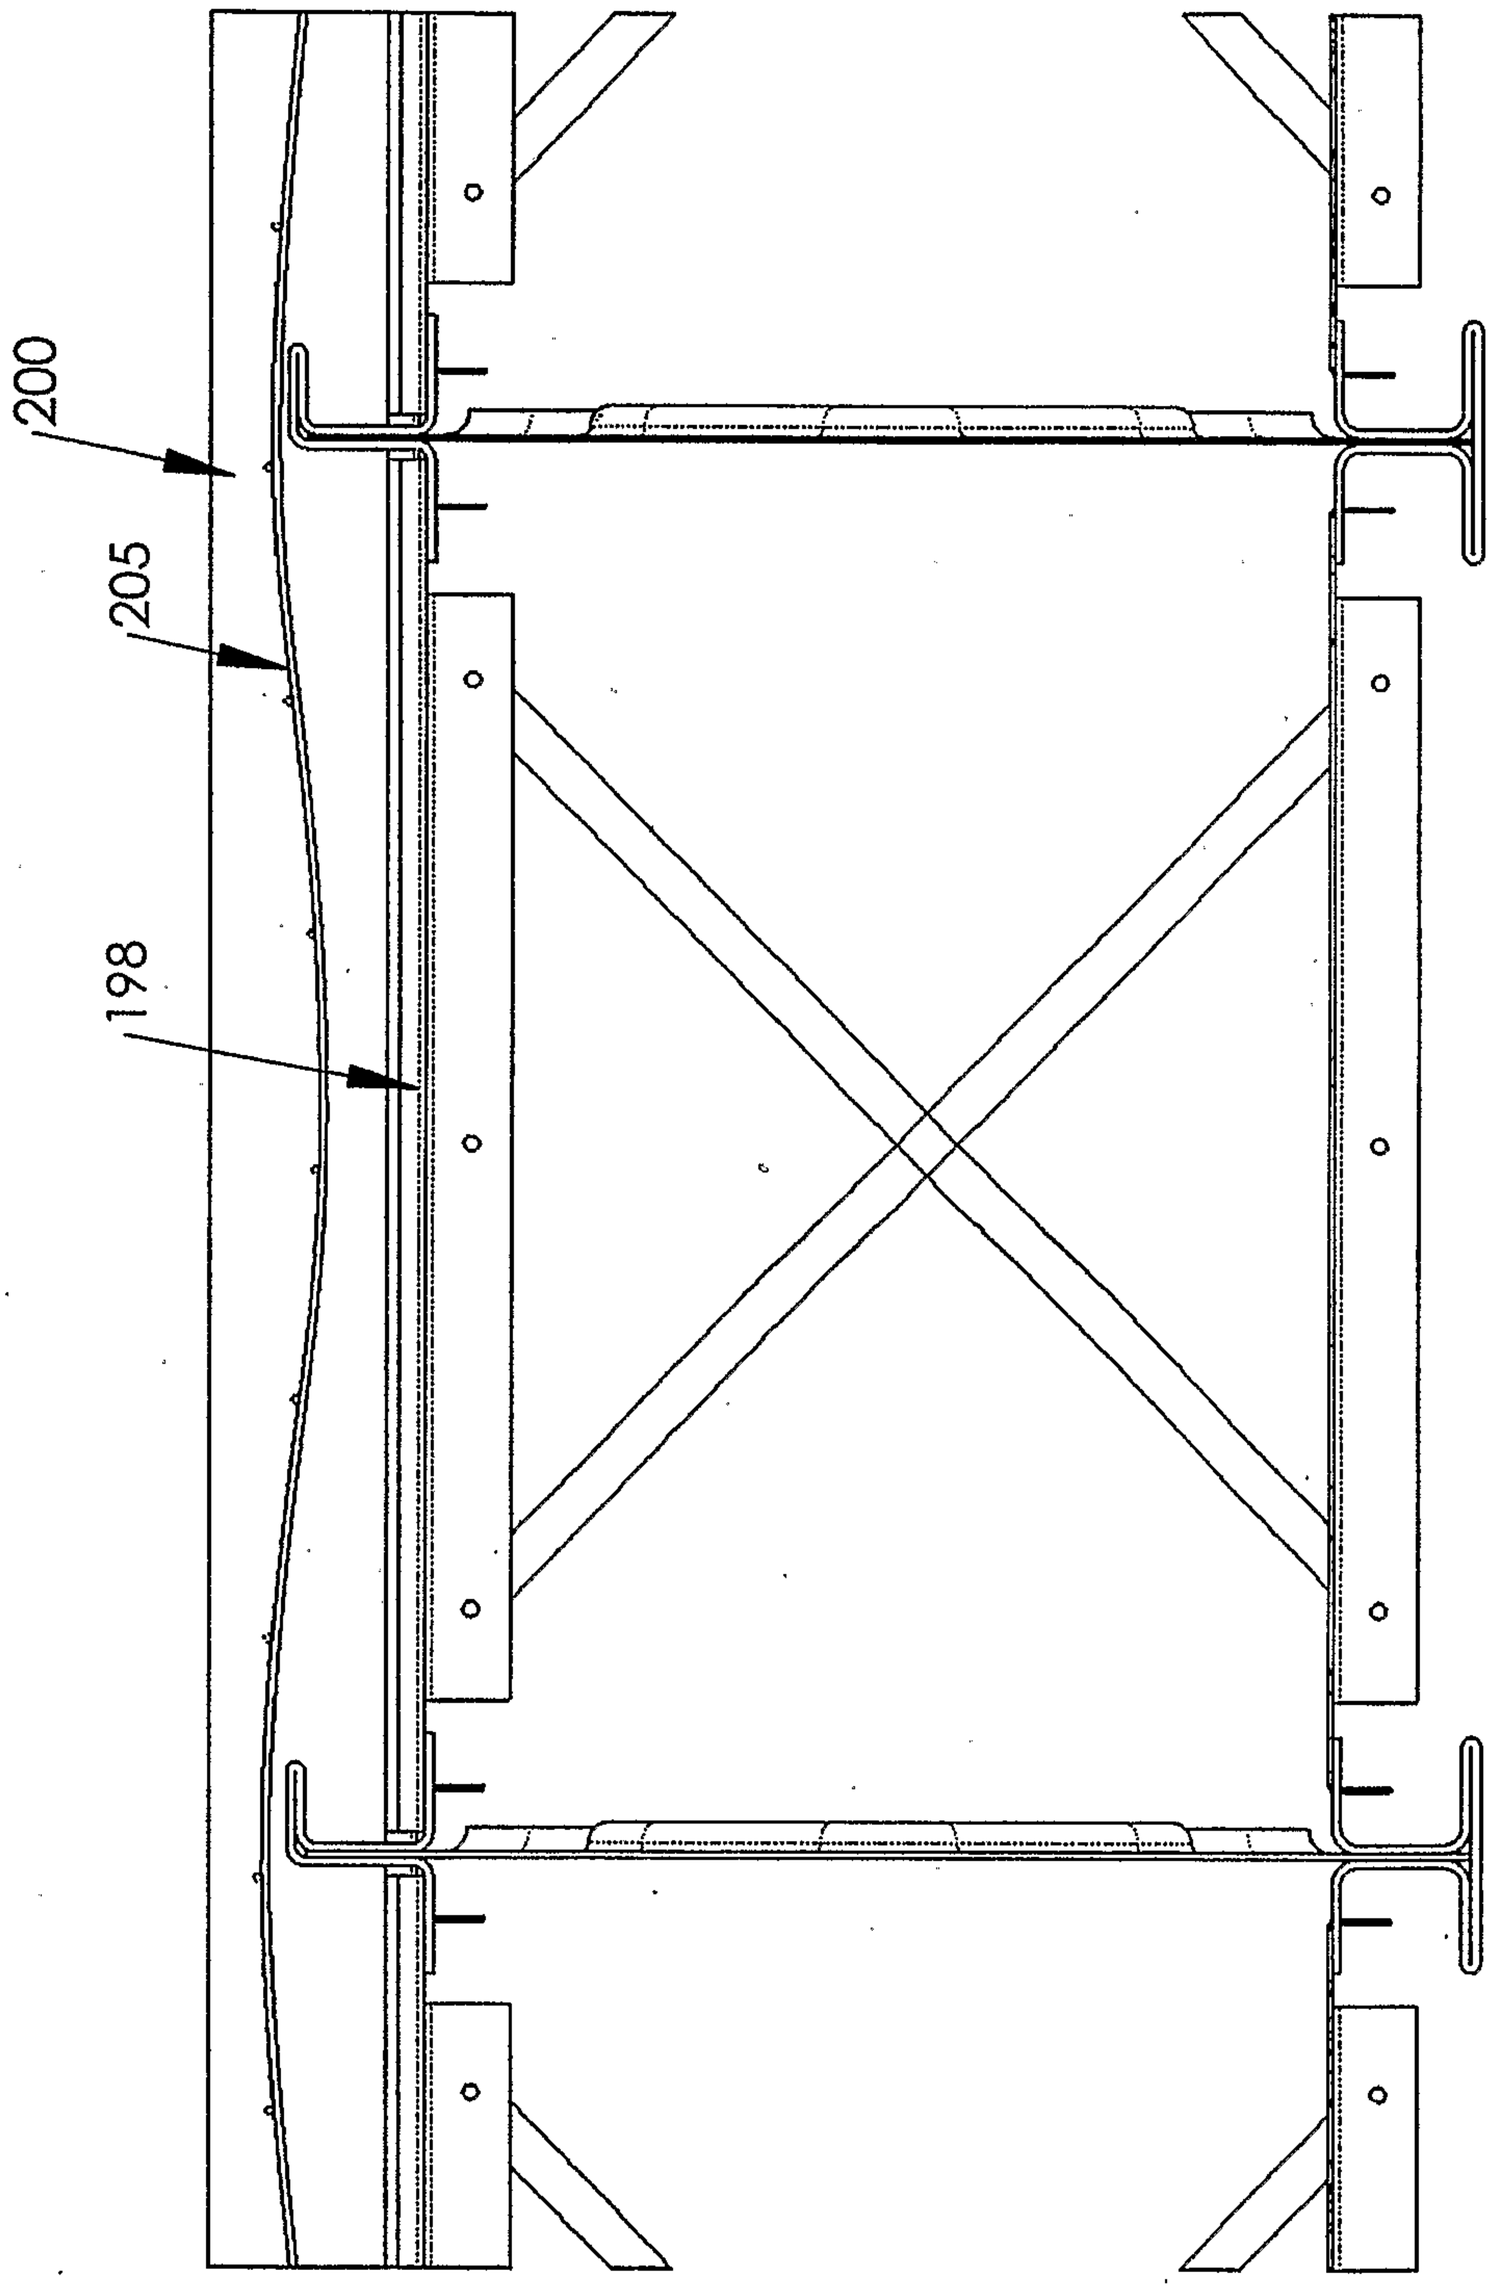

FIG. 13

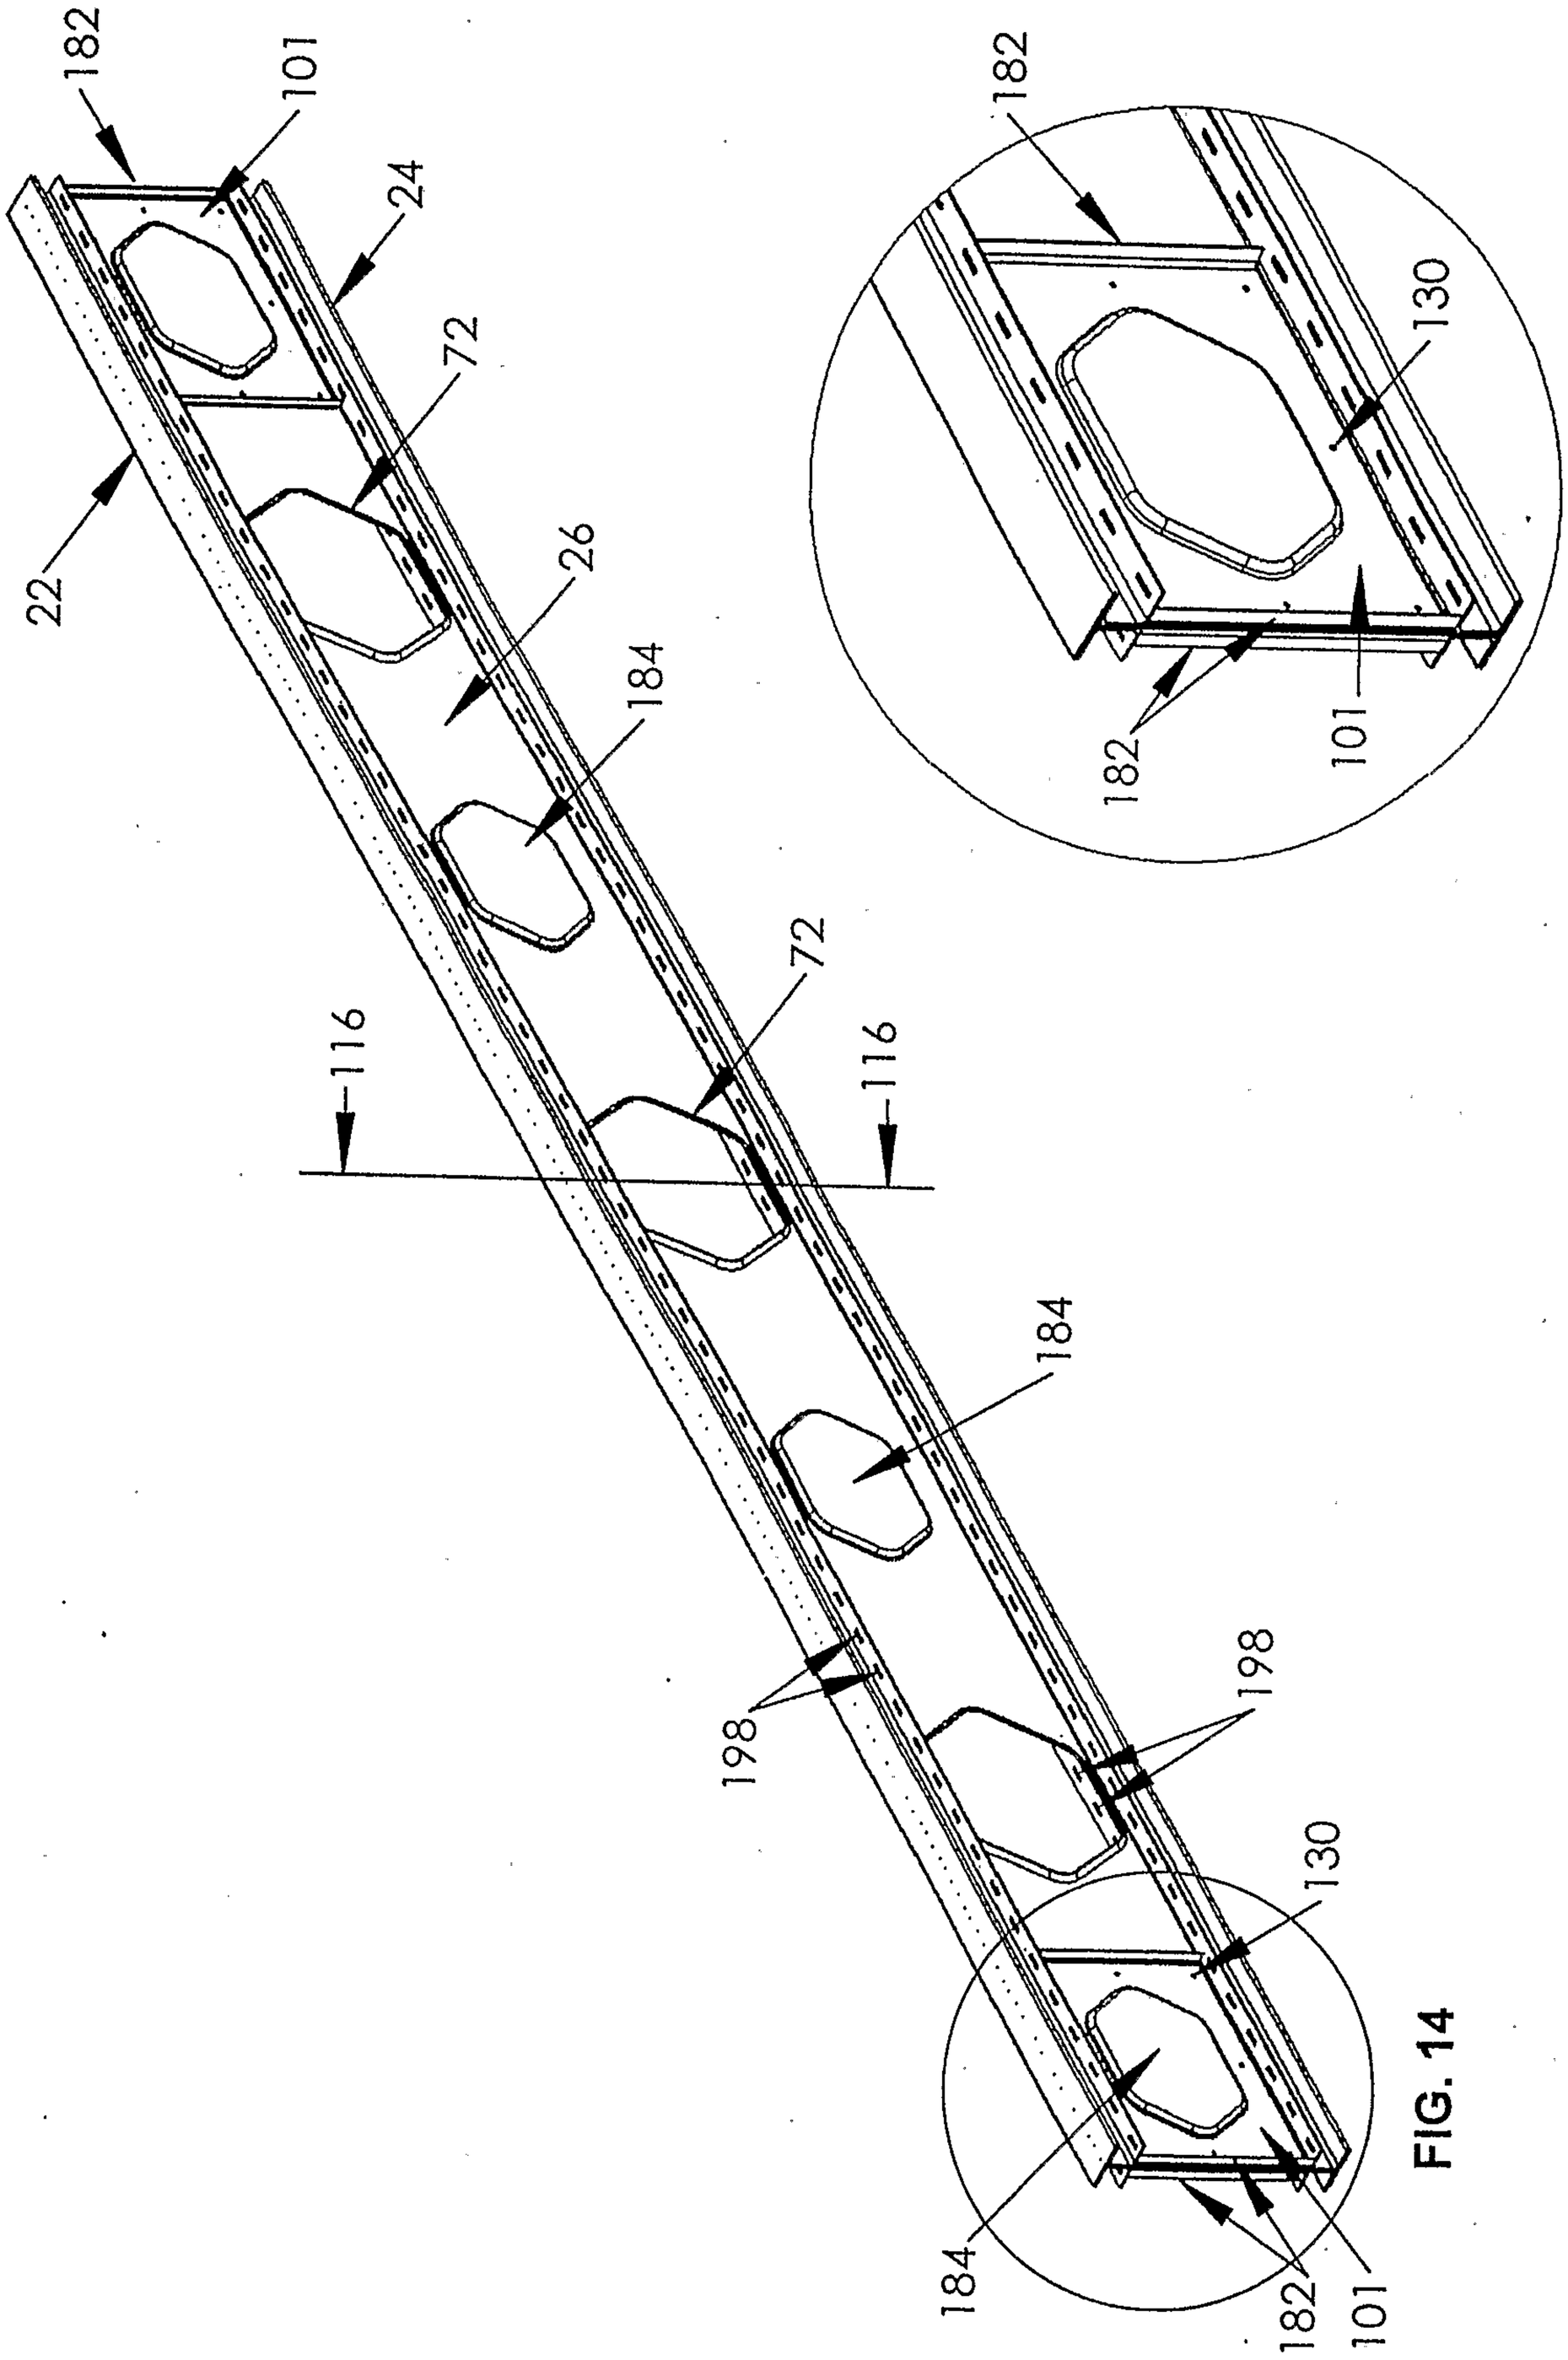

FIG. 14a

FIG. 14

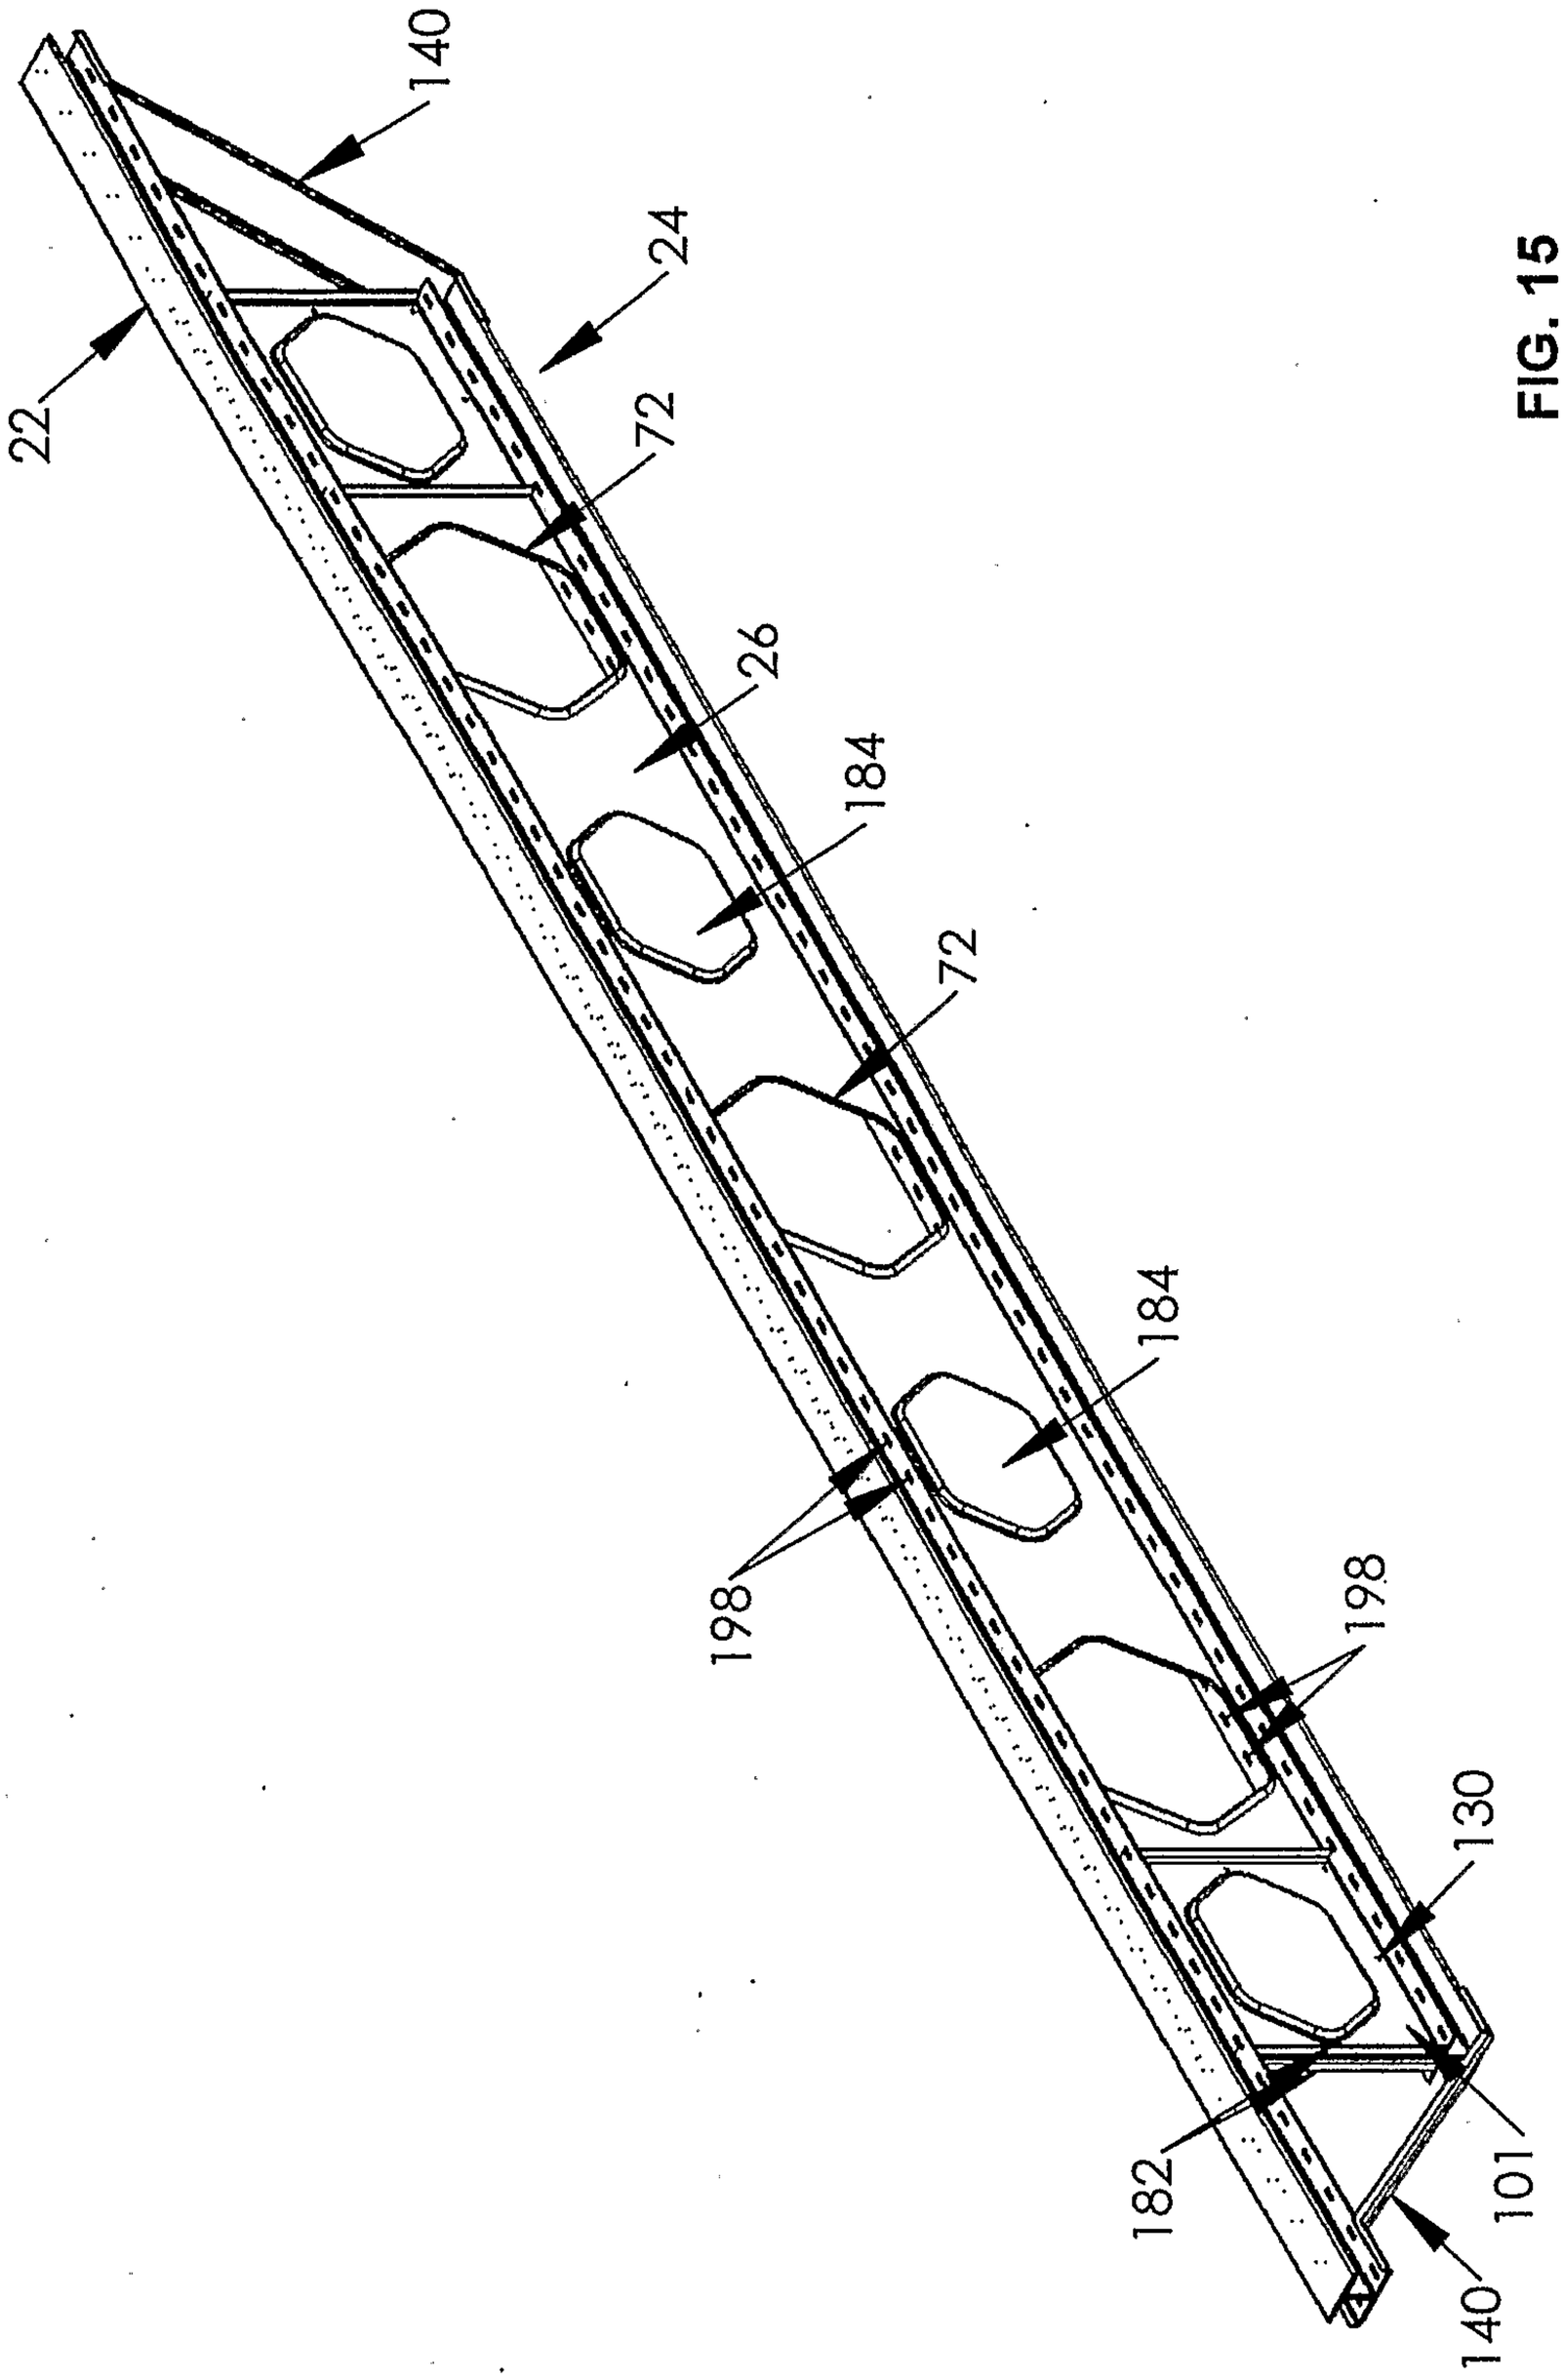

FIG. 15

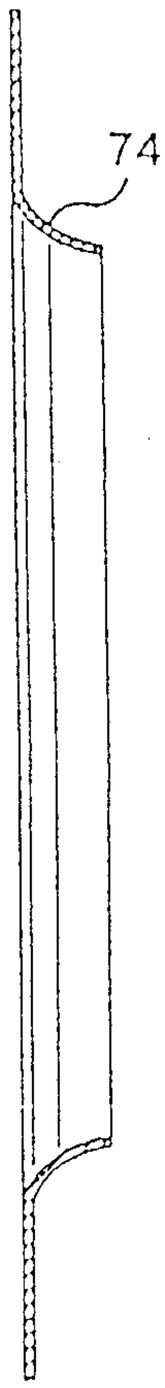

FIG. 16

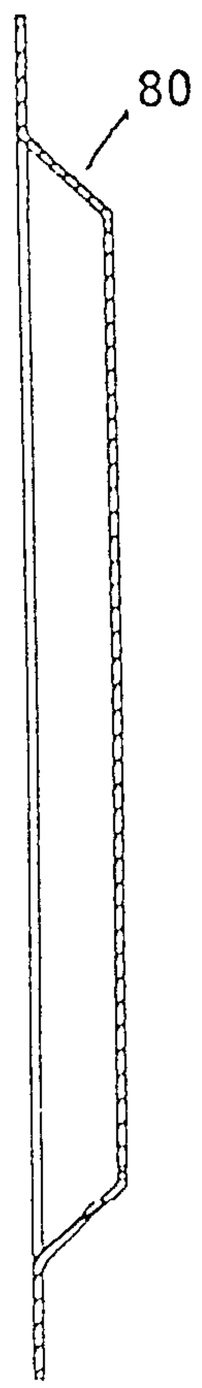

FIG. 17

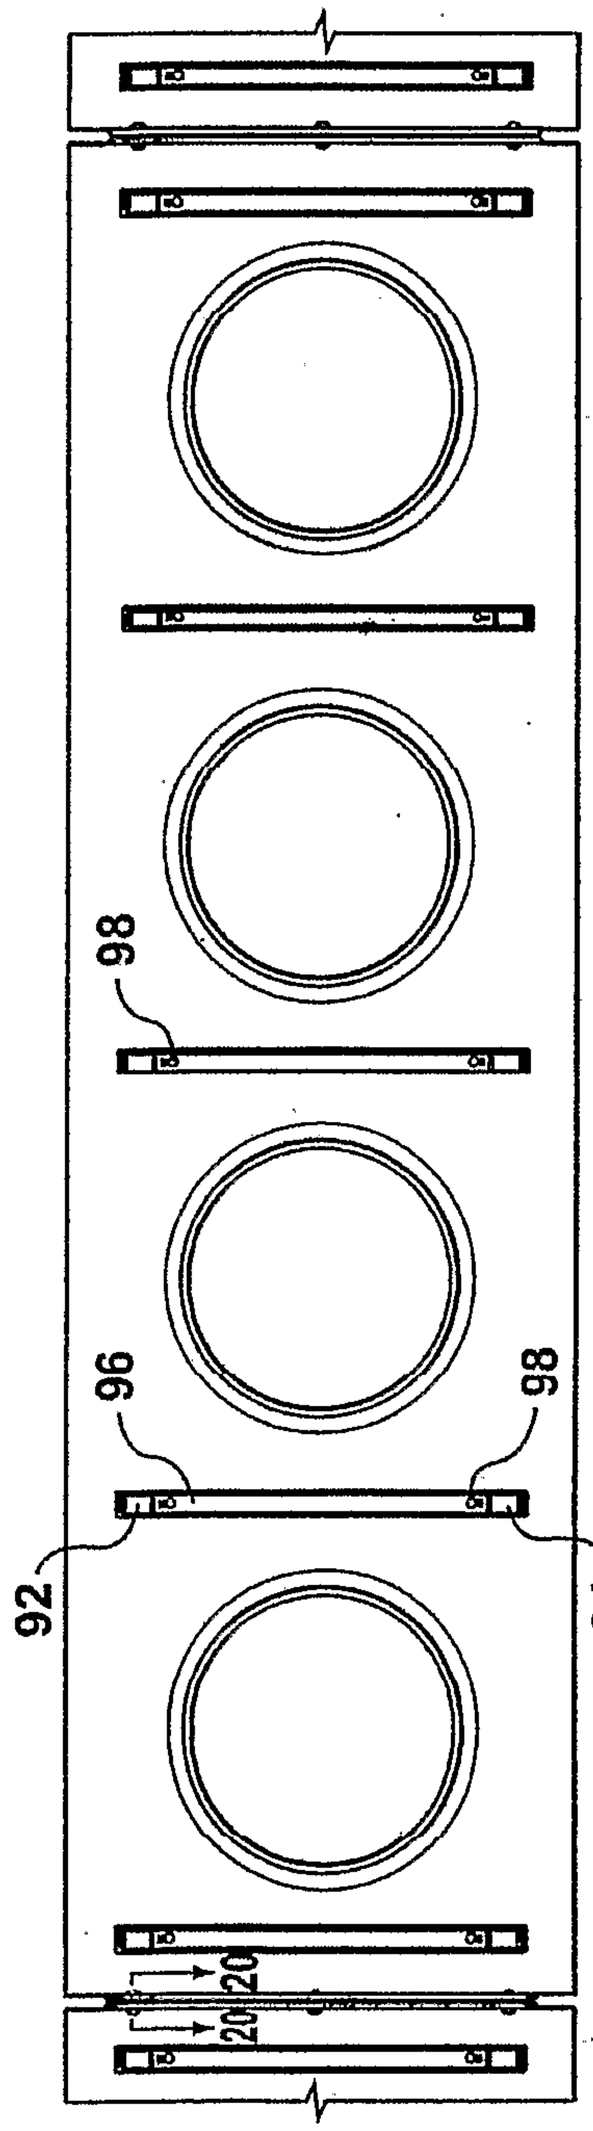

FIG. 18

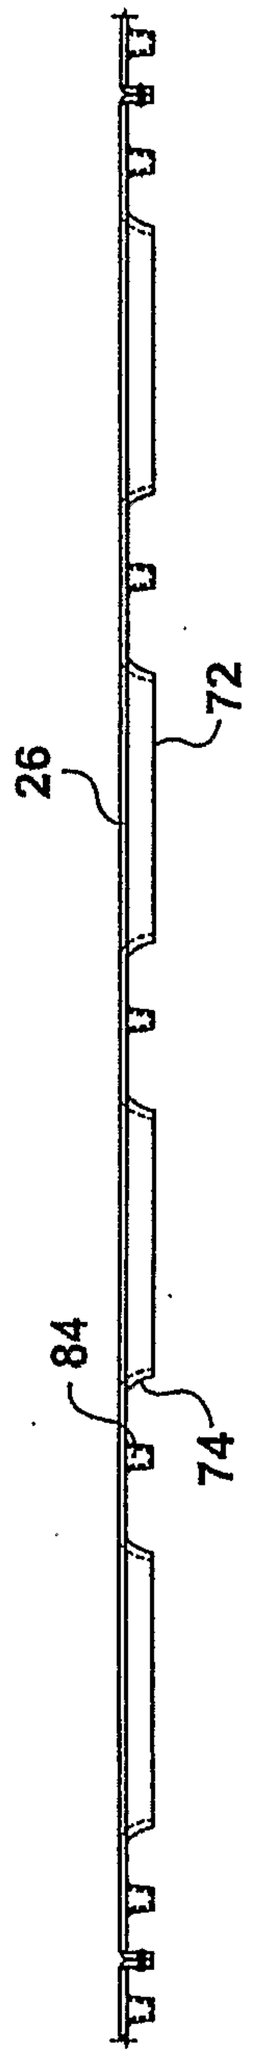

FIG. 19

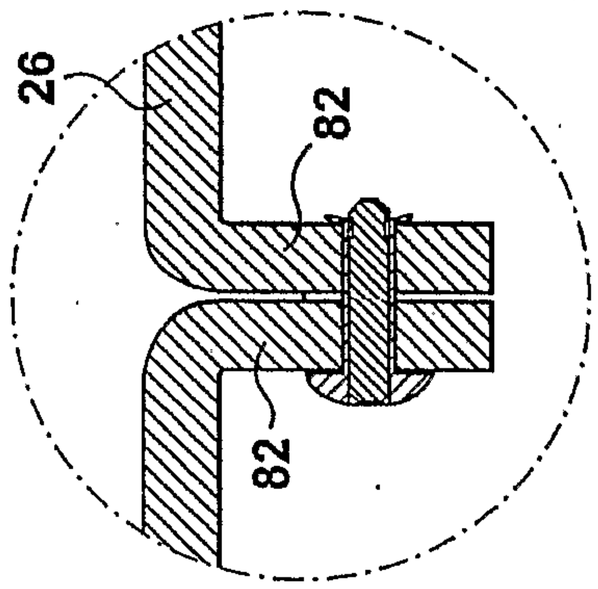

FIG. 20

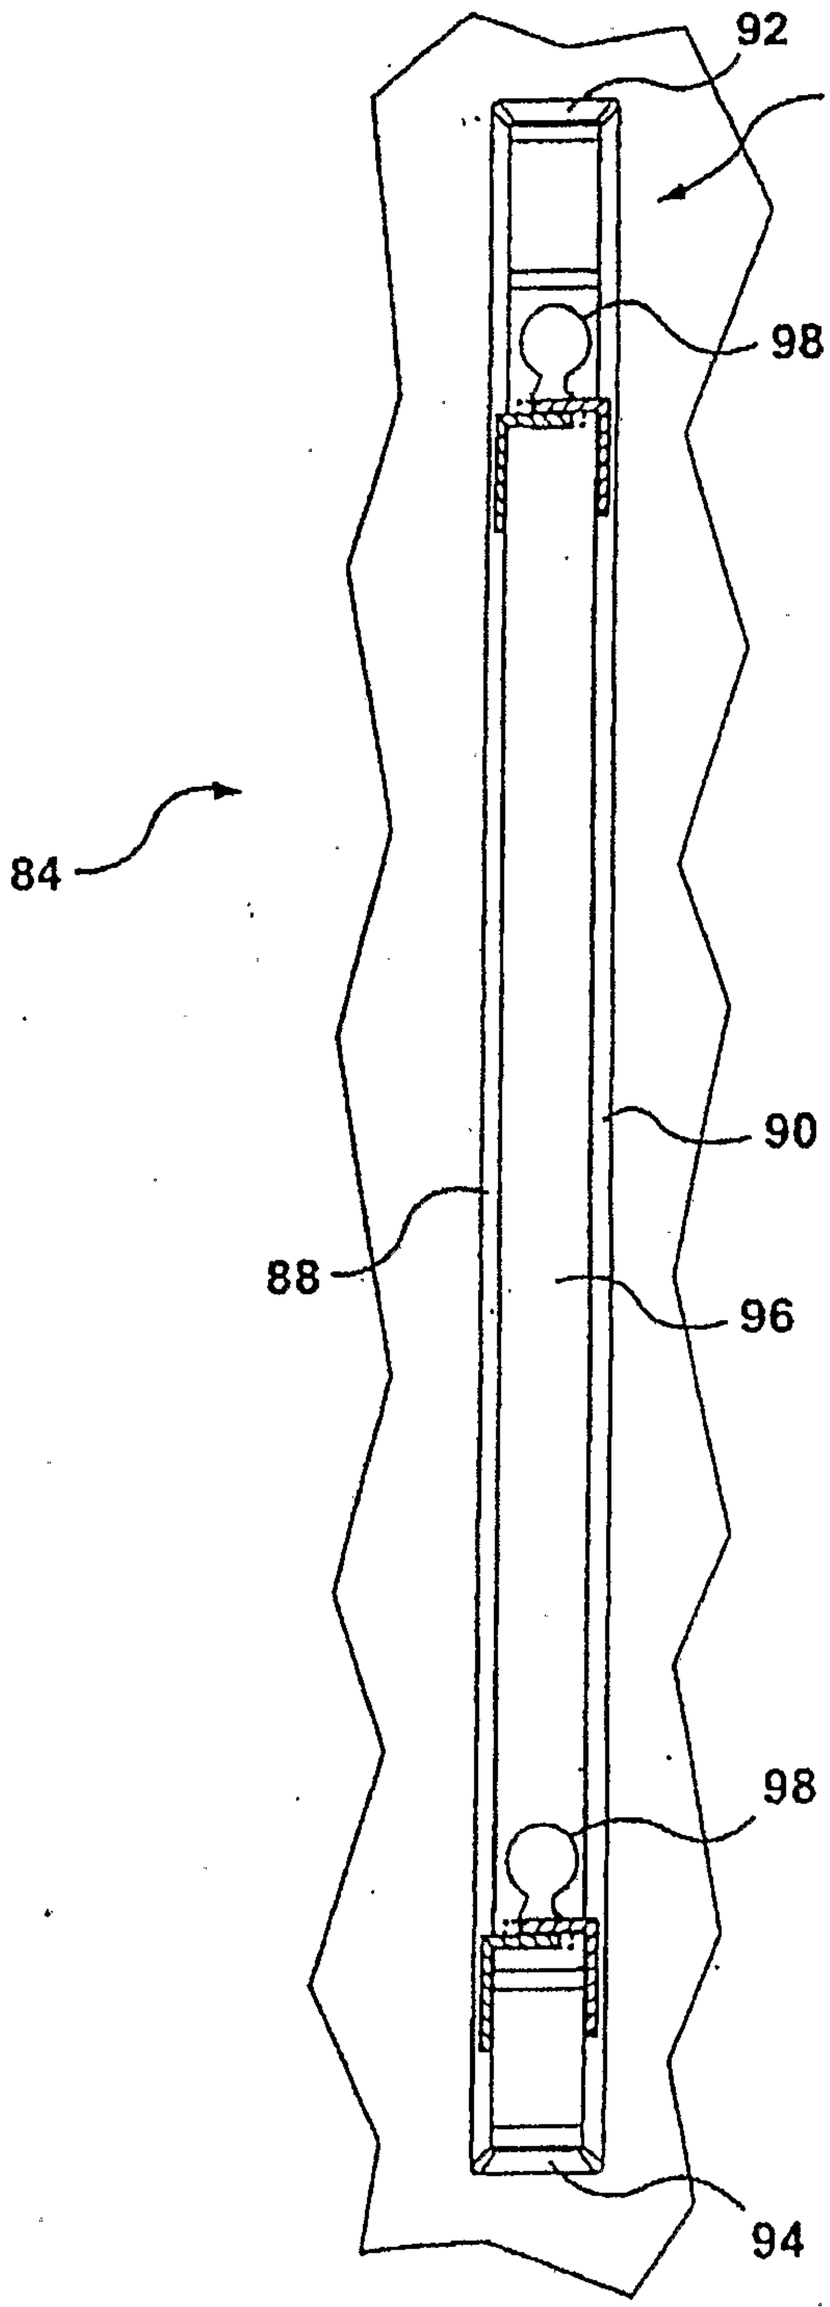

FIG. 21

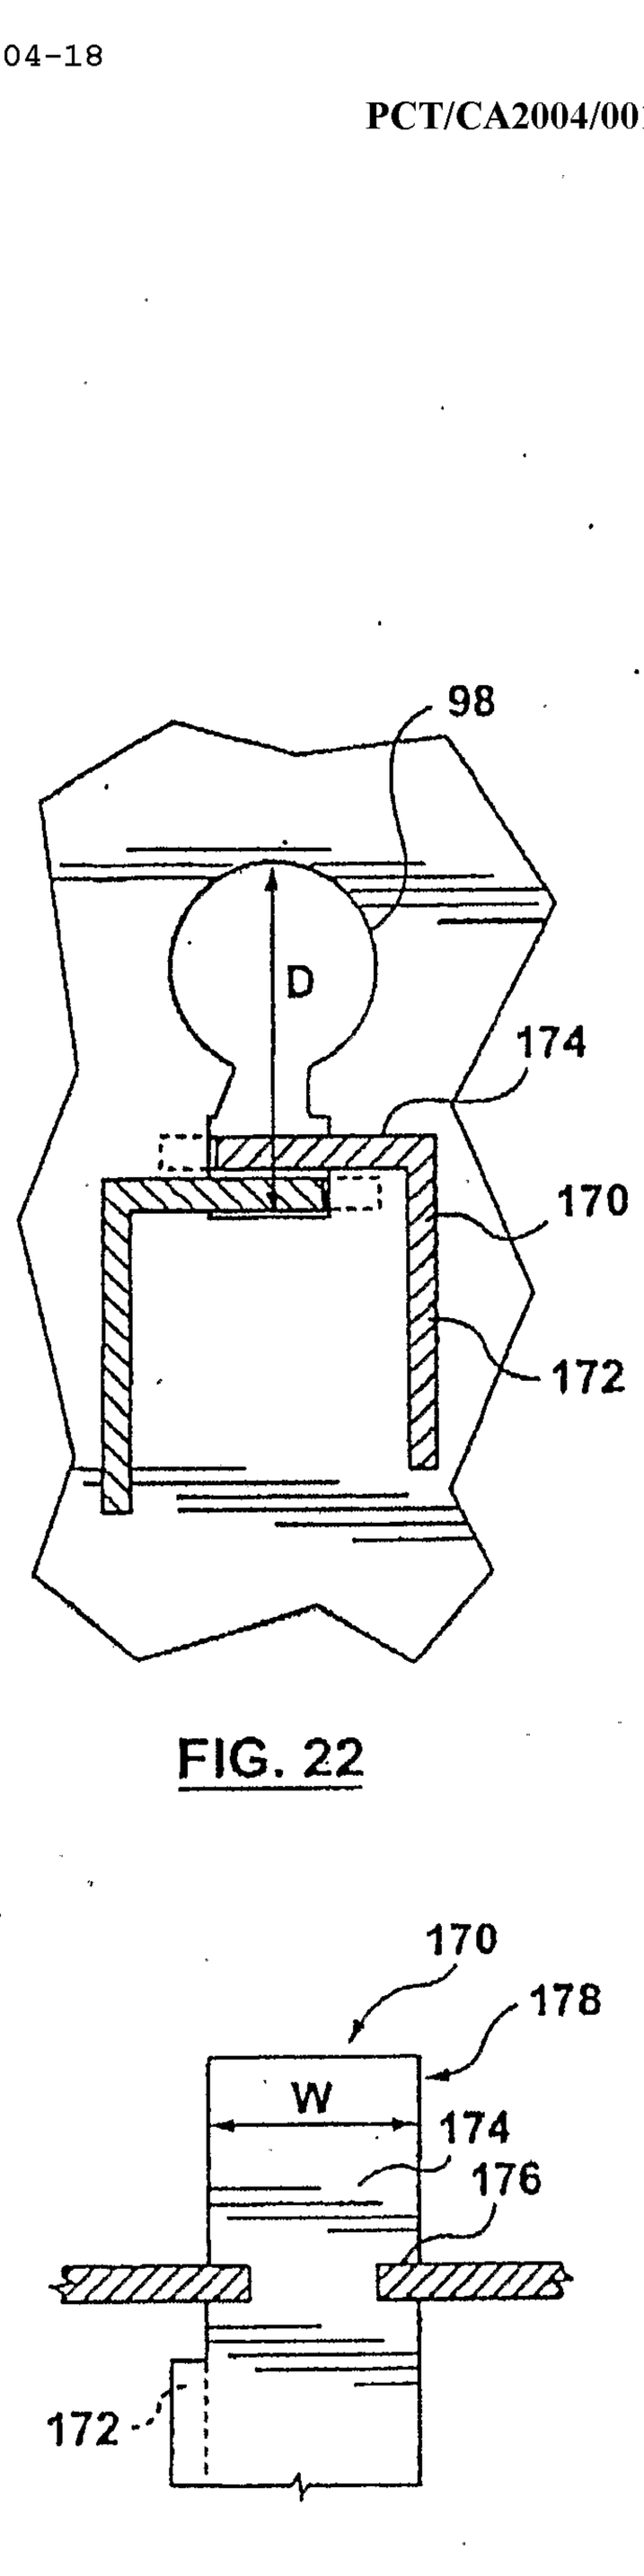

FIG. 22

FIG. 23

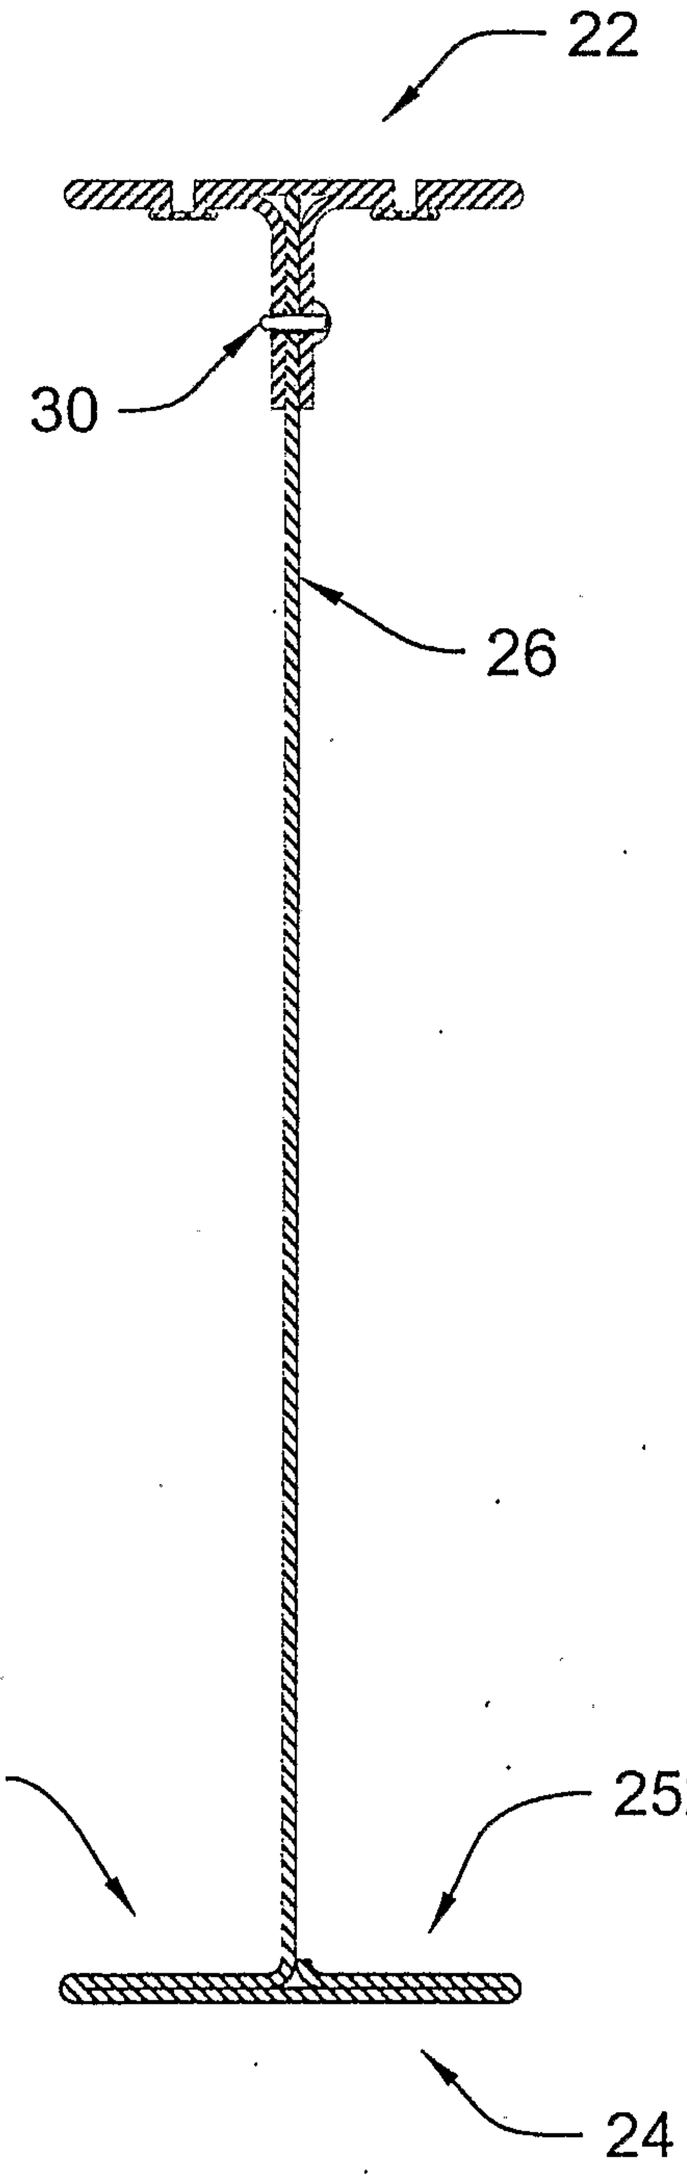

FIG. 24

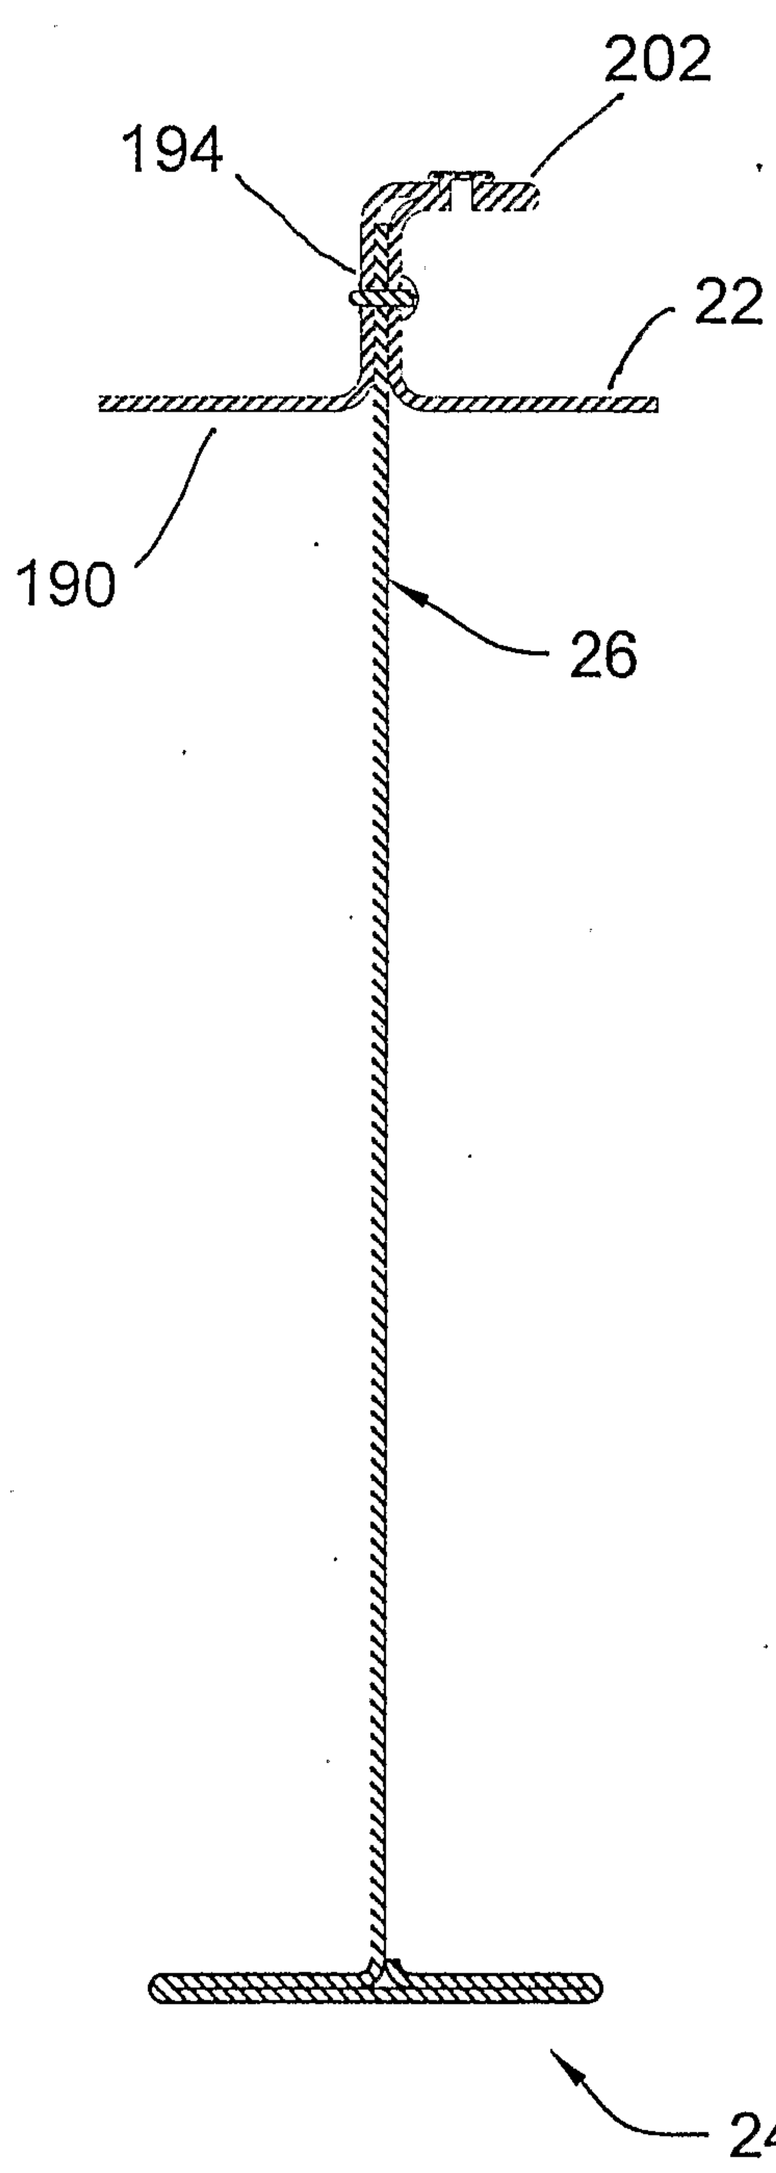

FIG. 25

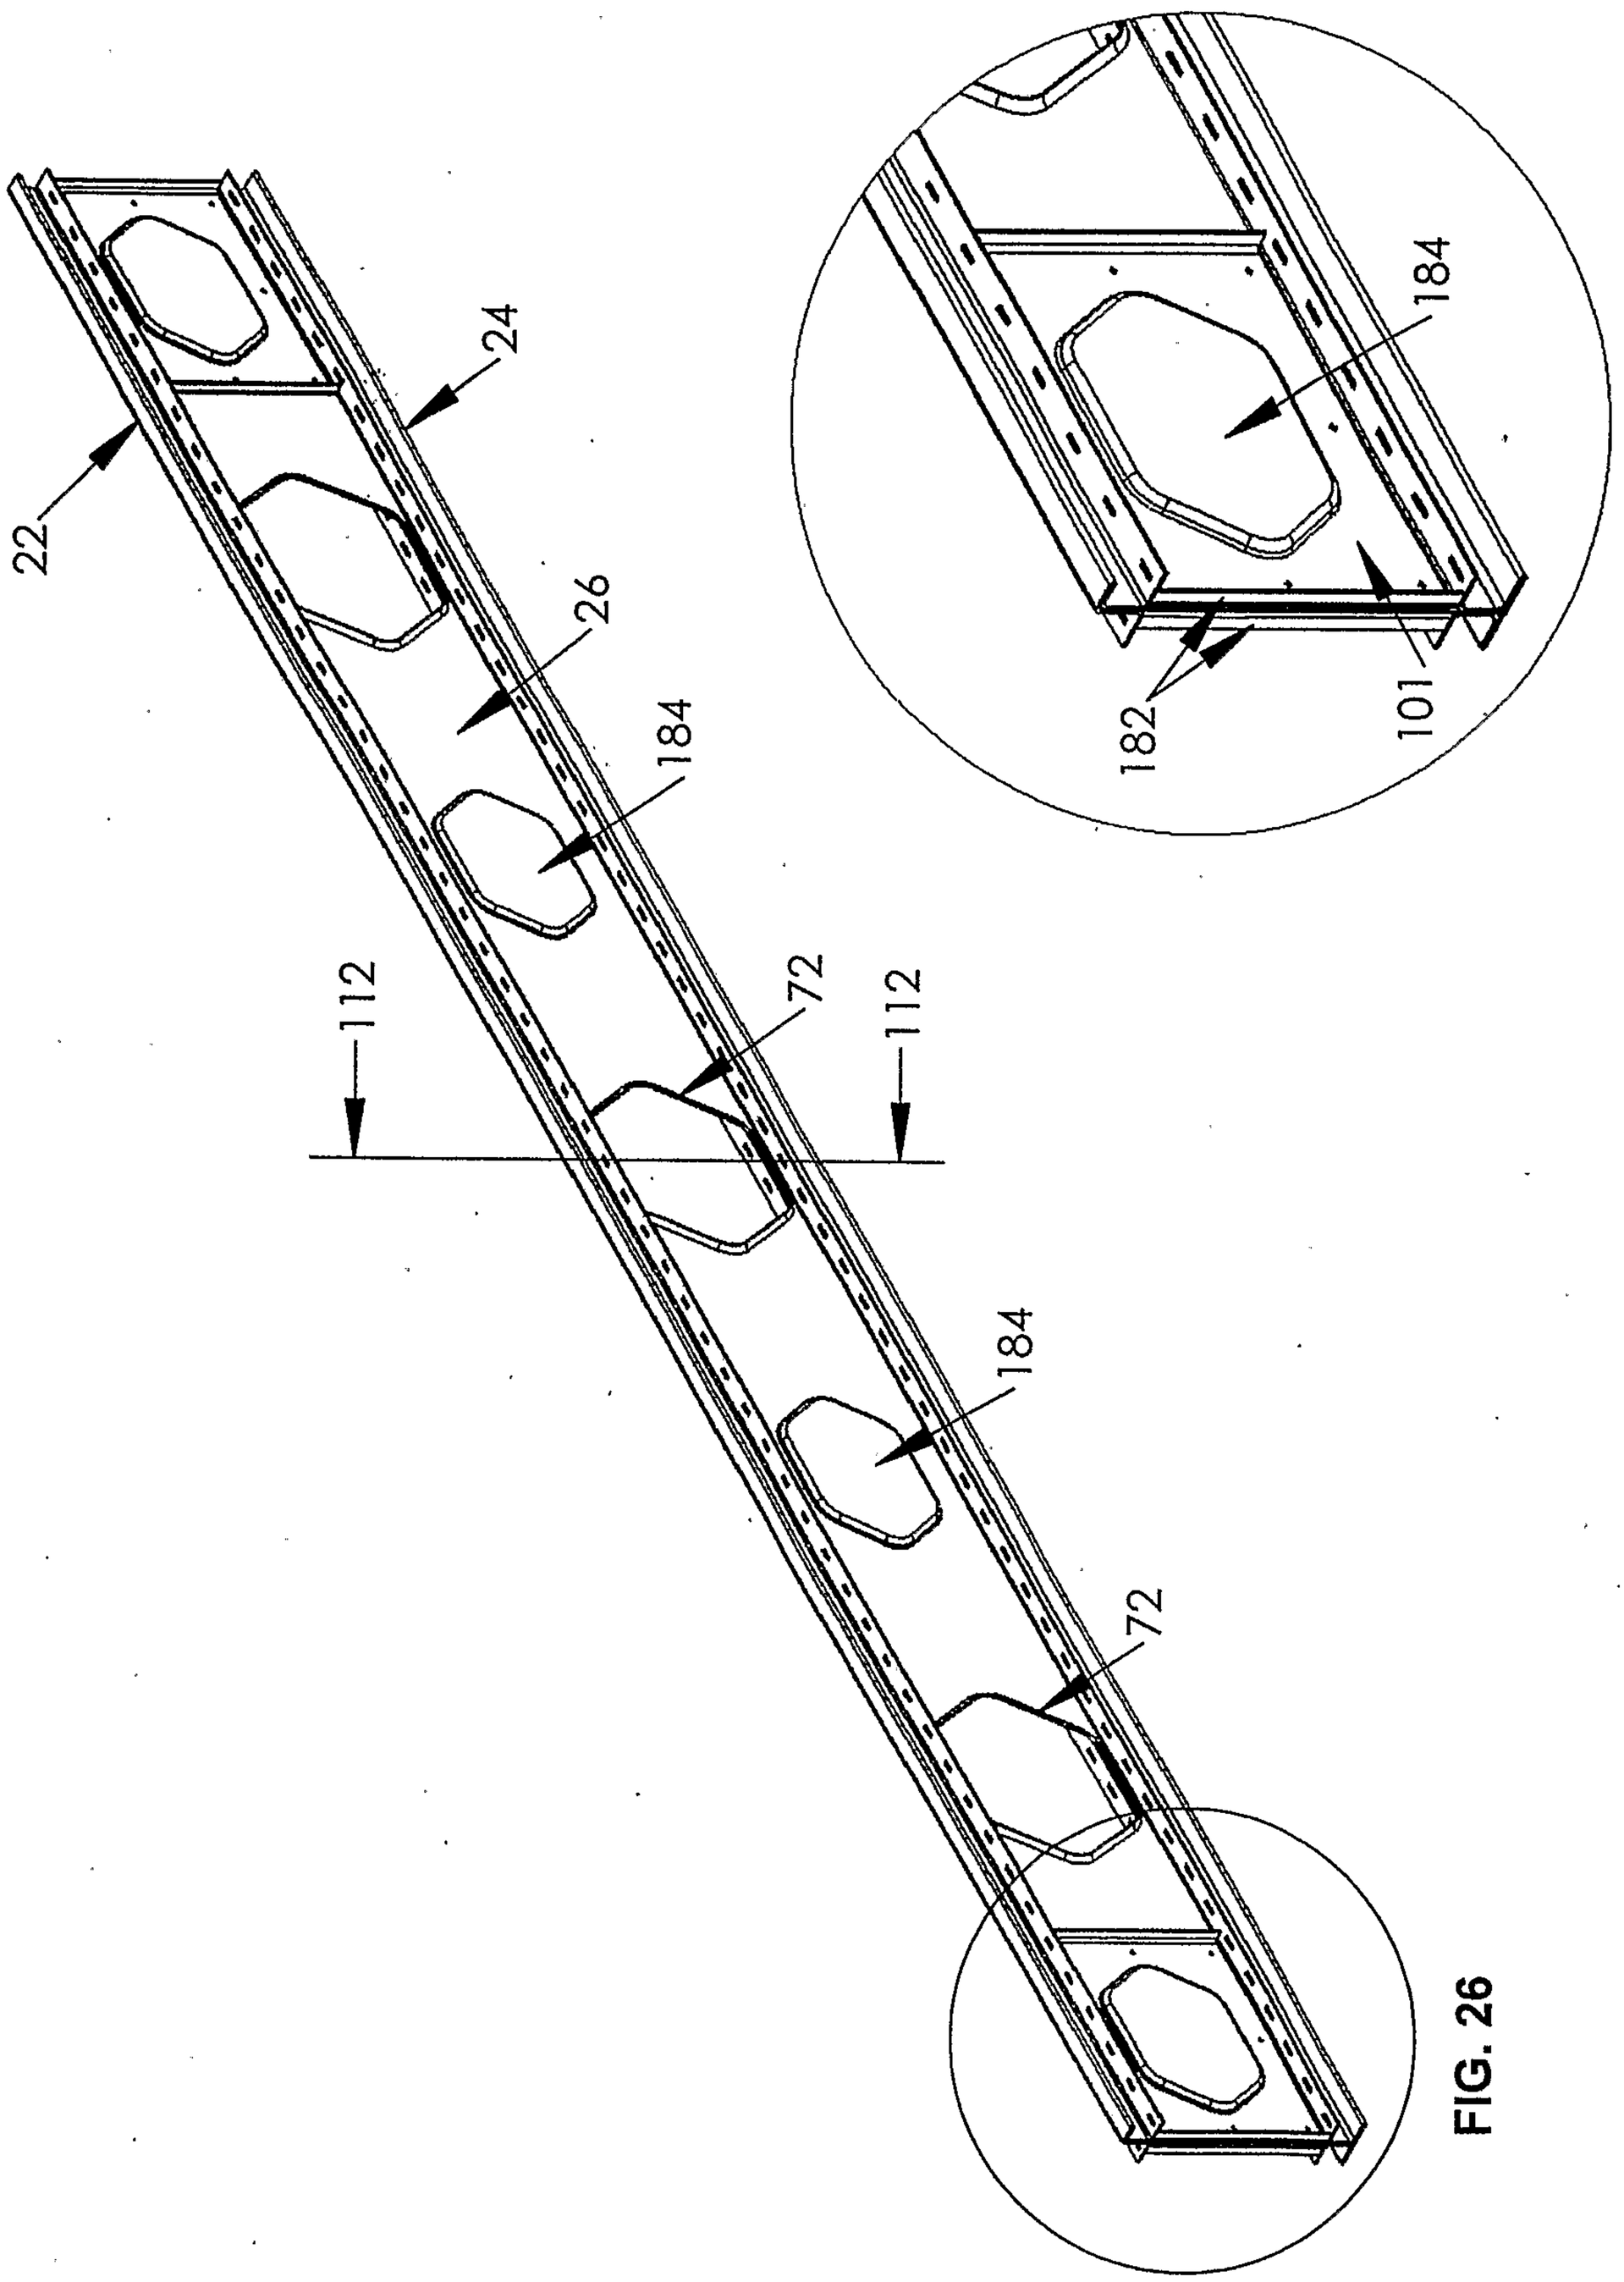

FIG. 26a

FIG. 26

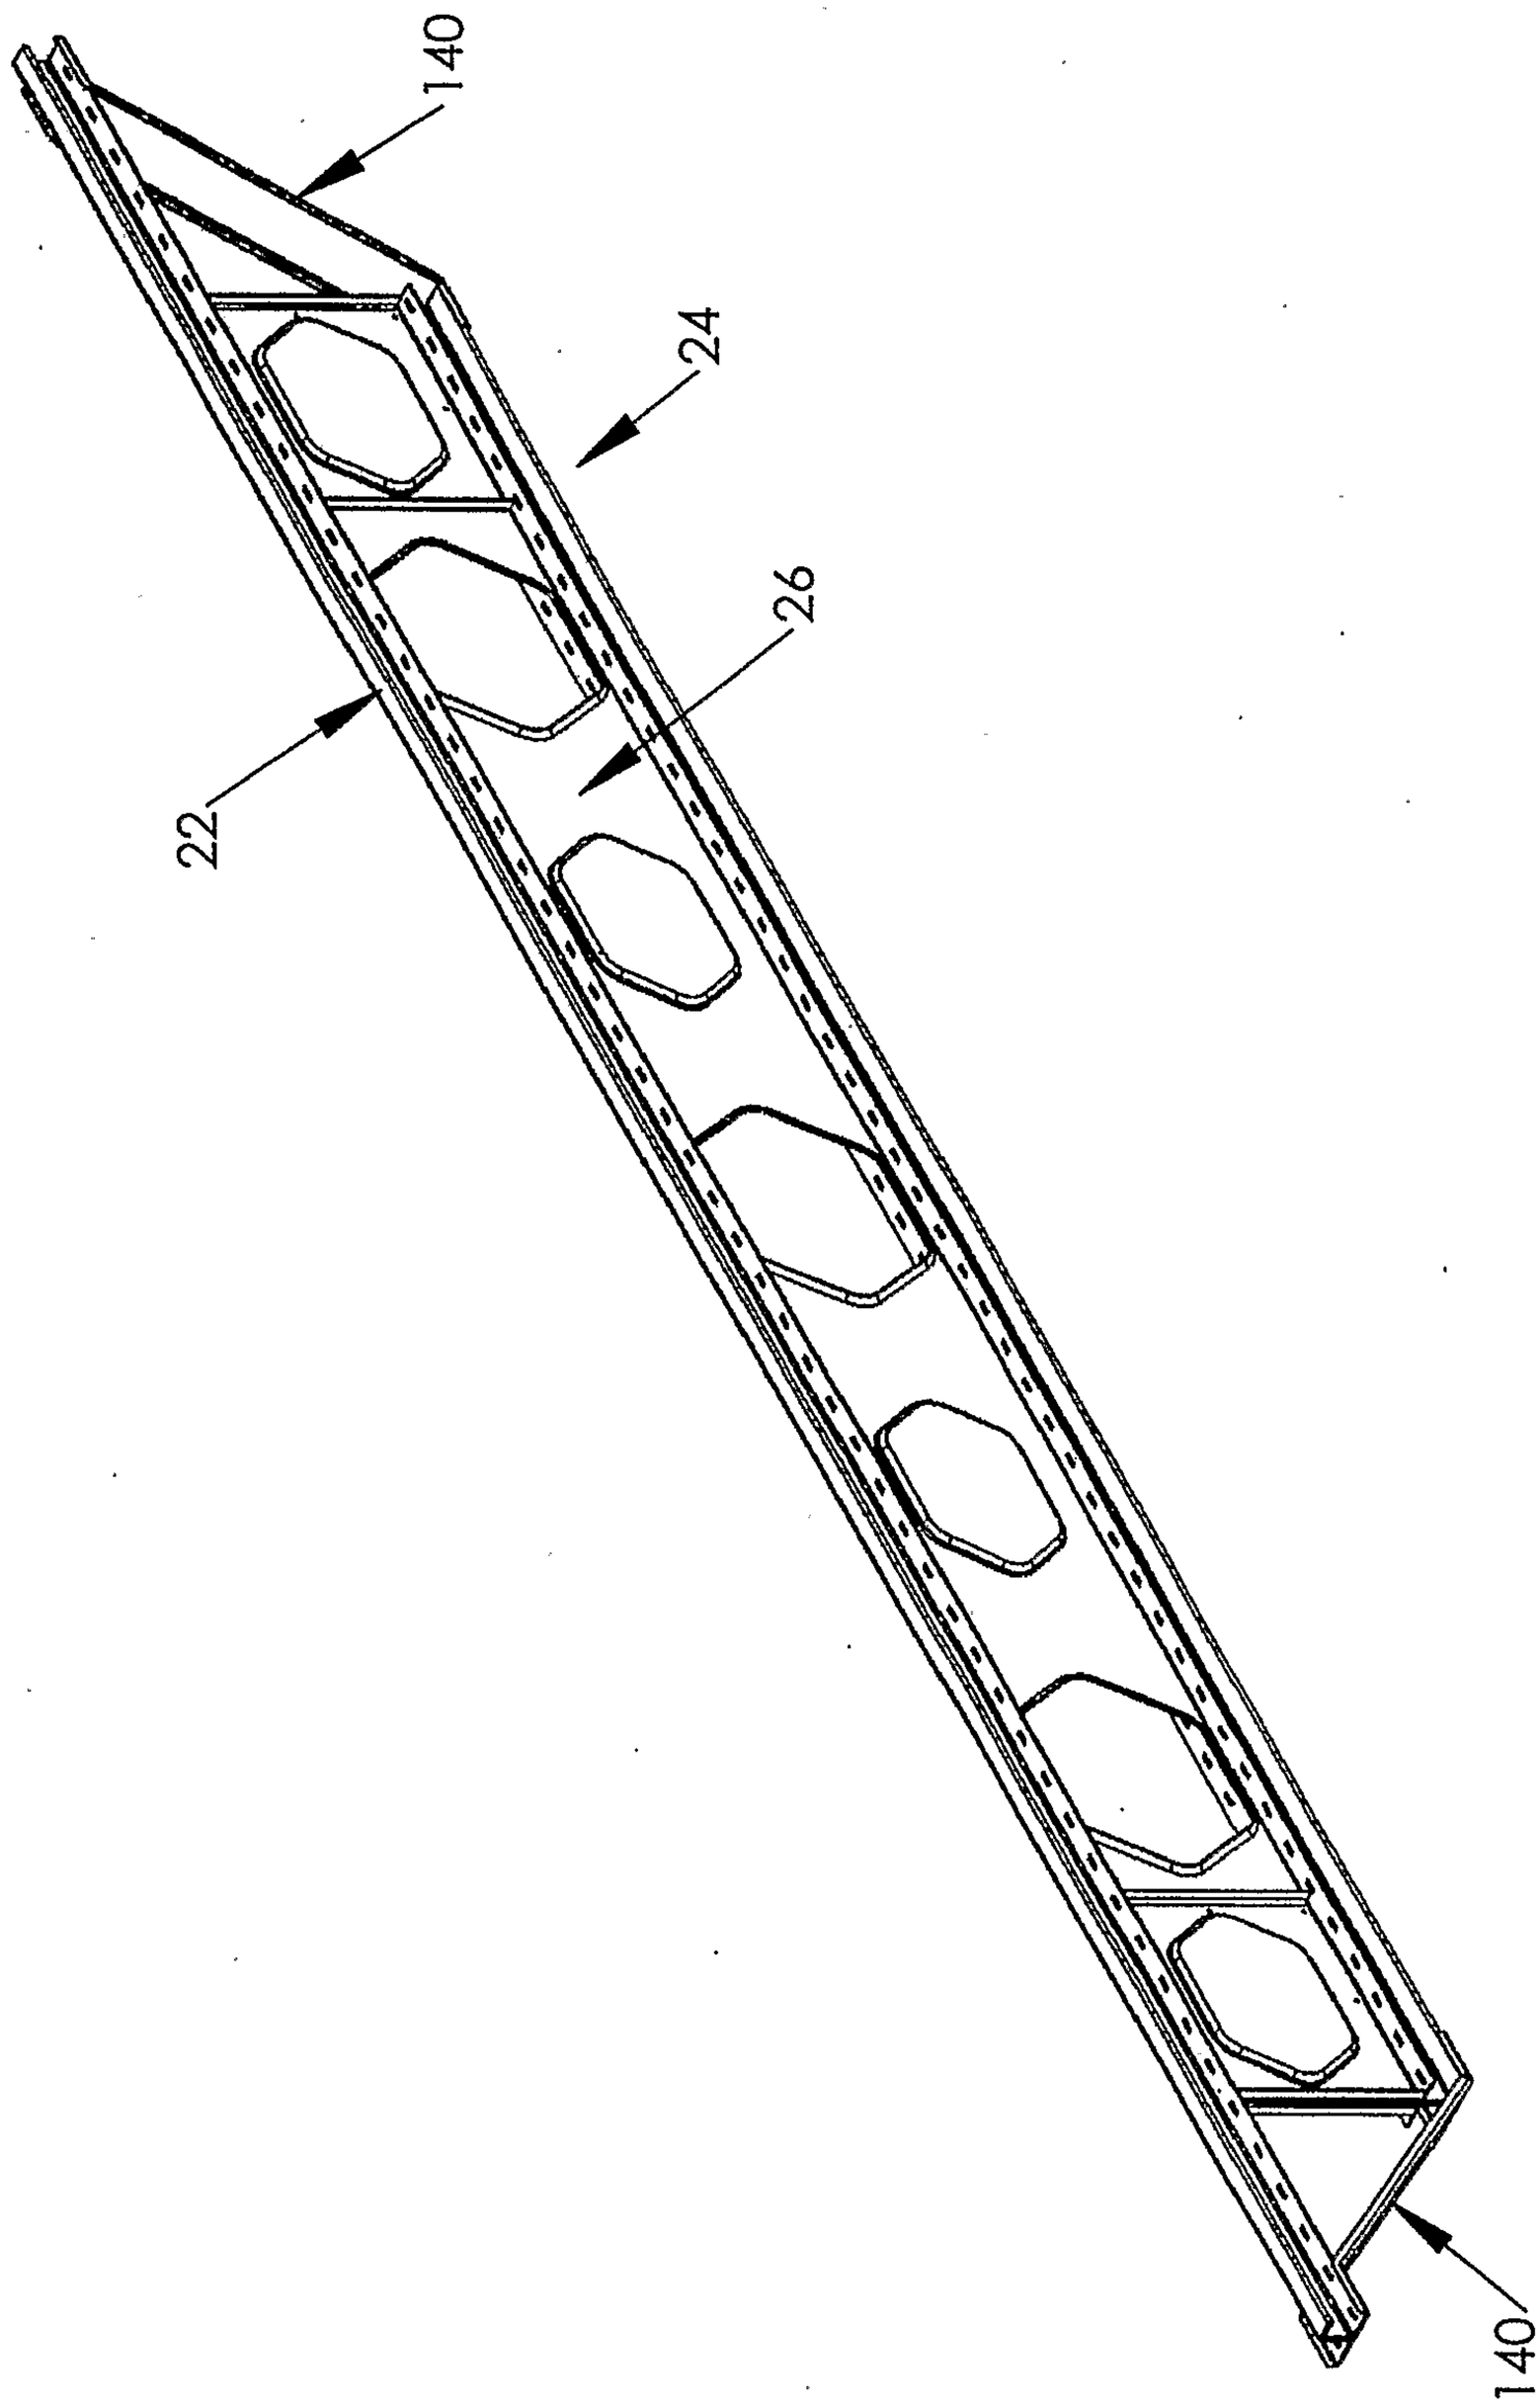

FIG. 27

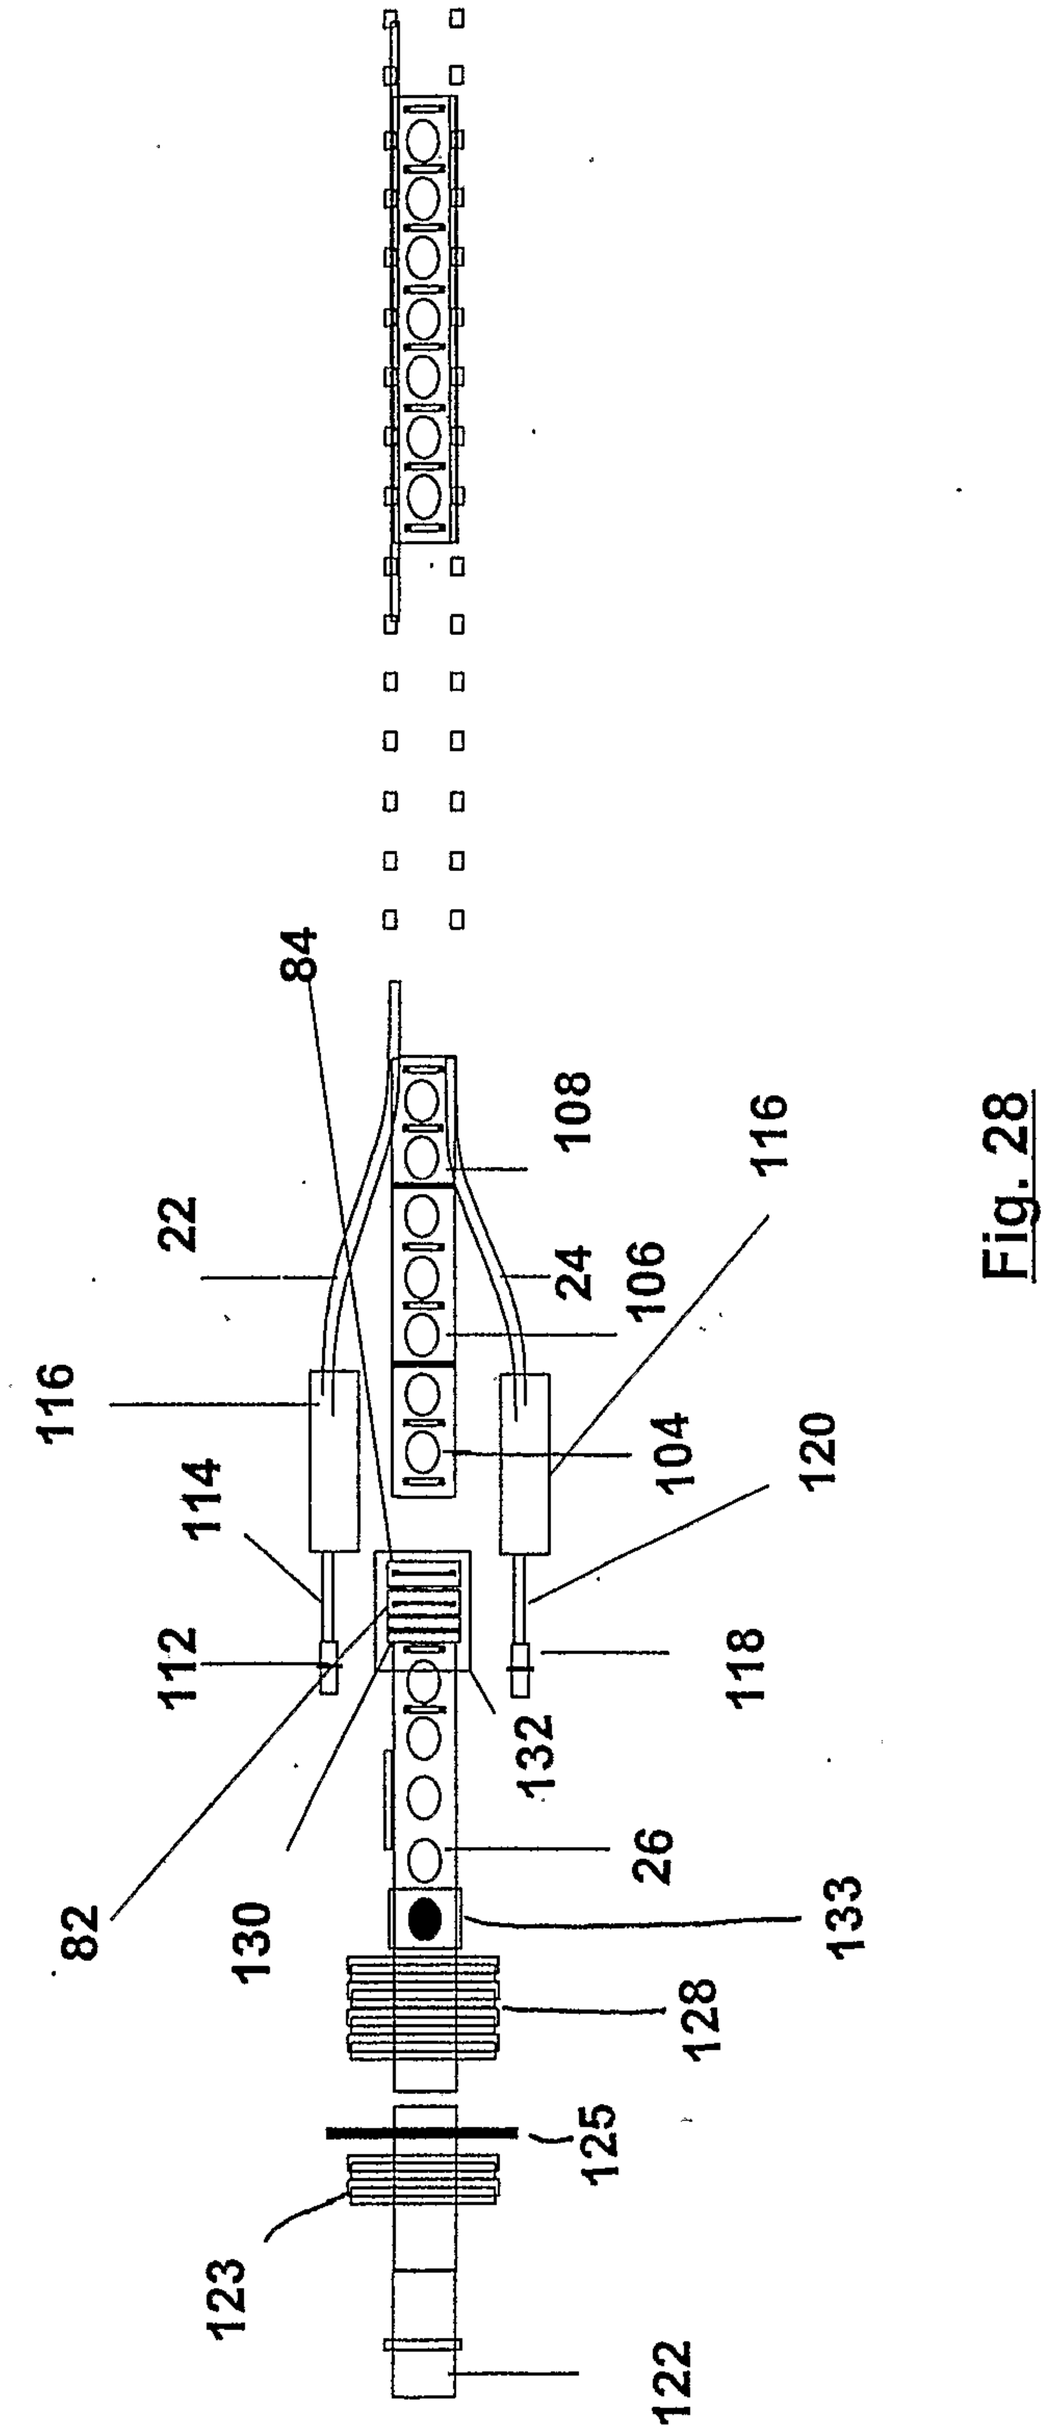
82
130
123
122
125
128
133
26
132
112
114
116
22
8
108
24
106
104
116
120
118

Fig. 28

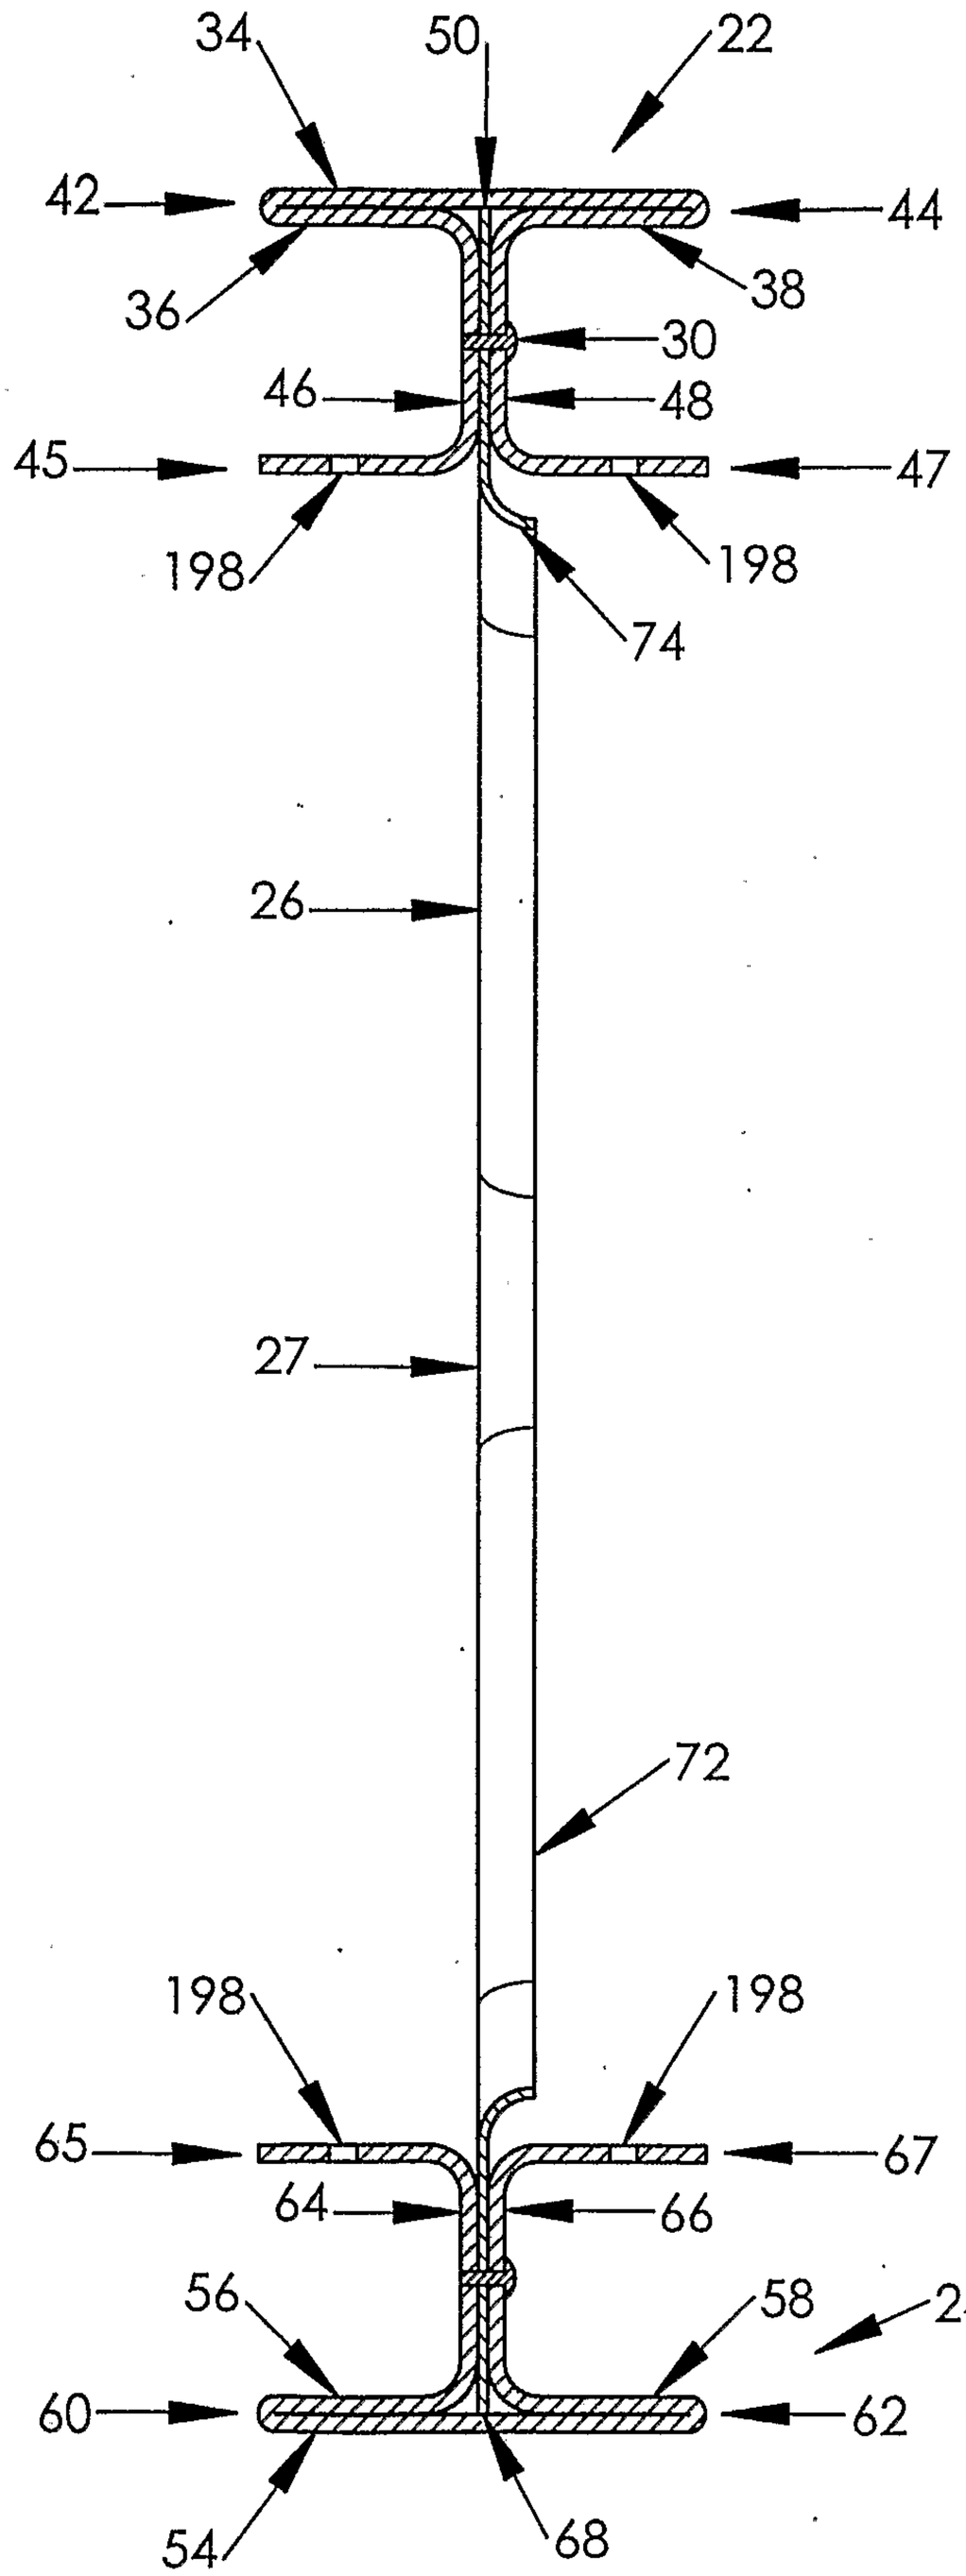
34
50
22
42
44
36
38
30
46
48
45
47
198
198
74
26
27
72
198
198
65
67
64
66
56
58
24
60
62
54
68

FIG. 29

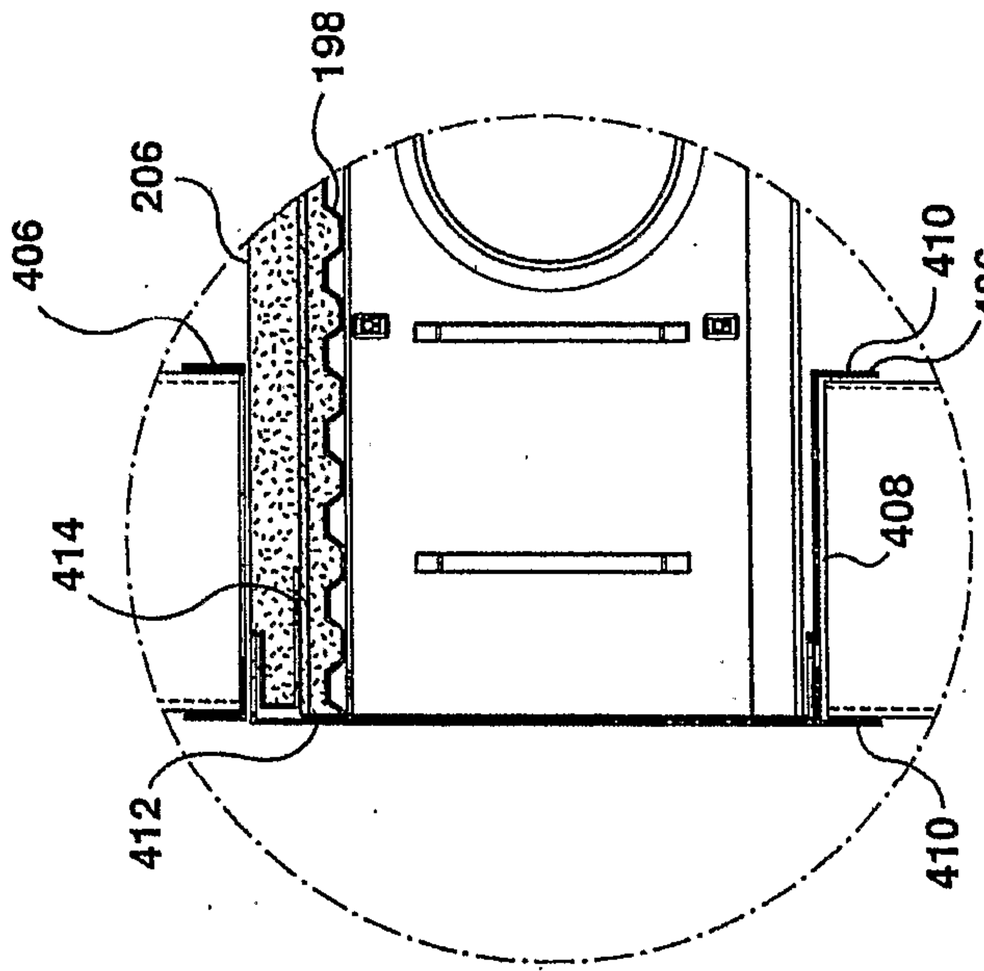

FIG. 31

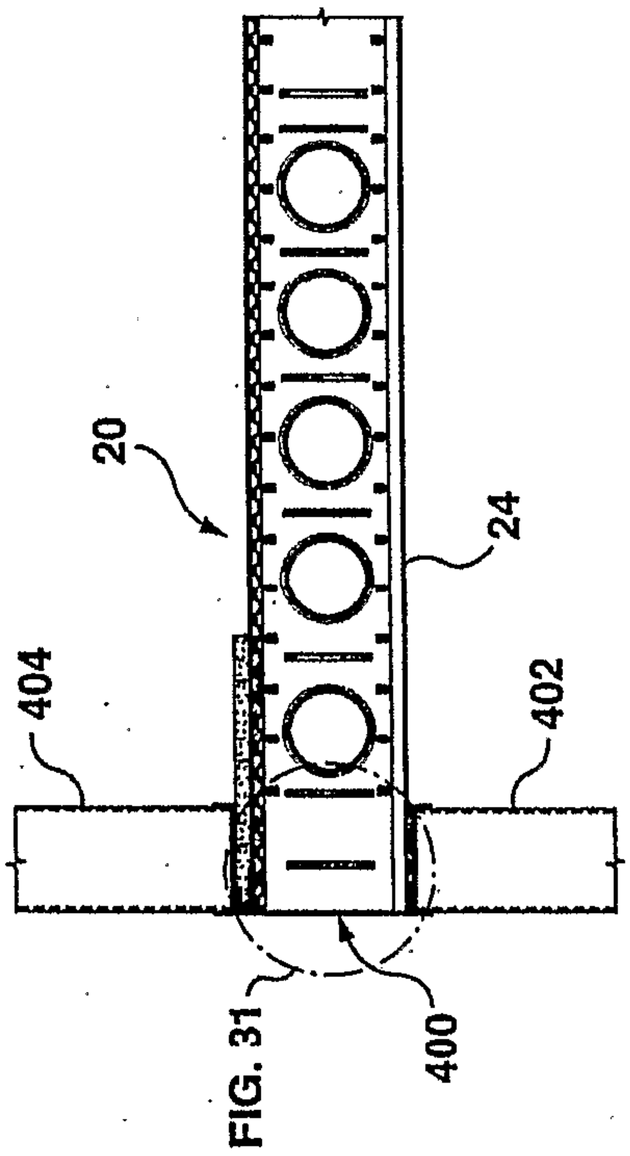

FIG. 30

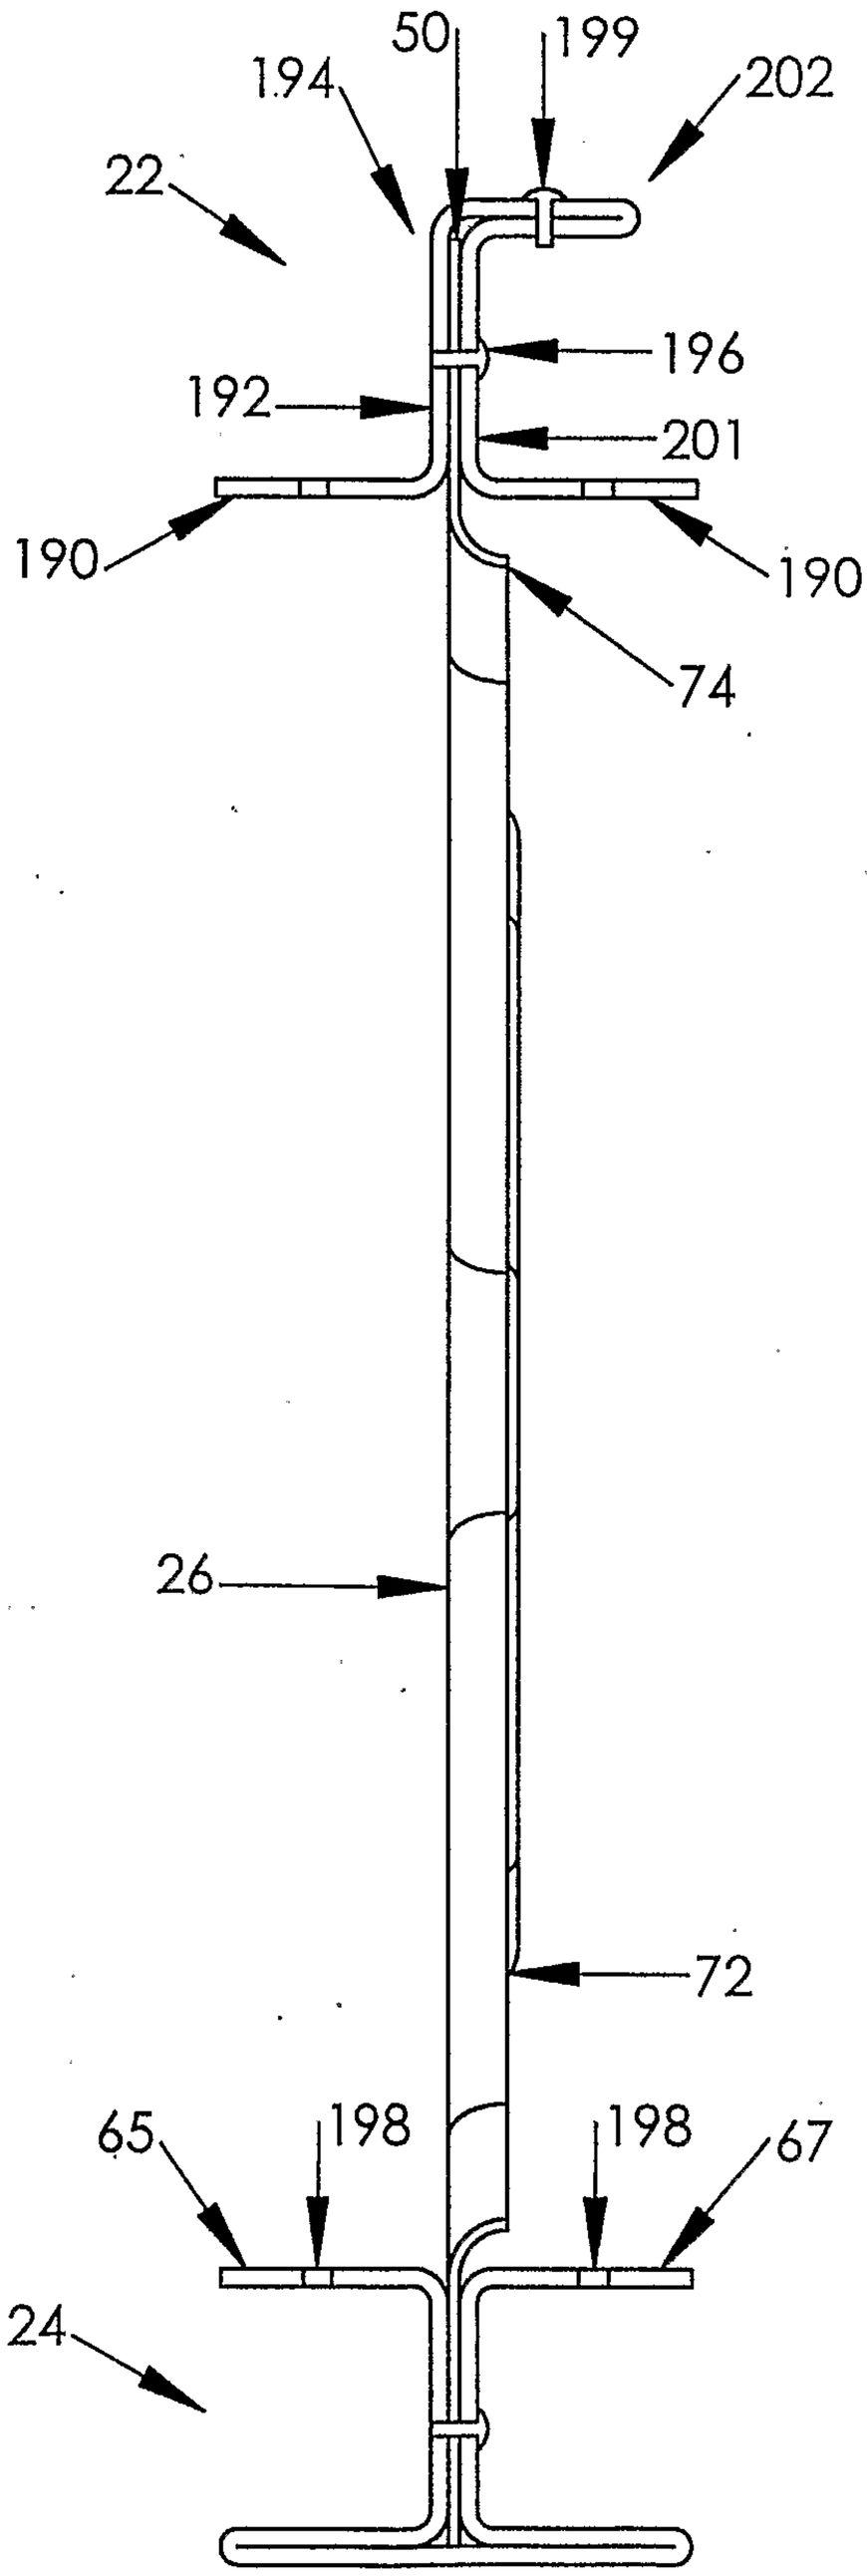

FIG. 32

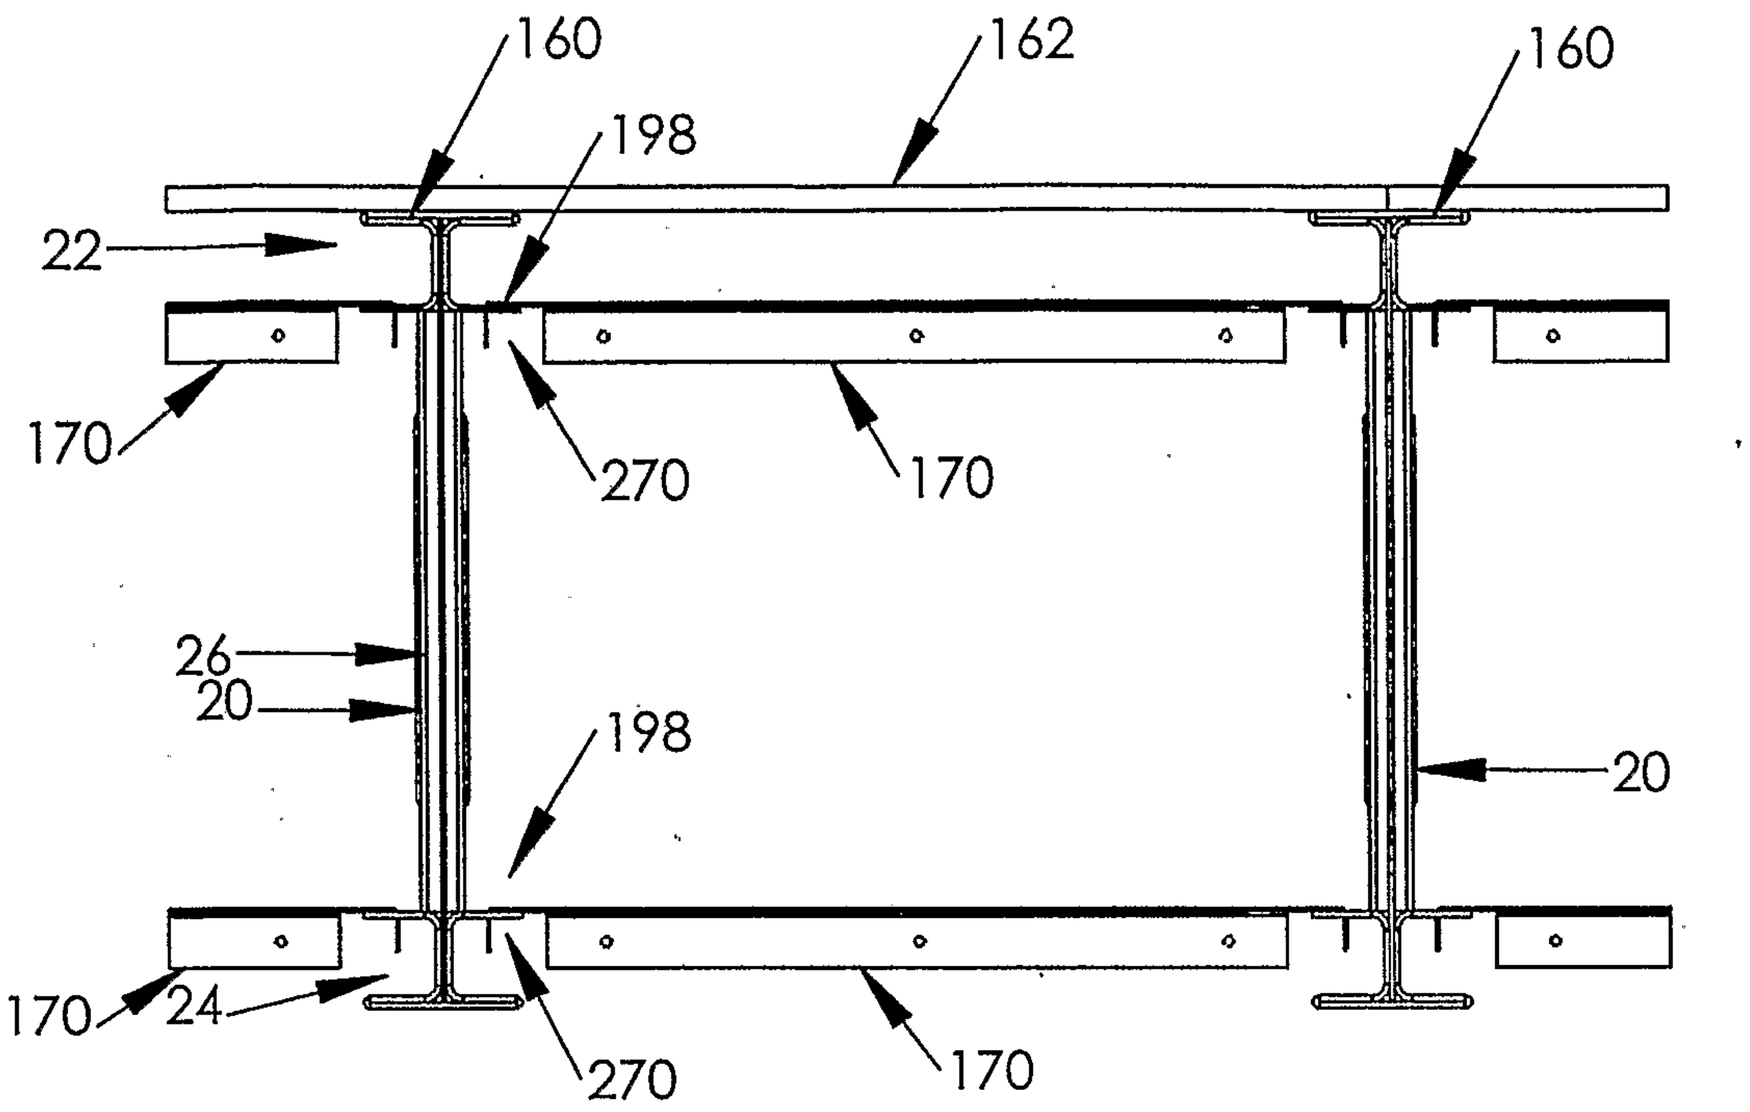
160
162
160
198
22
170
270
170
26
20
198
20
170
24
270
170

FIG. 33

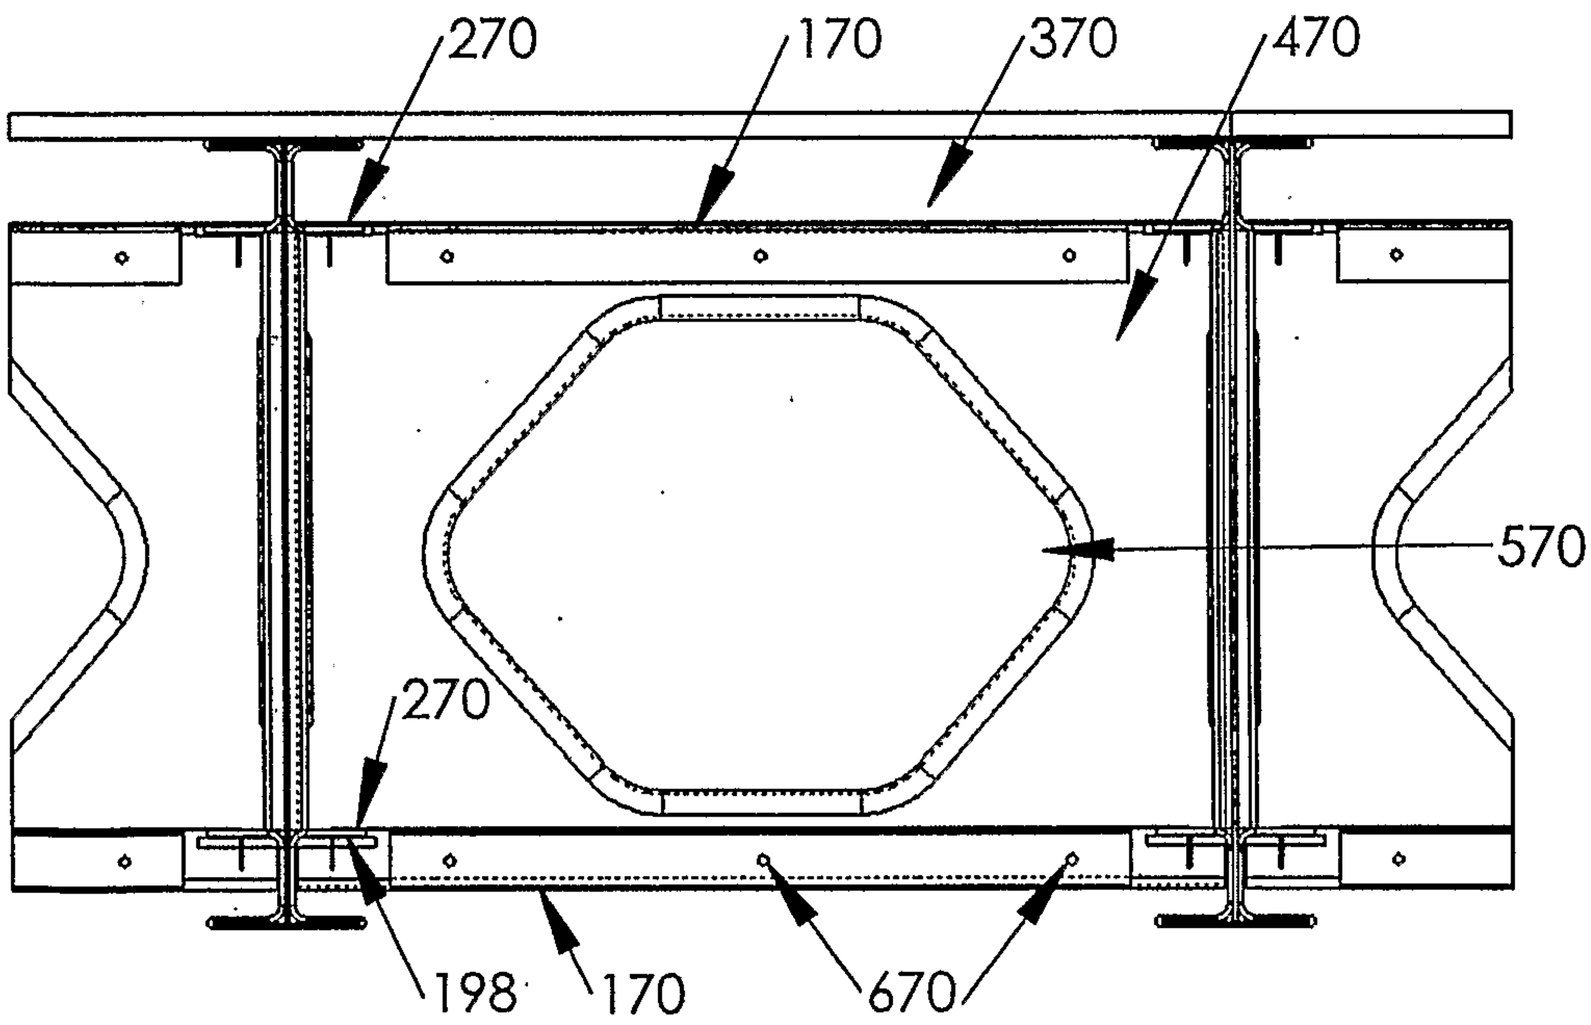
270
170
370
470
570
270
198
170
670

FIG. 34

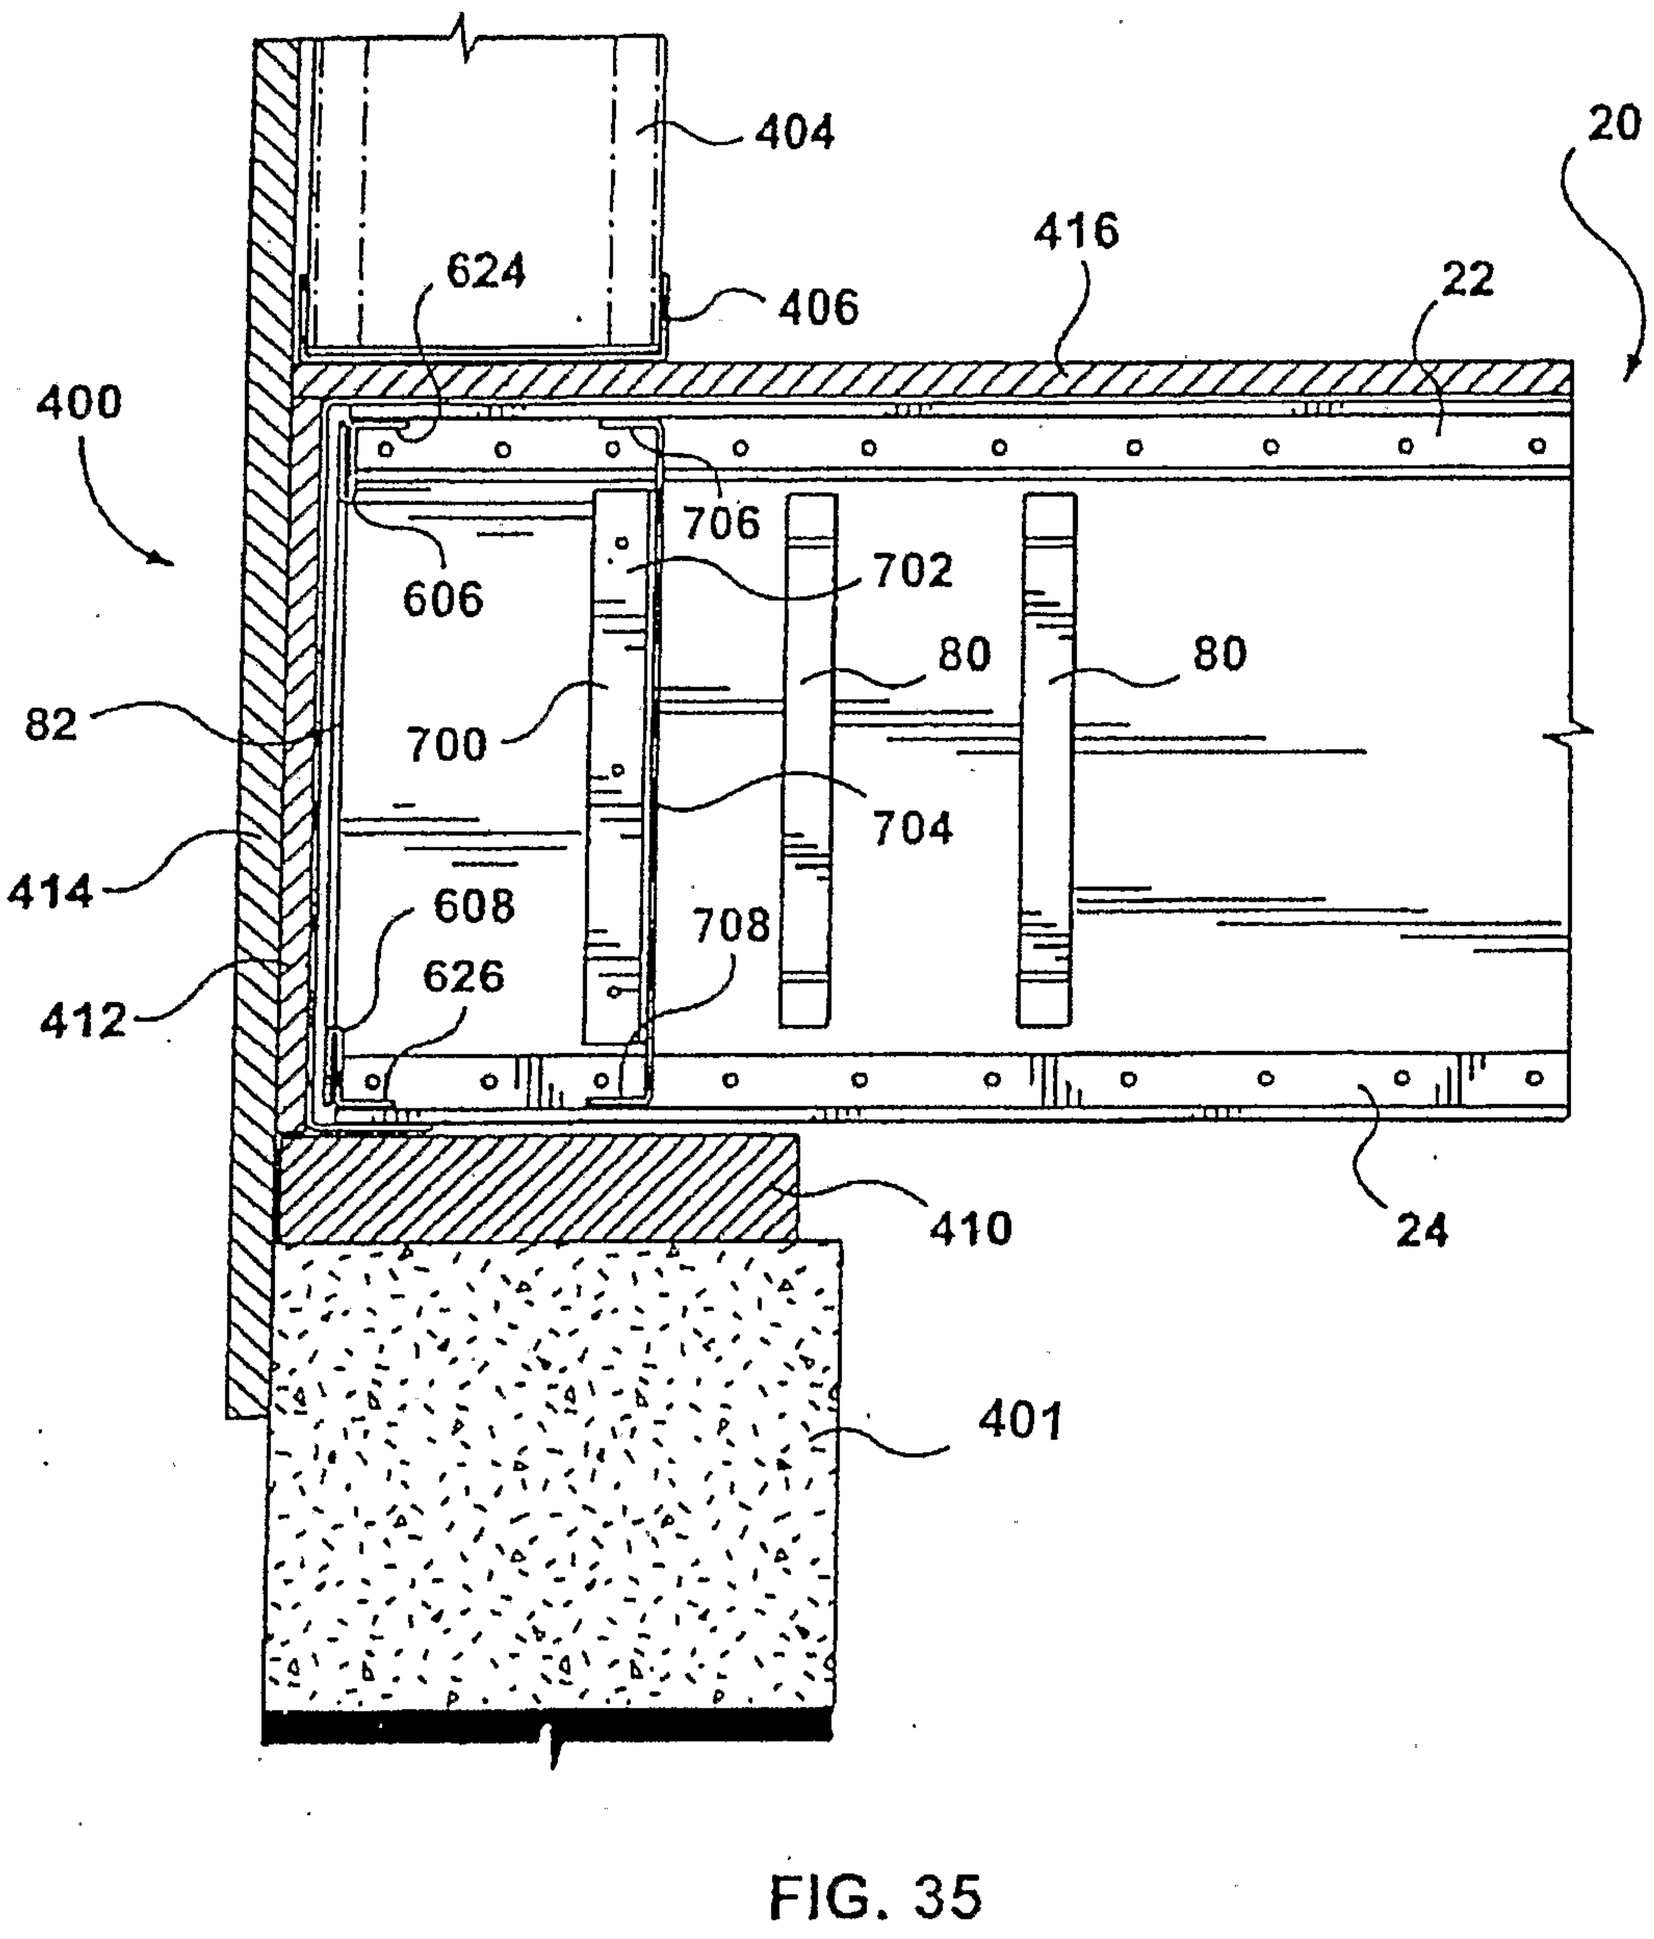
404
20
416
624
406
22
400
706
606
702
80
80
82
700
704
414
608
708
626
412
410
24
401

FIG. 35

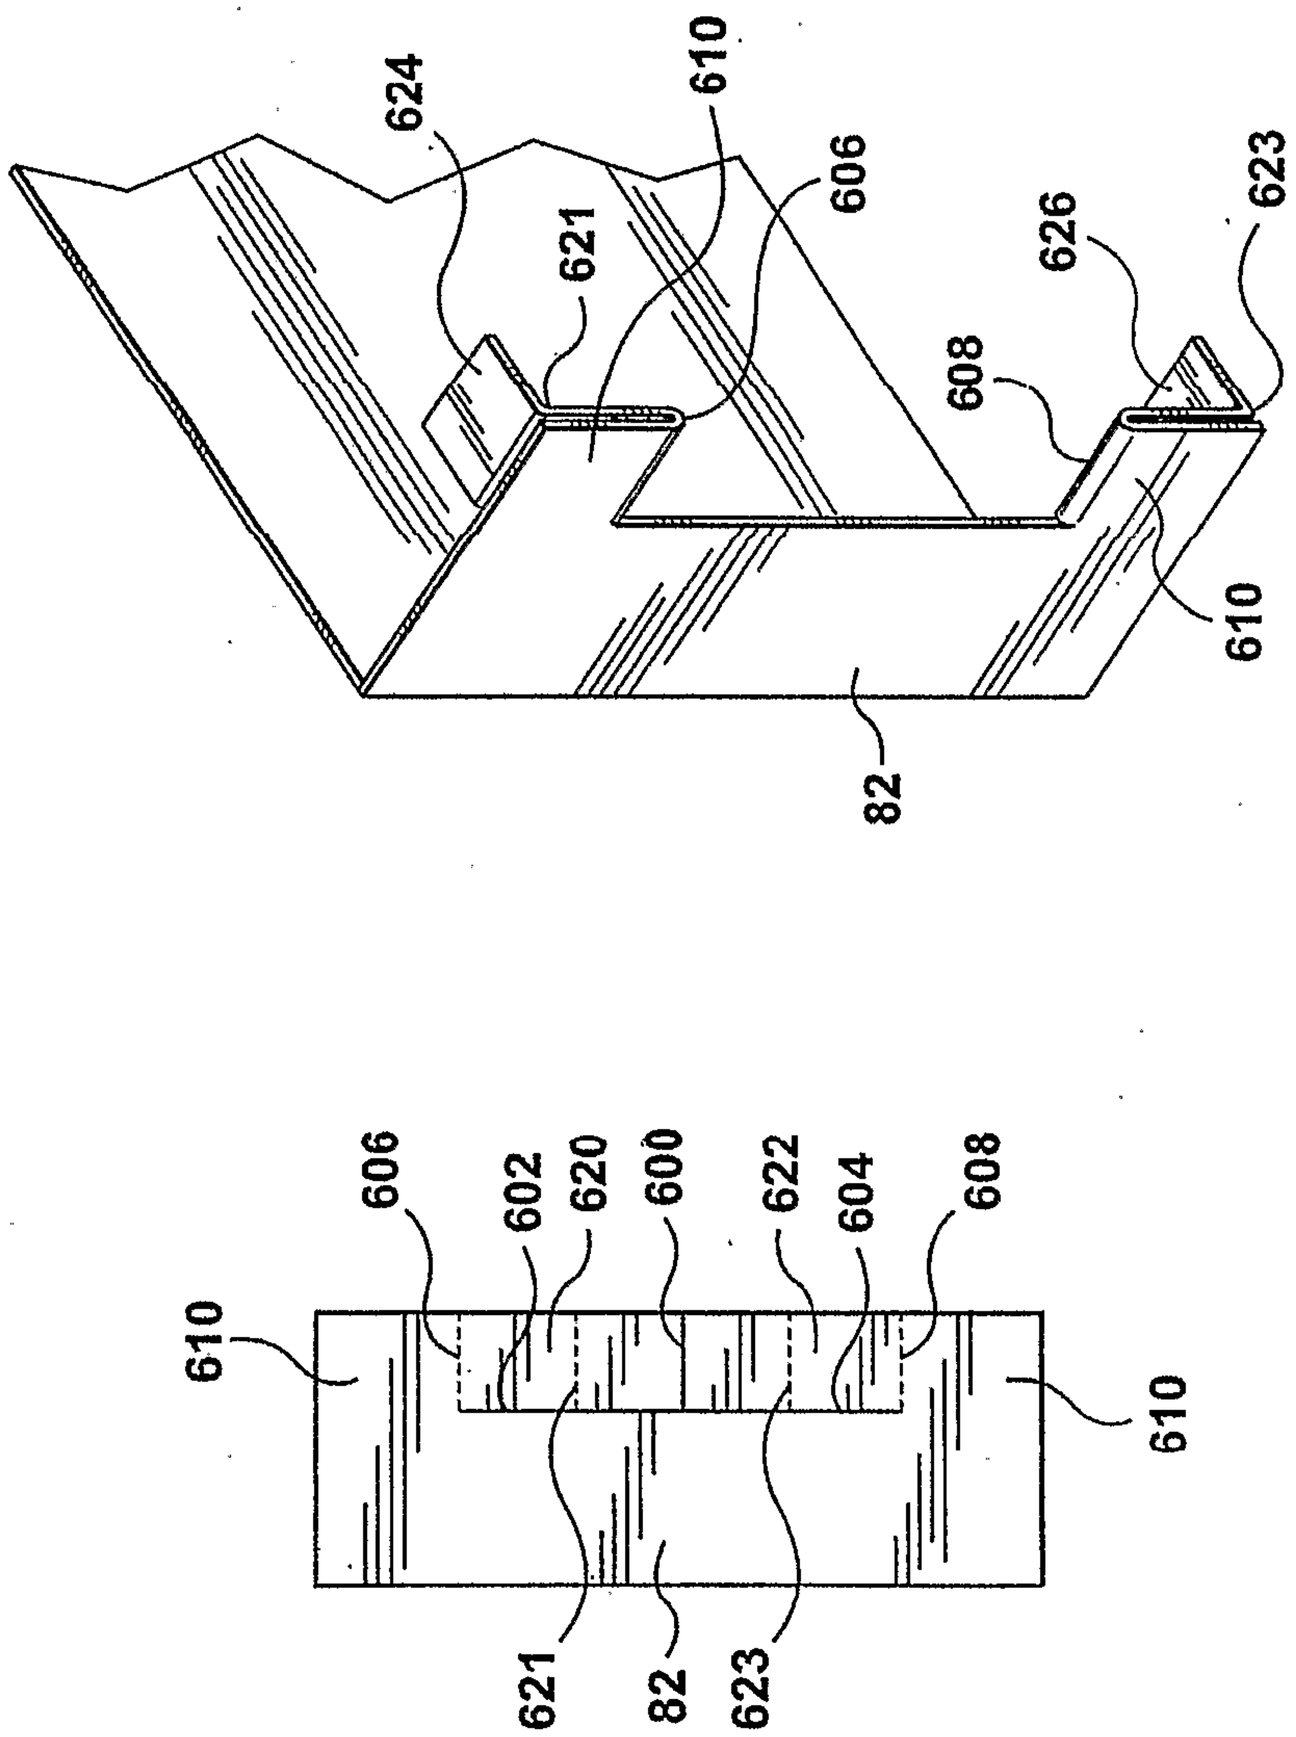

FIG. 36b

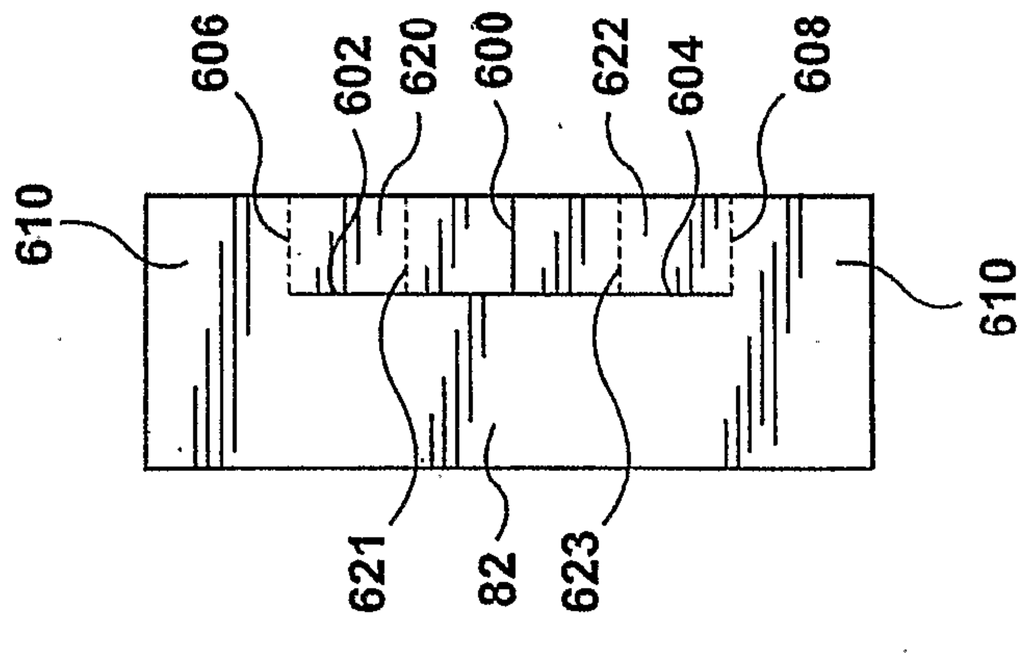

FIG. 36a

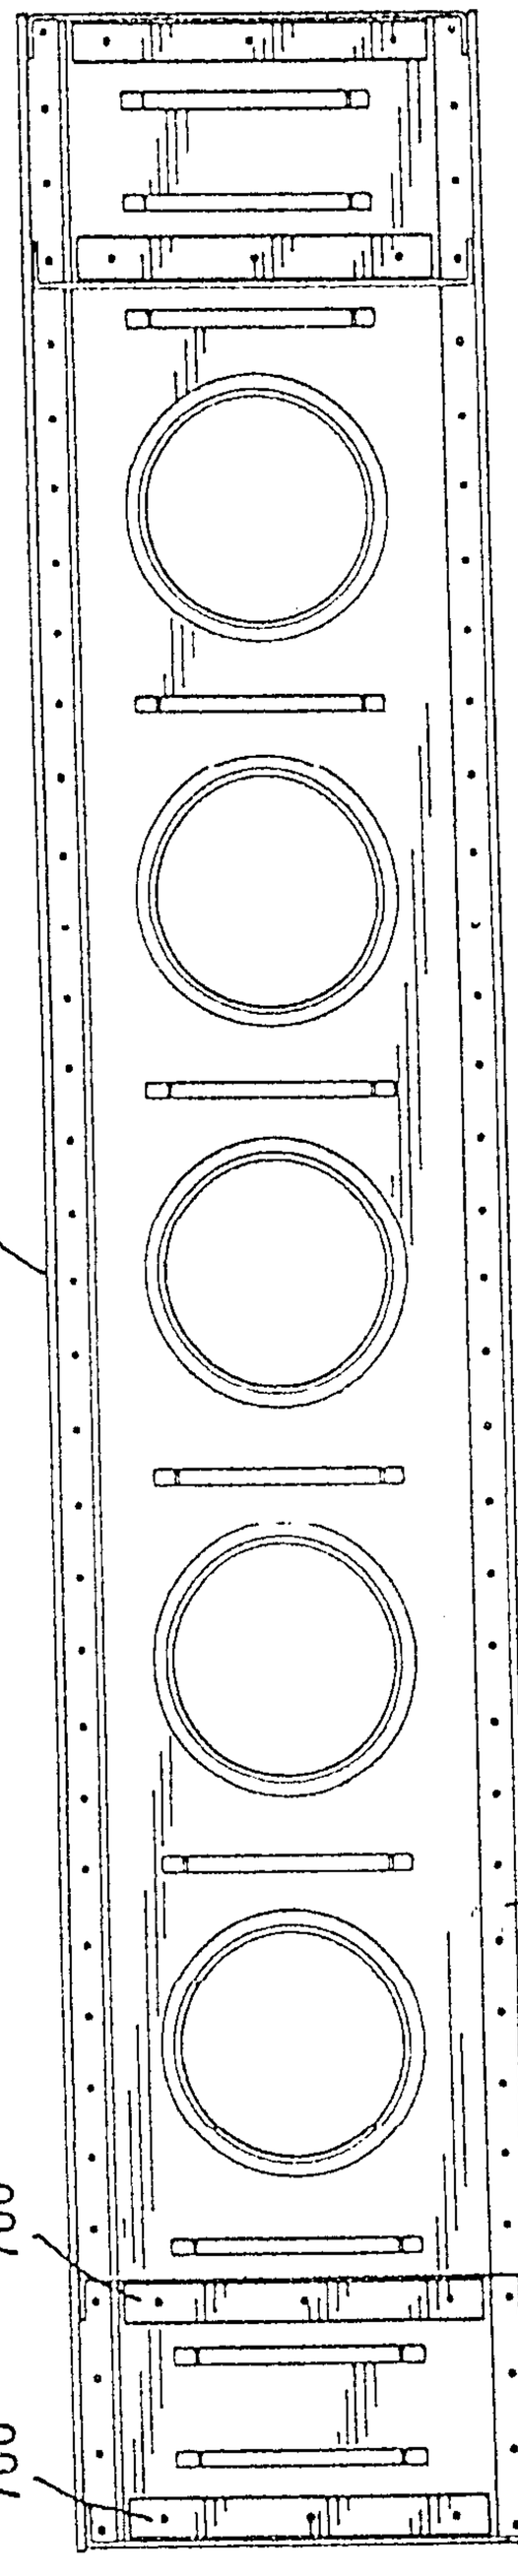

FIG. 38

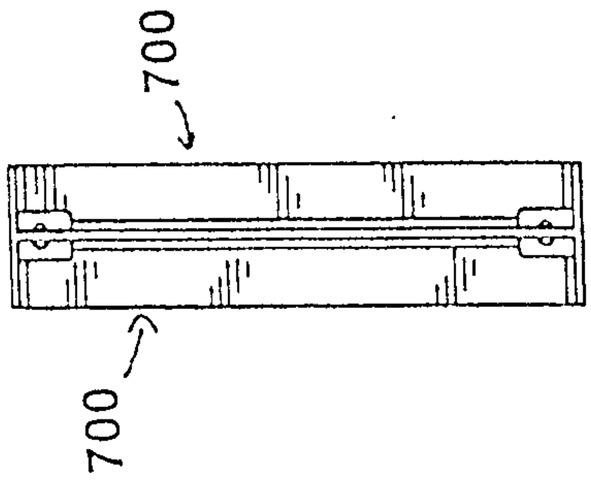

FIG. 39

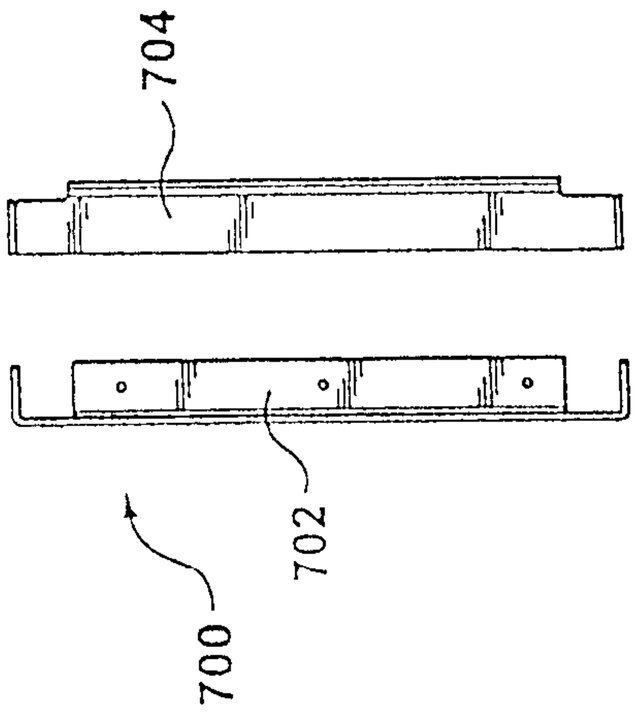

FIG. 37

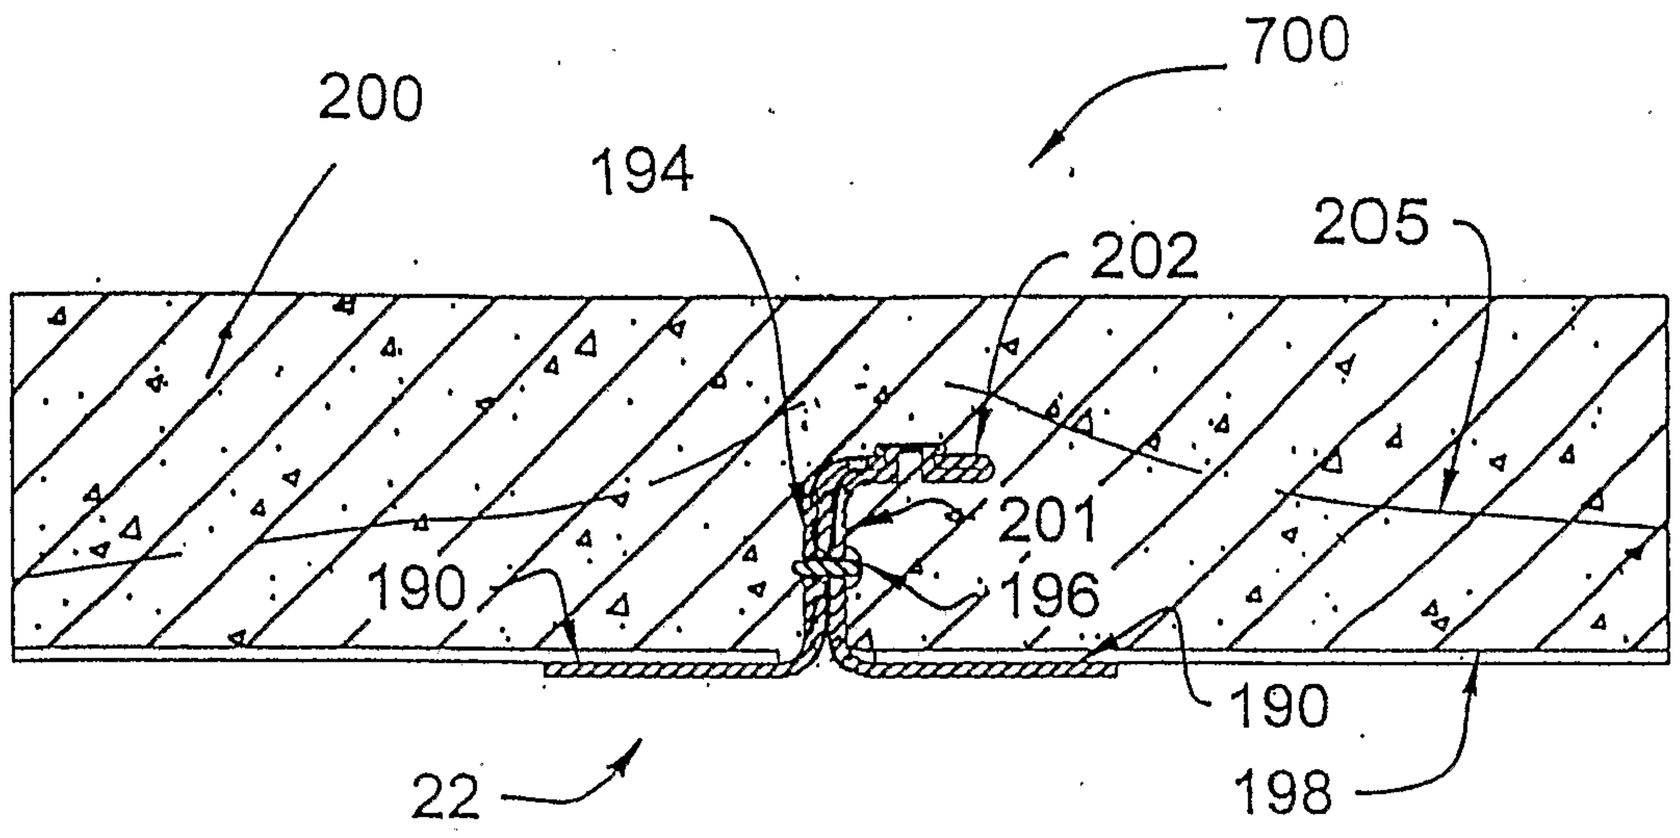

FIG. 40

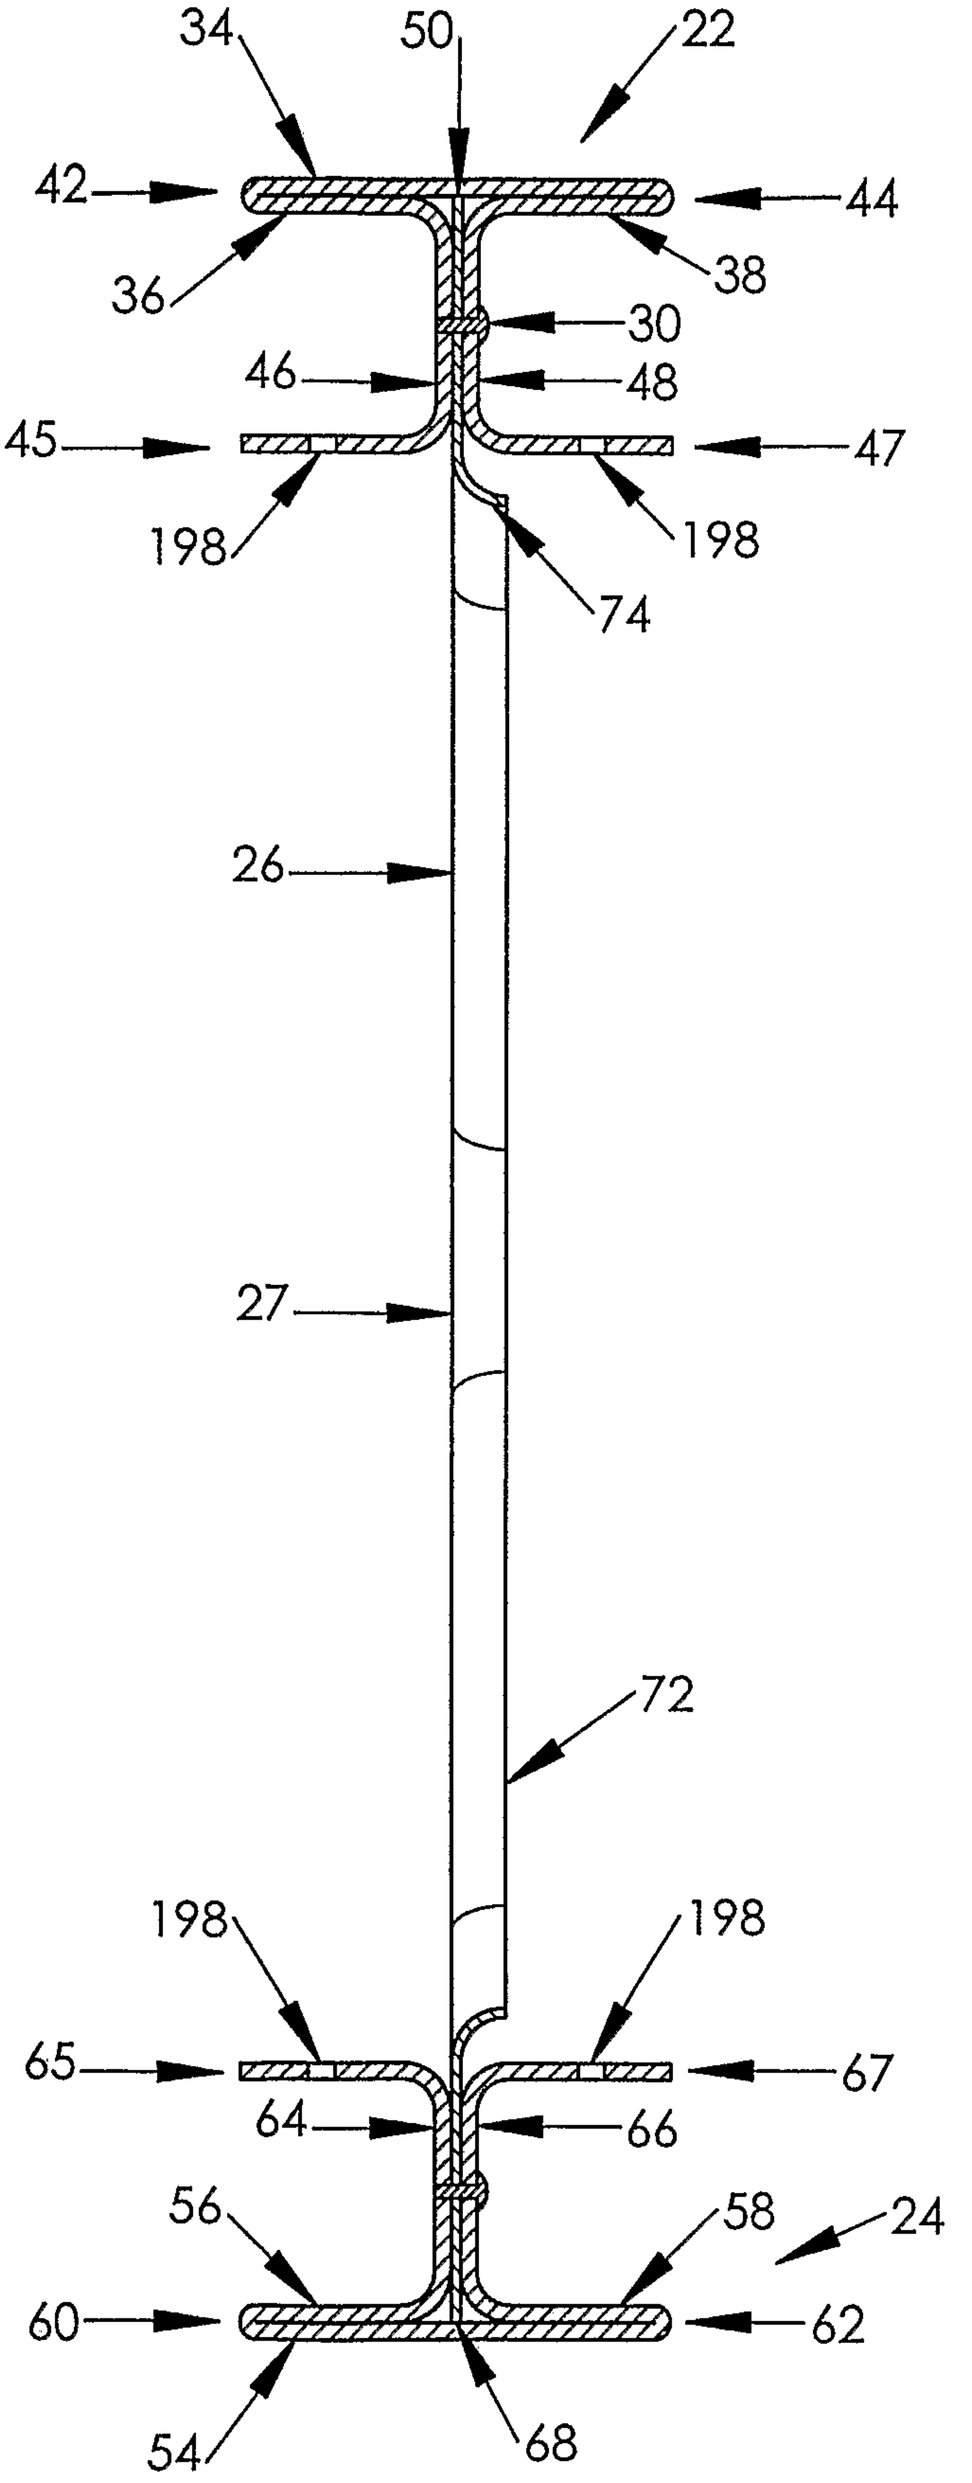
34
50
22
42
44
36
38
30
46
48
45
47
198
198
74
26
27
72
198
198
65
67
64
66
56
58
24
60
62
54
68