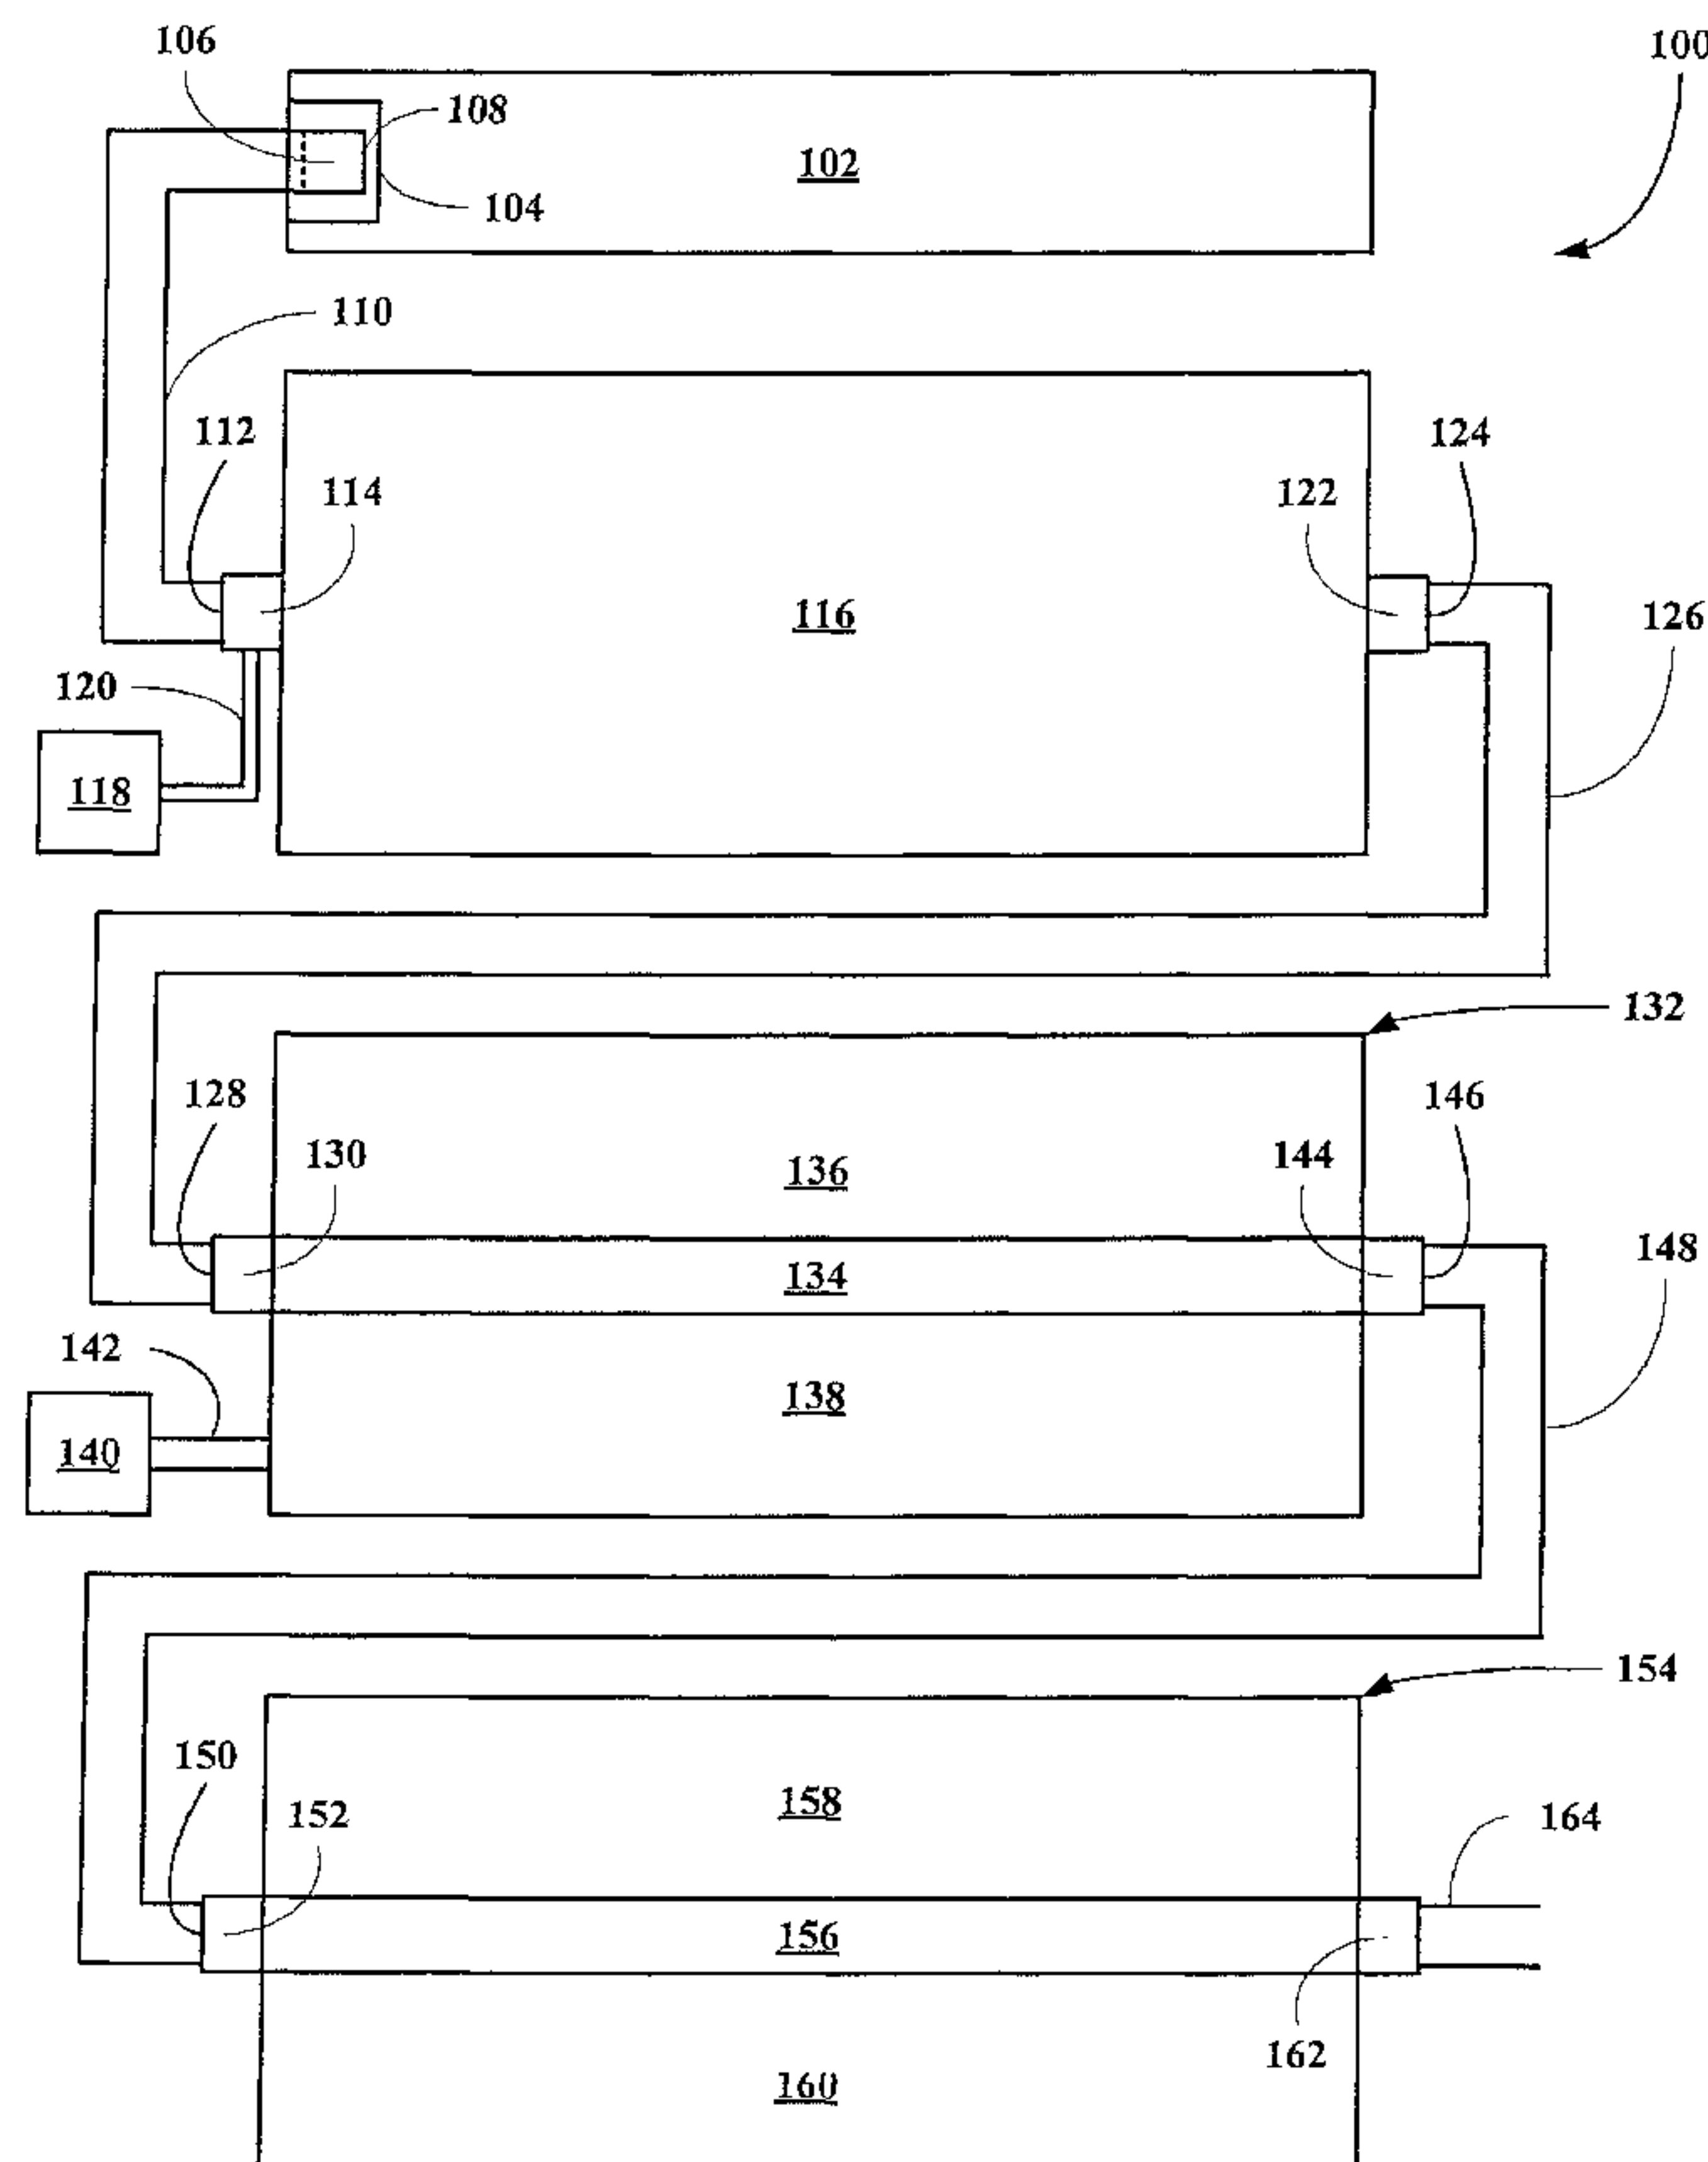




(86) **Date de dépôt PCT/PCT Filing Date:** 2010/08/11
(87) **Date publication PCT/PCT Publication Date:** 2011/02/17
(45) **Date de délivrance/Issue Date:** 2017/09/05
(85) **Entrée phase nationale/National Entry:** 2012/02/09
(86) **N° demande PCT/PCT Application No.:** US 2010/045237
(87) **N° publication PCT/PCT Publication No.:** 2011/019857
(30) **Priorités/Priorities:** 2009/08/11 (US61/232,861);
2009/08/11 (US61/232,850); 2010/06/08 (US61/352,724)

(51) **Cl.Int./Int.Cl.** **C02F 9/14** (2006.01),
C02F 1/20 (2006.01), **C02F 1/52** (2006.01),
C02F 1/58 (2006.01)
(72) **Inventeurs/Inventors:**
GALGON, RANDY A., US;
STICKNEY, ALAN RAY, CA;
STEINBERG, RICHARD B., US
(73) **Propriétaire/Owner:**
KINDER MORGAN OPERATING L.P."C", US
(74) **Agent:** MARKS & CLERK

(54) **Titre : SYSTEMES ET METHODES DE TRAITEMENT D'EAUX USEES A TENEUR ELEVEE EN AZOTE**
(54) **Title: SYSTEMS AND METHODS OF TREATING HIGH NITROGEN CONTENT WASTE WATER**



(57) **Abrégé/Abstract:**

A system of treating high nitrogen content waste water is disclosed, where the system includes a precipitation and conditioning subsystem, an ammonia stripper subsystem, and a denitrification subsystem. The system is adapted to reduce nitrogen contamination to level below about 10 ppm and in certain embodiments below 3 ppm.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
17 February 2011 (17.02.2011)(10) International Publication Number
WO 2011/019857 A3

(51) International Patent Classification:

C02F 9/14 (2006.01) *C02F 1/20* (2006.01)
C02F 1/52 (2006.01) *C02F 1/58* (2006.01)

(21) International Application Number:

PCT/US2010/045237

(22) International Filing Date:

11 August 2010 (11.08.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/232,850	11 August 2009 (11.08.2009)	US
61/232,860	11 August 2009 (11.08.2009)	US
61/352,724	8 June 2010 (08.06.2010)	US

(71) Applicant (for all designated States except US):
KINDER MORGAN OPERATING L.P."C" [US/US];
 500 Dallas Street, Suite 1000, Houston, Delaware 77002
 (US).

(72) Inventors; and

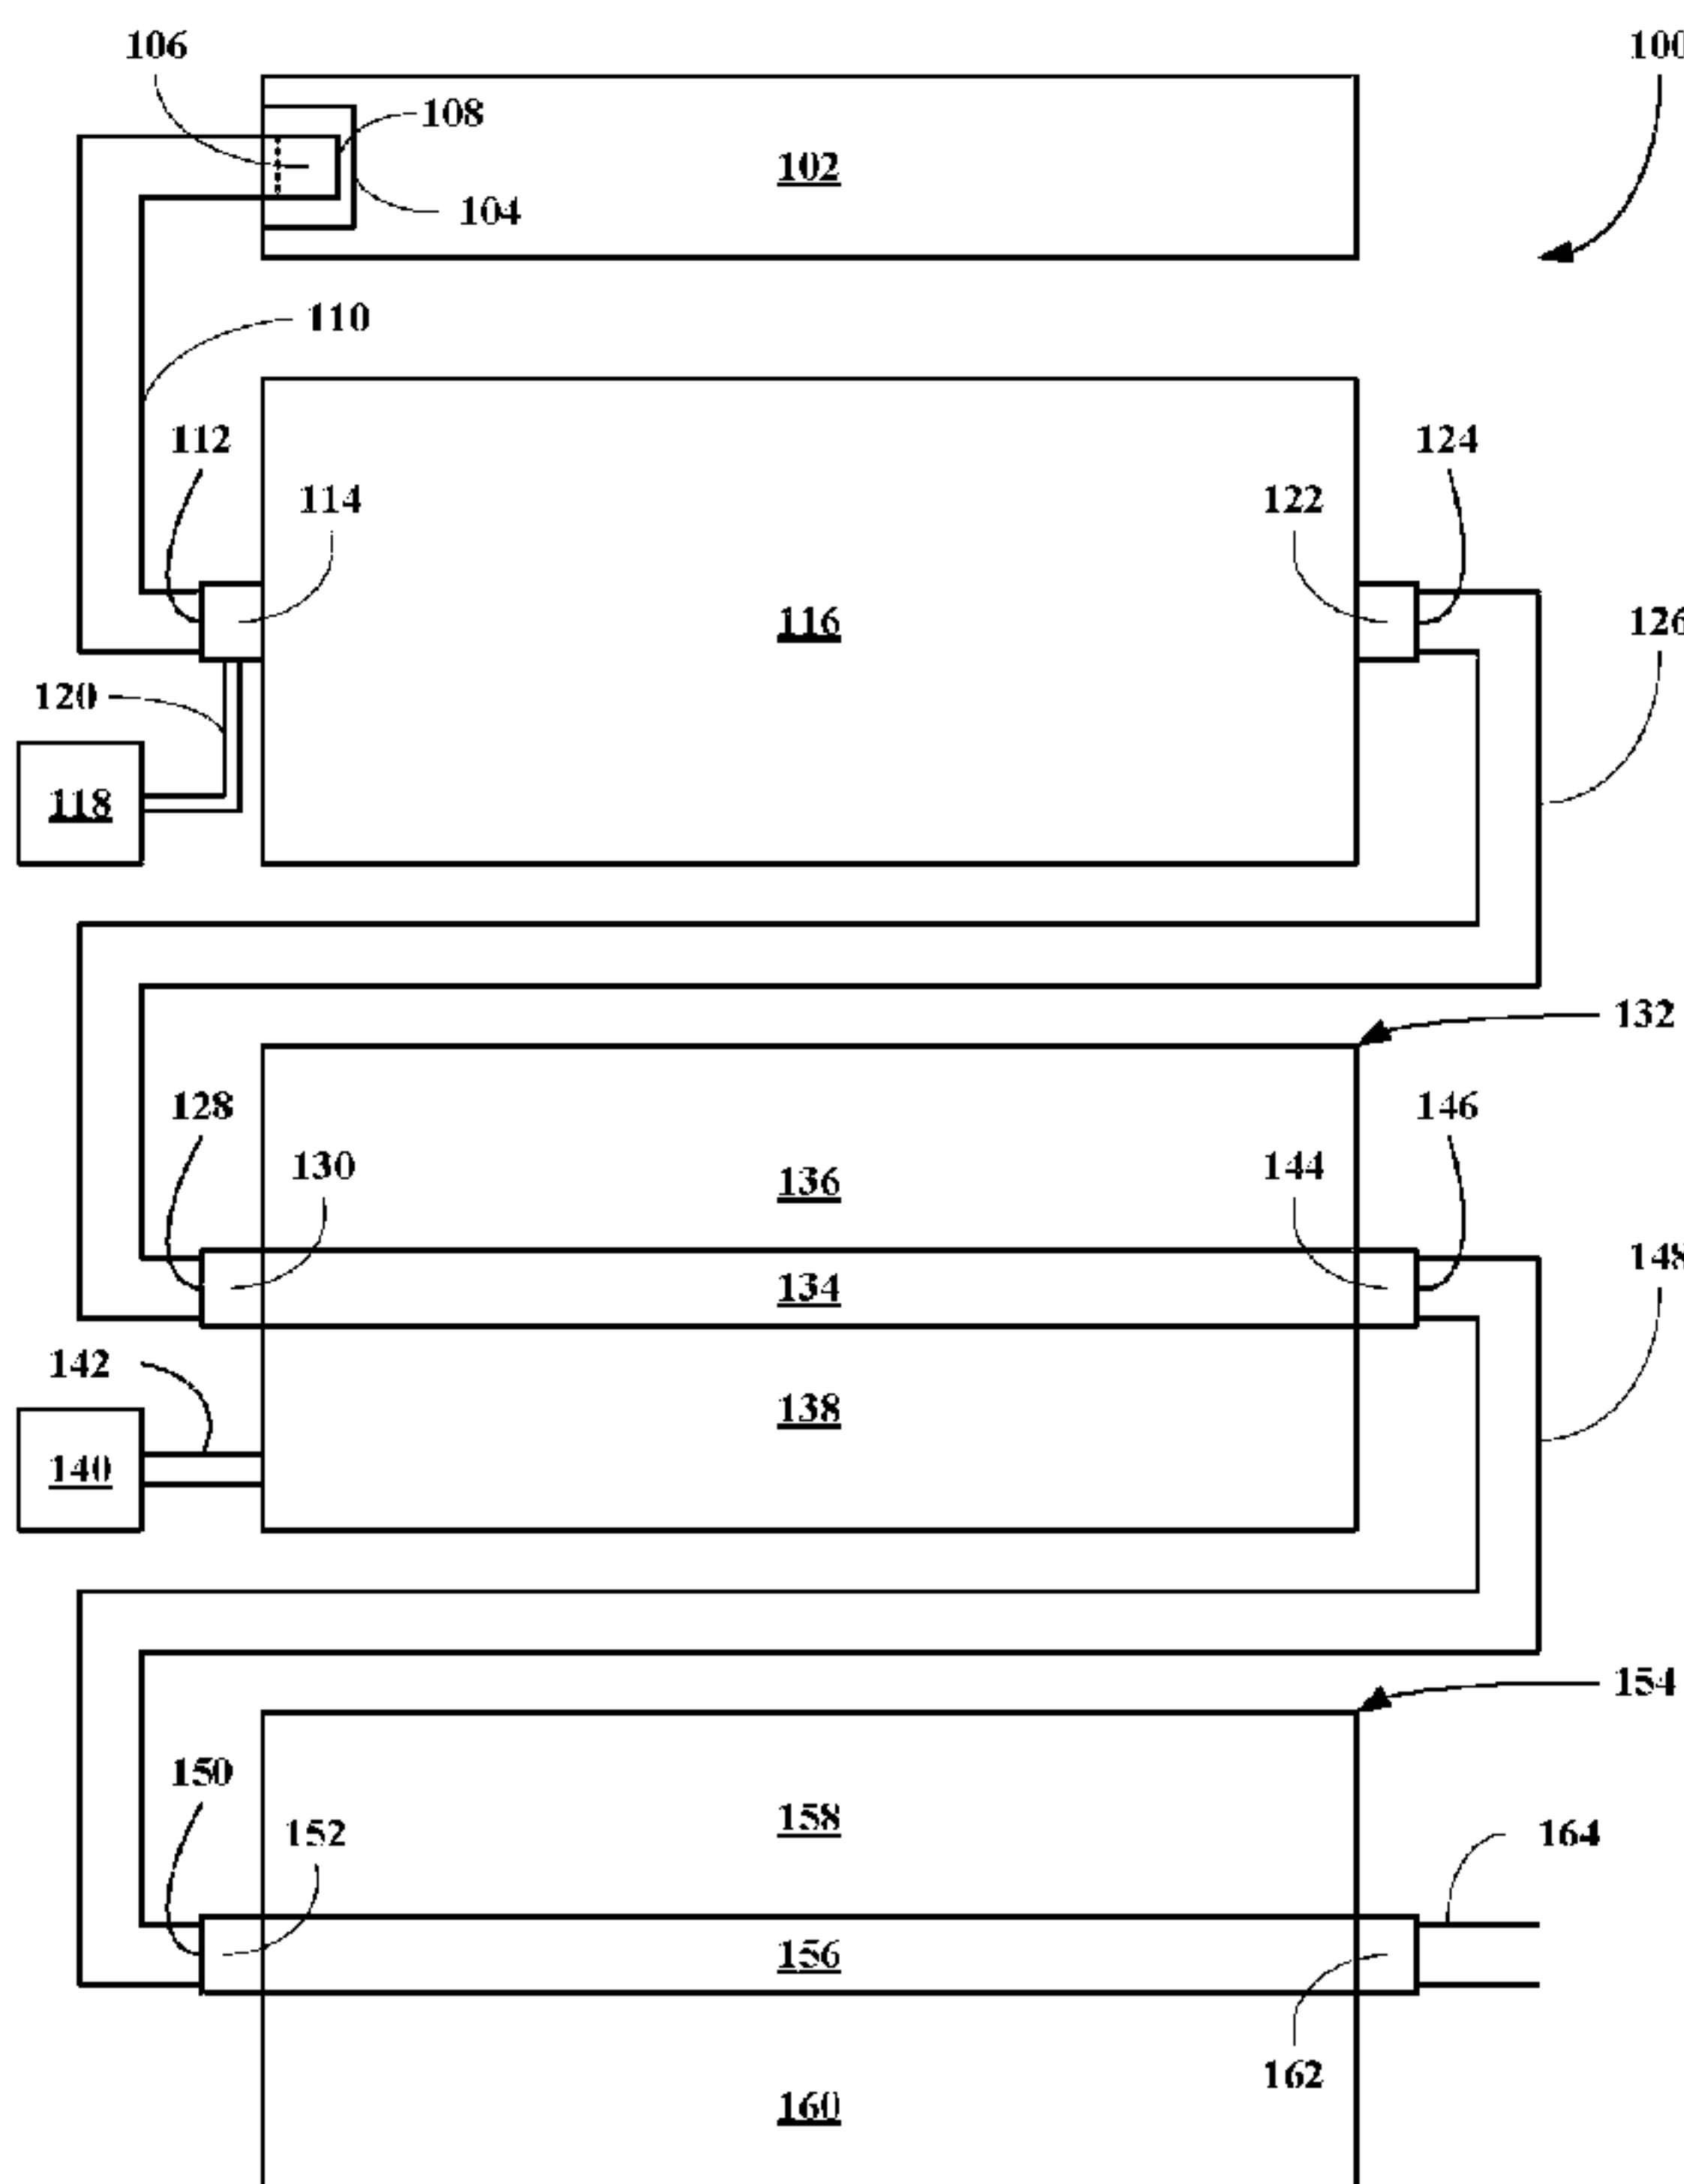
(75) Inventors/Applicants (for US only): **GALGON, Randy A.** [US/US]; A-45 Cheyenne Drive, Nuremberg, PA 18241 (US). **STICKNEY, Alan Ray** [CA/CA]; 1016 Highway 59, RR #3, Port Rowan, Ontario N0E 1M0 (CA). **STEINBERG, Richard B.** [US/US]; 2703 Bolgheri Lane, League City, TX 77573 (US).

(74) Agent: **STROZIER, Robert W.**; P.O. Box 429, Bellaire, TX 77402-0429 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SYSTEMS, APPARATUSES AND METHODS FOR TREATING WASTE WATER



(57) Abstract: A system of treating high nitrogen content waste water is disclosed, where the system includes a precipitation and conditioning subsystem, an ammonia stripper subsystem, and a denitrification subsystem. The system is adapted to reduce nitrogen contamination to level below about 10 ppm and in certain embodiments below 3 ppm.

FIG. 1

WO 2011/019857 A3

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

16 June 2011

- 1 -

PCT SPECIFICATION

**TITLE: SYSTEMS AND METHODS OF TREATING HIGH NITROGEN
CONTENT WASTE WATER**

INVENTOR: Randy A. Galgon, Alan Ray Stickney and Richard B. Steinberg

ASSIGNEE: KINDER MORGAN OPERATING L.P."C"

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] Embodiments of the present invention relate to systems, apparatuses and methods for treating waste water including high concentrations of nitrogen contaminants. The waste water can include other contaminants in addition to nitrogen contaminants.

[0003] Embodiments of the present invention relate to systems, apparatuses and methods for treating waste water including high concentrations of nitrogen contaminants, where the system includes three subsystem arranged in series: 1) a precipitation and conditioning subsystem, 2) an ammonia stripper subsystem, and 3) a denitrification subsystem. The system is adapted to reduce nitrogen contamination to a level below about 10 ppm and in certain embodiments below 3 ppm and in other embodiments, to a level below about 1 ppm.

2. Description of the Related Art

[0004] There are various types of readily available, conventional and advanced treatment processes that can be used to treat contaminated waste water containing high levels of nitrogen contaminants for subsequent discharge. Most of these treatments processes are of three basic types: agricultural reuse (trucking water), deep well injection, and treatment. The agricultural reuse and deep well injection processes are generally considered short term options, because there is an uncertainty of the long term agricultural needs for the high nitrogen contaminated waste water and deep well injection is dependent on the availability of injection wells.

[0005] There are treatment processes, which appear to be long term solutions. These treatment processes can be organized into three categories: reverse osmosis treatments, ion exchange treatments, and biological treatments. Commercial biological ammonia removal systems cannot directly process urea and commercial biological nitrate removal systems are currently limited to 100 mg/L due to

-2-

nitrate inhibition (toxicity). Physical processes do not reduce the waste, they either concentrate it or exchange it for a different chemical waste. Ion exchange produces a chemical waste and reverse osmosis simply concentrates the waste producing large volumes of hazardous waste.

[0006] Although numerous treatment options exist, there is a need in the art for a system that will treat high nitrogen-content waste water in an efficient and controlled manner, especially in a manner that is quickly adjustable with respect to the volume or amount of waste water required to be treated such as waste water created during rain falling on a site having a source of nitrogen containing compounds.

SUMMARY OF THE INVENTION

[0007] Embodiments of the present invention provide systems of treating waste waters having a high nitrogen content, where the system includes three subsystem or major components arranged in a series configuration: 1) a precipitation and conditioning subsystem, 2) an ammonia stripper and neutralization subsystem and 3) a denitrification subsystem. The system is capable of reducing a nitrogen level of a waste water from hundreds of parts per million (ppm) to levels below 10 ppm or to nitrogen levels below applicable discharge requirements established by federal, state or local governmental entities. The system is also adapted to reduce other contaminations by means of precipitation using caustic and ammonia removal through the formation of an ammonium salt.

[0008] Embodiments of the present invention provide apparatuses for treating high nitrogen content waste waters including a precipitation and conditioning unit, an ammonia stripper and neutralization unit, and a denitrification unit. The precipitation and conditioning unit includes an optional water aeration apparatus and one or a plurality of precipitation and conditioning stages. The ammonia stripper and absorber or neutralization unit include a plurality of ammonia air stripper assemblies and absorber assemblies. The stripper assemblies strip ammonia from the water, while the absorber assemblies convert the absorbed ammonia gas to an ammonium salts by reaction with a mineral acid such as sulfuric acid. The ammonium salt is accumulated and stored as an ammonium salt liquor such as an ammonium sulfate liquor. The denitrification unit includes a plurality of absorber columns, where the absorbent is circulated in a bacteria supporting medium. The absorbent is adapted to absorb all or substantially all nitrogen-containing compounds remaining in the water from the ammonia stripper and neutralization unit, while the bacteria convert the absorbed nitrogen-containing compounds into nitrogen gas or into amino acids used by the bacteria to make proteins. The apparatuses can also include a polishing unit. The apparatuses are adapted to convert waste water having a high nitrogen content and other unacceptable contaminants into an effluent water that meets or surpasses all applicable regulations concerning contaminants in water to be discharged into the

environment from retention ponds or other sources of waste water.

[0009] Embodiments of the present invention provide methods for treating waste water including a high level of nitrogen contaminants, where the method includes supplying a waste water stream to an apparatus of this invention. The method may optionally include the step of aerating the waste water prior to it being pumped into a precipitation and conditioning unit of the apparatus of this invention. The method also includes the step of adding a sufficient amount of caustic from a caustic source to raise a pH of the waste water (aerated or not aerated) to a pH of at least 8. The method includes the step of removing precipitate from the resulting pH-adjusted waste water. The method includes the step of adding sufficient caustic from the caustic source to increase the pH to at least 10. The method includes the step of removing precipitate. In certain embodiments, the caustic can be added in a single addition to raise the pH to at least pH 10. In other embodiments, the caustic can be added in two or more stages to effect selective precipitation of various precipitable contaminants. The method includes the step of heating the resulting water to a temperature of about 70°C. However, the system can operate between about 40°C and 70°C. The temperature adjusted waste water is then passed through a plurality of ammonia strippers to remove ammonia from the water. The method also includes the step of adding sufficient sulfuric acid to stripped and absorbed ammonia to form an ammonium salt liquor such as an ammonium sulfate liquor. The method also includes passing a portion of the resulting waste water into a plurality biological denitrification units. The method also includes adding active denitrifying microorganisms and a microbial nutrient formulation to the waste water. The denitrification units include an absorbent and a bacterial population sufficient to consume residual ammonia and other nitrogen-containing compounds and to convert nitrates and nitrites into nitrogen gas to produce a water effluent having a nitrogen content of no more than 10 ppm. In certain embodiments, the water effluent has a nitrogen content of no more than 5 ppm. In certain embodiments, the water effluent has a nitrogen content of no more than 3 ppm. In certain embodiments, the water effluent has a nitrogen content of no more than 1 ppm. In certain embodiments, the water effluent has a nitrogen content of no more than 0.5 ppm. In certain embodiments, the water effluent has a nitrogen content of no more than 0.4 ppm. In certain embodiments, the water effluent has a nitrogen content of no more than 0.1 ppm.

According to an aspect of the invention, there is provided a method for treating waste water comprising:

supplying a waste water to a precipitation and conditioning subsystem of a waste water treating system;

adding an amount of caustic from a caustic source to the waste water, where the amount

-3a-

of caustic raises a pH of the waste water to a pH sufficient to precipitate all or substantially all precipitable contaminants in the waste water to produce a first treated waste water and a precipitate;

overflowing a portion of the first treated waste water over a wall separating the precipitation and conditioning subsystem into a first safe path associated with an ammonia stripper and neutralization subsystem;

heating the first treated waste water to a temperature of about 50° C. to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of the ammonia stripper and neutralization subsystem, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

adding an amount of ammonia neutralization agent to the stripped ammonia stream to form a crude ammonium salt material,

overflowing a portion of the second treated waste water into a second safe path associated with a denitrification subsystem,

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus,

introducing the second treated waste water, an amount of a microbe carbon food source and an amount microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis,

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone

-3b-

and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly,

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly,

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus,

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm,

returning the purified waste water to the second safe path, and

discharging the purified waste water from a system outlet.

According to another aspect of the invention, there is provided a method for treating waste water comprising:

supplying a waste water to a first precipitation and conditioning stage of a precipitation and conditioning subsystem of a waste water treating system,

adding a first amount of caustic from a caustic source to the waste water supplied to the first precipitation and conditioning stage, where the first amount of caustic is sufficient to raise a pH of the waste water to a pH of at least 8 to form a first pH adjusted waste water,

precipitating a first precipitate from the first pH adjusted waste water in the first precipitation and conditioning stage to form a first stage treated waste water,

overflowing a portion of the first stage treated waste water over a wall separating the first precipitation and conditioning stage from a second precipitation and conditioning stage,

adding a second amount of caustic from the caustic source to the first stage treated waste water in the second precipitation and conditioning stage, where the second amount is sufficient to raise the pH of the first stage treated waste water to a pH of at least 10 to form a second pH adjusted waste water,

precipitating a second precipitate from the second pH adjusted waste water to form a first treated waste water,

heating the first treated waste water to a temperature of about 50° C. to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

-3c-

adding an amount of sulfuric acid to the stripped ammonia stream to form a crude ammonium sulfate material,

overflowing a portion of the second treated waste water into a second safe path associated with a denitrification subsystem,

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus,

introducing the second treated waste water, an amount of a microbe carbon food source and an amount microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis,

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly,

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly,

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus,

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm,

returning the purified waste water to the second safe path, and

discharging the purified waste water from a system outlet.

According to another aspect of the invention, there is provided a system for treating waste waters comprising:

-3d-

a precipitation and conditioning subsystem including:

at least one precipitation and conditioning stage, and

a supply of caustic,

where caustic is added in an amount to adjust a pH of the waste water to a pH sufficient to precipitate precipitable contaminants in the waste water and where the precipitation and conditioning subsystem forms a first safe comprising precipitation and conditioning subsystem purified water;

an ammonia stripper and neutralization subsystem including:

at least one ammonia stripper unit,

at least one ammonia neutralization unit, and

a supply of an ammonia neutralizing agent,

where the ammonia stripper and neutralization subsystem forms a second safe path comprising ammonia stripper and neutralization subsystem purified water, where the first safe path provides the precipitation and conditioning subsystem purified water for use in the ammonia stripper and neutralization subsystem, where the ammonia stripper withdraws water from the first safe path and returns ammonia stripped water thereto, and where stripped ammonia is converted in the ammonia neutralization unit into a crude ammonium salt liquor; and

a denitrification subsystem including:

at least one bio-denitrification/absorber unit, where a particulate absorbent is circulated through the unit in a bacteria supporting medium, the absorbent is adapted to adsorb and/or absorb nitrogen-containing compounds in an effluent from the ammonia stripper and neutralization subsystem, while the bacteria in the supporting medium converts the nitrogen-containing compounds in interstitial water and the absorbed and/or adsorbed nitrogen-containing compounds into nitrogen gas or into amino acids via bio-synthesis by the bacteria, and where the second safe path provides the ammonia stripper and neutralization subsystem purified water for use in the denitrification subsystem and

where the subsystems are arranged in a series configuration, the system is capable of reducing a nitrogen level in a waste water levels below 10 ppm or to levels below applicable water discharge nitrogen levels and to reduce other contaminants through precipitation using the caustic and to reduce or eliminate ammonia through formation of an ammonium salt.

According to another aspect of the invention, there is provided a method for treating waste water comprising:

supplying a waste water to a precipitation and conditioning subsystem of a waste water treating system;

-3e-

adding an amount of caustic from a caustic source to the waste water, where the amount of caustic raises a pH of the waste water to a pH sufficient to precipitate all or substantially all precipitable contaminants in the waste water to produce a first treated waste water and a precipitate;

overflowing a portion of the first treated waste water over a wall separating the precipitation and conditioning subsystem to form a first safe path of an ammonia stripper and neutralization subsystem through which water is extracted for use in the ammonia stripper and neutralization subsystem and into which ammonia stripped water is returned;

heating the first treated waste water to a temperature of about 50° C. to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of the ammonia stripper and neutralization subsystem, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

adding an amount of ammonia neutralization agent to the stripped ammonia stream to form a crude ammonium salt material;

overflowing a portion of the second treated waste water to form a second safe path of a denitrification subsystem through which untreated water is removed for used in the denitrification subsystem and treated water is returned;

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus;

introducing the second treated waste water, an amount of a microbe carbon food source and an amount of microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis;

-3f-

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly;

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly;

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus;

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm;

returning the purified waste water to the second safe path; and

discharging the purified waste water from a system outlet.

According to another aspect of the invention, there is provided a method for treating waste water comprising:

supplying a waste water to a first precipitation and conditioning stage of a precipitation and conditioning subsystem of a waste water treating system;

adding a first amount of caustic from a caustic source to the waste water supplied to the first precipitation and conditioning stage, where the first amount of caustic is sufficient to raise a pH of the waste water to a pH of at least 8 to form a first pH adjusted waste water,

precipitating a first precipitate from the first pH adjusted waste water in the first precipitation and conditioning stage to form a first stage treated waste water;

overflowing a portion of the first stage treated waste water over a wall separating the first precipitation and conditioning stage from a second precipitation and conditioning stage to form a first safe path from which water is extracted for use in an ammonia stripper and neutralization subsystem and into which ammonia stripped water is returned;

adding a second amount of caustic from the caustic source to the first stage treated waste water in the second precipitation and conditioning stage, where the second amount is sufficient to raise the pH of the first stage treated waste water to a pH of at least 10 to form a second pH adjusted waste water;

precipitating a second precipitate from the second pH adjusted waste water to form a first treated waste water;

heating the first treated waste water to a temperature of about 50° C. to form a temperature adjusted waste water;

-3g-

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of the ammonia stripper and neutralization subsystem, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

adding an amount of sulfuric acid to the stripped ammonia stream to form a crude ammonium sulfate material;

overflowing a portion of the second treated waste water to form a second safe path of a denitrification subsystem through which untreated water is removed for used in the denitrification subsystem and treated water is returned;

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus;

introducing the second treated waste water, an amount of a microbe carbon food source and an amount microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis;

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly;

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly;

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus;

-3h-

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm;

returning the purified waste water to the second safe path; and
discharging the purified waste water from a system outlet.

According to another aspect of the present invention, there is provided a system for treating waste waters comprising:

a precipitation and conditioning subsystem including:
at least one precipitation and conditioning stage, and
a supply of caustic,

where caustic is added in an amount to adjust a pH of the waste water to a pH sufficient to precipitate precipitable contaminants in the waste water and where the precipitation and conditioning subsystem forms a first safe path comprising precipitation and conditioning subsystem purified water;

an ammonia stripper and neutralization subsystem including:
at least one ammonia stripper unit,
at least one ammonia neutralization unit, and
a supply of an ammonia neutralizing agent,

where the ammonia stripper and neutralization subsystem forms a second safe path comprising ammonia stripper and neutralization subsystem purified water, where the first safe path provides the precipitation and conditioning subsystem purified water for use in the ammonia stripper and neutralization subsystem, where the ammonia stripper withdraws water from the first safe path and returns ammonia stripped water thereto, and where stripped ammonia is converted in the ammonia neutralization unit into a crude ammonium salt liquor; and

a denitrification subsystem including:

at least one bio-denitrification/absorber unit, where a particulate absorbent is circulated through the unit in a bacteria supporting medium, the absorbent is adapted to adsorb and/or absorb nitrogen-containing compounds in an effluent from the ammonia stripper and neutralization subsystem, while the bacteria in the supporting medium converts the nitrogen-containing compounds in interstitial water and the absorbed and/or adsorbed nitrogen-containing compounds into nitrogen gas or into amino acids via bio-synthesis by the bacteria, and where the second safe path provides the ammonia stripper and neutralization subsystem purified water for use in the denitrification subsystem, where the purified water has a nitrogen content of no more than 10 ppm, and

-3i-

where the subsystems are arranged in a series configuration.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The invention can be better understood with reference to the following detailed description together with the appended illustrative drawings in which like elements are numbered the same:

[0011] Figure 1 depicts a block diagram of an embodiment of a waste water treating apparatus or facility of this invention including a waste water source, a precipitation and conditioning unit, an

-4-

ammonia stripping and neutralization unit, and a denitrification unit.

[0012] **Figure 2A** depicts another embodiment of a water waster treating apparatus or facility of this invention, with a single stage precipitation subsystem.

[0013] **Figure 2B** depicts another embodiment of a water waster treating apparatus or facility of this invention, with a two stage precipitation subsystem.

[0014] **Figures 3A&B** depict another embodiment of a water waster treating apparatus or facility of this invention.

[0015] **Figures 3C-E** depict 3D renderings of the system of **Figures 3A&B**.

[0016] **Figures 4A-C** depict an embodiment of a two stage precipitation subsystem of this invention.

[0017] **Figures 5A-E** depict an embodiment of an AR subsystem of this invention.

[0018] **Figure 5F** depict another embodiment of an AR subsystem of this invention.

[0019] **Figures 6A-C** depict an embodiment of a denitrification subsystem of this invention.

[0020] **Figures 7A-I** depict another embodiment of a denitrification subsystem of this invention.

[0021] **Figure 8A** depicts an embodiment of a heating, heat exchange or recovery subsystem of this invention.

[0022] **Figure 8B** depicts another embodiment of a heating, heat exchange or recovery subsystem of this invention.

[0023] **Figure 9A-C** depicts 3D renderings of the system of **Figure 3A** illustrating the safe path feature of the invention.

[0024] **Figures 9D-G** depict 3D renderings of a safe path section featuring a momentum block and pump configuration for feeding the denitrification units.

[0025] **Figure 10** depicts another embodiment of a denitrification subsystem of this invention.

[0026] **Figures 11A&B** depicts embodiment of a denitrification subsystem of this invention.

DETAILED DESCRIPTION OF THE INVENTION

[0027] The inventors have found that a system, an apparatus, and a method can be constructed and implemented for reducing nitrogen contaminants in waste water to levels below Federal, State and/or Local regulatory requirements. The system and apparatus includes at least three components: 1) a precipitation subsystem, 2) an ammonia stripping subsystem, and 3) a denitrification subsystem. The system can also include a polishing subsystem. The inventors have found that by using these three subsystems in series, waste water having a nitrogen level in the hundreds to thousands of parts per million can be reduced to a water effluent having a nitrogen level below about 10 ppm. In certain embodiments, the nitrogen level can be reduced below about 7.5 ppm. In other embodiments, the nitrogen level can be reduced below about 5 ppm. In other embodiments, the nitrogen level can be

-5-

reduced below about 4 ppm. In other embodiments, the nitrogen level can be reduced below about 3 ppm. In other embodiments, the nitrogen level can be reduced below about 2 ppm. In other embodiments, the nitrogen level can be reduced below about 1 ppm.

[0028] The inventors designed the present systems and apparatuses to handle waste water such as storm water runoff associated with various rain events, which results in a potentially large range of hydraulic loading conditions that would prevail during and after various storm events (ranging from a light sprinkle to a continuous heavy driving rain). The systems and apparatuses were engineered to (a) treat contaminated waste water such as storm water runoff in consistent manner, as needed to prevent uncontrolled overflows at retention ponds, while (b) ensuring compliance with the federal, state and/or local rules and regulations pertaining to a discharge of contaminated water and to a quality of water releasable into a given environment.

[0029] The systems and apparatuses of this invention were designed to achieve the following characteristics:

[0030] First, the systems and apparatuses of this invention will be capable of reducing trace metal concentrations that may be present in the waste water at a concentration level exceeding applicable surface water quality standards imposed by law and/or pose potential toxicity issues to the aquatic life in the desired discharge area such as a river, bay, or the like. The trace metals include, without limitation, copper and/or zinc. Embodiments of the systems and apparatuses will reduce the concentrations of these trace metals to acceptable or desired low concentrations. In certain embodiments, the low concentrations will be in the parts per million range and in other embodiments the low concentration will be in the parts per billion range.

[0031] Second, the systems and apparatuses of this invention will be capable of reducing relatively large nitrogen concentrations on the order of 400 to 4,000 milligrams per Liter (mg/L), which are present in various forms including ammonia, nitrate, nitrite, and urea.

[0032] Third, the systems and apparatuses of this invention are capable of achieving levels of treatment necessary to remove sufficient contaminant mass at all times under all conditions. The systems are designed to be able to operate even at near saturated conditions of various ionic species such as sulfate, silica, calcium, and other contaminants.

[0033] Fourth, the systems and apparatuses of this invention are capable of reducing contaminants from potentially large volumes of waste water generated by sudden rainfall events, especially, in situations, where the facility undergoing the runoff has limited storage volume. The treatment system are designed to be capable of being quickly activated and to quickly achieve a desired level of treatment within hours or days so that an overflow condition of the retention ponds or other temporary

storage vessels does not occur.

[0034] Fifth, the systems and apparatuses of this invention will be capable of reducing to adjust the hydraulic flow-through capacity of the system downward in order to optimize and operate the system through the rainy season of the year while avoiding multiple start-ups and shut-downs of the system;

[0035] Sixth, the systems and apparatuses of this invention are capable of properly treating storm water runoff in contact with a high strength nitrogen source such as a fertilizer material as runoff amounts and concentrations of dissolved nitrogen compounds vary with time due to rainfall intensity. The systems are capable of consistently producing an effluent meeting the requisite water quality criteria as well as passing toxicity testing requirements associated with a given facility.

[0036] Seventh, the systems and apparatuses of this invention are capable of properly addressing potential emissions of ammonia into the atmosphere by means of selecting suitable control strategies and technologies.

[0037] Eighth, the systems and apparatuses of this invention are capable of minimizing the overall complexity of the system so that it can be operated by a typical waste water operator, who will be capable of controlling the treatment process, absent of extreme conditions, thus, reducing the annual cost to operate and maintain the system.

[0038] Ninth, the systems and apparatuses of this invention will be capable of configuring and situating the system in such a manner so that the overall footprint of the system minimizes impact on use and configuration of the existing site, even though there may be limited open area surrounding a given facility.

SUITABLE REAGENTS AND COMPONENTS

[0039] Suitable mineral acids for use in the present invention include, without limitation, nitric acid, phosphoric acid, sulfuric acid, hydrochloric acid, acetic acid, or mixture or combinations thereof. In certain embodiments, the mineral acid comprises nitric acid or sulfuric acid.

[0040] Suitable bases for uses in the present invention include, without limitation, alkali metal hydroxides, alkaline metal hydroxides, alkaline metal oxides, certain transition metal hydroxides, and mixture or combinations thereof. In certain embodiments, the base comprises sodium hydroxide, potassium hydroxide, calcium oxide, calcium hydroxide, cesium hydroxide, barium hydroxide, and mixtures or combinations thereof.

[0041] Suitable microorganisms for use in the present invention include, without limitation, any denitrifying bacteria or other microbes or mixtures or combinations thereof. Exemplary examples include, without limitation, heterotrophic bacteria (such as *paracoccus denitrificans* and various *pseudomonads*), although autotrophic denitrifiers have also been identified (e.g., *thiobacillus*

-7-

denitrificans *Micrococcus denitrificans*/*Paraoccus denitrificans*, *Pseudomonas*, etc.). Denitrifiers are represented in all main phylogenetic groups. Generally several species of bacteria are involved in the complete reduction of nitrate to molecular nitrogen, and more than one enzymatic pathway have been identified in the reduction process. Any suitable bacteria may be used in the denitrification cells or units of this invention, such as bacteria of the genera *Aeromonas*, *Psuedomonas*, *Bacillis*, or mixtures or combinations thereof. In certain embodiments, the culture used in the bio-denitrification units include about 5% aerobic microorganisms, which are used to control the dissolved oxygen (DO) level in the units. However, the exact ratio of anoxic microbes to aerobic microbes may be varied based on the waste water contaminant composition. Measurements of the DO level in two zones of the units are in a cascade control loop to control food and micro-nutrients to the column to support robust microbial growth. The terms microorganism and microbes are used interchangeably throughout the specification. In certain embodiments, the microbes are mesophilic microbes, while in other embodiments, the microbes are heterotropes, while in other embodiments, the microbes are thermophilics microbes, while in yet other embodiments, the microbes are mixture of two or more of these classes of microbes.

[0042] Suitable absorbent media for use in the present invention include, without limitation, natural zeolitic materials, surfactant modified zeolitic materials, synthetic zeolitic materials, surface modified synthetic zeolitic materials, clays, activated carbon and other adsorbing and or absorbing granular materials. Exemplary examples of suitable zeolitic materials include, without limitation, naturally occurring zeolitic materials and synthetic zeolite materials. Zeolites are minerals that have a microporous structure. They are basically hydrated alumino-silicate minerals with an "open" structure that can accommodate a wide variety of cations, such as Na^+ , K^+ , Ca^{2+} , Mg^{2+} and others. Natural zeolites form where volcanic rocks and ash layers react with alkaline groundwater. Zeolites are the aluminosilicate members of the family of microporous solids known as "molecular sieves". The term molecular sieve refers to a particular property of these materials, the ability to selectively sort molecules based primarily on a size exclusion process. This is due to a very regular pore structure of molecular dimensions. The maximum size of the molecular or ionic species that can enter the pores of a zeolite is controlled by the diameters of the tunnels. These are conventionally defined by the ring size of the aperture, where, for example, the term "8ring" refers to a closed loop that is built from 8 tetrahedrally coordinated silicon (or aluminum) atoms and 8 oxygen atoms. These rings are not always perfectly flat and symmetrical due to a variety of effects, including strain induced by the bonding between units that are needed to produce the overall structure, or coordination of some of the oxygen atoms of the rings to cations within the structure. Therefore, the pore openings for all

-8-

rings of one size are not identical. The adsorption properties applicable to the present application are primarily electrostatic in nature and are primarily surface charges. The crystal structure is of interest only in the context of the structures ability to trap micelles or micellular structure in such a way as to make nearly permanent the surfactant such as a hexadecyltrimethylammonium (HDTMA) surfactant in surfactant modified zeolitic material, where the surfactant flips the surface charge to a specific charge density per unit area producing nitrate selective binding sites.

[0043] Suitable microorganism nutrient mixtures for use in the present invention include, without limitation, methanol, ethanol, or any other carbon source for use with the above listed microorganisms or any other microorganisms that degrade nitrates and/or nitrites and/or other nitrogen containing compound amendable to biodegradation;

SYSTEM AND APPARATUS CONFIGURATIONS

[0044] The system and apparatus configurations are divided into three primary physical/chemical operations: trace contaminant precipitation and solids handling, ammonia removal and recovery, and nitrate/nitrite removal.

Trace Contaminant Precipitation and Solids Handling (TCP) SYSTEM

[0045] In certain embodiments, the TCP subsystem includes a two stage precipitation process, TCP1 and TCP2, intended to reduce trace metals, phosphates, scale-producing compounds and/or other components that can be precipitated by caustic concentrations in waste water or other suitable reagent or combinations of suitable reagents or combination of other suitable reagents and caustic. Waste solids from all process subsystems are also returned to the TCP subsystem for removal and primary dewatering. The conditioning and precipitation process can include four unit operations. First, the raw waste water is degassed/oxidized using a static venturi aerator to equilibrate the raw waste water to atmospheric conditions prior to introducing the waste water into the first stage TCP1. In certain embodiment, the raw waste water is heated either before or after degassing to a temperature of about 72°C or 160°F. Second, caustic or another equivalent base is added to TCP1 to convert trace metals and scale-producing compounds into insoluble hydroxides or oxide to facilitate removal of these components from the waste water via precipitation. Caustic or another equivalent base is added to TCP2 to further raise the pH to further raise the pH for ammonium recovery. Third, precipitation/desaturation is mechanically enhanced in each stage, TCP1 and TCP2, by flow control. A type of upflow fluidized bed is created to desaturate the pH adjusted or neutralized stream. Fourth, primary dewatering via a contact clarification process removes the bulk of the solids precipitated as well as those returned from other processes. pH adjustment, precipitation/desaturation and primary dewatering unit operations are accomplished in two steps to prevent metals such as zinc precipitated

in TCP1 from re-dissolving at higher pH needed in TCP2.

[0046] In TCP1 sufficient caustic or other equivalent base is added to adjust the pH of the waste water to about pH 8.0, in a first step neutralization. Raising the pH to about pH 8 causes trace metals, limestone and silica to precipitate. In TCP2, sufficient caustic or other equivalent base is added to further increase a pH of the waste water to about pH 10. Raising the pH to about pH 10 causes phosphates, magnesium hydroxide, limestone and the remaining silica to precipitate and causes ammonium to be converted to gaseous ammonia for stripping. Accumulated solids are stored within the TCP basins for seasonal removal and disposal. Each stage is of a length sufficient to permit time for precipitate to sink into a precipitate reservoir formed in the TCP between its inlet and its exit. Clean water is allowed to flow out of the exit, which is above the precipitate height. In certain embodiments, especially, when treating waste waters including urea as one of the nitrogen-containing contaminants, the raw water is pre-heated to a temperature of at least 50°C and providing additional water hold up time until the urea thermally hydrolyzes to ammonia and carbon dioxide. In other embodiments, the temperature is at least 60°C. In other embodiments, the temperature is at least 70°C. In other embodiments, the temperature is at least 80°C. At the completion of the urea hydrolysis the nitrogen-containing water with or without concurrent metal precipitation is processed through the ammonia stripping (AS) system. In other embodiments of this invention, hydrolyzing water containing urea by pre-heating the water to a temperature of at least 50°C and thermally hydrolyzing the urea to ammonia and carbon dioxide, with or without concurrent metal precipitation, and processing the hydrolyzed water through the ammonia stripping (AS) system. In other embodiments, the temperature is at least 60°C. In other embodiments, the temperature is at least 70°C. In other embodiments, the temperature is at least 80°C.

Ammonia Removal and Recovery

[0047] Overall nitrogen removal from waste water streams including relatively high nitrogen contents is accomplished in this application through the combination of mechanical stripping and absorbing of ammonia. Mechanical driven processes such as ammonia stripping and absorption are relatively insensitive to ammonia concentration so the processes work as a first pass system to remove ammonia freed during the final raising of the pH of the water to a pH of about 10.

[0048] The ammonia stripping (AR) subsystem comprises a closed loop ammonia recovery process including five unit operations designed to recover ammonia, control ammonia emission, and control heat recovery and conservation. The first unit operation comprises a heat transfer component to heat the effluent from the TCP to a temperature optimal for economical and efficient stripping of ammonia. In certain embodiments, the temperature is about 70°C. Recuperative and booster

-10-

exchangers are used in a heat exchanger subsystem. The second unit operation comprises neutralization to liberate gaseous ammonia, which occurs in the TCP just prior to entry into the ammonia recovery subsystem. The third unit operation comprises stripping employing mass transfer to move ammonia to the gas phase. The fourth unit operation comprises chemical absorption or reaction of the ammonia rich gas from the stripping operation to form an ammonium rich liquid product. In certain embodiments, the ammonium rich liquid product can be a liquid ammonium sulfate product or ammonium nitrate product depending on whether sulfuric acid or nitric acid is used to absorb the gaseous ammonia. The fifth unit operation comprises post neutralization and is employed to return the pH of the ammonia stripped water to a value suitable for the denitrification subsystem. The ammonia recovery (AR) subsystem includes a plurality of coupled stripper and absorber units. The stripper units remove ammonia gas to form a gas streams including the stripped ammonia gas. The stripped ammonia rich gas streams are transferred to the coupled absorber units, which absorb the ammonia in an acid solution to form an ammonium salt solution. The acid can be any mineral acid. In certain embodiments, the mineral acid is either sulfuric acid and/or nitric acid. In the AR subsystem, the stripper units are disposed on one side of the subsystem and their associated absorber units are disposed on the other side. The stripper units feed the absorber units and each stripper absorber pair form an essentially closed loop gas processing assembly. The AR subsystem also includes a safe path through which water is extracted for ammonia stripping and into which ammonia stripped water is returned. The AR subsystem also includes an integrated series ammonia stripping/scrubbing or absorbing stages and an ammonium sulfate product control process using a specific recirculation scheme. In certain embodiments, the absorber units are interconnected so that ammonium salt liquor flows forward from the last absorber to the first absorber, which includes a weir connected to the ammonium salt reservoirs. The embodiments also include a single point acid introduction at a vortex mixer of the second absorber. The embodiments also include an uncontrolled liquid conduit connecting the second absorber to the last absorber and a controlled liquid conduit from the first absorber to the last absorber. The embodiments also include a clean water introduction conduit connecting a clean water source of the first absorber. The single point acid introduction, the uncontrolled interconnecting conduits and the pH monitoring are used to control the efficiency of the AR subsystem with minimal control devices. The absorber 1 clean water introduction, the controlled interconnecting conduits and pH monitoring are used to produce a commercial byproduct ammonium salt. The AR subsystem, therefore, requires only monitoring of a pH in the second absorber which is adjusted to a pH of about 2, a pH of the first absorber to a pH of the ammonium salt liquor, such as pH of about 5.5 for ammonium sulfate and a density of the liquor so that the liquor does not get

to concentrated.

Denitrification Subsystem

[0049] The denitrification subsystem for nitrate/nitrite removal and ammonia polishing comprises as plurality of series configured biological regenerated adsorptive cells. The cells use two different treatment techniques. Initially, the cells employ a single unit operation, physical absorption of nitrogen-containing compounds. The second operation employs a biological denitrification process that requires a period of time to reach steady state. The denitrification subsystem also includes a safe path from which untreated water is removed and treated water is returned.

[0050] The physical adsorption process is used to absorb nitrogen contaminants for subsequent biological denitrification. The absorbent is especially useful during start up, nitrogen surges, or other disruptions. For example, when the system is initially activated, the nitrogen mass of a waste water or the remaining nitrogen mass in the partially treated waste water is absorbed to permit the biological denitrification process to start and achieve steady state. The volume of media needed until the biological denitrification process takes over, is determined by time, hydraulic capacity of the system and the average nitrate/nitrite and other nitrogen contaminant concentrations. Subsequently, once a satisfactory biomass is established, the denitrification process removes nitrogen-containing compounds present in the water as well as nitrogen-containing compounds absorbed on or in the media. Nitrates/nitrites and nitrogen-containing compounds are converted into nitrogen gas which is removed from the system as an inert gas.

[0051] The cells are arranged in a series configuration to achieve the nitrogen treatment goals. Each cell is essentially an upflow absorber for nitrates, nitrites, ammonia and some additional anions.

[0052] The cell media are regenerated by the bacteria in the cells. Bio-regeneration produces a symbiotic effect. The biological activity reduces the waste produced by regeneration of the media and the media reduces the toxic effects of the contaminants on the bacteria, while acting as a surge device to permit treatment during startup and smooth out rapid changes in nitrogen contaminant concentrations in the waste water caused by accidental spills or other accidental contaminations.

[0053] Bench and full scale testing of the cells was used to verify that bio-regeneration cells were cost effective for the specific type of water that would be treated and to evaluate the efficiency of media regeneration. Testing was also performed to determine the effects of the super-salinity on the media and to determine some estimate of the attrition rate of the media.

[0054] Embodiments of the BioRA apparatuses, methods and enabling technologies of this invention comprises adsorption/desorption, continuous plug flow device and method for denitrification of high nitrogen content waste waters. Each BioRA cell supports a dual isolated recirculation loop system

-12-

comprising a media recirculated loop and a water treatment loop providing for be expansion. The media loop provides sufficient particle shearing to dislodge dead or weakly bond microorganism films growing on the exterior surface of the media, but insufficient to cause degradation of the friable media – that is the shear causes only minimal degradation (reduction of particle size) of the media. The term minimal in this context means less than about 1 wt.% of the media undergoes a size reduction per day (24 hours) or less than about 0.1 wt.% per cycle. In other embodiments, the term minimal in this context means less than about 0.5 wt.% of the media undergoes a size reduction per day or less than about 0.05 wt.% per cycle. In other embodiments, the term minimal in this context means less than about 0.1 wt.% of the media undergoes a size reduction per day or less than about 0.25 wt.% per cycle. In other embodiments, the term minimal in this context means less than about 0.09 wt.% of the media undergoes a size reduction per day or less than about 0.015 wt.% per cycle. Thus, the loops achieve media washing, while causing minimal particle size reduction. The media recycle loop comprises inducers where downward flowing media enters one of a plurality of inducers which is swept along the inducers by the recirculating backwash. The flow the recirculating backwash is sufficient to shear the media dislodging dead or weakly bond biofilm from the media and lifts the media to the ultra low pressure drop hydrocyclone.

[0055] Raw water is introduced into the cells via a distributing header that produces a substantially even or even distribution (*i.e.*, a uniform or substantially uniform distribution) of incoming water that carries microorganisms, microorganism nutrients and other materials to achieve a desired environmental profile throughout the cell. The term substantially here means that the profile of incoming nutrient rich water is even or uniform across the cells cross-section at the header, with no more the a 10% different in nutrient concentration across the cross-section at the header. In certain embodiments, the nutrient concentration difference by no more than 5%. In other embodiments, the nutrient concentration difference by no more than 1%. Such even or uniform distribution improves microorganism utilization and reduces hot spots and channeling. The even or uniform distribution is achieved through a designed pattern of holes in the header so that each hole attains a near equal flow of nutrient rich incoming water. The even or uniform distribution cause the zone above the header to operate in an expanded bed mode, where particles are separated, but do not move independently. Thus, the cells becomes a plug flow reactor with improved microbe activity throughout the zone above the header.

[0056] A portion of the recirculating water used in the inducers is feed into the raw water before it enters the distributing header to complete the backwash recirculation loop. By controlling the microorganism composition and the nutrient balance in the cells, the cells achieve an integrated

-13-

production of anoxic conditions above the distributing header and a respiratory inhibited zone below the distributing header. The respiratory inhibited zone is the zone where electron donors, carbon and or other inhibiting nutrients are supplied to the biomass by desorption and endogenous decay. The zone becomes suboxic just prior to the slurry entering the collection and up lift assembly.

[0057] Each cell will generally include three zone: an aerobic zone, an anoxic zone and a respiratory inhibited zone. However, in certain cells, the aerobic zone may be minimal or absence depending on the initial conditions of the incoming water. The microorganisms that degrade nitrate and nitrite are relatively sensitive to dissolved oxygen (DO). At DO values above about 0.8 mg/L, these microorganism use molecular oxygen as the electron acceptor instead of oxides of nitrogen until the DO value falls below about 0.4 mg/L. Such an aerobic zone will exist whenever the DO value is high enough to inhibit the nitrate/nitrite destroying microorganisms proliferation and aerobic microorganism are added to the water to reduce the DO value so that an active anoxic zone can be established in the cells. Thus, the aerobic zone can range between about 0% of the height of the cell to about 30% of the height of the cells. The respiratory inhibited zone can range from about 7% to about 30% of the height to the cell. The remainder of the cells will be the anoxic zone. The height is measured from the exit of the ultra low pressure drop three phase separating hydro cyclone. The cell condition are thus adjusted so that a desired ratio is produced between the three zones: the aerobic zone, the anoxic zone and respiratory inhibited zone. The ratio can be about 30:40:30 to about 0:70:30 to about 0:93:7 to about 30:63:7 or any other value depending on the waste water to be treated and on the desired outcome.

[0058] The cells operate on an indirect biological desorption process. The media is primarily responsible for fast absorption or adsorption of the nitrates/nitrites in the waste water and to support the formation of microbial film on the surfaces thereof. The microorganisms degrade the nitrate/nitrite in the water. As the water levels of the nitrate/nitrite are reduced, absorbed or adsorbed nitrate/nitrite in or on the media desorb into the water so that the bulk of the nitrate/nitrite degradation occurs at the film-water interface.

[0059] The distributing header is designed to achieve bulk flow distribution control so that nutrients and nitrate/nitrite rich water is evenly or uniformly distributed across a cross-section of the cells as described above.

[0060] The cells also include a gas back pressure control utilizing the media recirculation loop. As nitrogen gas and carbon dioxide gas are produced due to microbial degradation of nitrates/nitrites in the water, a substantial amount of the gas collects as bubbles on the media, which is flowing down through the cells to be collected and recirculated through the inducers in the respiratory inhibited zone

of the cells. Thus, the gas pressures in the BioRA cells can be effectively controlled by the speed of the recirculating media upon which a substantial fraction of the produced nitrogen and carbon dioxide gas accumulate as bubbles. Oxygen gas content can optionally be controlled by an aerator connected to the media recirculation loop. Thus, each BioRA cell can be operated with different gas back pressure control using microbial produced nitrogen and carbon dioxide in the absence or presence of added oxygen gas in the form of pure oxygen, air or any other oxygen containing gas.

[0061] The media recirculation system is not only used to recirculate the media, the recirculation also server as a selective biomass reject and media cleaning system. As stated above, the media is collected into a plurality of inducers, where a recirculating backwash water flow subjects the media particles to shear sufficient to dislodge dead microorganisms and/or weakly bound microbial films as the media is being recirculated. Thus as the recirculating media stream enters the ultra low pressure drop hydrocyclone, the media is cleaned from shearing and clean water entering the exit of the hydrocyclone acts to achieve a separation between the cleaned media and the dislodged dead microbes and weakly bound microbial films. The recirculation loops also act as a biomass growth limitation process, where biomass growth can be regulated to reduce biomass plugging and other adverse tendencies of bio-remediation processes. The loops and removal systems also permit continuous decay and respiration product removal from the biomass.

[0062] As stated above, the ultra low pressure drop three phase separating hydrocyclone provides upper flow of cleaned water to wash the sheared media as the sheared media particle flow downward through and out of the hydrocyclone. The inducer system of media pickup and recirculation is specifically designed to control shear (energy) for handling friable solids so that dead and weakly bound microbial films can be removed from the media with minimal particle size reduction of the friable solid particulate media.

[0063] The denitrification system includes a safe path as described below as a dilution control system. Each BioRA cell pulls water from the safe path and discharges clean water to the safe path. Thus, for series arranged BioRA cells, the first cell draws water from the safe path that is a mixture of all the untreated water entering the safe path and a portion of the treated water from the first cell, while the second BioRA cell draw water from the safe path that is a mixture of all the treated water from the first cell not mixed in its feed and a portion of the discharge of the second cell and subsequent cells operate in the same method. As a result, the safe path water has a continuously decreasing nitrogen content as the water flow downstream through the denitrification system. While many of the embodiments of this invention utilize series configured BioRA cells, the denitrification system can use parallel BioRA cells or a combination of series and parallel BioRA cells depending on

outcome and design requirements.

[0064] In series operations, a denitrification system of BioRA cells configured in series can be operated so that water passes downstream and rejected water can be passed upstream or downstream. Moreover, the cells or units can be configured in a manner to take advantage of endogenous decay, thereby reducing the methanol consumption as well as the amount and characteristic of the waste production.

[0065] In series operations, the denitrification system includes a two stage methanol control. Intentional methanol slip with DO measurement of aerobic zone is used for automatic feedback control of methanol introduction, while methanol control trim using DO measurement of enzymatic nitrite reduction is used as cascaded trim of automatic feedback control of methanol introduction. While methanol is used as the carbon nutrient source, any other nutrient source can be used depending on the microorganisms being used and the environment to be achieved, *e.g.*, the ratio of aerobic, anoxic and respiratory inhibited zones.

[0066] Because the biomass synthesis or proliferation consumes ammonia, ammonia reduction in the denitrification system is reduced by biomass reject and a caustic lysing scheme. For system where the denitrification system is part of a treatment system that include a precipitation system and an ammonia stripping/absorbing system, this rejection and lysing is achieved in the precipitation system where caustic is used to precipitate certain minerals in the water prior to subsequent process.

[0067] There are two distinctly different BioRA cell apparatus designs, possibly three that can produce a desired BioRA effect. A number of different media are envisioned for handled other constituents. The present design can be use with only minor variations to remove sulfates and there are several versions for BTEX biomass.

New Embodiment – Multipoint Pickup with Inducers

[0068] Another embodiment the present invention provides a denitrification system including at least one denitrification column, where the column or unit includes an inlet, an outlet, an optional aerobic zone, an anoxic zone, a clean water zone, a respiratory inhibition or inhibited zone, and a gas overhead zone. The unit also includes an ultra low pressure drop hydro cyclone, a water recirculation and media recirculation subsystem. The unit also includes a nitrogen-rich, nutrient rich, and microbial rich raw water supply distributor adapted to produce an even or substantially even distribution (*i.e.*, a uniform or substantially uniform distribution) of nitrogen-rich, nutrient rich, and microbial rich raw water across a cross-section of the column to improve nutrient utilization and reduce hot spots and channeling. The column is a counterflow column with water flowing up as it is being denitrified and absorptive media flowing down. The absorptive media is collected in the water recirculation and

-16-

media recirculation subsystem, where collected media is mixed with recirculating water and lifted into the hydrocyclone. The water entering the water recirculation and media recirculation subsystem is sufficient to dislodge dead microbes and weakly bound microbial films from the media, but insufficient to reduce media particles size. Thus, the shear is carefully controlled to achieve media cleaning, while minimizing particle size reduction of the media. The inlet is adapted to receive an aqueous stream to be treated containing an unacceptable concentration of total nitrogen. The water and media recirculation subsystem includes a solid nitrogen absorbent and a bioactive slurry, where the assembly is adapted to circulate the slurry from a bottom of the respiratory inhibited zone to a top of the anoxic zone. The absorbent absorbs the nitrates and nitrites in the aqueous upflowing stream, while microorganisms in the bioactive solution convert the nitrates and/or nitrites into nitrogen gas in all of the zones of the column, except of gas overhead zone, while ammonia and other nitrogen-containing compounds are consumed by the microbes. The water in the slurry as it is being treated progresses from the stream inlet to the stream outlet.

[0069] Another embodiment of the water and media recirculation subsystem of this invention includes a plurality of media lift headers and at least one inducer feed header. Each media lift header includes a straight stem having a plurality of branches and an output manifold. The media lift headers also include a flush line having an input manifold. Each flush line includes a first bend and a straight segment, where the first bend positions the straight segment to run above the stem of the media lift header. The flush line includes a second bend, where the flush line enters the stem just upstream of the output manifold. The second bend is a complex bend have an upward segment and a downward segment angled into the stem. The angled segment makes an angle γ with the stem of between about 15° to about 45° . In other embodiments, the angle γ is between about 20° and 40° . In other embodiments, the angle γ is between about 25° and 35° . In other embodiments, the angle γ is about 30° .

[0070] Each branch includes an inducer and an aperture. The branches make an angle δ with the stem between about 30° and about 60° . In certain embodiments, the angle δ is between about 40° and 50° . In other embodiments, the angle δ is about 45° . The inducer feed header includes a plurality of distribution nozzles.

[0071] The subsystem also includes a plurality of conduits connecting the nozzles to the inducers.

[0072] As the media rich slurry flows down the column, the media rich slurry is funneled into the apertures in the media lift headers. The number of apertures is designed to be sufficient to provide a more uniform collection of the slurry, while minimizing inhomogeneities in collection of the slurry into the media lift headers. The conduits supply recirculation water to the inducers associated with

-17-

the apertures at a non-aspirating flow rate. In certain embodiments, the flow rate is the same or substantially the same as a flow rate of the slurry entering the branches of the media lift header through the pickup apertures. The terms substantially the same as used here means that the flow rate of the recirculation water and the flow rate of the slurry into the branches through the apertures is within about 10% of each other. In other embodiments, the flow rates are with about 5% of each other. In other embodiments, the flow rates are with about 2.5% of each other. In other embodiments, the flow rates are with about 1% of each other. The diluted medium slurry then proceeds down the media lift header.

[0073] The media lift headers taper down from their output manifolds to their last branches. The tapering is designed to maintain the slurry flow through the header at a rate that reduces media particle size reduction and reduces slurry separation.

[0074] The header output manifolds are connected to lift lines situated exterior to the column. The lift lines are combined into a main line prior to the main line entering the column to feed the hydrocyclone. The lift lines and main line are configured in such a way as to reduce or eliminate flow into an unused or plugged lift line as is well known in the art. The lift lines and main line is constructed with branch connections to form a distributed slurry systems.

[0075] The input and output manifolds of the lift header and feed headers are all situating so that they all have the same or substantially relative hydraulic loss distribution. The term substantially means that the relative hydraulic loss distribution of the headers are within about 20% of each other. In other embodiments, the relative hydraulic loss distribution of the headers are within about 10% of each other. In other embodiments, the relative hydraulic loss distribution of the headers are within about 5% of each other

[0076] The recirculation water is supplied by the recirculation water pump assembly to the input manifolds of the feed headers at a rate to maintain a non-aspirating flow into the inducers. The recirculation water pump assembly is also connected to the input manifolds of the flush lines of the media lift header. The flush lines are used to unplug the manifold and lifts lines if they plug. Flushing of the manifold and lift lines may be performed on a regular schedule for maintenance purposes or only when needed.

Aspects of Methods Associated with Operation of the Denitrification System

[0077] Embodiments of this invention relate to an adsorption method including supplying a waste water stream having a high level of a contaminant such as oxides of nitrogen to a bio-denitrification column through a distributor. The distributor is located in a lower middle region of the column. The method also includes supplying a medium slurry into an upper middle region of the column through

a venturi feed apparatus. The two supplies produce a counter-flow zone in the column, which extends from a position immediately below the distributor to an output of the venturi apparatus. The counter-flow comprises medium flowing down from the venturi feed apparatus and water flowing up from the distributor. The water distributor supplies water distributed across the entire cross-section of the column at a rate that produces an expanded bed under plug flow conditions throughout the column. The expanded bed is defined as an upward liquid flow through medium bed at such a velocity as to cause the individual particles to partially separate, increasing the placed volume of the bed, but not at a velocity to change their relative position to each other. In certain embodiments, the velocity is sufficient to partially separate at least 70% of the particles in the medium. In other embodiments, the velocity is sufficient to partially separate at least 80% of the particles in the medium. In other embodiments, the velocity is sufficient to partially separate at least 90% of the particles in the medium. The expanded bed reduces or eliminates channeled flow in the column. Below the counter-flow zone is a co-flow zone, where the medium and residual water flows into a respiratory inhibited zone (RIZ) and ultimately into a medium slurry collection and uplift subsystem.

[0078] Embodiments of this invention relate to an adsorption method including establishing a stationary, mass transfer zone within the counter-flow zone of the column, where the medium is continuously replaced maintaining a static adsorptive capacity in the counter-flow zone of the column. In this zone, active microbial growth is occurring at a rate of at least doubling a microbe population in the counter-flow zone. The stationary zone is limited by x/m ratio at maximum concentration verses breakthrough at minimum x/m . The stationary zone reduces the total volume of medium required to operate the bio-denitrification unit – regenerated medium is always being introduced, while fully populated medium is withdrawn and regenerated.

[0079] Embodiments of this invention relate to an adsorption method including biologically assisted regenerating the medium, which is an integral feature of the method of this invention as this assisted regeneration is integral to maintaining the stationary, mass transfer zone. The microbes in the medium slurry forms a film on the medium. The medium is an active nitrate/nitrite adsorbent/absorbent. Thus, a portion of the nitrate/nitrites in the waste water is adsorbed and/or absorbed in and on the surface and pores of the medium. The microbes actively convert nitrates/nitrites in water surrounding them, the water between the particles of the medium. This generally causes the microbes near the surface of the medium to be starved of nitrates and/or nitrites. However, because the medium is an active nitrate/nitrite adsorber and/or absorber, as the nitrates and/or nitrites are depleted in the interstitial water, the nitrates and/or nitrites adsorbed and/or absorbed in and on the surface and pores of the medium is desorbed becoming a source of nitrates

and/or nitrites for the microbes near the surface and via diffusion for the microbes on the outer part of the film. In this way, the adsorptive/absorptive capacity of the medium is regenerated so that upon collection, uplift and reintroduction through the venturi feed apparatus, the medium is now capable adsorbing/absorbing nitrates and/or nitrites in the upflowing water as the medium proceeds down through the expanded bed portion of the columns.

[0080] Embodiments of this invention relate to an adsorption method including continuously cleaning the medium of foreign material in the co-flow zone of the column and the up-lift subsystem of the column. The column is divided by activity into four primary zone. The upper most zone comprises cleaned up-flowing water. The upper middle zone comprises an expanded bed medium zone in which anoxic denitrification occurs. The middle zone is marked by rapid microbial growth at a rate that results in a 1.5 to 5 times growth rate or increases viable or volatile microbes from about 1000 mg/L at the exit of the slurry feed to about 3000 mg/L at the distributor. The next zone is adjacent the water distributor and is an aerobic zone, where aerobic microorganisms reduce the dissolved oxygen (DO) levels to promote anoxic microorganism growth in the anoxic zone of the column. The in-coming waste water has a defined and controllable DO level and the amount of aerobic microorganisms are controlled by the DO level and are sufficient to reduce the DO level into an anoxic DO level. The lower zone is the respiratory inhibited zone (RIZ), where the medium is no longer in an expanded format and microbial growth is inhibited. The zone becomes suboxic just prior to the medium collectors and results in a reduction of a viable or volatile microbial population, which is rapidly re-established as the slurry is up-lifted and reintroduced into the column through the slurry feed unit.

[0081] Embodiments of this invention relate to an adsorption method including establishing a safe path to which the bio-denitrification unit acts as an attached reactor in an adsorption scheme. Mathematically, the safe path and the bio-denitrification units may be modeled as a continuous stirred tank reactor (CSTR), where the units or attached reactors are operating under plug flow conditions. Thus, the safe path is a fixed volume path into which a waste water stream is added and a cleaned water stream exits. Along the length of the safe path, waste water in different degrees of cleaning is being continuously withdrawn into the attached reactors and cleaner waste water is being sent back to the safe path, where that water is mixed with the water in the safe path to form the water for the next bio-denitrification unit (which are arranged in series). The water exiting the last bio-denitrification unit has a desired low nitrate/nitrite level and is now safe to be discharged into the environment. In certain embodiments, the water exiting each bio-denitrification unit is aerated as it flows through a spiral configured outlet pipe into a holding area, where the aerated water is allowed to attain a given dissolved oxygen value before it overflows into the safe path for use as a part of the

-20-

water going into the next bio-denitrification unit or ultimately exits the bio-denitrification system.

[0082] Embodiments of this invention relate to a bio-filtration method including establishing a fixed microbial film surrounding the particles of the medium producing a two sided electron acceptor supply – part of the supply from the interstitial water between the particles and part of the supply from the adsorbed and/or absorbed electron acceptors on and/or within the medium, with the fixed or attached side supply maintained for the longest time and is the most consistent throughout the biomass life, when RIZ is considered.

[0083] Embodiments of this invention relate to a bio-filtration method including establishing rapid biomass generation due to the expanded bed, which provides underlying continuous logistics, *i.e.*, supply of carbon, electron acceptor, and micro-nutrients to all of the biomass and removal of products from all of the biomass and due to a fixed film biomass that moves, within column, toward greater levels of carbon and electron acceptors – toward the waste water distributors. In the present configuration, traditional inhibition limiting carbon and/or electron acceptor only takes place as the downwardly flowing medium exits the anoxic zone.

[0084] Embodiments of this invention relate to a bio-filtration method including establishing a continuous growth of biomass in the counter-flow, which provides a microbial environment allowing removal of ammonia through bio-synthesis.

[0085] Embodiments of this invention relate to a bio-filtration method including sustaining a sufficient amount of aerobic microbes in the microbes culture in the column to control a dissolved oxygen (DO) environment by controlled introduction of a DO level into the safe path connected to the denitrification units and via the counter flow of fixed film biomass and water to be treated from the anoxic zone to the aerobic zone.

[0086] Embodiments of this invention relate to a bio-filtration method including establishing of a safe path attached to the reactors (denitrification units) in biological treatment scheme. Mathematically, the reactors may be described as a Continuous Stirred Tank Reactors (CSTRs) operated under plug flow conditions. The safe path coupled with the reactors disposed in a series configuration, produces the mathematically smallest volume of biomass required to remove substrate while allowing unlimited range of flow treatment.

[0087] Embodiments of this invention relate to a biologically assisted adsorbent regeneration method including continuous integral regeneration of adsorbent by desorption of adsorbed and/or absorbed nitrates and/or nitrites driven by the biocleansing of interstitial water and pore water in the co-current flow zone of the column.

[0088] Embodiments of this invention relate to a biologically assisted adsorbent regeneration method

including establishing a regeneration area or a respiratory inhibited zone (RIZ), where the medium and interstitial water enters with a largest biomass, a highest concentration of carbon, electron acceptor and nutrients producing the highest specific denitrification rate in column. In certain embodiments of the column, the RIZ may be adjusted to intentionally reduce volatile biomass to support ammonia removal by synthesis.

[0089] Embodiments of this invention relate to a biologically assisted adsorbent regeneration method including establishing a suboxic zone in the column to determine nitrate to reductase interaction by DO measurement.

[0090] Embodiments of this invention relate to an electron donor and carbon supply control method including measuring dissolved oxygen in the aerobic zone to control substrate addition by feedback control. In other embodiments, the electron donor and carbon supply control method including measuring dissolved oxygen in the suboxic zone of the RIZ to trim the control of substrate addition by cascaded feedback control. In certain embodiments, the carbon supply, generally methanol, but other carbon sources or combinations are equally useable, is controlled to maintain a DO level between about 0.19 and 0.12. If the DO level goes above 0.19, then more carbon source is added. If the DO level drops below about 0.12, less carbon source is added.

[0091] In certain embodiments of the methods of this invention, microbe seeding is only performed at startup, planned shut downs or operational disruptions. However, in all cases, microbe seeding may occur during the course of routine operation, if the microbe population drops below a viable or volatile population insufficient to repopulate a sufficient population in the counter-flow and co-flow zone of the denitrification units.

Additional Effluent Polishing & Conditioning

[0092] Absolute full scale plant performance and effluent water characteristics through toxicity testing cannot be determined from a bench scale treatability study. An additional post-treatment conditioning step may be required to adjust the chemistry of the treated effluent to achieve desired or required water release specifications. Thus, polishing units are optional to polish and condition the final effluent to meet a given discharge water profile, to meet levels of various contaminants required by applicable regulations.

Ancillary Components

[0093] In addition to the primary components that comprise the treatment system of this invention, there are a plurality of ancillary components that may or may not be required depending on operational parameters.

Air Emissions Control

-22-

[0094] The majority of the entire treatment process will be operated under anoxic to anaerobic conditions and, consequently, various reduced vapor-phase ion species such as hydrogen sulfide can be liberated during treatment. The system will include a return gas scrubber with barometric leg to capture sulfur based emissions from the biological processes. A closed loop scrubber system is utilized to recover ammonia removed from the pond water minimizing the potential for ammonia emission issues.

Solids Production and Disposal

[0095] At this time, it is anticipated that the majority of solids (sludge) that will be produced through the treatment process can be properly managed within the tanks where the TCP occurs and as stated above will result in the primary dewatering of solids. If the TCP produces significant quantities of solids, the TCP can include a solids withdrawal system and/or additional conditioning means such as a secondary dewatering step to concentrate the solid for removal.

Chemical Support Systems

[0096] A series of chemical systems are needed to support the operation of the treatment system. Caustic such as lime or sodium hydroxide is used to increase a pH of the waste water in the TCP treatment step at the front of the system. A mineral acid such as sulfuric acid is used to absorb ammonia gas converting into to a ammonium salt liquor and to reduce a pH of the ammonia stripped waste water to a pH level optimal for denitrification prior to routing the waste water into and through the BioRA cells or units. A nutrient such as methanol is used as a substrate source as well as nutrients for the biological denitrification process. All chemical supplies will include a dedicated area for proper storage and protection. The chemicals storage tanks or vessels will include secondary containment provisions. The system will also include dilution facilities, metering pumps, piping, valves, and transfer lines.

Instrumentation & Controls

[0097] Instrumentation and controls for the treatment system will be integrated and configured to minimize the amount of time that an operator will need to monitor and remain with the system to ensure that it is operating properly.

System Flow, Reliability and Control Discussion

[0098] The three subsystems are connected by a gravity flow scheme using as so called and well known safe path format. A safe path format was developed to extend integrity management into process design.

[0099] Simply stated, in safe path configured system, process performance and bulk flow through the treatment system are separate independent controls. Material flow is controlled by passive friction

-23-

devices (*e.g.*, openings in baffles, *etc.*). Several systems have been produced to-date using concrete basins with factory supplied critical components bolted in. A safe path configured system is usually cheaper to build, simpler to operate and easier to maintain than traditional, tank batteries, piping racks, valves and pumps. In the system of this invention, an intake structure is placed next to a pond side treatment system. Raw water is delivered to the TCP operation through a venturi aerator from a lift pump located in the intake structure in the pond. Simple reagent addition equipment also discharges into the venturi in the first stage TCP. pH is monitored in the reaction sump of the first stage TCP. The partially neutralized water underflows from the reaction sump to a type of upwell fluidized bed called a Floc Tunnel. The reaction chamber and floc tunnel are part of the stage one contact clarifier, separated by concrete baffles. The partially treated water overflows a submerged baffle into the contact clarifier.

[0100] TCP1 and TCP2 are separated by a concrete wall. Partially treated water from stage one (TCP1) overflows into a stage two reaction chamber, where the process is repeated. Other than the lift pump and metering equipment, there are no moving parts in the TCP.

[0101] Stage two TCP overflows to an empty chamber separated by a baffle into two sump zones. Water can be drawn from the first sump for heat exchange and then returned to the second sump or allowed to pass around the baffle, where the now un-ionized water underflows into the stripping system. Water flows through the multi-stage stripping system by gravity, underflowing from stage to stage in series. The operation of a recirculation pump connected to the stripper venturi determines whether the stage is operating or a spare. Water passes through the system regardless of stage operation. Stripped water overflows from the last stripping stage to the denitrification subsystem. Treated water underflows from the denitrification subsystem to an empty chamber, where it overflows to discharge. For these portions of the operation, there are no active level or flow controls used. All processes are side streams to the central flow of water.

[0102] Gas control devices will also use a safe path construction. Each ammonia stripping stage is connected to a complementary absorber via gas ducts. The aspirating characteristic of Maxi-Strip Venturi mixer moves the gas regardless of the operation of the complementary absorber or stripper. The H₂S scrubber has similar characteristics.

DETAILED DESCRIPTION OF THE DRAWINGS

Embodiments of Systems and Apparatuses for Treating High Nitrogen Waste Water

First Embodiment

[0103] Referring now to **Figure 1**, an embodiment of the system, generally **100**, includes a source **102** of waste water such as a retention pond. The source **102** includes a sump pump **104** having an

-24-

outlet **106** connected to a first end **108** of a source input conduit **110**. The conduit **108** is connected at its second end **112** to an inlet **114** of a precipitation and conditioning subsystem **116**, sometimes referred to herein as the TCP subsystem. The precipitation and conditioning subsystem **116** includes a source of a base **118**, which is connected to the inlet **114** by a base supply conduit **120**. The base is used to adjust the pH of the waste water effluent to a pH sufficient to precipitate precipitable contaminants. In some embodiments, the subsystem **116** is divided into two or more compartments as described more fully below. The subsystem **116** also includes an outlet **122** connected to a first end **124** of a base treated effluent conduit **126**. Sufficient base is added to the TCP subsystem **102** in one or more additions so that the final pH of the base treated effluent is at least pH 10.

[0104] The conduit **126** is connected at its second end **128** to an inlet **130** of an ammonia recovery subsystem **132**, sometimes referred to herein as the AR subsystem. The AR subsystem **132** includes a safe path **134**, a stripper section **136** and an absorber section **138**. The absorber section **138** includes a mineral acid reservoir **140** and a mineral acid conduit **142** for supplying the mineral acid to the absorber section **138** to convert stripped ammonia gas into an ammonium mineral acid salt liquor for disposal or use as a fertilizer. The AR subsystem **132** includes an outlet **144** connected to a first end **146** of an ammonia stripped effluent conduit **148**. Effluent water from the safe path **134** is withdrawn into the stripper section **136**, where an ammonia rich gas is extracted and forwarded to the absorber section **138**, where it is reacted with mineral acid such as sulfuric acid or nitric acid to form an ammonium mineral acid salt liquor. The details of the stripper section **136** and the absorber section **138** are shown herein.

[0105] The conduit **148** is connected at its second end **150** to an inlet **152** of a denitrification subsystem **154**, which uses an absorbent and microorganisms to convert nitrates, nitrites, residual ammonia/ammonium, or other nitrogen-containing compound to form nitrogen gas. The denitrification subsystem **154** includes a safe path **156**, an absorber/biological denitrification section **158** and a nutrient supply section **160**. The denitrification subsystem **154** includes an outlet **162** connected to a finished effluent conduit **164**. Effluent water from the safe path **152** is withdrawn into the absorber/biological denitrification section **158**, where the nitrogen-containing compounds are absorbed by the absorbent and converted to nitrogen gas. The nutrient supply section **160** supplies nutrients for the microorganisms. The details of the absorber/biological denitrification section **158** are shown herein.

Second Embodiment

[0106] Referring now to **Figure 2A**, an embodiment of the system, generally **200**, includes a source **202** of waste water such as a retention pond. The source **202** includes a sump pump **204** having an

-25-

outlet **206** connected to a source input conduit **208**, which in turn is connected to an inlet **210** of a precipitation and conditioning subsystem **212**, sometimes referred to herein as the TCP subsystem. The precipitation and conditioning subsystem **212** includes a source of a base **214**, which is connected to the inlet **210** by a base supply conduit **216**. The base is used to adjust a pH of the waste water effluent to a pH sufficient to precipitate precipitable contaminants. In some embodiments, the subsystem **212** is divided into two or more compartments as described more fully below. The subsystem **212** also includes an outlet **218** connected to a base treated effluent conduit **220**. Sufficient base is added to the TCP subsystem **216** in one or more additions so that a final pH of the base treated effluent is at least pH 10.

[0107] The conduit **220** is connected to an inlet **222** of an ammonia recovery subsystem **224**, sometimes referred to herein as the AR subsystem. The AR subsystem **224** includes a safe path **226**, a mineral acid supply path **228**, a stripper section **230** and an absorber section **232**. The stripper section **230** includes a plurality of stripper units **234** and an equal plurality of absorber units **236**. Each stripper unit **234** includes a waste water supply line **238**, a vortex water gas separator **240** and a stripped water reservoir **242**. Each stripper unit **234** is connected to an absorber unit **236** via a gas conduit **244a** and gas return conduit **244b** for equalizing air flow between the stripper unit and its associated absorber unit. Each absorber unit **236** includes a vortex gas water mixer **246**, a mineral acid supply line **248** and an ammonium mineral acid liquor reservoir **250**. The AR subsystem **224** also includes four ammonium mineral acid liquor storage tanks **252** connect to the liquor reservoirs **250** via conduits not shown. The strippers and absorbers are paired so that the ammonia-laden air is continuously feed back and forth between the stripper and absorber until the ammonia content has been reduced to desired low level. The series of coupled stripper/absorber pairs withdraw water from and discharge water to the safe path. Although acid can be introduced at all or any number of the absorber units, in certain embodiments, the acid is introduced into only a single absorber. Although the ammonium mineral acid liquor can be withdrawn from all of the absorber units, in certain embodiments, the absorber units include weirs that allow the ammonium mineral acid liquor to flow toward the first absorber in the series, which includes a weir that empties into the liquor storage reservoirs.

[0108] The AR subsystem **224** also includes an outlet **254** connected to an ammonia stripped effluent conduit **256**. Effluent water from the safe path **226** is withdrawn into the stripper units **234**, where an ammonia rich gas is separated via the vortex separator **240** and forwarded to its corresponding absorber unit **236** via the conduit **244**, where it is reacted with a mineral acid such as sulfuric acid or nitric acid in the vortex mixer **246** to form an ammonium mineral acid salt liquor such as an

-26-

ammonium sulfate or ammonium nitrate liquor. The mineral acid supply path **228** is supplied from a mineral acid tank **258** via a mineral acid supply conduit **260** into a mineral acid inlet **262**. Further details of the stripper section **230** and the absorber section **236** are shown herein.

[0109] The AR subsystem **224** also includes a heating, heat exchange and heat recovery subsystem **264** includes a heating and exchange/recovery unit **266**. A stream of based treated effluent is taken from the safe path **226** via a base effluent heat exchange conduit **268**. The stream paths through the unit **266**, where it is heated by heaters (shown in detail below) and brought into heat exchange relationship with a stream taken from the ammonia stripped effluent via an ammonia stripped heat exchange conduit **270**. The unit **266** heats the base treated effluent water to a temperature optimal for ammonia stripping. In certain embodiments, the temperature is between about 40°C and about 70°C. In other embodiments, the temperature is between about 45°C and about 70°C. In other embodiments, the temperature is about 70°C. The unit **266** is designed to use the "hot" ammonia stripped stream to heat the in coming "cool" base treated stream to reduce the energy supplied to the heaters to increase the temperature of the in coming stream to the desired higher temperature.

[0110] The conduit **256** is connected to an inlet **272** of a denitrification subsystem **274**, which uses an absorbent and microorganisms to absorb and convert nitrates, nitrites, residual ammonia/ammonium, or other nitrogen-containing compounds into nitrogen gas. The denitrification subsystem **274** includes a safe path **276**, an absorber/biological denitrification section **278** and a nutrient supply section **280**. The denitrification subsystem **274** also includes a waste water inlet conduit **282**, a nutrient supply conduit **284** and a treated water outlet **286**. The denitrification subsystem **274** also includes an outlet **288** connected to a finished effluent conduit **290**.

[00111] In the denitrification subsystem **274**, the effluent water from the safe path **276** is withdrawn into the absorber/biological denitrification section **278**, where the nitrogen-containing compounds are absorbed by the absorbent and converted to nitrogen gas by the microorganisms. The nutrient supply section **280** supplies nutrients for the microorganisms. Further details of the absorber/biological denitrification section **278** are shown herein.

Third Embodiment

[0112] Referring now to **Figure 2B**, another embodiment of the system, generally **200**, includes a source **202** of waste water such as a retention pond. The source **202** includes a sump pump **204** having an outlet **206** connected to a source input conduit **208**, which in turn is connected to an inlet **210a** of a first stage **213a** of a precipitation and conditioning subsystem **212**, sometimes referred to herein as the TCP subsystem. The precipitation and conditioning subsystem **212** includes two precipitation stages **213a** and **213b**. The subsystem **212** also includes a source of a base **214**, which is connected to the inlet **210a** by

-27-

a base supply conduit **216a**. The base supplied through conduit **216a** mixes with the waste water in conduit **208** at the inlet **210a** and is sufficient to adjust a pH of the waste water to a pH sufficient to precipitate precipitable contaminants such as trace metal contaminants or other precipitable contaminants. In certain embodiments, the pH in the first stage **213a** of the subsystem **212** is adjusted to a pH between about 4.8 and about 8.8. In certain embodiments, the pH is adjusted to a pH of about 8. At this pH, trace metals are precipitated, but the pH is not too high to cause the precipitate to re-dissolve. The base source **214** is also connected to an inlet **210b** associated with the second stage **213b** of the subsystem **212** via a base supply conduit **216b**. The base supplied through conduit **216b** is sufficient to adjust a pH of the first stage waste water effluent to a pH sufficient to precipitate other precipitable contaminants. In certain embodiments, the pH in the second stage **213b** is adjusted to pH a value between about 9.8 and 11.0. In certain embodiments, the pH is adjusted to a value of about 10. At this pH, substantially all precipitable contaminants are precipitated and the pH is optimal for converting ammonium in the base treated effluent into gaseous ammonia for extraction in the AR subsystem set forth herein. The subsystem **212** also includes an outlet **218** connected to a base treated effluent conduit **220**. [0113] The conduit **220** is connected to an inlet **222** of an ammonia recovery subsystem **224**, sometimes referred to herein as the AR subsystem. The AR subsystem **224** includes a safe path **226**, a mineral acid supply path **228**, a stripper section **230** and an absorber section **232**. The stripper section **230** includes a plurality of stripper units **234** (here three) and the absorber section **232** includes an equal plurality of absorber units **236** (here three). Each stripper unit **234** includes a waste water supply line **238**, a vortex water gas separator **240** and a stripped water reservoir **242**. Each stripper unit **234** is connected to an absorber unit **236** via a gas conduit **244a** and gas return conduit **244b** for equalizing air flow between the stripper unit and its associated absorber unit. Each absorber unit **236** includes a vortex gas water mixer **246**, a mineral acid supply line **248** and an ammonium mineral acid liquor reservoir **250**. The AR subsystem **224** also includes four ammonium mineral acid liquor storage tanks **252** connect to the liquor reservoirs **250** via conduits not shown. The AR subsystem **224** also includes an outlet **254** connected to an ammonia stripped effluent conduit **256**. Effluent water from the safe path **226** is withdrawn into the stripper units **234**, where an ammonia rich gas is separated via the vortex separator **240** and forwarded to its corresponding absorber unit **236** via the conduit **244**, where it is reacted with a mineral acid such as sulfuric acid or nitric acid in the vortex mixer **246** to form an ammonium mineral acid salt liquor such as an ammonium sulfate or ammonium nitrate liquor. The mineral acid supply path **228** is supplied from a mineral acid tank **258** via a mineral acid supply conduit **260** into a mineral acid inlet **262**. Further details of the stripper section **230** and the absorber section **232** are shown herein.

[0114] The AR subsystem **224** also includes a heating, heat exchange and heat recovery subsystem **264**

-28-

includes a heating and exchange/recovery unit **266**. A stream of based treated effluent is taken from the safe path **226** via a base effluent heat exchange conduit **268**. The stream paths through the unit **266**, where it is heated by heaters (shown in detail below) and brought into heat exchange relationship with a stream taken from the ammonia stripped effluent via an ammonia stripped heat exchange conduit **270**. The unit **266** heats the base treated effluent water to a temperature optimal for ammonia stripping. In certain embodiments, the temperature is between about 40°C and about 70°C. In other embodiments, the temperature is between about 45°C and about 75°C. In other embodiments, the temperature is about 70°C. The unit **266** is designed to use the "hot" ammonia stripped stream to heat the in coming "cool" base treated stream to reduce the energy supplied to the heaters to increase the temperature of the in coming stream to the desired higher temperature.

[0115] The conduit **256** is connected to an inlet **272** of a denitrification subsystem **274**, which uses an absorbent and microorganisms to absorb and convert nitrates and nitrites into nitrogen gas and consumes residual ammonia/ammonium, or other nitrogen-containing compound. The denitrification subsystem **274** includes a safe path **276**, an absorber/biological denitrification section **278** and a nutrient supply section **280**. The denitrification section **278** include a plurality of absorbent/microorganism denitrification units **282**, here three denitrification units. Each unit **282** includes a water inlet conduit **284**, a water outlet conduit **286** and a nutrient inlet conduit **288**. The water inlet conduit **284** withdraws water from the safe path **276** into the unit **282**, while the water outlet conduit **286** returns denitrified water to the safe path **276**. The nutrient inlet conduit **288** supplies microorganism nutrients from the nutrient supply section **280** to the units **282**. The denitrification subsystem **274** includes an outlet **290** connected to a finished effluent conduit **292**.

[0116] In the denitrification subsystem **274**, effluent water from the safe path **276** is withdrawn into the absorber/biological denitrification units **282**, where the nitrogen-containing compounds are absorbed by the absorbent and converted to nitrogen gas by the microorganisms. The nutrient supply section **280** supplies nutrients for the microorganisms. Further details of the absorber/biological denitrification section **278** are shown herein.

Fourth Embodiment

[0117] Referring now to **Figure 3A**, another embodiment of the system, generally **300**, include of a two stage precipitation and conditioning subsystem **302**, sometimes referred to herein as the **TCP** subsystem, having a first stage **304a**, sometimes referred to as **TCP1** and a second stage **304b**, sometimes referred to as **TCP2**. The subsystem **302** also includes a waste water input conduit **306** connected to an inlet **308** to the first stage **304a**. The subsystem **302** also includes a base reservoir **310** having a base supply conduit **312** and an access hatch **313**. The base supply conduit **312** supplies base through a base outlet

314a to the inlet **308**. Sufficient base is added to the inlet **308** to adjust a pH of the waste water to a pH sufficient to precipitate precipitable trace metal contaminants. In certain embodiments, the pH in the first stage **304a** is adjusted to a pH between about 7.5 to about 8.5. In other embodiments, the pH is adjusted to about 8. At this pH, trace metals are precipitated, but the pH is not too high to cause the precipitate to re-dissolve. The base conduit **312** also supplies base to the second stage **304b** at a second base outlet **314b**. The base supplied through the second outlet **314b** is sufficient to adjust a pH of the waste water leaving **TCP1 304a** to a pH sufficient to precipitate other precipitable contaminants. In certain embodiments, the pH in the second stage **304b** is adjusted to pH 10. At this pH, substantially all precipitable contaminants are precipitated and the pH is optimal for converting ammonium salts into gaseous ammonia for extraction and recovery in the AR subsystem set for herein. The subsystem **302** also includes an outlet **316** connected to a base treated effluent conduit **318**. **TCP1 304a** also includes a hatch **320a** for removing precipitate periodically therefrom. **TCP2 304b** also includes a hatch **320b** for removing precipitate periodically therefrom.

[0118] The conduit **318** is connected to an ammonia recovery subsystem **330** at an inlet **332**. The subsystem **330** is sometimes referred to herein as the AR subsystem. The AR subsystem **330** includes a stripper section **334** and an absorber section **336**. The stripper section **334** includes a plurality of stripper units **338** (here eight), and the absorber section **336** includes an equal plurality of absorber units **340** (here eight). The stripper units **338** and the absorber units **340** are described in greater detail herein. The AR subsystem **330** also includes four ammonium mineral acid liquor storage zones **342** for storage of the ammonium mineral acid liquor and corresponding hatches **343** to remove the liquor. The AR subsystem **330** includes an outlet **344** connected to an ammonia stripped effluent conduit **346**.

[0119] The conduit **346** is connected to a denitrification subsystem **360** at an inlet **362**, which uses an absorbent and microorganisms to absorb and convert nitrates, nitrites, residual ammonia/ammonium, or other nitrogen-containing compound into nitrogen gas. The denitrification subsystem **360** includes an absorber/biological denitrification section **364** and a nutrient supply section **366**. The absorber/biological denitrification section **364** includes a plurality of absorber/biological denitrification units **368**. The nutrient supply section **366** includes microorganism nutrients tanks **370** and associated hatches **371** for filling the tanks. The nutrient supply section **366** also includes mineral acid tanks **372** and associated hatches **373** for filling the tank. The mineral acid is used in the AR subsystem and in the denitrification subsystem. In the AR subsystem, the mineral acid is used to convert ammonia gas into the ammonium mineral acid salt liquor. In the denitrification subsystem, the mineral acid is used to adjust the pH to the optimal pH for supporting the microorganisms used to convert nitrogen-containing oxide, residue ammonia and other species into nitrogen gas. The denitrification section **364** includes media lift pump

-30-

assemblies **374** for supplying waste water to the units **368** and recirculation pump assemblies **375** for supplying nutrients to the units **368**. The denitrification section **364** also includes access hatches **376**. The denitrification subsystem **360** includes an outlet **378** connected to a finished effluent conduit **379**. [0120] The system **300** also includes a heating, heat exchange and heat recovery subsystem **390** having a base treated water inlet **392a**, a heated base treated water outlet **392b**, a hot ammonia stripped water inlet **394a** and a cooled ammonia stripped water outlet **394b**. The subsystem **390** also includes a base treated water supply and return unit **396** and an ammonia stripped water supply and return unit **398**. The subsystem **390** heats the base treated water before entering the stripper units **334** and the absorber units **340**. The water is heated to a temperature optimal for ammonia gas removal in the stripper units **334**. In certain embodiments, the temperature is about 50°C. Before the water is discharged in the denitrification subsystem **360**, the water is cooled by transferring a portion of its heat to heat the base treated water as it enters the AR subsystem. Thus, the combination of heating and heat recovery is used to heat the base treated water as it enters the AR subsystem. The subsystem **390** is described in more detail herein.

[0121] Referring now to **Figure 3B**, the embodiment of the system of **Figure 3A**, generally **300**, is shown absent in covering and equipment. The system **300** includes the subsystem precipitation and conditioning subsystem **302**, the AR subsystem **330**, and the denitrification subsystem **360**. The subsystem **302** is shown to include outer and inner walls **322a&b**. The subsystem **302** also include a base tank enclosure **323** housing the base tank **310**. The subsystem **302** also include a first flocculent tunnel **324a** associated with the first stage **304a** and located at the inlet **308**. The flocculent tunnel **324a** provides efficient mixing of the waste water and the base to facilitate precipitation of the trace metals and other contaminants that precipitate at a pH of about 8. The subsystem **302** also includes a first stage precipitate enclosure/reservoir **325a**, where the pH 8 precipitates settle. The subsystem **302** also includes transfer conduit **326**, which allows water to flow from the enclosure **325a** to a second flocculent tunnel **324b** associated with the second stage **304b** and located at the second base outlet **314b** and the transfer conduit **326**. Like the first flocculent tunnel **324a**, the second flocculent tunnel **324b** provides efficient mixing of the waste water and the base to facilitate precipitation of the trace metals and other contaminants that precipitate at a pH of about 10. The subsystem **302** also includes a second stage precipitate enclosure/reservoir **325b**, where the pH 10 precipitates settle. The reservoirs **325a&b** are of sufficient length and the transfer conduit **326** and the outlet **316** are of sufficient height from a bottom of the reservoirs **325a&b** to insure that all or substantially all of the precipitate formed settles in the reservoirs. The term "substantially" as used here means that the effluent water includes less than about 10 wt.% precipitate. In certain embodiments, substantially shall mean that the effluent water includes less than

-31-

5 wt.% precipitate. In certain embodiments, substantially shall mean that the effluent water includes less than 2.5 wt.% precipitate. In certain embodiments, substantially shall mean that the effluent water includes less than 1 wt.% precipitate.

[0122] The ammonia recovery (AR) subsystem **330** includes outer and inner walls **348a&b**. The subsystem **330** also includes a base treated water input reservoir **349** into which the inlet **332** empties the base treated water and associated with the supply and return unit **396** of the subsystem **390**. The subsystem **330** also includes a plurality of stripper unit enclosures/reservoirs **350** (eight here) and an equal plurality of absorber unit enclosures/reservoirs **351**. The subsystem **330** also includes a first groove **352a** in the inner wall **348b** for receiving the air conduit **244a** and a second groove **352b** for receiving the air conduit **244b**. The subsystem **330** also includes the ammonium mineral acid enclosure/reservoirs **342**. The subsystem **330** also includes an ammonia stripped outlet reservoir **353** out of which the ammonia stripper water flow out of the outlet **334** and associated with the supply and return unit **398**.

[0123] The denitrification subsystem **360** includes outer and inner walls **380a&b**. The subsystem **360** also includes a nutrient enclosure **381** of the nutrient section **366** housing the nutrient tanks **370** and a mineral acid enclosure **382** of the nutrient section **366** housing the mineral acid tanks **372**. The subsystem **360**. The subsystem **360** also includes safe paths **383a-c**, one for each absorber/biological denitrification section **368**. The paths **383a-c** are associated with the recirculation pump assemblies **375**. The subsystem **360** also includes auxiliary safe paths **384a-c** for use with an optional final treatment subsystem (not shown) if needed to bring the denitrified water into final compliance with appropriate federal, state and local governmental regulations. The subsystem **360** also includes a discharge enclosure/reservoir **386** connected to the outlet **378**.

Detailed Description of TCP Subsystem

[0124] Referring now to **Figure 4A**, an embodiment of the precipitation and conditioning subsystem, generally **400**, is shown to include a source **402** of waste water **403** such as a retention pond. The source **402** includes a sump pump **404** connected to a waste water input conduit **406**. The subsystem **400** can also include an optional aeration unit **408**, which aerates the incoming waste water **403** to a desired input condition. The subsystem **400** also includes an inlet **410** of associated with a first precipitation stage **412**. The subsystem **400** also includes a second precipitation stage **414**. The subsystem **400** includes a source of a base **416**, which is connected to the inlet **410** by a first base supply conduit **418**. The base supplied through the conduit **418** mixes with the waste water **403** entering through the conduit **406** at the inlet **410** and is sufficient to adjust a pH of the incoming waste water to a pH sufficient to precipitate precipitable contaminants such as trace metal contaminants or other precipitable contaminants. In certain embodiments, the pH in the first stage **412** of the subsystem **400** is adjusted to a pH between about 7.5

-32-

and about 8.5. In certain embodiments, the pH is adjusted to a pH of about 8. At this pH, trace metals are precipitated, but the pH is not too high to cause any or substantially any of the precipitate to re-dissolve. The base source **416** is also connected to a second base supply conduit **420**, which is connected to an base outlet **422** associated with the second stage **414**. The base supplied through conduit **420** is sufficient to adjust a pH of the first stage waste water effluent to a pH sufficient to precipitate other precipitable contaminants. In certain embodiments, the pH in the second stage **414** is adjusted to pH a value between about 9.5 and 10.5. In certain embodiments, the pH is adjusted to a value of about 10. At this pH, substantially all precipitable contaminants are precipitated and the pH is optimal for converting ammonium in the base treated effluent into gaseous ammonia for extraction in the AR subsystem set forth herein.

[0125] The subsystem **400** also includes a first flocculent tunnel **424** associated with the first stage **412** and located so that the inlet **410** empties into the tunnel **424**. The tunnel **424** is adapted to provide sufficient mixing of the base and the entering waste water so facilitate precipitation formation. The subsystem **400** also includes a second flocculent tunnel **426** associated with the second stage **414** and located so that the outlet **422** empties into the tunnel **426**. The tunnel **426** is adapted to provide sufficient mixing of the base and the entering waste water so facilitate precipitation formation. The first flocculent tunnel **424** is formed by a first downward extending wall **428** and a first upward extending wall **430**. After passing through the first flocculent tunnel **424**, the first base treated water flows into a precipitation settling zone or reservoir **432**. The second flocculent tunnel **426** is formed by a second downward extending wall **434** and a second upward extending wall **436**. After passing through the second flocculent tunnel **426**, the second base treated water flows into a precipitation settling zone or reservoir **438**. The subsystem **400** also includes a transfer conduit **440** from the first stage **412** to the second stage **414**. The subsystem **400** also includes an base treated waste water outlet **442** connected to a base treated waste water conduit **444**, which forwards base treated water to the AR subsystem described below.

[0126] The optional aerator unit is adapted to adjust oxygen content of the waste water prior to pumping the waste water into the precipitation unit. As the waste water is pumped into the precipitation unit, sufficient caustic is added to raise a pH of the water to a pH sufficient to precipitate some to substantially all precipitable components in the waste water. The precipitation unit includes a precipitate retention zone and an outlet. Precipitate free or substantially precipitate free water is forwarded to the ammonia stripping unit. In certain embodiments, the precipitation zone is defined between baffles that permit precipitate free or substantially precipitate free water to flow in into the outlet. In other embodiments, the precipitation unit include at least two precipitation zone. Caustic is added to each zone. Sufficient caustic is added to waste water as it enters each zone to adjust the pH to a desired pH to affect a given

-33-

precipitation. In certain embodiments, sufficient caustic is added to the first zone to raise the pH of the waste water to about pH 8. At this pH, certain metals precipitate as oxide or hydroxides. As the waste water enters the second zone, sufficient caustic is added to raise the pH of the waste water to about pH 10. At pH 10 other contaminants precipitate. Each zone is baffled so that as the water flows through the zone, precipitate settles in the area between the baffles and water free or substantially free of the precipitated solid in the stages spills over the baffle and either into the next zone or into the output of the unit. The water exiting the precipitation unit will have a desired pH optimized for ammonia stripping.

[0127] The subsystem **400** also includes pH monitors used to measure pH at various points to control a rate of caustic input relative to a rate of waste water being pump into the subsystem **400**. The monitors permit the pH of water in each stage of the subsystem to be monitored so that base treatment can be adjusted continuously, semi-continuously or periodically to insure optimal base treatment of the waste water.

[0128] Referring now to **Figure 4B**, the embodiment of **Figure 4A** is shown in a linear cross-sectional to show the water and base flow in the subsystem **400**. The water **403** enters the subsystem **400** through the inlet **410** along with a first amount of base **445**. The base **445** and the water **403** mix in a mixing zone **446** of the first stage **412** and then enter into the first flocculent tunnel **424** formed from the walls **428** and **430**. The water **403** then flows through the remainder of the first stage **412** and precipitate collects in the precipitate zone **432**. The waste water **403** then flows into a second mixing zone **448** of the second stage **414**, where a second amount of base **447** is added. The water **403** and the base **448** then enter into the second flocculent tunnel **426** formed from the walls **434** and **436**. The water **403** then flows then through the remainder of the second stage **412** and precipitate collects in the precipitate zone **438** to form a base treated water **449**, which exits through the outlet **442** through the conduit **444**.

[0129] Referring now to **Figure 4C**, the embodiment of **Figure 4A** is shown in a side view. On the top of the subsystem **400** is positioned the heating, heat exchange and recovery subsystem **700** disclosed below.

Detailed Description of AR Subsystem

[0130] Referring now to **Figure 5A**, an embodiment of the AR subsystem, generally **500**, is shown to include an inlet **502**, an incoming supply and return unit **504**, an outgoing supply and return unit **506**, an outlet **508**, a stripper section **510**, and an absorber section **512**. The stripper section **510** includes a plurality of stripper units **514** (here eight) and the absorber section **512** includes an equal plurality of absorber units **516** (here eight). Each stripper unit **514** includes a waste water supply line **518** and a stripper gas supply line **520**. Each absorber unit **516** includes a mineral acid supply line **522** and an absorber gas supply line **524**. The AR subsystem **500** also includes four ammonium mineral acid liquor

-34-

storage tanks **526** for storage of the ammonium mineral acid liquor.

[0131] Referring now to **Figure 5B&C**, a view of a stripper unit **514** and its corresponding absorber unit **516** is shown. Each stripper unit **514** is paired with an absorber unit **516** so that ammonia gas separated from the waste water in the stripper unit **514** can be transferred to the absorber unit **516** for reacting with the mineral acid to form an ammonium mineral acid liquor. The subsystem **500** includes outer walls **528**, a bottom **530**, inner walls **532** and top walls **534**. The subsystem **500** also includes a waste water safe path or conduit **536** and a mineral acid supply conduit **538**. The stripper unit **514** includes a stripper enclosure **540**, a stripper pump **542**, the waste water supply line **518** connected to a liquid inlet **544**, the stripper gas supply line **520** connected to a gas inlet **546**, and a stripper vortex mixing zone **548**. After passing through the vortex mixing zone **548**, the resulting effluent exits through a stripper orifice **550** opening into the enclosure **540**. The absorber unit **516** includes an absorber enclosure **552**, an absorber pump **554**, the mineral acid supply line **522** connected to a gas inlet **556**, the absorber gas supply line **524** connected to a gas outlet **558**, and an absorber vortex mixing zone **560**. After passing through the vortex mixing zone **560**, the resulting effluent exits through an absorber orifice **562** opening into the enclosure **552**.

[0132] Referring now to **Figure 5D&E**, waste water **564** is pumped from the conduit **536** into the line **518** as a waste water flow **566** and directed into the stripper vortex mixing zone **548**, where the waste water **566** flowing into the vortex mixing zone **548** draws an ammonia deplete gas **568** from the absorber enclosure **552** as an ammonia depleted gas flow **570**. In the stripper vortex mixing zone **548**, ammonia gas entrained in the waste water **566** is separated producing an ammonia stripped waste water **572** and an ammonia rich gas **574**, both exiting the orifice **550**. The water **572** flows into the enclosure **540** and collects in an ammonia stripped waste water reservoir **576**.

[0133] Mineral acid **578** is pumped from the conduit **538** into the line **522** as a mineral acid flow **580** and directed into the absorber vortex mixing zone **560**, where the mineral acid **580** flowing into the absorber vortex mixing zone **560** draws the ammonia rich gas **574** from the stripper enclosure **540** as an ammonia rich gas flow **582**. In the absorber vortex mixing zone **560**, ammonia gas in the ammonia rich gas **582** reacts with the mineral acid in the mineral acid flow **580** producing an ammonium mineral acid salt liquor **584** and the ammonia depleted gas **570**, both exiting the orifice **562**. The ammonium mineral acid salt liquor **584** flows into the enclosure **552** and collects in an ammonia stripped waste water reservoir **586**.

[0134] Referring now to **Figure 5F**, another embodiment of the AR subsystem, generally **500**, is shown to include an inlet **502**, an incoming supply and return unit **504**, an outgoing supply and return unit **506**, an outlet **508**, a stripper section **510**, and an absorber section **512**. The stripper section **510** includes a

-35-

plurality of stripper units **514a-h** (here eight) and the absorber section **512** includes an equal plurality of absorber units **516a-h** (here eight). Each stripper unit **514** includes a waste water supply line **518** and a stripper gas supply line **520**. Each absorber unit **516** includes a waste water supply line **522** and an absorber gas supply line **524**. The AR subsystem **500** also includes four ammonium mineral acid liquor storage tanks **526** for storage of the ammonium mineral acid liquor. The AR subsystem **500** also includes a first interconnecting conduit **588** connecting the second absorber **516b** to the eighth absorber **516h**. The AR subsystem **500** also includes a second interconnecting conduit **590** connecting the first absorber **516a** and the eighth absorber **516h**, where the flow from the first absorber **516a** and the eighth absorber **516h** is controlled by a control valve **591**. The AR subsystem **500** also includes a mineral acid supply conduit **592**, which connects an acid source (not shown) to the vortex mixing **548** of the second absorber **516b**. All mineral acid is added via the mineral acid conduit **592** at a rate to maintain the pH in the second absorber **516b** at a pH of about 2. All ammonium mineral acid flows out of the first absorber **516a** into the storage areas via a weir **594**. The interconnecting conduits **588** and **590** are designed to permit control of the overall ammonia stripping and absorption from the coupled stripper and absorber units **514a-h** and **516a-h**, where the stripper **514a** is paired with the absorber **516a**. The AR subsystem **500** is designed so that the eight paired stripper/absorber units exchange ammonium mineral acid liquor so that all the liquor exits the AR subsystem **500** via a weir **594** into the storage containers **526**. The AR subsystem **500** also include a clean water makeup conduit **596** connected from the outlet **604** of the denitrification unit **600** and controlled by a control valve **597**. The make up water is used to reduce the density of the liquor in the first absorber **516a**. In certain embodiments, the mineral acid is sulfuric acid and the liquor is ammonium sulfate. In these embodiments, the pH of ammonium sulfate is 5.5 so that the overall ammonia stripping can be controlled by monitoring the pH in the first absorber **516a** and the pH in the second absorber **516b** where acid is added to maintain a pH in the second absorber **516b** at about 2. Of course, the pH in the other absorbers will vary between pH 2 and pH 5.5 depending on the ammonia content in the water.

Detailed Description of Denitrification Subsystem

[0135] Referring now to **Figures 6A&B**, an embodiment of the denitrification subsystem, generally **600**, is shown to include an inlet **602** and an outlet **604**. The subsystem **600** includes a water and nutrient supply section **610** and an absorber/biological denitrification section **660**.

[0136] The water and nutrient supply section **610** includes a safe path **612**, optional final stage treating compartments **614** and an exit enclosure **616**. The section **610** also includes a microorganism nutrient tank enclosure **618** including four microorganism nutrient tanks **620** and three access covers **622**. The section **610** also includes an mineral acid enclosure **624** including two mineral acid tanks **626** and an

access cover **628**. The mineral acid from the tanks **626** are used in the AR subsystem to neutralize the ammonia and in the nitrification subsystem to adjust the pH of the waste water to a pH optimal for microorganism growth and stability. The section **610** also include access covers **630**.

[0137] The water and nutrient supply section **610** further includes three medium uplift pumps **632a-c** connected to a medium collection conduit **634a-c** (see **Figure 6C**) and a medium supply conduit **636a-c**. The section **610** also includes a waste water and nutrient supply and recirculation pump **638a-c** connected to a nitrogen rich waste water and nutrient supply conduit **640a-c** and a nitrogen lean water return conduit **642a-c**.

[0138] The absorber/biological denitrification section **660** include three denitrification units **662a-c** and a top member **664**. The conduits **634a** and **636a** recirculate an absorbent through the unit **662a**, while conduits **640a** and **642a** feed nitrogen-rich waste water to and withdraw nitrogen-lean water from the unit **662a**. Similarly, the conduits **634b** and **636b** recirculate an absorbent through the unit **662b**, while conduits **640b** and **642b** feed nitrogen-rich waste water to and withdraw nitrogen-lean water from the unit **662b**. Similarly, the conduits **634c** and **636c** recirculate an absorbent through the unit **662c**, while conduits **640c** and **642c** feed nitrogen-rich waste water to and withdraw nitrogen-lean water from the unit **662c**.

[0139] The section **610** and **660** also include inner walls **666**, outer walls **668** and top walls **670**. The denitrification units also include outer walls **672** and a top wall **673**. The subsystem **600** also includes a bottom wall **674**.

[0140] Referring now to **Figure 6C**, the operation of the units **662a-c** are described in conjunction with the details of the structure of the units **662a-c**. Nitrogen rich waste water from the AR subsystem enters into the safe path **612** of the denitrification subsystem **600**, the nitrogen-rich waste water is removed from the safe path **612** and pumped into the units **662a-c** by the pump **638a-c**, respectively. For the unit **662a** (true for the other two), the nitrogen-rich, nutrient rich waste water is pumped through a nitrogen-rich waste water conduit **676** into a distributing header unit **677**, where the nitrogen-rich waste water is introduced into a first absorption/denitrification zone or region **679a** comprising a first absorbent/water/microbe mixture. In this zone, nitrogen species are absorbed into or onto the absorbent or absorbing media indicated by the dots. Depending on the oxygen content of the water entering the header **677**, the zone **679a** may be an aerobic zone, where aerobic microorganisms reduce the DO value to a value below about 0.04; otherwise, the zone **679a** is an anoxic zone, but with evenly or uniformly distributed nutrients from the header **684**. If the zone **679a** is an anoxic zone, then nitrates/nitrites are actively converted to nitrogen gas by the action of microorganisms in the fluid inside the unit **662a**. The distributing header unit **677** is designed to introduce the nitrogen-rich, nutrient-rich waste water into the

-37-

zone **679a** in an even or substantially even distribution or a uniform or substantially uniform distribution. This even or substantially even distribution or uniform or substantially uniform distribution is achieved through a pattern of holes and shape of the distributor **677** so that a flow through each hole is substantially identical. This even or uniform distribution insures that nutrients for the microbes are even or uniform distributed to reduce hot spots, dead spots or channeling of the water upward through the down flowing media. The nitrogen-rich, nutrient-rich waste water flows up as nitrates/nitrites are being absorbed and degraded to denitrify the water, while the media flows down so that the water and media form a counter-flow system.

[0141] As the media flow down past the header **677**, the media enters a third zone **679c**. The zone **679c** is the respiratory inhibited zone, where microbial activity is substantially arrested. In this zone **679c**, the media is collected and recirculated through a plurality of media collectors or inducers **680a-e**, here five inducers are shown. In certain embodiments, the collectors or inducers **680a-e** have different opening sizes, while in other embodiments, the collectors or inducers **680a-e** have the same opening sizes. In the collectors or inducers **680a-e**, the collected media is mixed with a recirculating flow of waste water, which enters the pump **632a** via a recirculating conduit **682** having its end **682a** centered in an ultra low pressure drop three phase separating hydrocyclone **684**. The pump **632a** pumps the recirculating flow into a recirculation exit conduit **686**. The exit conduit **686** is divided into five inducer inlet conduits **686a-e**, a shunt conduit **686f** and a rejection conduit **686g**. Fluid flows through the inducer inlet conduits **686a-e**, the shut conduit **686f** and the rejection conduit **686g** are controlled by valves **687a-g**. The recirculating fluid flowing through the inducers **680a-e**, sweeps the collected media out of the inducers **680a-e** and into outlet conduits **688a-e**, which are combined into a medium return conduit **688**. Fluid flow through the outlet conduits **688a-e** is controlled by valves **689a-e**. The flow rate of fluid through the inducers **680a-c** is sufficient to dislodge dead microbes and weakly bound microbial films disposed on the surface of the media, but insufficient to reduce the particle size of the friable media to minimal extent. The conduit **688** can optionally include an aeration conduit **698** connected to an aeration unit **699**. The rejection stream flowing through the conduit **686g** is forwarded to a caustic lysing process, in this case to the precipitation subsystem **302**.

[0142] The conduit **688** terminates in an upper part **684a** of the hydrocyclone **684**. In the hydrocyclone **684**, the media stream mixes with clean water from a clean water zone **679d** as the action of the hydrocyclone **684** separates the media from the water and the dead and weakly bound microbes and microbial films. The recirculating media then flows out of the hydrocyclone **684** through an hydrocyclone exit **684b**, where the media is distributed in a second and an anoxic zone or region **679b**, comprising a second absorbent/water/microbe mixture, where nitrogen species are absorbed into or onto the absorbent

-38-

or absorbing media indicated by the dots and the nitrogen species are converted to nitrogen gas by the action of microorganisms in the water in this zone **679b**. Nitrogen-lean water accumulates in the fourth zone **679d**. Cleaned water is withdrawn from the unit **662a** in the nitrogen-lean region **679d** through an exit trough **690** connected to a nitrogen-lean water exit conduit **691**. The two absorbing and denitrification regions **679a-b** are designed to absorb and to convert nitrogen species into nitrogen gas. The resulting nitrogen-lean water exiting through the conduit **691** contains nitrogen concentration less than or equal to ($\leq$) about 20 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 15 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 10 ppm. In other embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 5 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 4 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 3 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 2 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 1 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 0.5 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 0.4 ppm. In certain embodiments, the nitrogen concentration is less than or equal to ($\leq$) about 0.1 ppm.

Fourth Embodiment

[0143] Referring now to **Figures 7A-I**, an embodiment of the media collection and lift subsystem, generally **700**, is shown to include three media lift headers **710**, two inducer feed headers **740** and eighteen conduits **760** mounted in a third zone **702** of a denitrification unit **704**. Each media lift header **710** includes a straight stem **712** including six branches **714** distributed in a spaced apart and side to side configuration down a length of the stem **712**. Each branch **714** includes a funneled shaped aperture **716** and an inducer **718**. Each media lift header **710** includes an output manifold **720**. Each media lift header **710** also includes a flush line **722** having an input manifold **724**. The flush line **722** includes an S-bend **726** at a first location **728** near the input manifold **716** so that a straight segment **730** of the flush line **722** is disposed above the stem **712**. The flush line **722** include a second bend **732** at a second location **734** near the output manifold **720**, which angles upward and then downward until it ties into the stem **712** at the second location **734** near the output manifold **720**. The second bend **732** is angled downward by an angle γ as set forth above. The branches **714** are angled with respect to the stem **712** by the angle δ as set forth above. The straight segment **730** of the flush line **722** held in place by standoffs **736**. The media lift headers **710** are held in place by brackets **738**.

[0144] Each inducer feed header **740** includes an input manifold **742**, an output manifold **744**, two S-bends **746** and a straight segment **748** including nine nozzles **750** distributed in a spaced apart and side

-39-

to side configuration down a length of the straight segment **748**, with six nozzles on one side and three nozzles on the side. Each nozzle **750** extending out from the header **740** at the angle δ . The S-bends **746** occur at a first location **752** after the input manifold **742** and a second location **754** before the output manifold **744**, where the S-bends **746** position the straight segment **748** between the lift headers **710** and below the lift headers **710** so that the conduits **760** extend up to the inducers **718** of the lift headers **710**.
[0145] The conduits **760** connect the nozzles **750** of the feed header **740** to the inducers **710**.

[0146] The manifolds **720**, **724**, **742** and **744** extend through an outer wall **706** of the unit **704** at a distance **d** about a bottom **708** of the unit **704**. The feed header output manifolds **744** are equipped with valves **756** as are the input manifolds **720**, **724** and **742** (not shown). The output manifolds **720** of the media lift headers **710** are connected to lift lines **770**. The lift line **770** connect to a main line **772**. The main line **772** feeds the hydrocyclone as previously described in the other embodiments. As is true in the embodiment of **Figure 6C**, the embodiment of **Figures 7A-I** is capable of the same levels of reduction of nitrogen contaminants as if the case of the embodiment of **Figure 6C**. The main difference between the embodiment of **Figure 6C** is the medium collection subsystem in the lower zone of the denitrification units. The collection subsystem of **Figure 7A-I** differs from the collection system of **Figure 6C** in all of the collections openings are disposed in the same or substantially the same plane, while the collection system of **Figure 6C** is a staged collections subsystem with collection openings disposed in stages down the length of the RI zone.

Detailed Description of Heating and Heat Transfer and Recovery Subsystem

[0147] Referring now to **Figure 8A**, an embodiment of the heating, heat exchange and recovery subsystem, generally **800**, is shown to include a cool ammonia rich waste water stream **802**, which represents a portion of the effluent from the subsystem **400**. The cool stream **802** is brought into heat exchange relationship with a warm ammonia stripped stream **804**, which represents a portion of the ammonia stripped effluent stream. The streams **802** and **804** are brought into a counter flow relationship with each other in a heat exchanger or heat exchange zone **806**. After passing through the heat exchanger **806**, the cool stream **802** is heated to a heated ammonia rich stream **808** and the warm stream **804** is cooled to a cool ammonia stripped stream **810**, which is returned to the AR subsystem **500**. The heated ammonia rich stream **808** is then passed through a heater **812**, where it is heated to its final temperature to form a hot ammonia rich stream **814**, which is sent back to the AP subsystem **500** to raise a temperature of the subsystem **400** effluent to an optimal temperature for ammonia stripping. A flow rate of the water into and out of the heating, heat exchange and recovery subsystem **800** is controlled such that a temperature of the stream entering the stripper and absorber units is optimal for ammonia gas removal and ammonia gas recovery.

-40-

[0148] Referring now to **Figure 8B**, an embodiment of the heating, heat exchange and recovery subsystem, generally **850**, is shown to include a cool ammonia rich waste water stream **852**, which represents a portion of the effluent from the subsystem **400**. The cool stream **852** is brought into heat exchange relationship with a warm ammonia stripped stream **854**, which represents a portion of the ammonia stripped effluent stream. The streams **852** and **854** are brought into a counter flow relationship with each other in a first heat exchanger or heat exchange zone **856**. After passing through the first heat exchanger **856**, the cool stream **852** is heated to form a heated ammonia rich stream **858** and the warm stream **854** is cooled to form a cool ammonia stripped stream **860**, which is returned to the AR subsystem **500**. The heated ammonia rich stream **858** is then passed through a second heat exchanger or heat exchange zone **862**, where it is brought into heat exchange relationship with a hot heat exchange fluid stream **864**. The streams **858** and **864** are brought into a counter flow relationship with each other in the second heat exchanger or heat exchange zone **862**. After passing through the second heat exchanger **862**, the heated stream **858** is heated to its final temperature to form a hot ammonia rich stream **866**, which is sent back to the AP subsystem **500** to raise a temperature of the subsystem **400** effluent to an optimal temperature for ammonia stripping. A flow rate of the water into and out of the heating, heat exchange and recovery subsystem **800** is controlled such that a temperature of the stream entering the stripper and absorber units is optimal for ammonia gas removal and ammonia gas recovery.

[0149] After passing through the second heat exchange **862**, the hot heat exchange fluid stream **864** forms a cooled heat exchange fluid stream **868**. The cooled heat exchange fluid stream **868** is forwarded to an upper portion **870** of a heat exchange fluid reservoir **872**. A recirculating stream **874** of the heat exchange fluid is pumped by a pump **876** and forwarded to heater **878**, where its temperature is raised to a temperature sufficient to heat the stream **858** to its final temperature to form the stream **864**.

Electrical Supply and Control

[0150] It should be recognized that all sensors, all pumps and all other equipment requiring electric energy to function is supplied through control panels (not shown) connected to a power distribution system. The control panel can include on site or remote control capabilities. If on site, then the control panel will be wired or wireless connected to a control room (not shown). Otherwise, the system can be controlled remotely either via an intranet or the internet.

Safe Path Description and Operation

[0151] The safe path of the present invention is primarily incorporated to overcome the reduced efficiencies of the traditional continuous stirred tank reactor (CNTR) designs and the lack of turndown capability in the plug flow reactor (PER) designs. Using reactor terminology, the safe path is a mixed feed attached reactor. The reduced efficiency arises from a lack of turndown capability in a plug flow

-41-

reactor (PER) model. Using reactor terminology, the safe path is a mixed feed with attached reactors. [0152] Referring now to **Figures 9A-C**, an embodiment of the system of this invention, generally **900**, is shown to include a precipitation and conditioning stage **902**, an ammonia stripping and neutralization stage **904**, and a denitrification stage **906**. The safe path **908** begins near the effluent **910** from the stage **902** and passes through the other two stages **904** and **906**, sequentially. When all unit operations are off, the influent flows through the safe path **908** continuously from the influent to the effluent of the stages **902**, **904** and **906** as shown in **Figures 9A-C**.

[0153] As shown in **Figures 9A-C**, influent flows into the stages **904** and **906** through an opening **912** in the stage wall **914** as shown in **Figures 9A-C**. The momentum of the influent flow carries it into an apparatus **916** called a momentum block shown in **Figures 9D-G** disposed in the safe path **918**. If a stage **904** or **906** is off, pressure will increase in the momentum block **916** forcing the influent to swirl out of the momentum block **916**, flow around it and pass through the stage into the next downstream stage.

[0154] If a stage **904** or **906** is on, a recirculation pump **920** draws from the momentum block **916**. If the recirculation pump **920** flow is greater than the incoming influent flow, the pressure inside the momentum block **916** will lower causing water already in the stage to flow back into a space **922** between the influent or safe path wall **924** and the momentum block **916**, supplementing flow to the recirculation pump **920**. This mixed flow is described schematically below in **Figure 10** to illustrate the calculations.

[0155] The momentum block **916** is shaped for efficient flow, but when placed against the safe path wall **924** is essentially a 3 sided box **926** with a hole **928** in its top **930**. The hole **928** is designed to accept a pump suction tailpipe **932** in such a fashion as to allow top pull out maintenance and reassembly without being able to see the momentum block **916** as shown in **Figure 9D**. **Figure 9E** shows the safe path opening **934** before placement of the momentum block **916**. **Figure 9F** shows the momentum block **916** with a separation **936**, in certain embodiments, the separation **936** is about 4½ inch, from the safe path wall **924** containing the safe path opening **934**. **Figure 9F** shows a fully assembled reactor feed pump assembly **938**.

[0156] In the safe path configuration of this invention, all liquid entering the tank after the momentum block **916** is from an attached reactor, in this case a denitrification unit discharge. In the denitrification stage **906**, because all safe path discharges are from the denitrification units in this area of the safe path, the safe path may be described as a plug flow tank; therefore, discharge may be mathematically modeled as a PER. The reactor treats a diluted feed like a CNTR model, except that the dilution is controlled because the reactor, the denitrification units, act as attached reactors to the safe path. In the safe path model, the size or volume of the tank (safe path sump) has no relationship to system performance in any steady-state calculation.

An Alternate Denitrification Embodiment

[0157] Referring now to **Figure 10**, an embodiment of a denitrification system, generally **1100**, is shown to include a waste water inlet conduit **1102** connected to a waste water inlet **1104**. The system **1100** uses an absorbent and microorganisms to absorb and convert nitrates and nitrites into nitrogen gas and consume ammonia/ammonium and/or other nitrogen-containing compound. The denitrification system **1100** includes at least one absorber/biological denitrification unit **1106**. The unit **1106** includes microorganism and microorganism nutrients supply unit **1108** connected to the conduit **1102** via a microorganism/nutrient conduit **1110**. The system **1100** can also include a supply of mineral acid (not shown) to adjust the pH of the water to an optimal level and a heating unit (not shown) to adjust the temperature of the water to an optimal temperature. The unit **1106** includes media lift pump assemblies **1112** for recirculating water and media in a two loop configuration. Recirculation water enters the pump **1112** through conduit **1114**, which originates in a central region of an ultra low pressure drop hydrocyclone **1116**. The pump **1112** pumps the recirculation water into an outlet conduit **1118**. The outlet conduit **1118** is split into three conduits: a reject conduit **1120**, a shut conduit **1122** and a recirculation conduit **1124**. The reject conduit **1120** forwards biomass debris for process. The shut conduit **1122** sends part of the recirculation water into the raw water to improve nutrient utilization. The recirculation conduit **1124** is forwarded to an inducer or media lift subsystem **1126**, where the water flow is used to sweep media collected in the inducer or media lift subsystem **1126** out through a media recirculation conduit **1128**. The water flow into and out of the inducer or media lift subsystem **1126** is sufficient to lift the media for discharge into the ultra low pressure drop hydro cyclone **1116**. The water flow in the inducer or media lift subsystem **1126** is sufficient to shear the media dislodging dead microbes and weakly bound microbial films from the media, but insufficient to reduce the particle size of the media to any appreciable extent, generally less than 0.05% of the particles undergo a reduction in size per cycle with the ultimate goal being less than 0.015% or no particles undergoing a reduction in size per cycle. Minimal reduction in size can be achieved through careful inducer design and water flow rate. The inducer has holes in the top through which the media are collected. The incoming water inlet **1104** is connected to a distributor **1130**. The distributor **1130** includes holes in its bottom which are patterned so that the incoming nitrogen-rich, microbial rich and nutrient rich water is evenly or uniformly distributed through the unit **1106** across a cross-section in a first zone **1132a**. In the first zone **1132a**, nutrient and water is evenly or uniformly distributed and, if present, oxygen is depleted through the action of aerobic microbes. As the water flows up and the oxygen content is dropped below about 0.4 mg/L, an anoxic zone **1132b** is produced, where the microbes degrade nitrate and nitrites to nitrogen gas. As the water continues to rise, denitrified water accumulates in a clear water zone **1132c** and exits the unit **1106** through a trough **1134**, which is

-43-

connected to an outlet conduit **1136**. As the media enter the hydrocyclone **1116**, clean water from the zone **1132c** is pulled into a bottom of the hydrocyclone **1116** cleaning the media of the dislodged debris. As the media falls through the denitrification zone **1132b**, microbes degrade nitrate and/or nitrites from the water and from any adsorbed or absorbed nitrates/nitrites in the media. As the media fall past the distributor **1130** and out of the zone **1132a**, the media enters a respiratory inhibited zone **1132d**, where microbial activity is arrested. The media is then collected in the inducer **1126** and recirculated. The final zone **1132e** in the unit **1106** is a head space filled with gas.

Another Alternate Denitrification Embodiment

[0158] Referring now to **Figure 11A**, a denitrification system **1200** includes at an inlet **1202** connected to an inlet conduit **1201**, where the system is designed to use an absorbent and microorganisms or microbes to absorb and convert nitrates, nitrites, residual ammonia/ammonium, or other nitrogen-containing compound into nitrogen gas or amino acids through bio-synthesis. The denitrification subsystem **1200** includes an absorber/biological denitrification section **1204** and a nutrient supply section **1206**. The absorber/biological denitrification section **1204** includes a plurality of absorber/biological denitrification units **1208**. The nutrient supply section **1206** includes microorganism nutrients tanks **1210** and associated hatches **1211** for filling the tanks **1210**. The nutrient supply section **1206** also includes mineral acid tanks **1212** and associated hatches **1213** for filling the tank. The mineral acid is used in the AR subsystem and in the denitrification subsystem. In the AR subsystem, the mineral acid is used to convert ammonia gas into the ammonium mineral acid salt liquor. In the denitrification subsystem, the mineral acid is used to adjust the pH to the optimal pH for supporting the microorganisms used to convert nitrogen-containing oxide, residue ammonia and other species into nitrogen gas. The denitrification section **1204** includes media lift pump assemblies **1214** for supplying waste water to the units **1208** and recirculation pump assemblies **1215** for supplying nutrients to the units **1208**. The denitrification section **1204** also includes access hatches **1216**. The denitrification subsystem **1200** includes an outlet **1218** connected to a finished effluent conduit **1219**.

[0159] Referring now to **Figure 11B**, the denitrification subsystem **1200** includes outer and inner walls **1220a&b**. The subsystem **1200** also includes a nutrient enclosure **1221** of the nutrient section **1206** housing the nutrient tanks **1210** and a mineral acid enclosure **1222** of the nutrient section **1206** housing the mineral acid tanks **1212**. The subsystem **1200**. The subsystem **1200** also includes safe paths **1222a-c**, one for each absorber/biological denitrification section **1208**. The paths **1222a-c** are associated with the recirculation pump assemblies **1215**. The subsystem **1200** also includes auxiliary paths **1224a-c** with overflow walls **1226** for use with an optional final treatment subsystem (not shown) if needed to bring the denitrified water into final compliance with appropriate federal, state and local governmental

-44-

regulations or to allow water to de-aerate as the water is discharged from the units **1208**. In certain embodiments, the unit discharge is a partially spiral discharge line that mixes the discharge water with air. The system **1200** also includes a discharge enclosure/reservoir **1228** connected to the outlet **1218**.

[0160] All references cited herein are incorporated by reference. Although the invention has been disclosed with reference to its preferred embodiments, from reading this description those of skill in the art may appreciate changes and modification that may be made which do not depart from the scope of the invention as described above and claimed hereafter.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method for treating waste water comprising:

supplying a waste water to a precipitation and conditioning subsystem of a waste water treating system;

adding an amount of caustic from a caustic source to the waste water, where the amount of caustic raises a pH of the waste water to a pH sufficient to precipitate all or substantially all precipitable contaminants in the waste water to produce a first treated waste water and a precipitate;

overflowing a portion of the first treated waste water over a wall separating the precipitation and conditioning subsystem into a first safe path associated with an ammonia stripper and neutralization subsystem;

heating the first treated waste water to a temperature of about 50° C to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of the ammonia stripper and neutralization subsystem, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

adding an amount of ammonia neutralization agent to the stripped ammonia stream to form a crude ammonium salt material,

overflowing a portion of the second treated waste water into a second safe path associated with a denitrification subsystem,

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus,

introducing the second treated waste water, an amount of a microbe carbon food source and an amount microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a

-46-

counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis,

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly,

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly,

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus,

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm,

returning the purified waste water to the second safe path, and
discharging the purified waste water from a system outlet.

2. The method of claim 1, further comprising:
prior to supplying the waste water, aerating the waste water.
3. The method of claim 1 or 2, wherein the purified waste water has a nitrogen content of no more the 5 ppm.
4. The method of claim 1 or 2, wherein the purified waste water has a nitrogen content of no more the 3 ppm.

-47-

5. The method of claim 1 or 2, wherein the purified waste water has a nitrogen content of no more the 1 ppm.

6. The method of claim 1 or 2, wherein the purified waste water has a nitrogen content of no more the 0.5 ppm.

7. The method of claim 1 or 2, wherein the purified waste water has a nitrogen content of no more the 0.1 ppm.

8. A method for treating waste water comprising:

supplying a waste water to a first precipitation and conditioning stage of a precipitation and conditioning subsystem of a waste water treating system,

adding a first amount of caustic from a caustic source to the waste water supplied to the first precipitation and conditioning stage, where the first amount of caustic is sufficient to raise a pH of the waste water to a pH of at least 8 to form a first pH adjusted waste water,

precipitating a first precipitate from the first pH adjusted waste water in the first precipitation and conditioning stage to form a first stage treated waste water,

overflowing a portion of the first stage treated waste water over a wall separating the first precipitation and conditioning stage from a second precipitation and conditioning stage,

adding a second amount of caustic from the caustic source to the first stage treated waste water in the second precipitation and conditioning stage, where the second amount is sufficient to raise the pH of the first stage treated waste water to a pH of at least 10 to form a second pH adjusted waste water,

precipitating a second precipitate from the second pH adjusted waste water to form a first treated waste water,

heating the first treated waste water to a temperature of about 50° C to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

-48-

transferring the stripped ammonia stream to an ammonia absorber assembly;
adding an amount of sulfuric acid to the stripped ammonia stream to form a crude ammonium sulfate material,

overflowing a portion of the second treated waste water into a second safe path associated with a denitrification subsystem,

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus,

introducing the second treated waste water, an amount of a microbe carbon food source and an amount microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis,

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly,

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly,

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus,

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm,

returning the purified waste water to the second safe path, and
discharging the purified waste water from a system outlet.

9. The method of claim 8, further comprising:
aerating the waste water prior to supplying the waste water to the precipitation and conditioning subsystem.
10. The method of claim 8 or 9, wherein the purified waste water has a nitrogen content of no more the 5 ppm.
11. The method of claim 8 or 9, wherein the purified waste water has a nitrogen content of no more the 3 ppm.
12. The method of claim 8 or 9, wherein the purified waste water has a nitrogen content of no more the 1 ppm.
13. The method of claim 8 or 9, wherein the purified waste water has a nitrogen content of no more the 0.5 ppm.
14. The method of claim 8 or 9, wherein the purified waste water has a nitrogen content of no more the 0.1 ppm.
15. The method of any one of claims 8 to 14, further comprising:
measuring a first dissolved oxygen level at the distributor,
measuring a second dissolved oxygen level at the slurry collection assembly, and
controlling the food source and micro-nutrients based on values of the first and second dissolved oxygen levels.

-50-

16. The method of claim 15, wherein if the first dissolved oxygen level is above 0.19, increasing the carbon food source and micro-nutrients introduced with the second treated waste water and if the second dissolved oxygen level is below 0.12 reducing carbon food source and micro-nutrients introduced with the second treated waste water.

17. A system for treating waste waters comprising:

a precipitation and conditioning subsystem including:

at least one precipitation and conditioning stage, and

a supply of caustic,

where caustic is added in an amount to adjust a pH of the waste water to a pH sufficient to precipitate precipitable contaminants in the waste water and where the precipitation and conditioning subsystem forms a first safe path comprising precipitation and conditioning subsystem purified water;

an ammonia stripper and neutralization subsystem including:

at least one ammonia stripper unit,

at least one ammonia neutralization unit, and

a supply of an ammonia neutralizing agent,

where the ammonia stripper and neutralization subsystem forms a second safe path comprising ammonia stripper and neutralization subsystem purified water, where the first safe path provides the precipitation and conditioning subsystem purified water for use in the ammonia stripper and neutralization subsystem, where the ammonia stripper withdraws water from the first safe path and returns ammonia stripped water thereto, and where stripped ammonia is converted in the ammonia neutralization unit into a crude ammonium salt liquor; and

a denitrification subsystem including:

at least one bio-denitrification/absorber unit, where a particulate absorbent is circulated through the unit in a bacteria supporting medium, the absorbent is adapted to adsorb and/or absorb nitrogen-containing compounds in an effluent from the ammonia stripper and neutralization subsystem, while the bacteria in the supporting medium converts the nitrogen-containing compounds in interstitial water and the absorbed and/or adsorbed nitrogen-containing compounds into nitrogen gas or into amino acids via bio-synthesis by the bacteria, and where the second safe path provides the ammonia stripper

-51-

and neutralization subsystem purified water for use in the denitrification subsystem, where the purified water has a nitrogen content of no more than 10 ppm, and where the subsystems are arranged in a series configuration.

18. The system of claim 17, wherein the precipitation and conditioning subsystem includes:

a water aeration apparatus.

19. The system of claim 17 or 18, wherein the precipitation and conditioning subsystem includes:

at least one precipitation and conditioning stages to affect a selective precipitation of various precipitable contaminants in the waste water by adjusting the pH of the waste water to different pH values in each stage.

20. A method for treating waste water comprising:

supplying a waste water to a precipitation and conditioning subsystem of a waste water treating system;

adding an amount of caustic from a caustic source to the waste water, where the amount of caustic raises a pH of the waste water to a pH sufficient to precipitate all or substantially all precipitable contaminants in the waste water to produce a first treated waste water and a precipitate;

overflowing a portion of the first treated waste water over a wall separating the precipitation and conditioning subsystem to form a first safe path of an ammonia stripper and neutralization subsystem through which water is extracted for use in the ammonia stripper and neutralization subsystem and into which ammonia stripped water is returned;

heating the first treated waste water to a temperature of about 50° C to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of the ammonia stripper and neutralization subsystem, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

-52-

adding an amount of ammonia neutralization agent to the stripped ammonia stream to form a crude ammonium salt material;

overflowing a portion of the second treated waste water to form a second safe path of a denitrification subsystem through which untreated water is removed for used in the denitrification subsystem and treated water is returned;

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus;

introducing the second treated waste water, an amount of a microbe carbon food source and an amount of microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis;

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly;

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly;

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus;

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm;

returning the purified waste water to the second safe path; and
discharging the purified waste water from a system outlet.

21. The method of claim 20, further comprising:
prior to supplying the waste water, aerating the waste water.
22. The method of claim 20 or 21, wherein the purified waste water has a nitrogen content of no more the 5 ppm.
23. The method of claim 20 or 21, wherein the purified waste water has a nitrogen content of no more the 3 ppm.
24. The method of claim 20 or 21, wherein the purified waste water has a nitrogen content of no more the 1 ppm.
25. The method of claim 20 or 21, wherein the purified waste water has a nitrogen content of no more the 0.5 ppm.
26. The method of claim 20 or 21, wherein the purified waste water has a nitrogen content of no more the 0.1 ppm.
27. A method for treating waste water comprising:
supplying a waste water to a first precipitation and conditioning stage of a precipitation and conditioning subsystem of a waste water treating system;
adding a first amount of caustic from a caustic source to the waste water supplied to the first precipitation and conditioning stage, where the first amount of caustic is sufficient to raise a pH of the waste water to a pH of at least 8 to form a first pH adjusted waste water,

precipitating a first precipitate from the first pH adjusted waste water in the first precipitation and conditioning stage to form a first stage treated waste water;

overflowing a portion of the first stage treated waste water over a wall separating the first precipitation and conditioning stage from a second precipitation and conditioning stage to form a first safe path from which water is extracted for use in an ammonia stripper and neutralization subsystem and into which ammonia stripped water is returned;

adding a second amount of caustic from the caustic source to the first stage treated waste water in the second precipitation and conditioning stage, where the second amount is sufficient to raise the pH of the first stage treated waste water to a pH of at least 10 to form a second pH adjusted waste water;

precipitating a second precipitate from the second pH adjusted waste water to form a first treated waste water;

heating the first treated waste water to a temperature of about 50° C to form a temperature adjusted waste water;

withdrawing the temperature adjusted waste water into an ammonia stripper assembly of the ammonia stripper and neutralization subsystem, where the stripper assembly removes ammonia from the temperature adjusted waste water to form a second treated waste water and a stripped ammonia stream;

transferring the stripped ammonia stream to an ammonia absorber assembly;

adding an amount of sulfuric acid to the stripped ammonia stream to form a crude ammonium sulfate material;

overflowing a portion of the second treated waste water to form a second safe path of a denitrification subsystem through which untreated water is removed for used in the denitrification subsystem and treated water is returned;

withdrawing the second treated waste water from the second safe path;

introducing a regenerated particulate adsorbent/absorbent slurry into an upper section of a bio-denitrification unit of the denitrification subsystem through a slurry introduction apparatus;

introducing the second treated waste water, an amount of a microbe carbon food source and an amount microbe micro-nutrients into the bio-denitrification unit through a distributor disposed in a lower middle section of the bio-denitrification unit, where the water, food source and micro-nutrients are added at a rate sufficient to establish a

-55-

counter-flow, anoxic expanded bed zone of the particulate adsorbent/absorbent between the distributor and the slurry introduction apparatus, where the water flows up the zone and the particulate adsorbent/absorbent flows down the zone, the particulate adsorbent/absorbent adsorbs and/or absorbs nitrogen-containing compounds in the second treated waste water, the microbes degrade the nitrogen-containing compounds into nitrogen gas or amino acids via bio-synthesis, the microbes control a dissolved oxygen (DO) level in the medium and the microbes utilize any residual or formed ammonia in bio-synthesis;

regenerating the particulate adsorbent/absorbent via bio-denitrification of the adsorbed and/or absorbed nitrogen-containing compounds in the counter-flow, anoxic expanded bed zone and in a co-flow, respiratory inhibited zone disposed below the distributor and before a slurry collection assembly and uplift assembly;

collecting the regenerated particulate adsorbent/absorbent as the regenerated particulate adsorbent/absorbent slurry in the slurry collection assembly;

uplifting the regenerated particulate adsorbent/absorbent slurry including a sufficient amount of viable bacteria to re-populate the bacteria to a denitrification level to the slurry introduction apparatus;

overflowing a purified waste water from an outlet trough disposed in a top zone of the bio-denitrification unit, where the purified waste water has a nitrogen content of no more than 10 ppm;

returning the purified waste water to the second safe path; and

discharging the purified waste water from a system outlet.

28. The method of claim 27, further comprising:

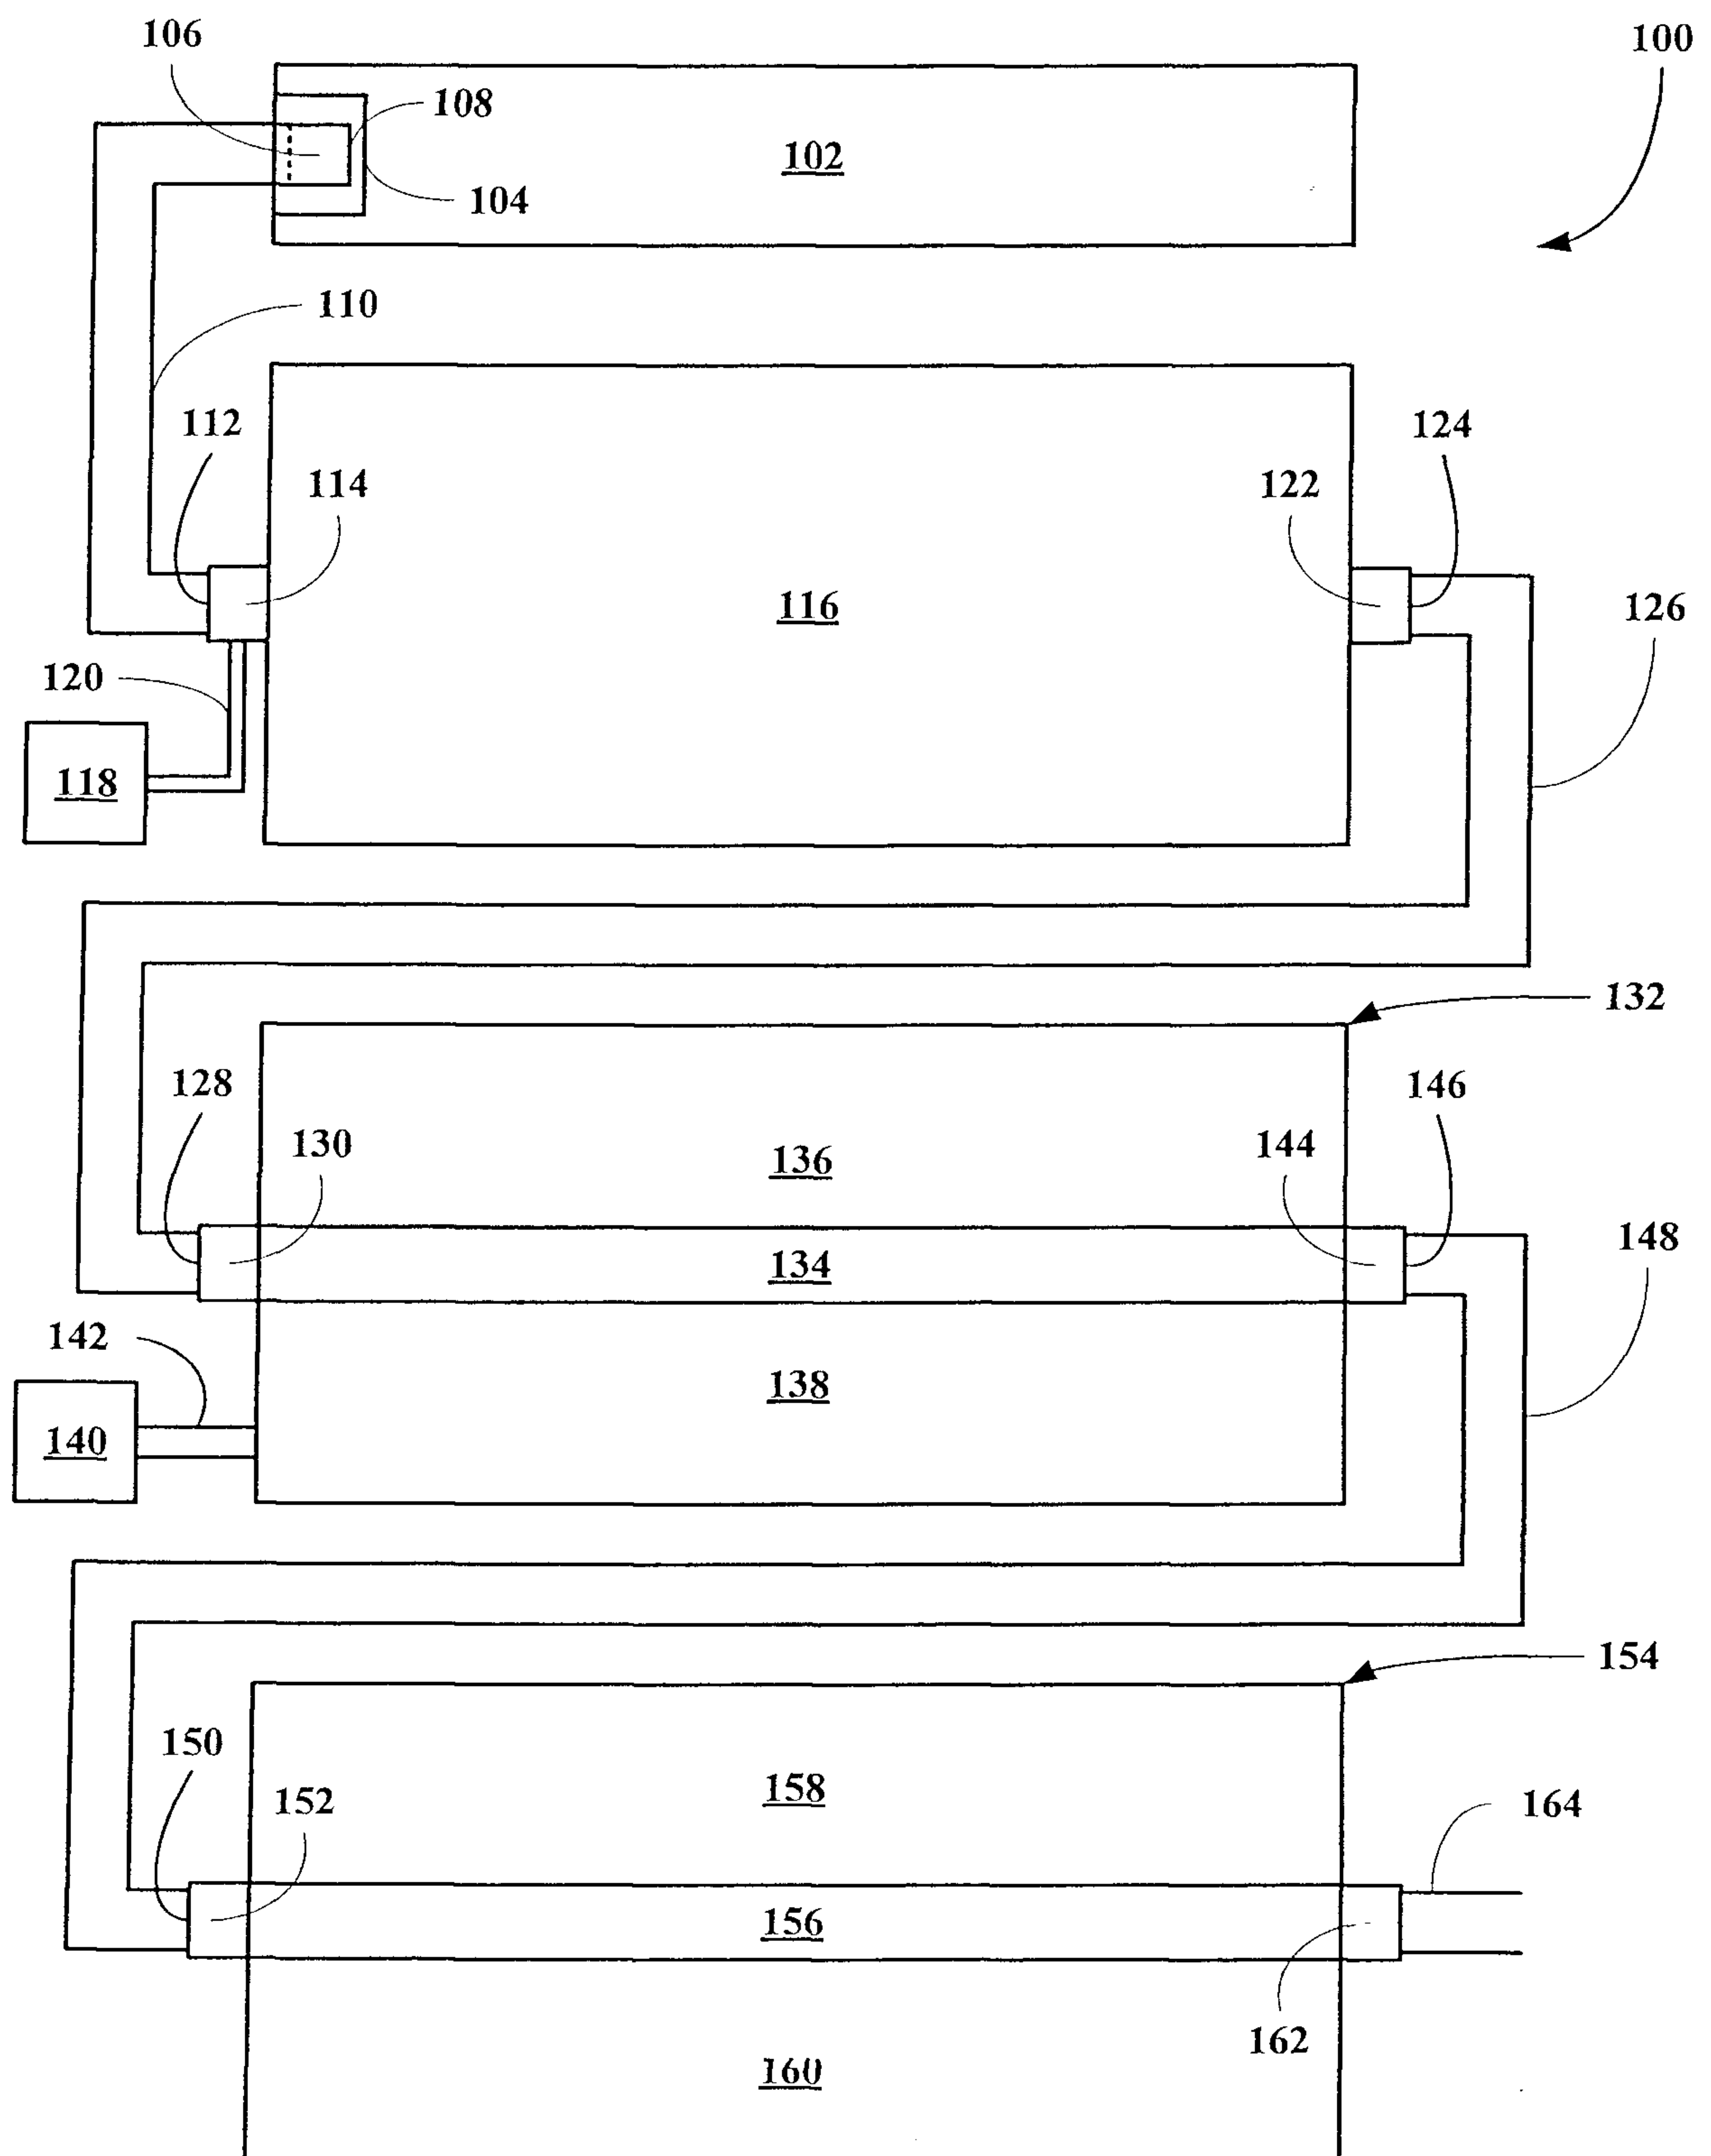
aerating the waste water prior to supplying the waste water to the precipitation and conditioning subsystem.

29. The method of claim 27 or 28, wherein the purified waste water has a nitrogen content of no more than 5 ppm.

30. The method of claim 27 or 28, wherein the purified waste water has a nitrogen content of no more than 3 ppm.

31. The method of claim 27 or 28, wherein the purified waste water has a nitrogen content of no more the 1 ppm.
32. The method of claim 27 or 28, wherein the purified waste water has a nitrogen content of no more the 0.5 ppm.
33. The method of claim 27 or 28, wherein the purified waste water has a nitrogen content of no more the 0.1 ppm.
34. The method of any one of claims 27 to 33, further comprising:
 - measuring a first dissolved oxygen level at the distributor;
 - measuring a second dissolved oxygen level at the slurry collection assembly; and
 - controlling the food source and micro-nutrients based on values of the first and second dissolved oxygen levels.
35. The method of claim 34, wherein if the first dissolved oxygen level is above 0.19 mg/L, increasing the carbon food source and micro-nutrients introduced with the second treated waste water and if the second dissolved oxygen level is below 0.12 mg/L reducing carbon food source and micro-nutrients introduced with the second treated waste water.

1/31

**FIG. 1**

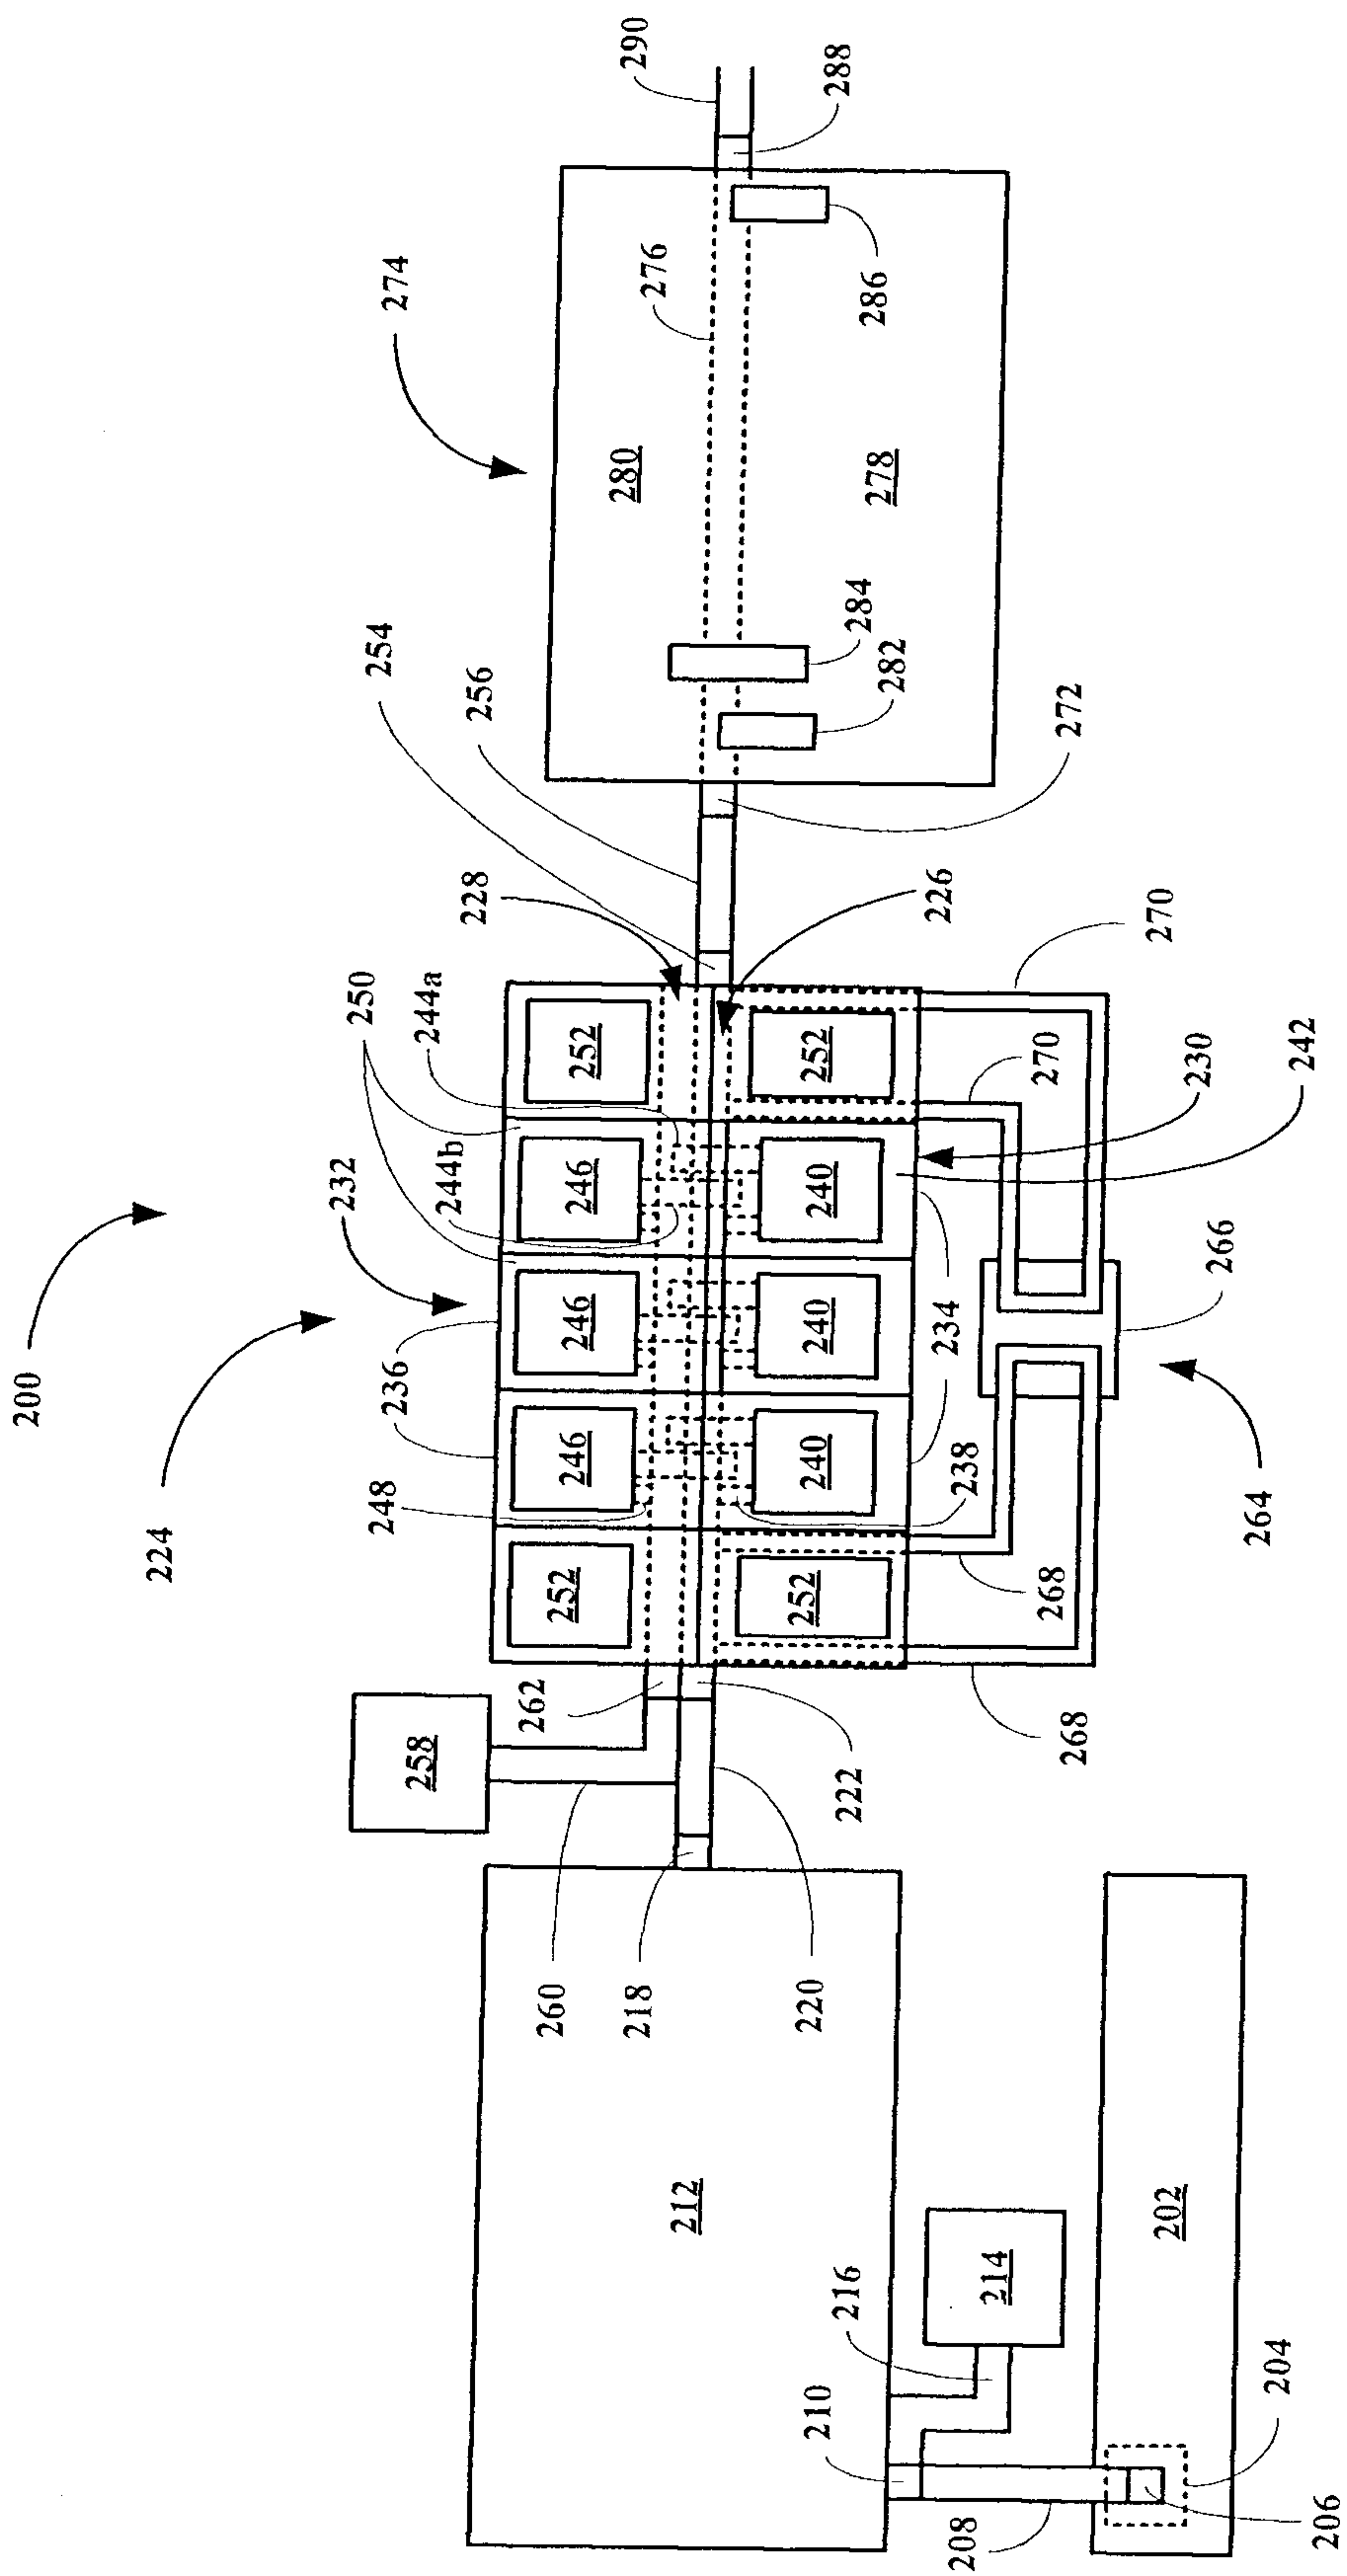


FIG. 2A

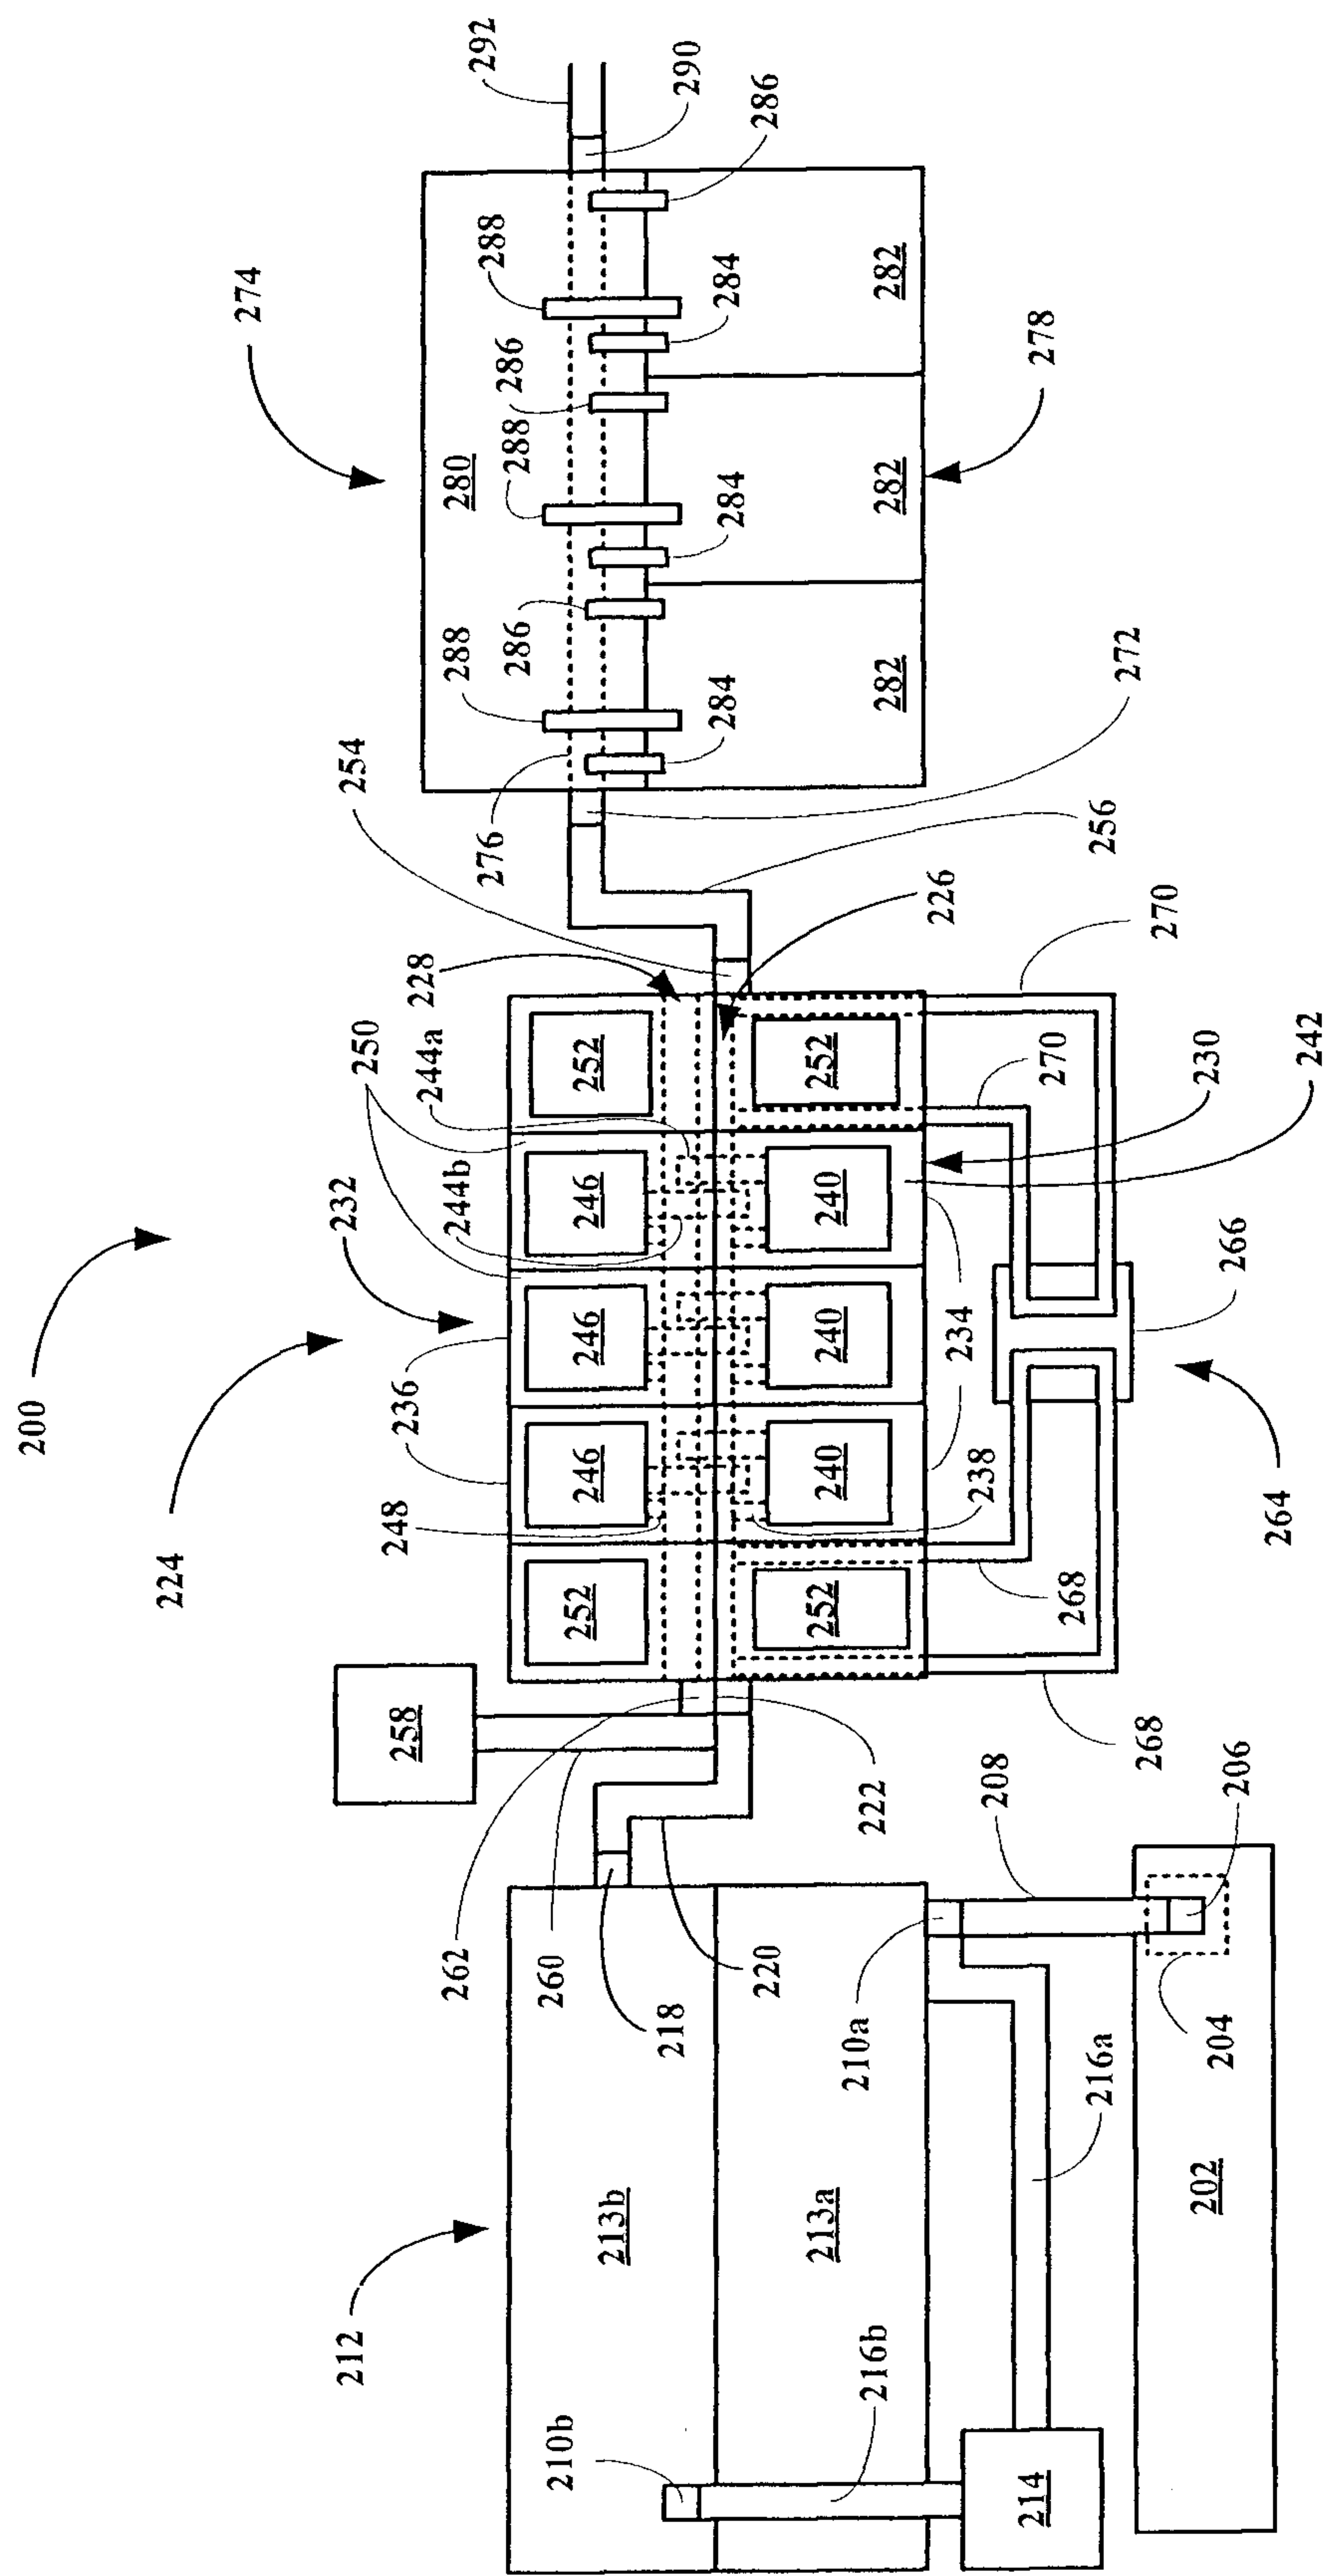


FIG. 2B

4/31

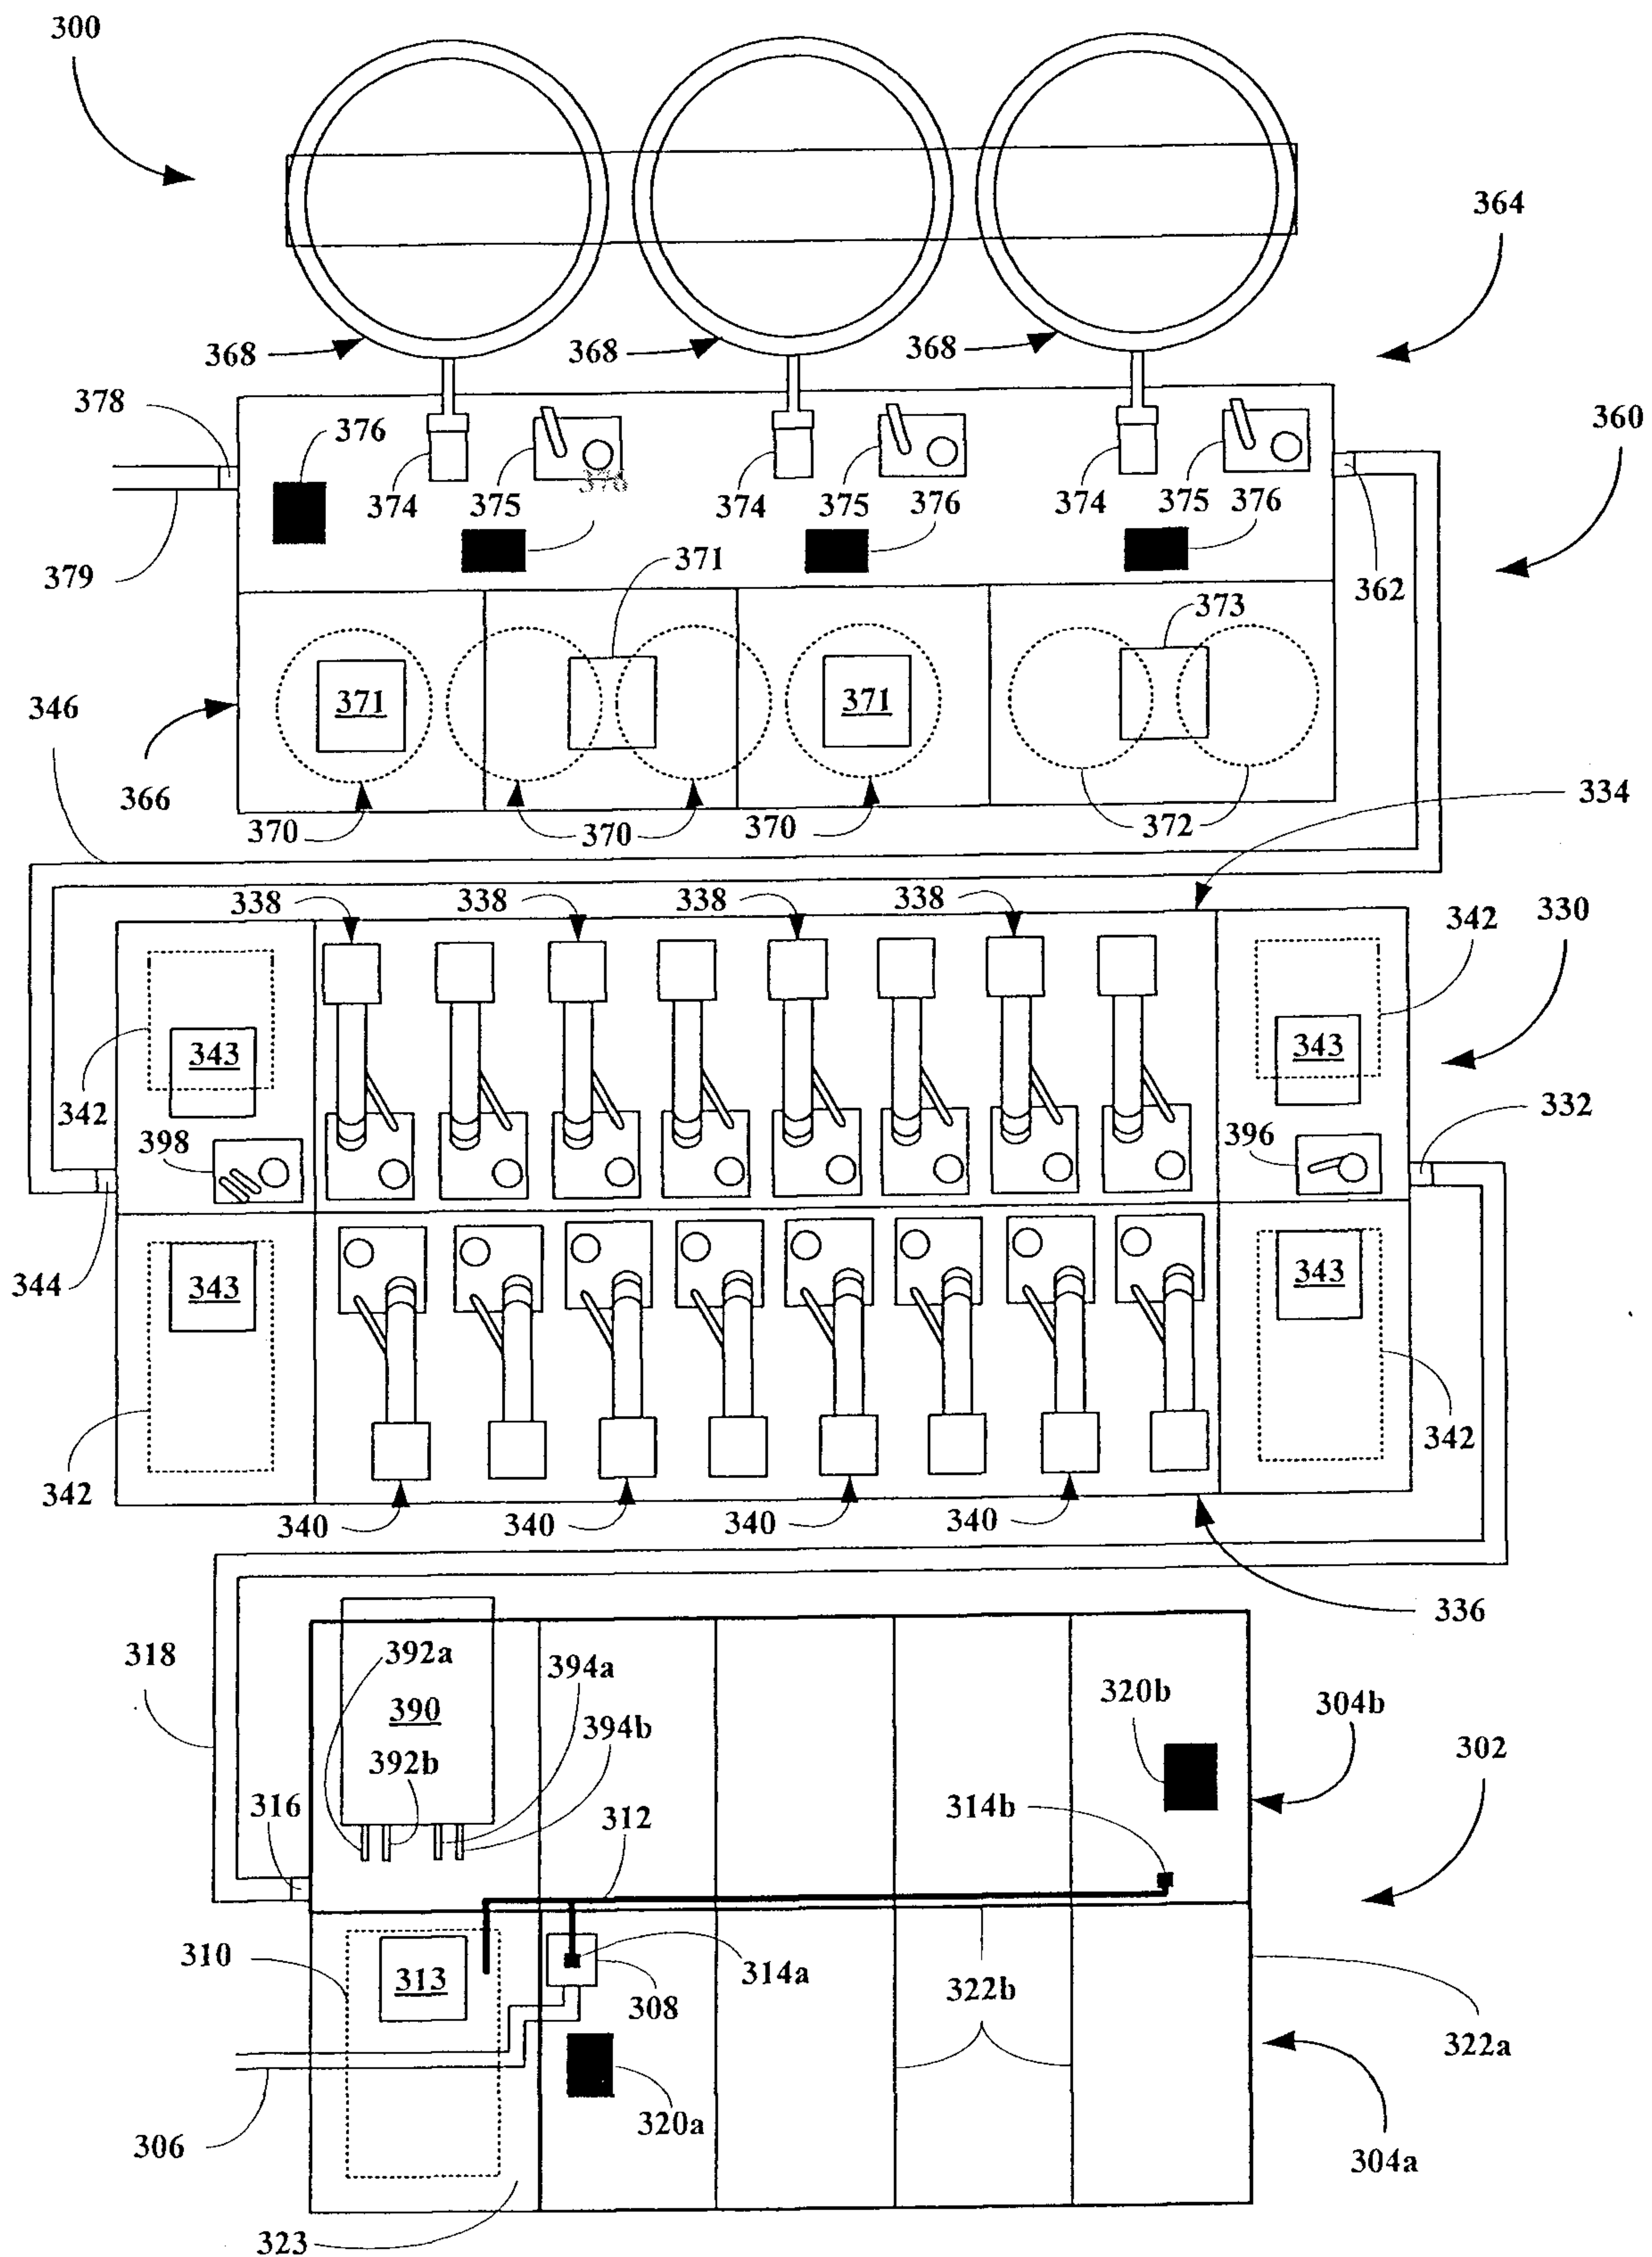
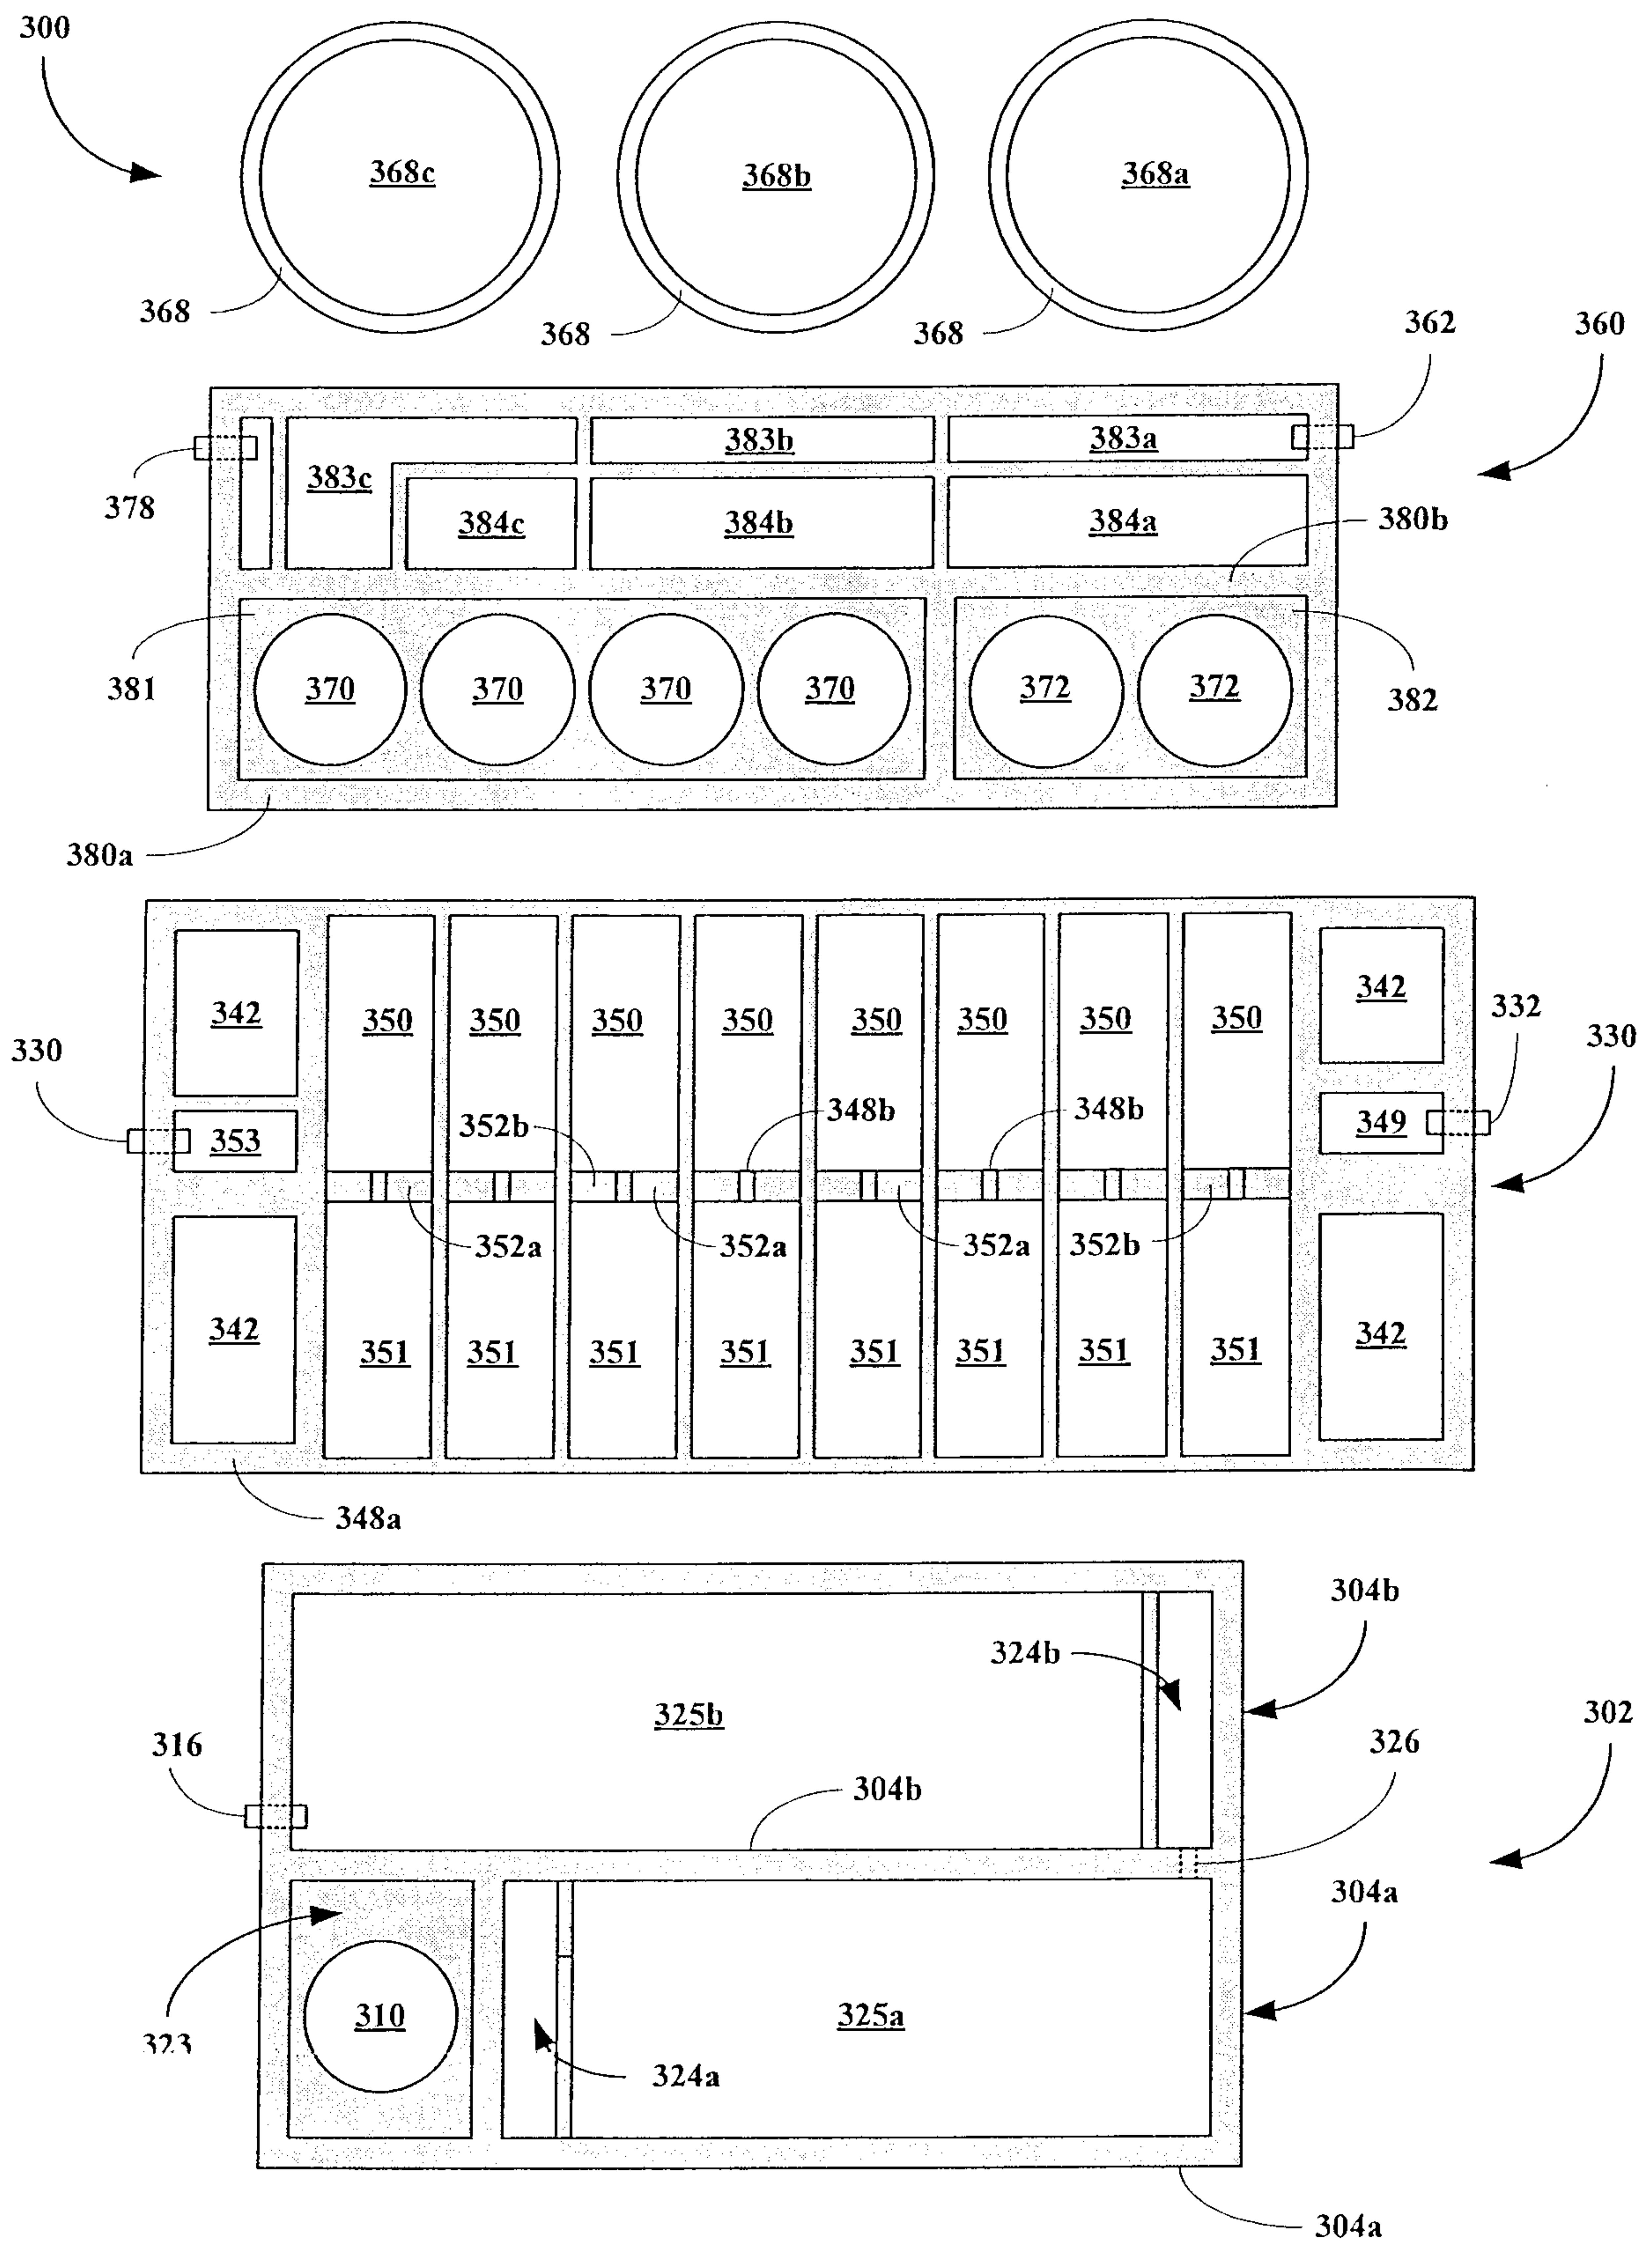


FIG. 3A

5/31

**FIG. 3B**

6/31

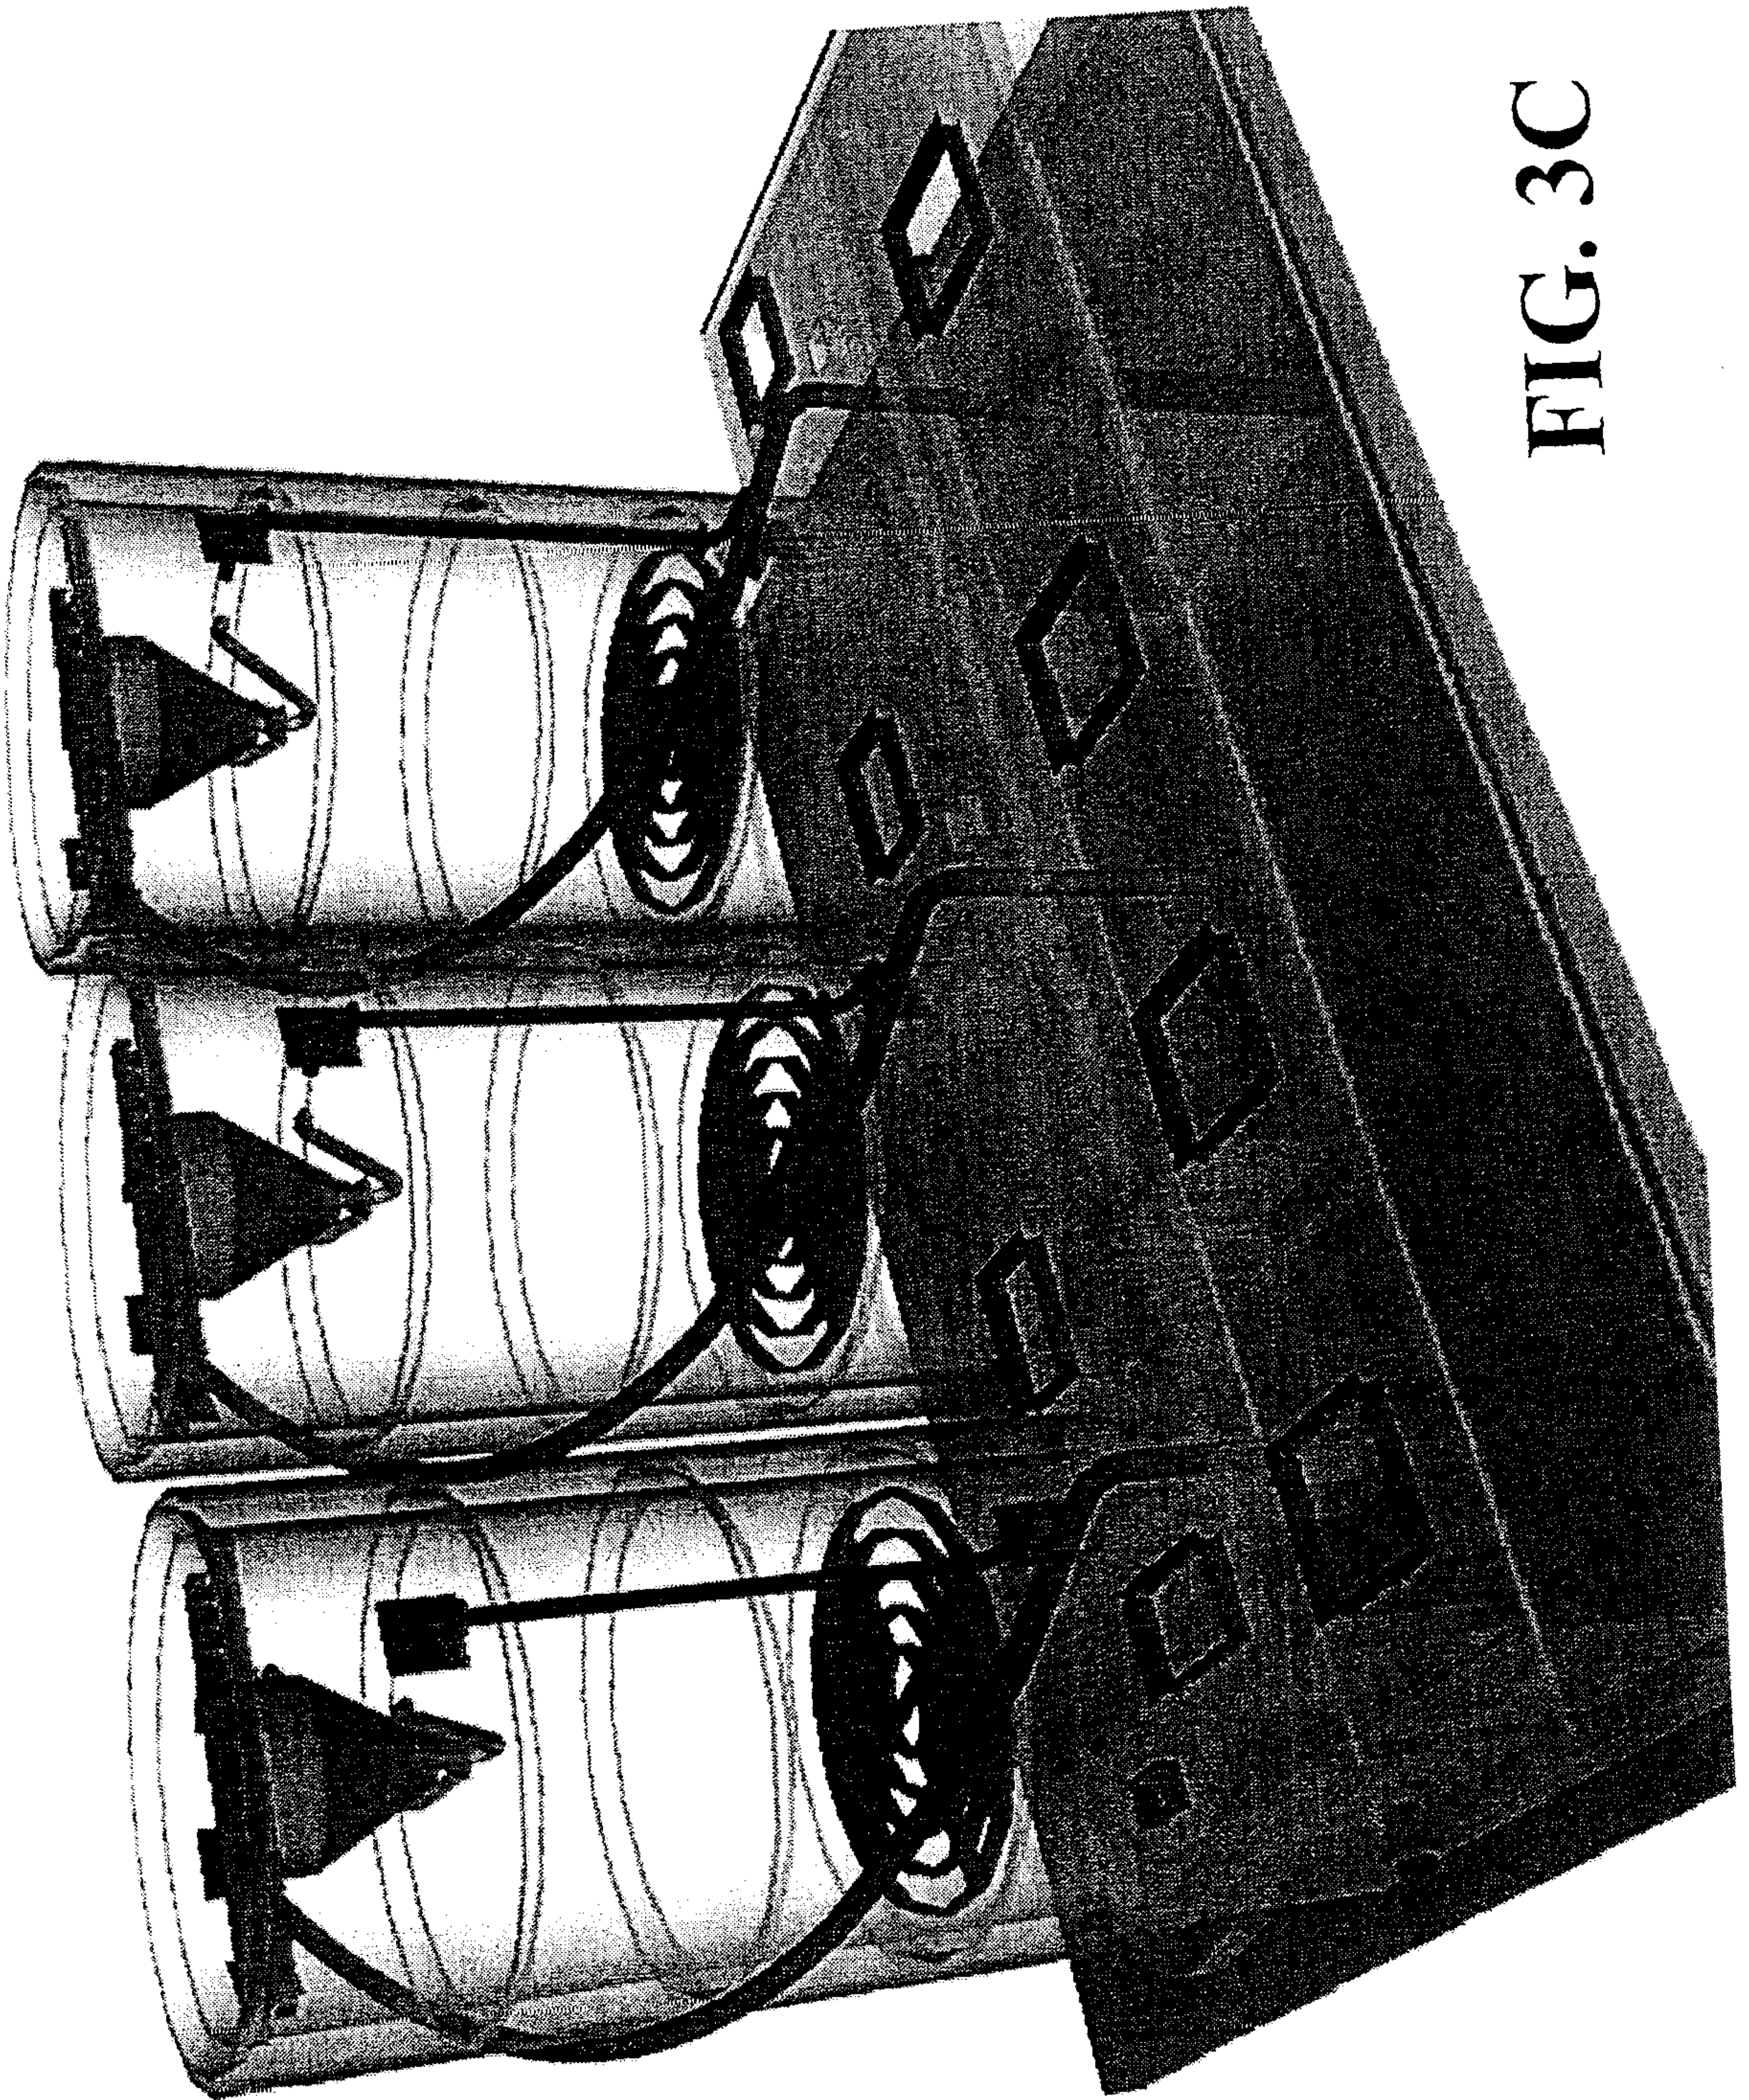


FIG. 3C

7/31

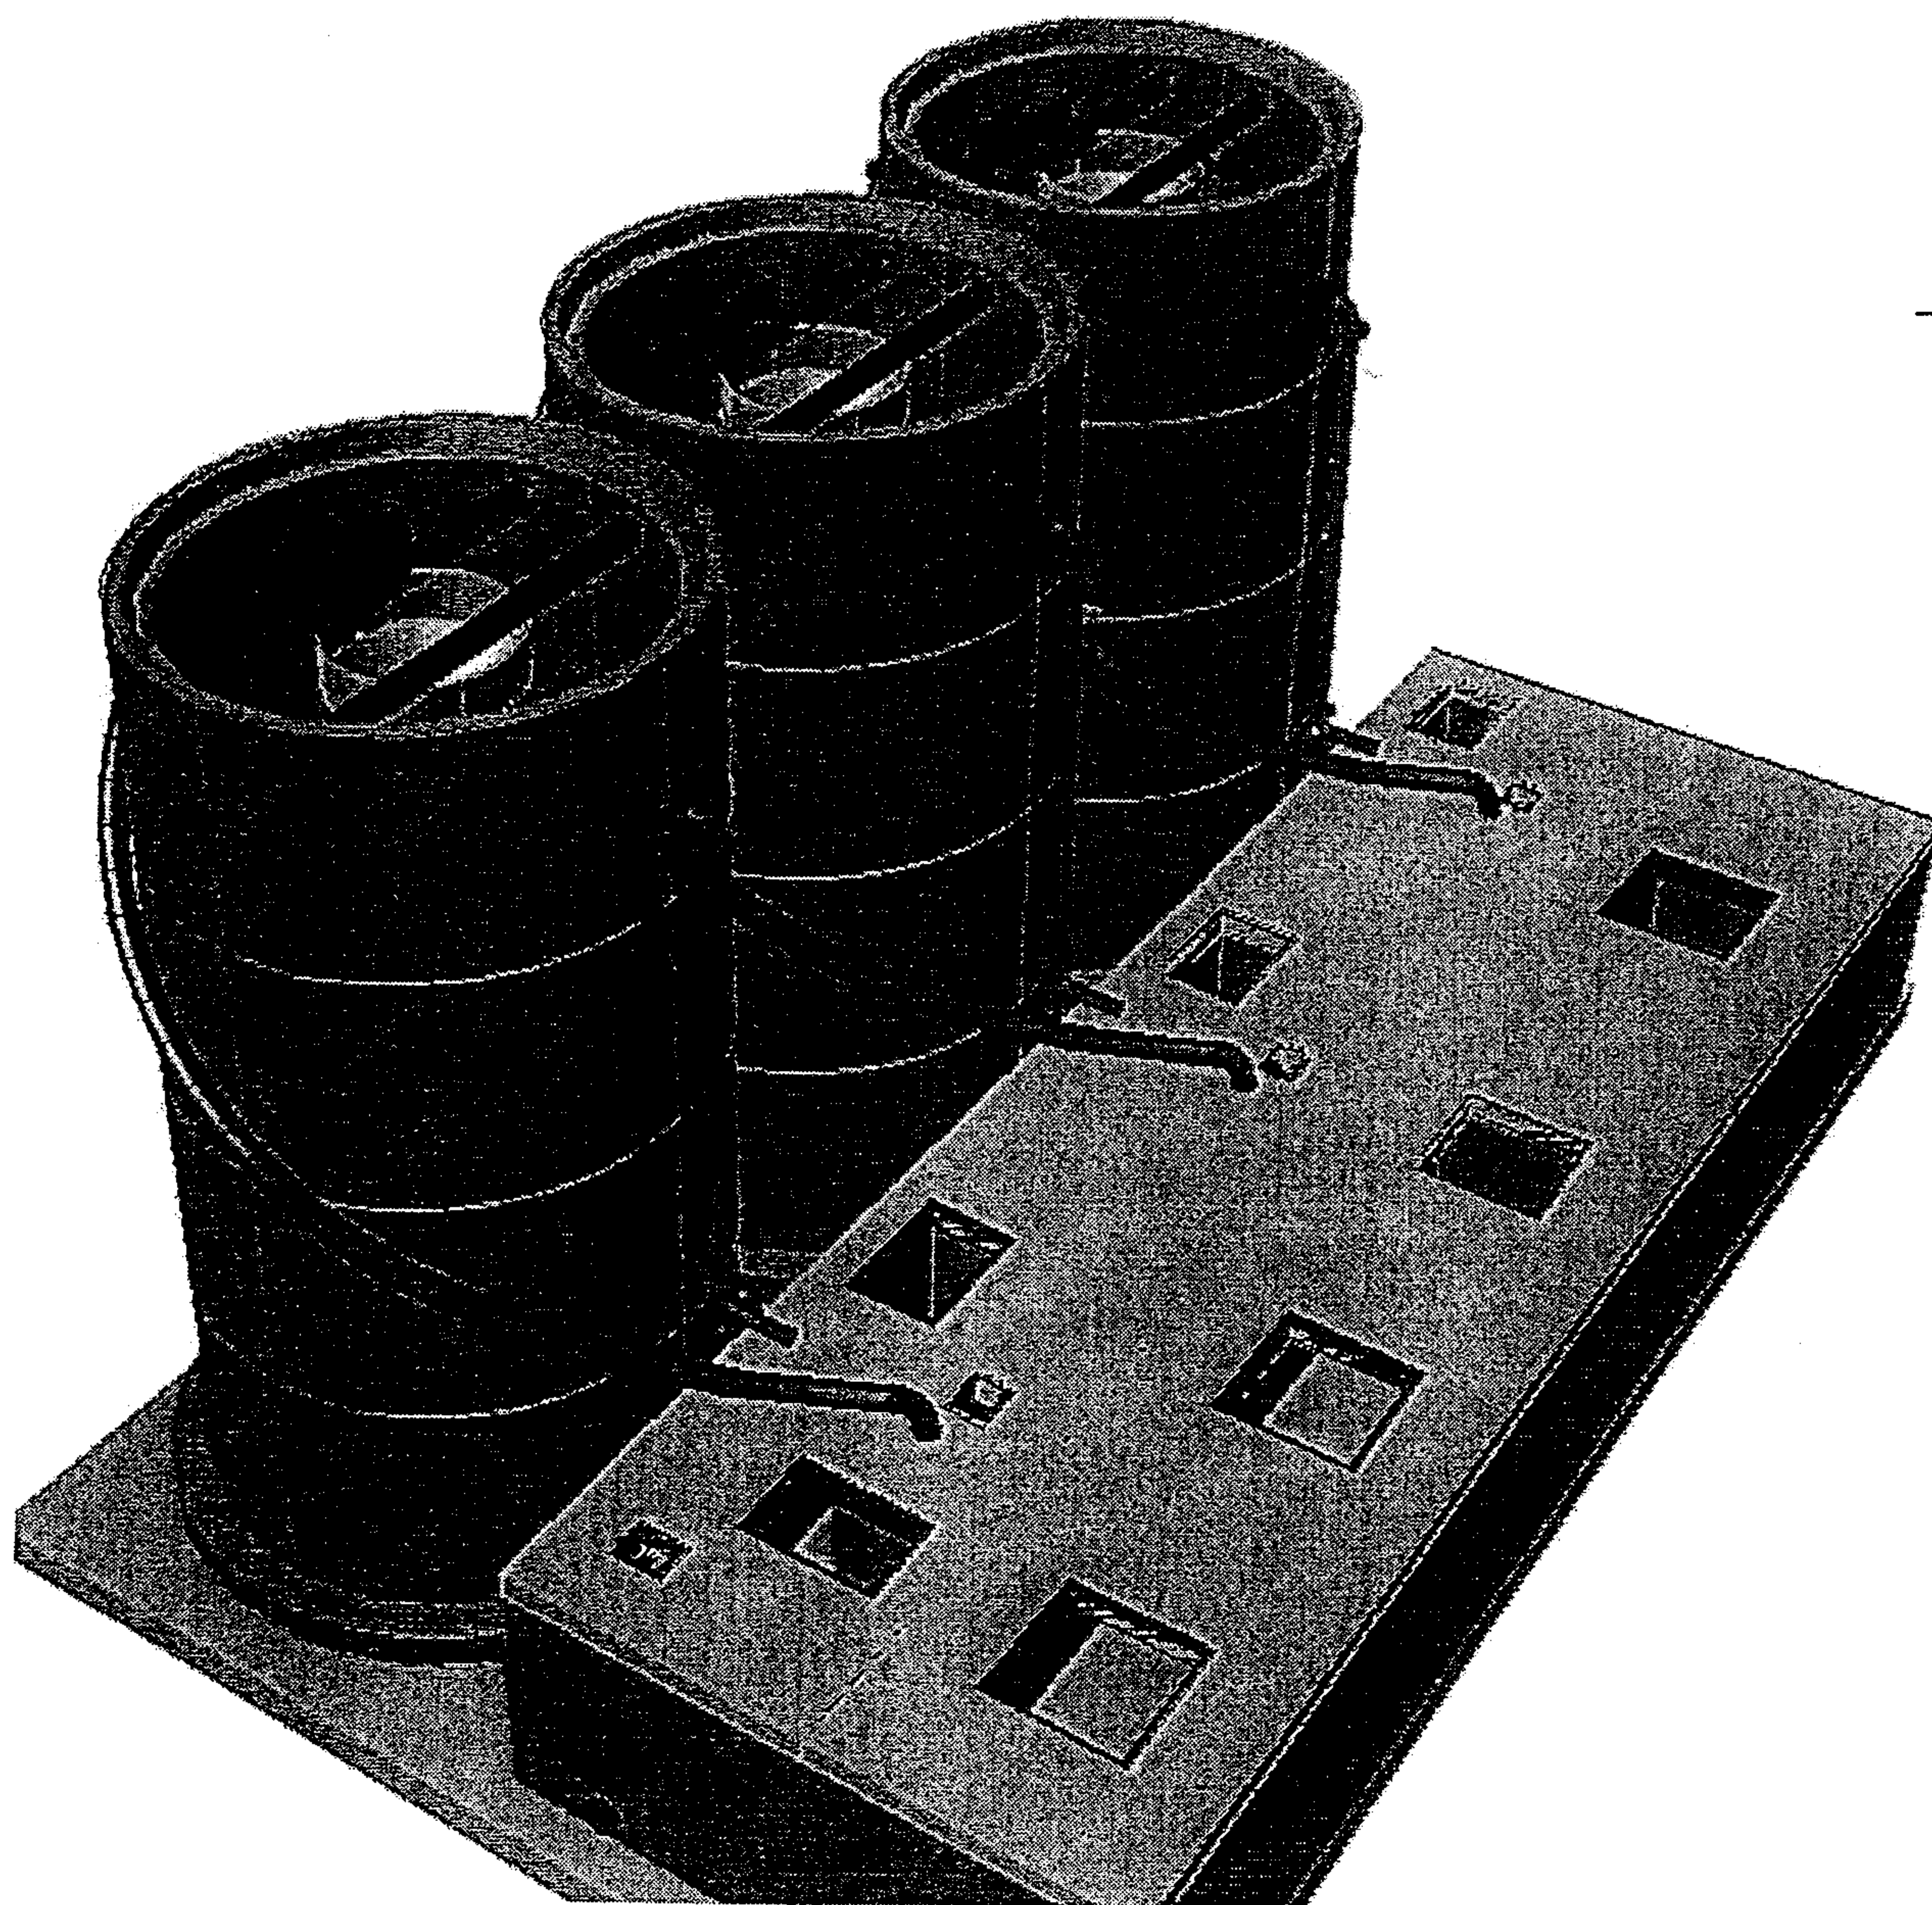


FIG. 3D

8/31

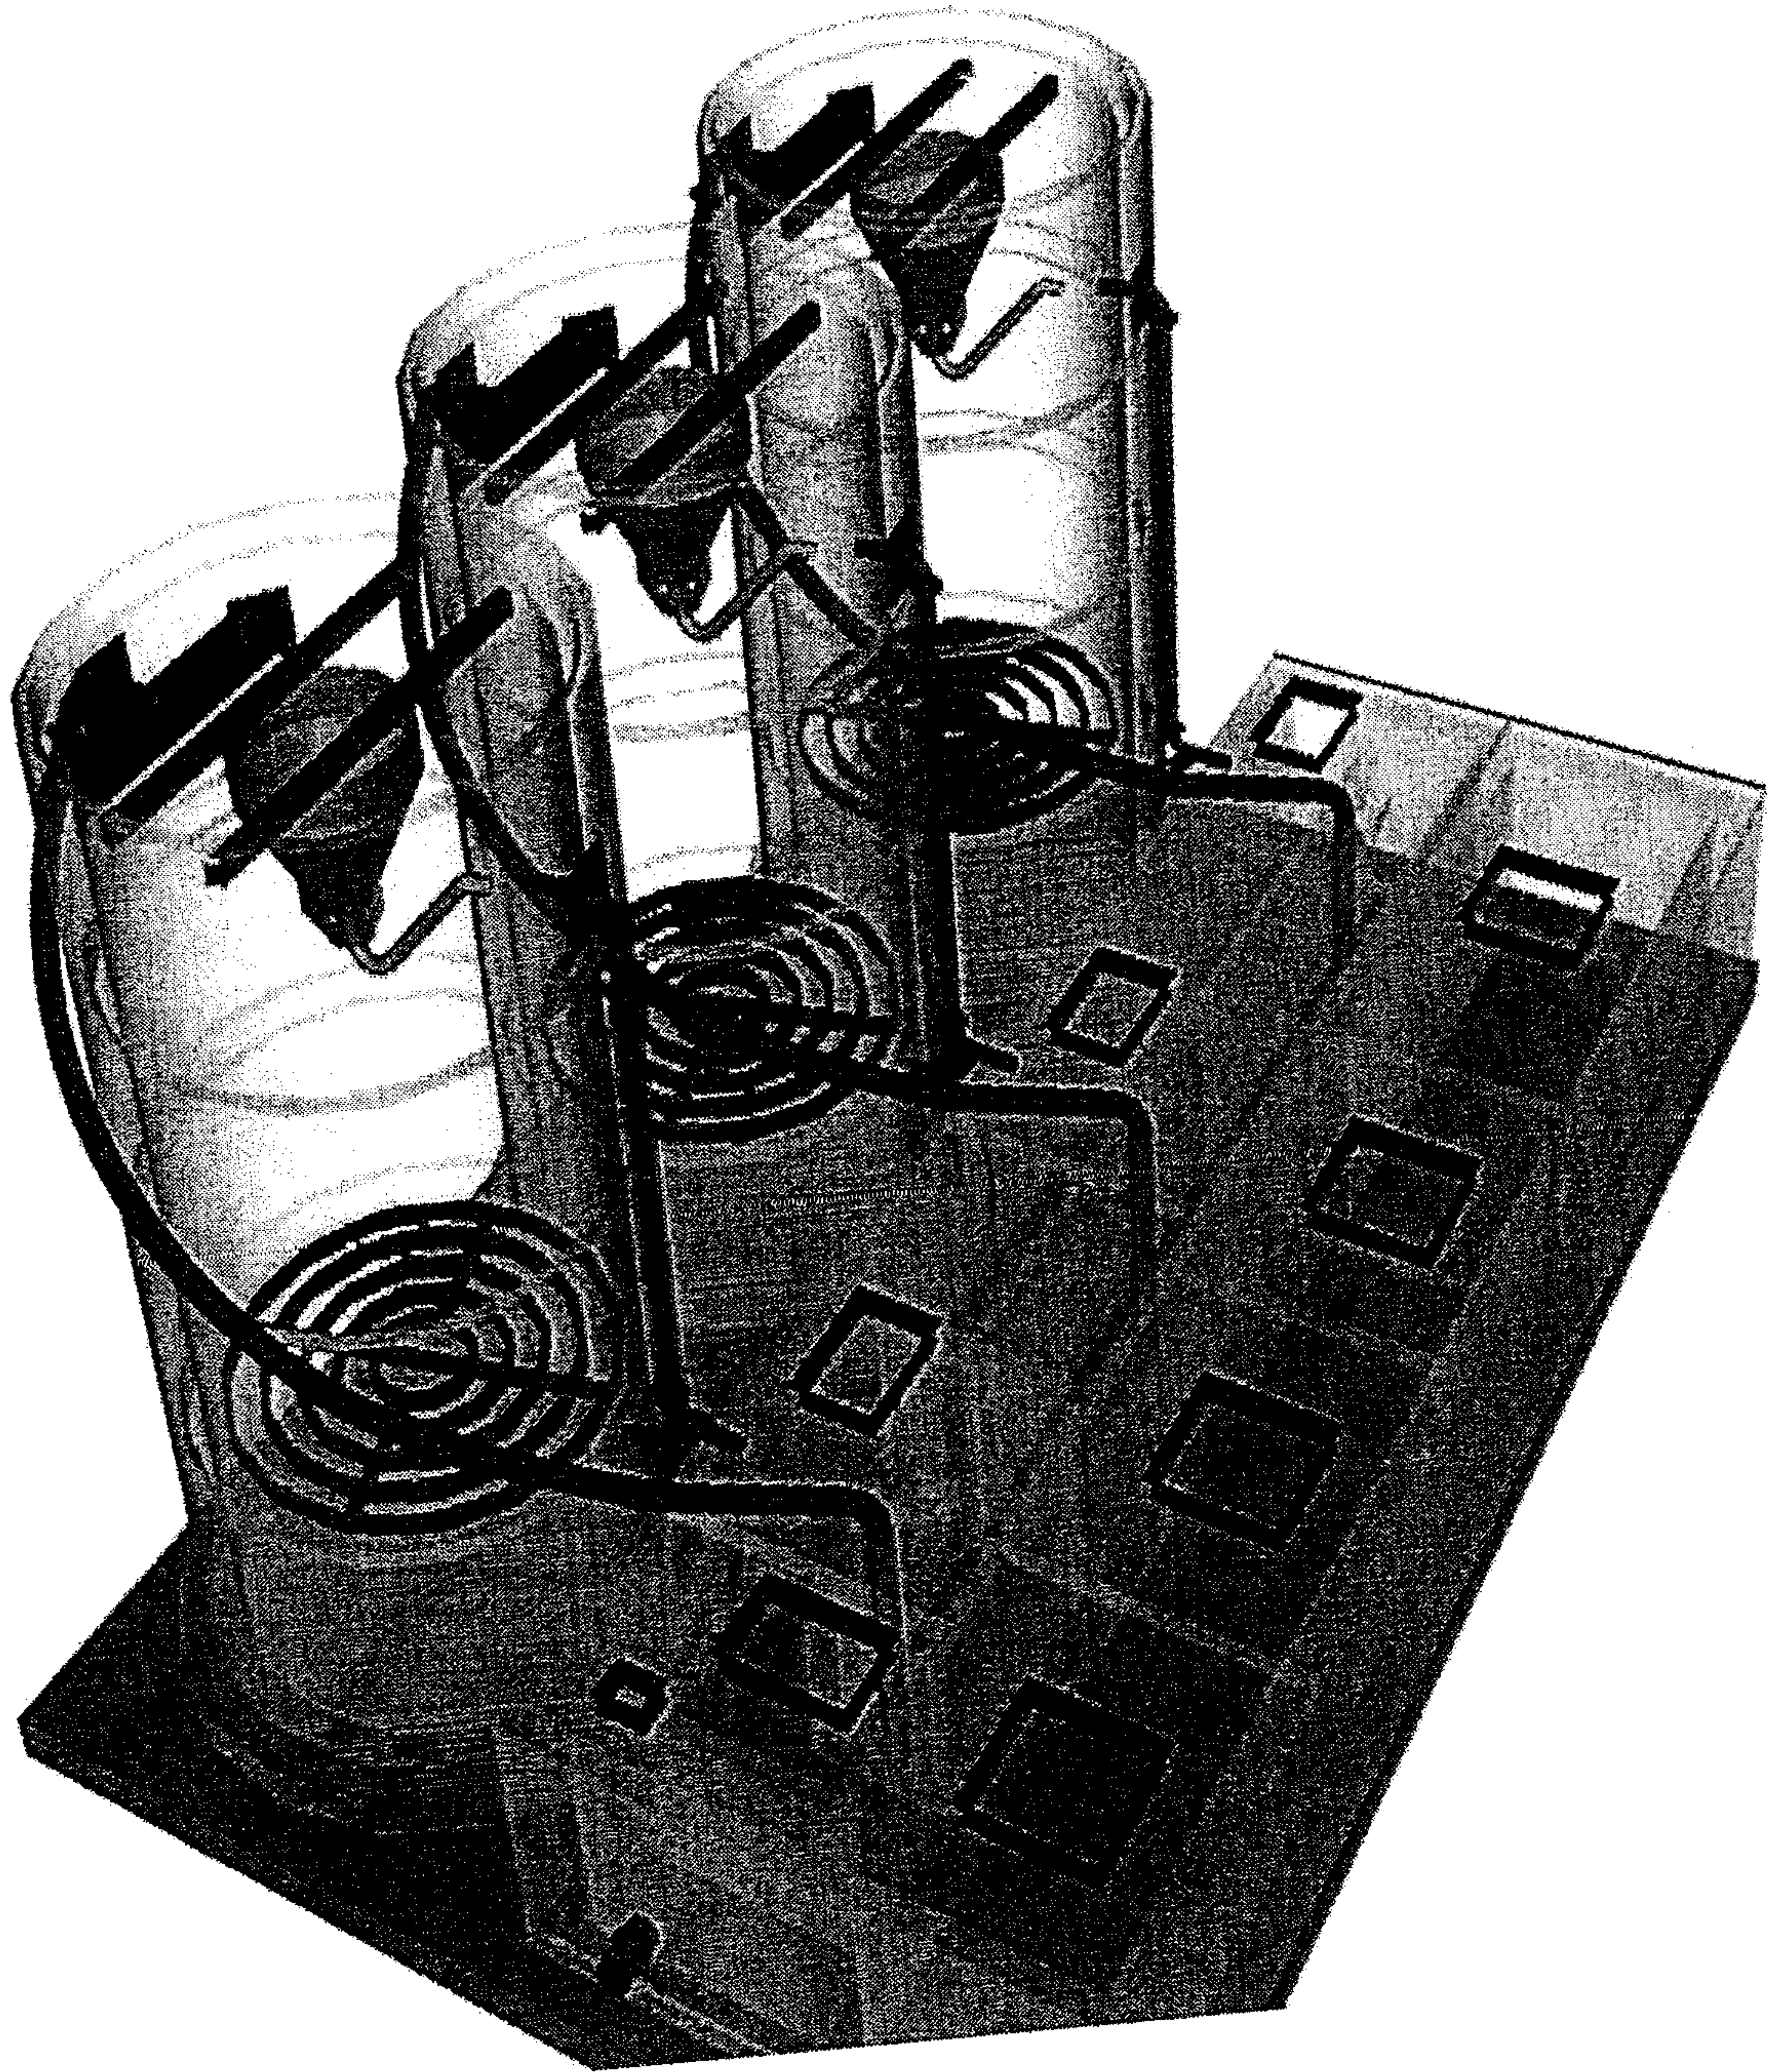


FIG. 3E

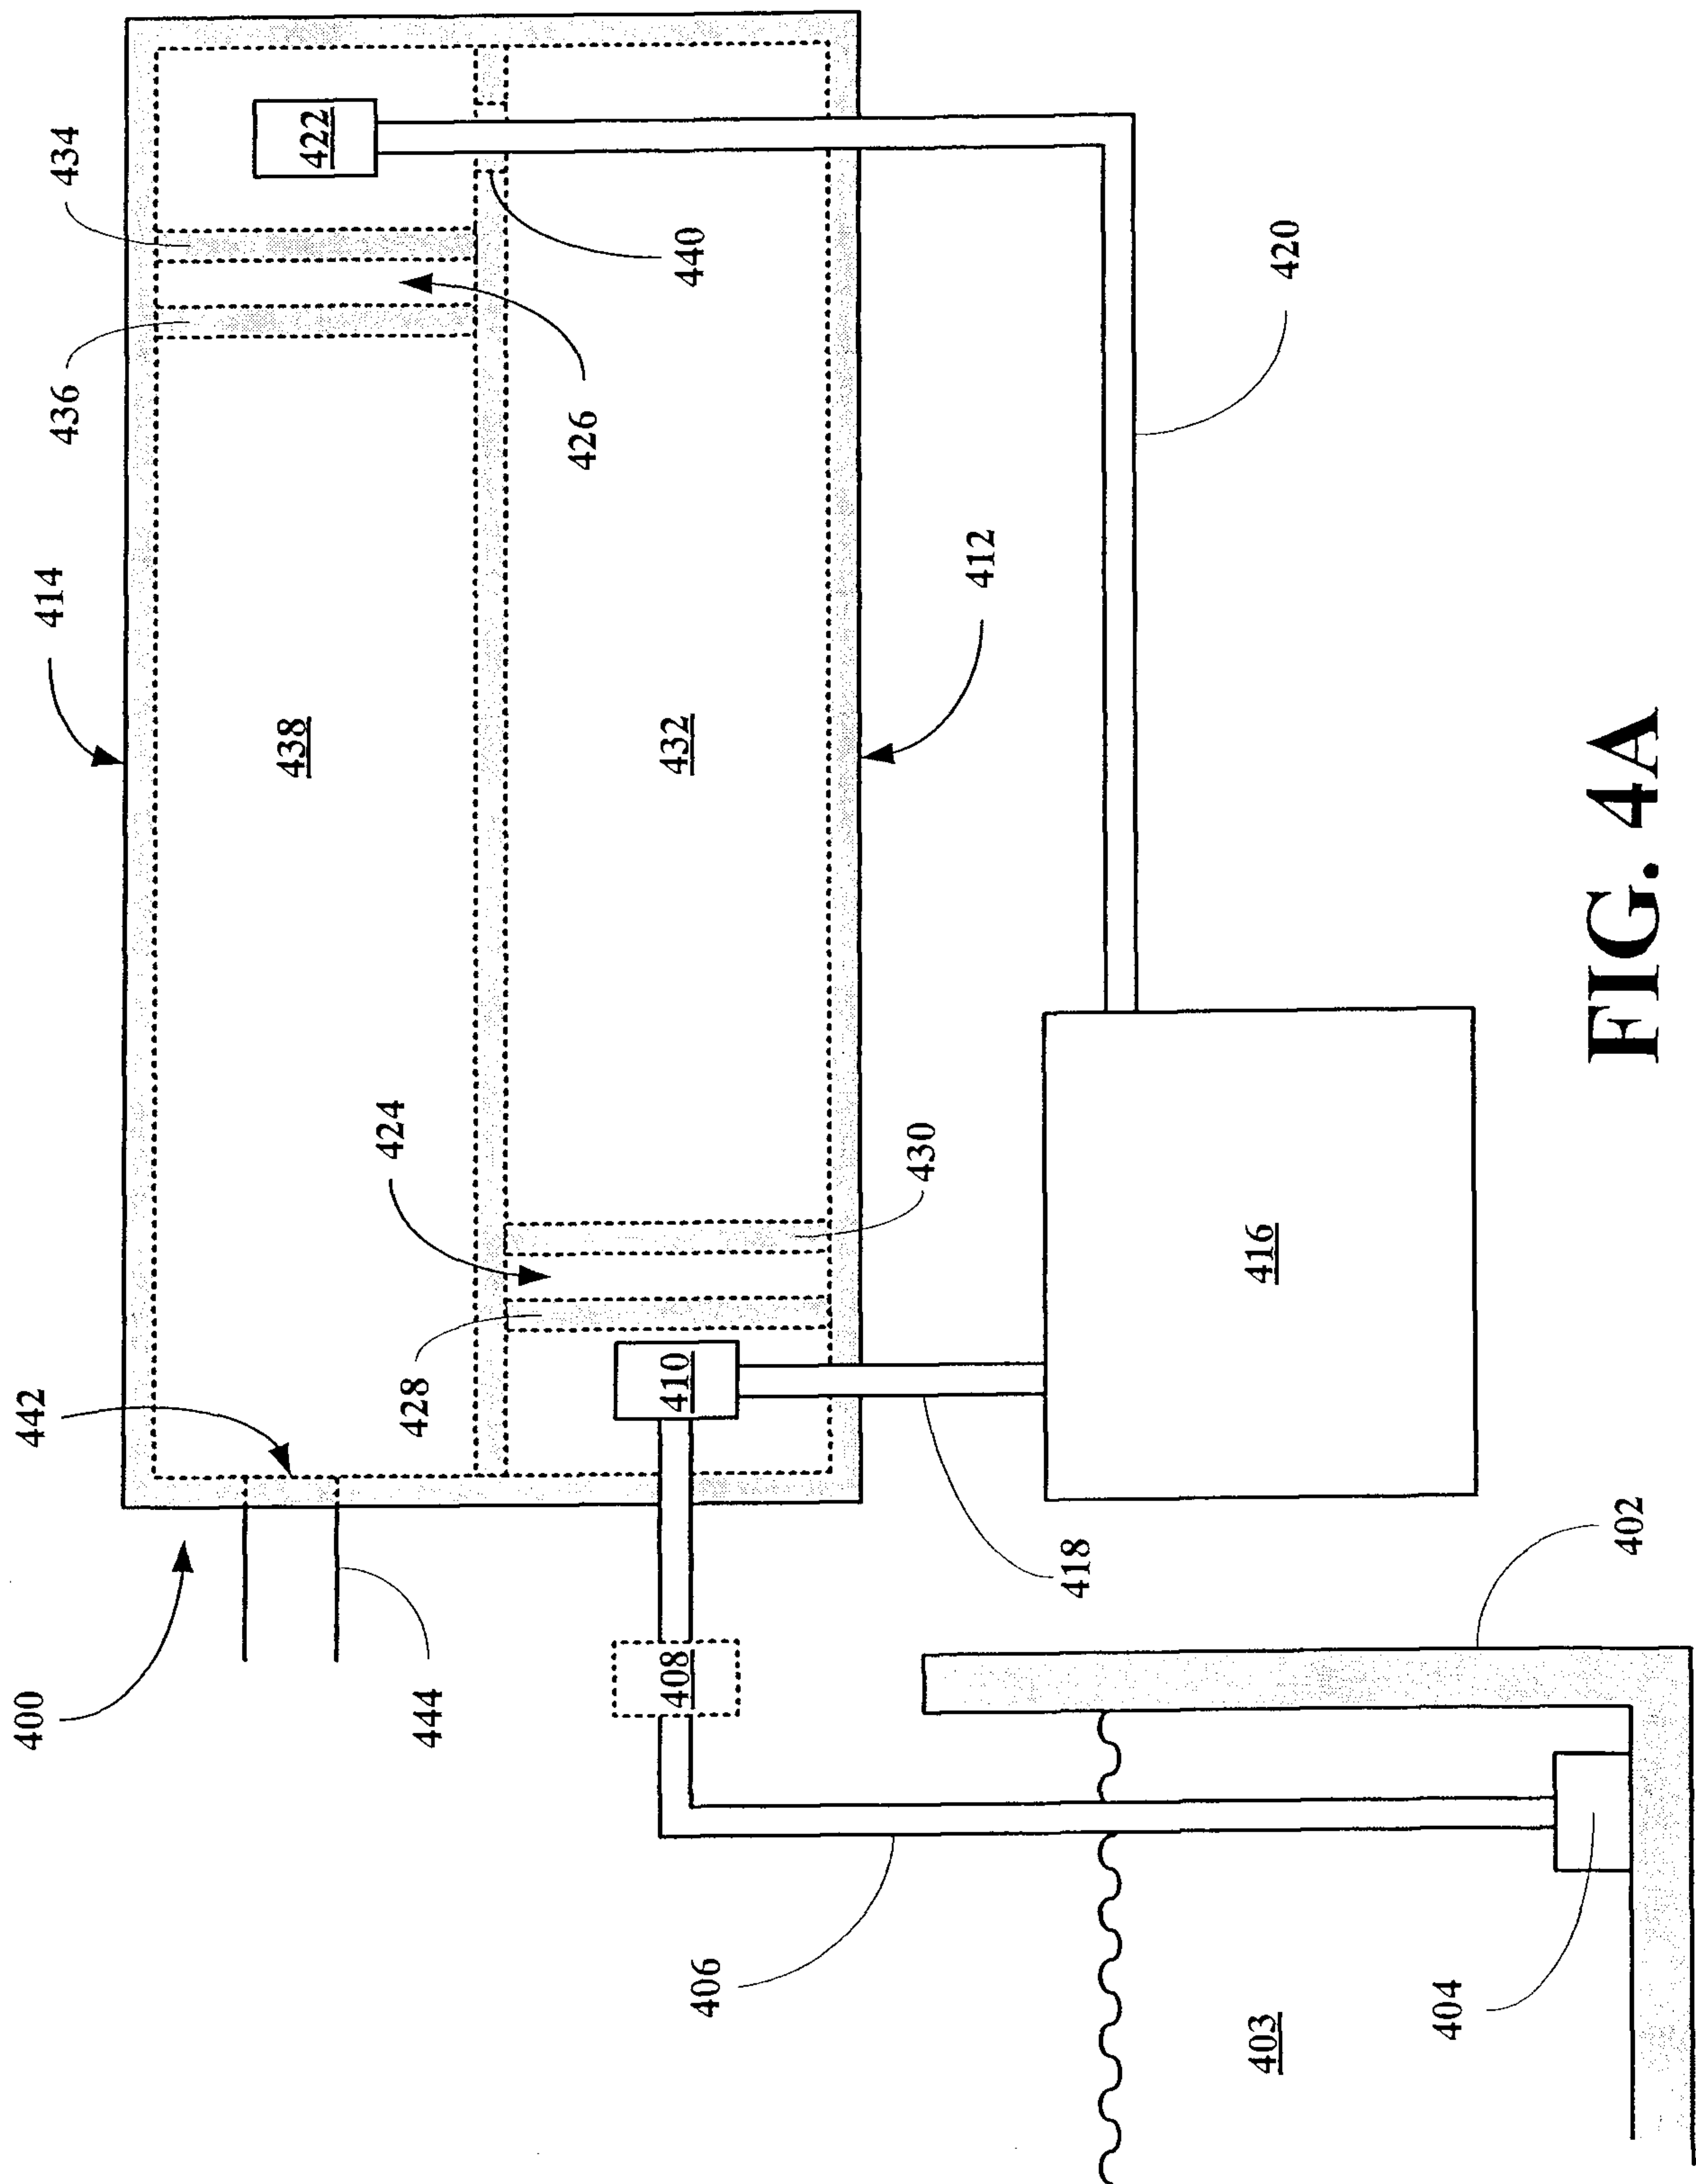


FIG. 4A

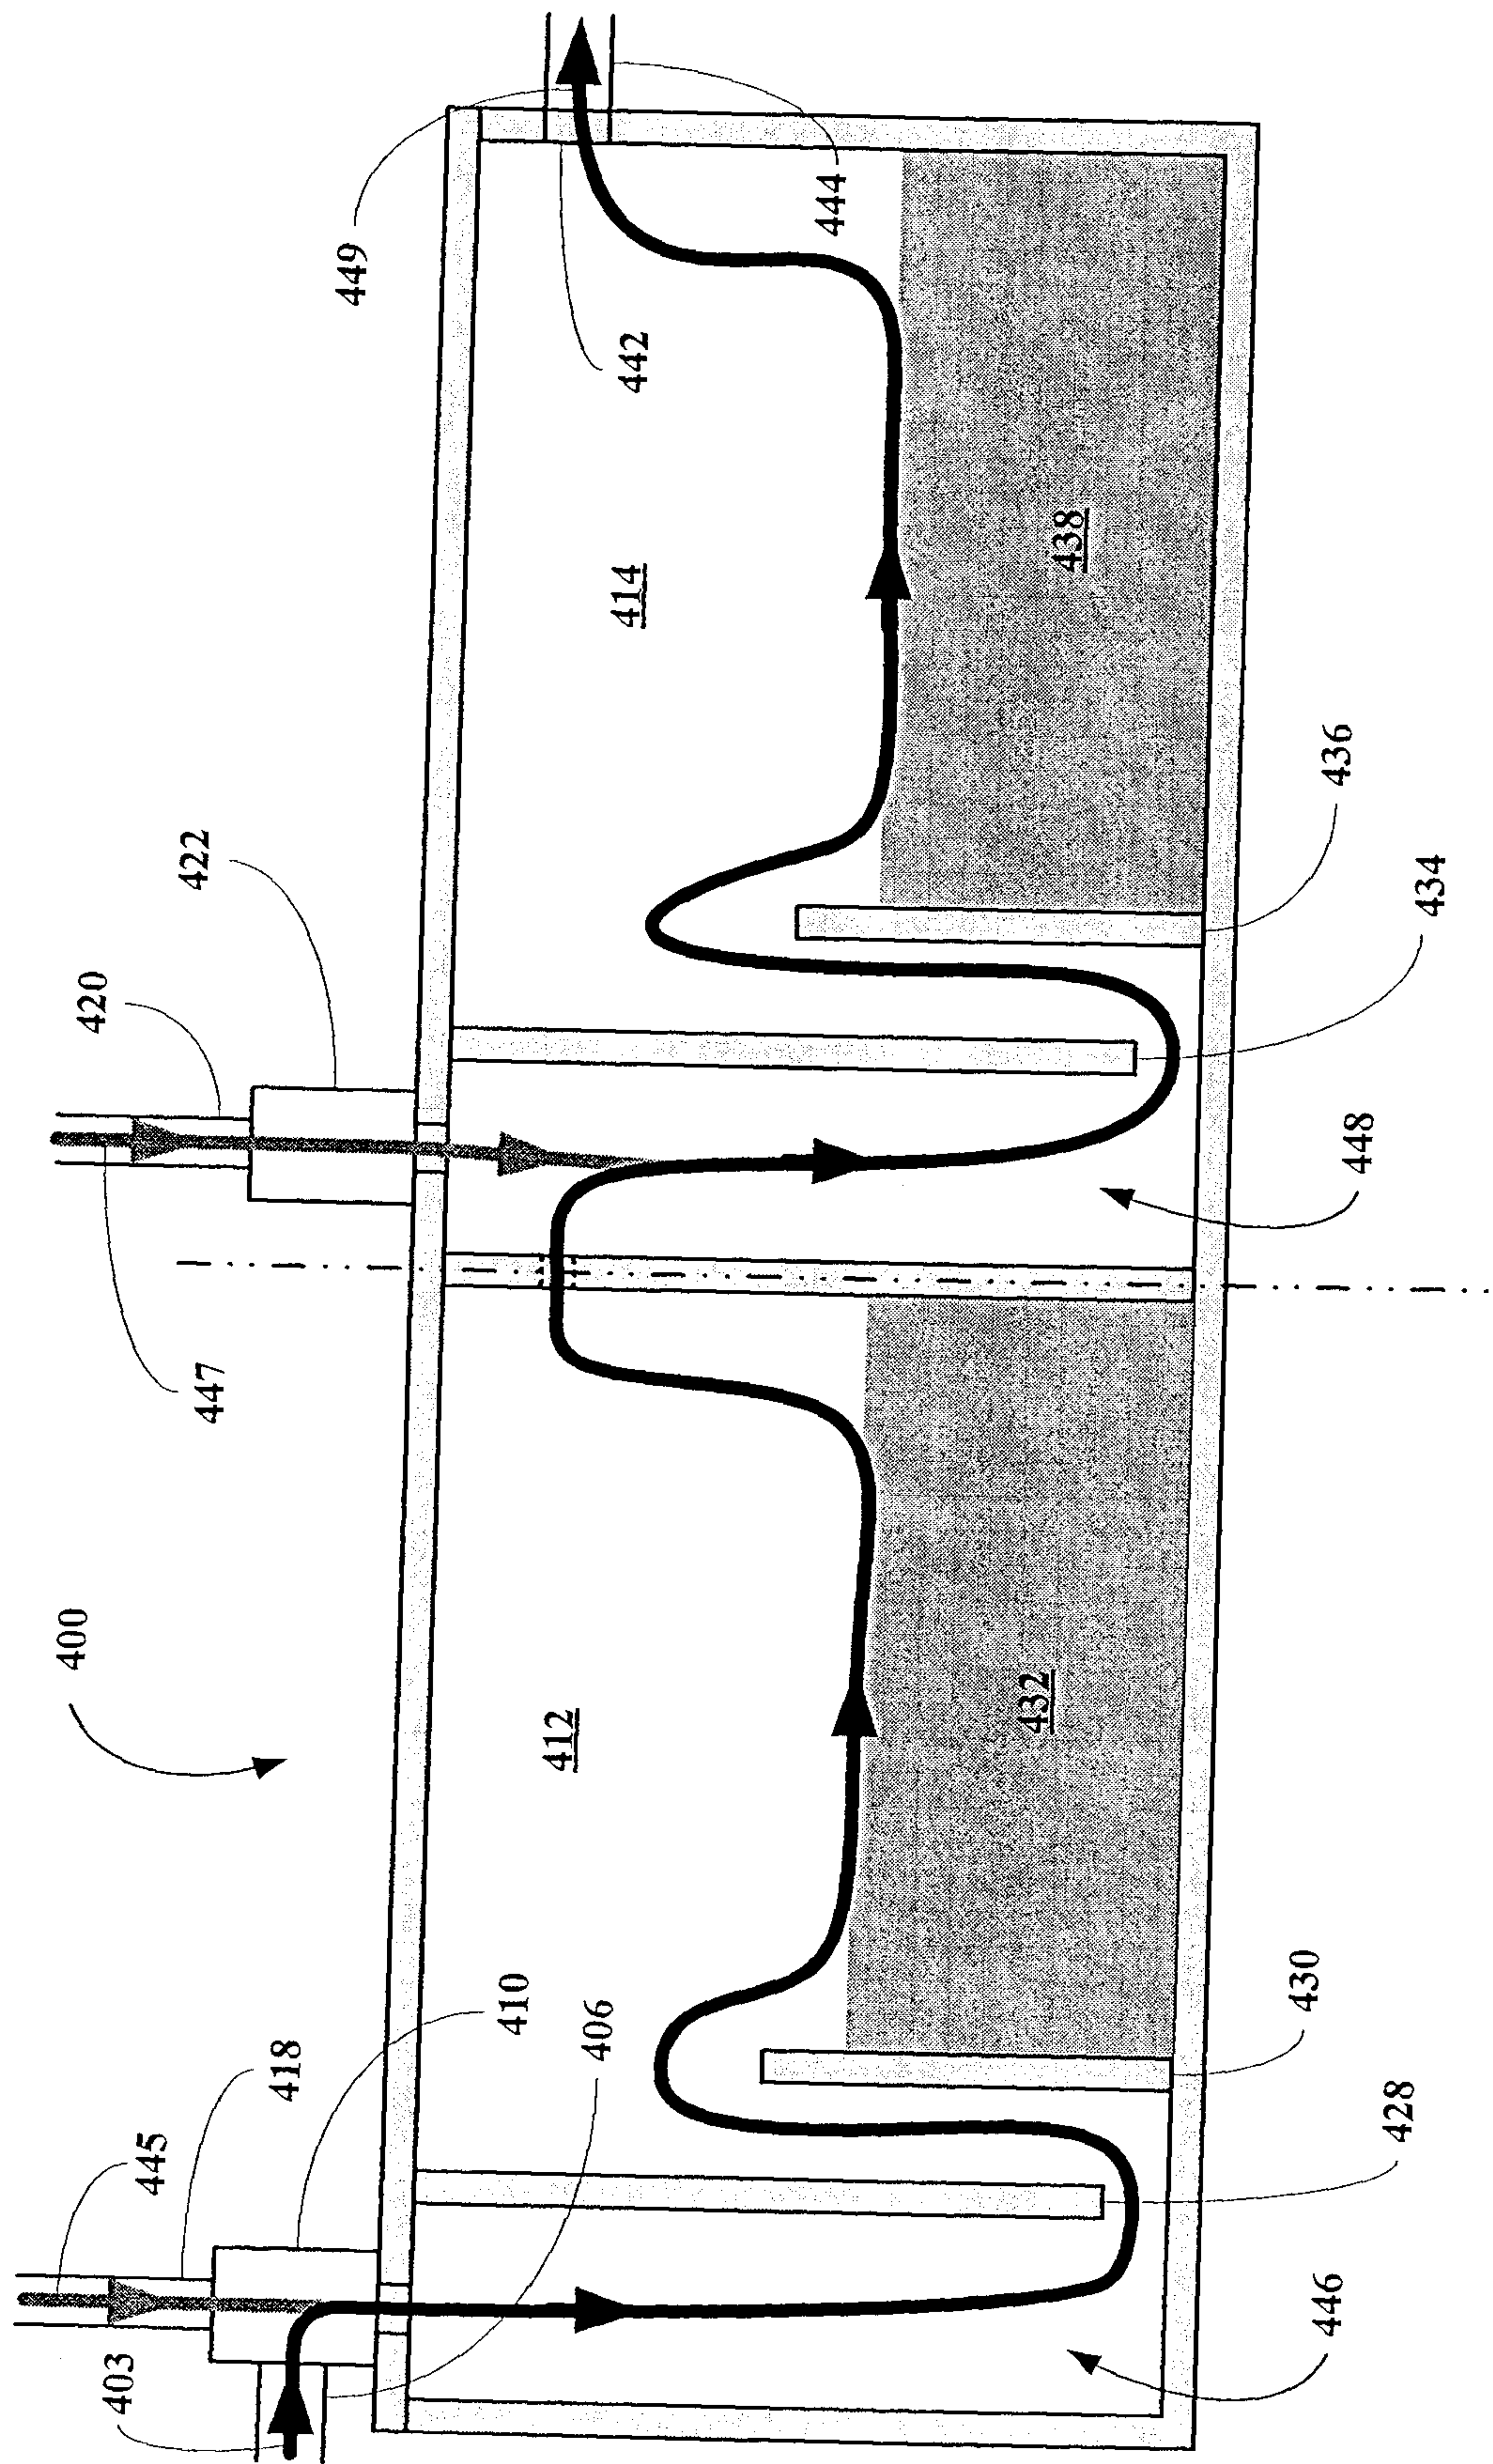


FIG. 4B

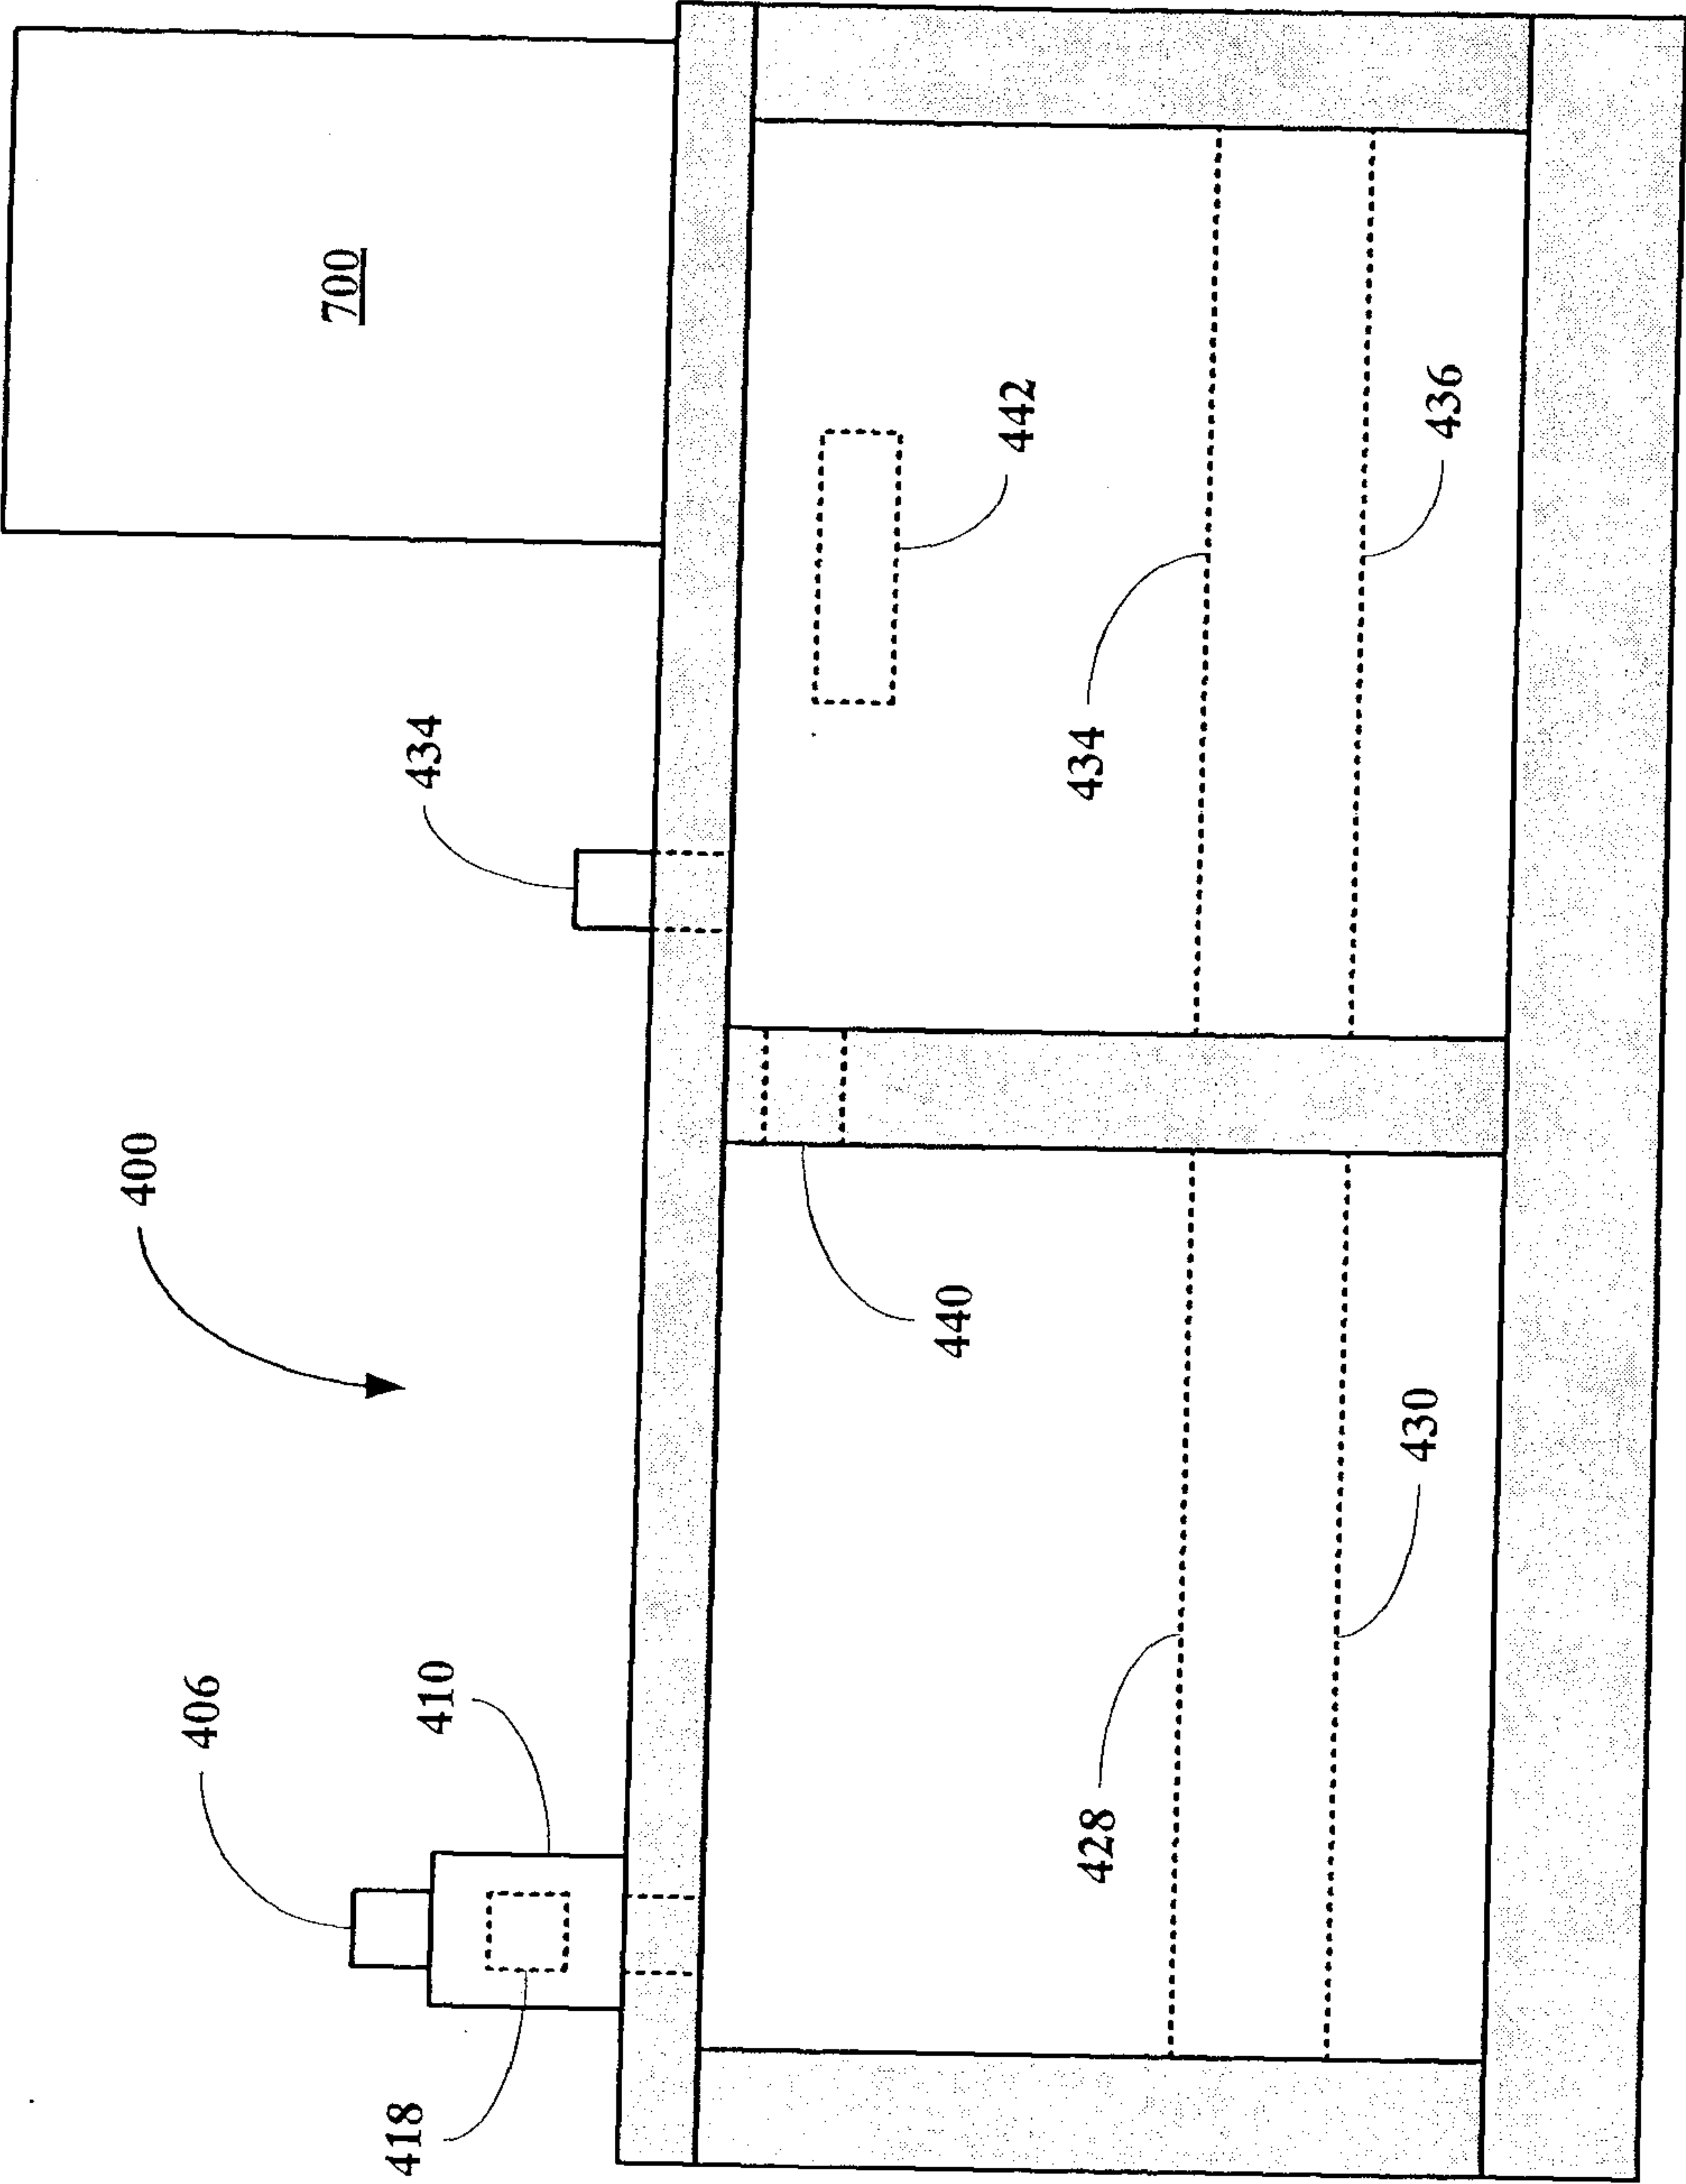


FIG. 4C

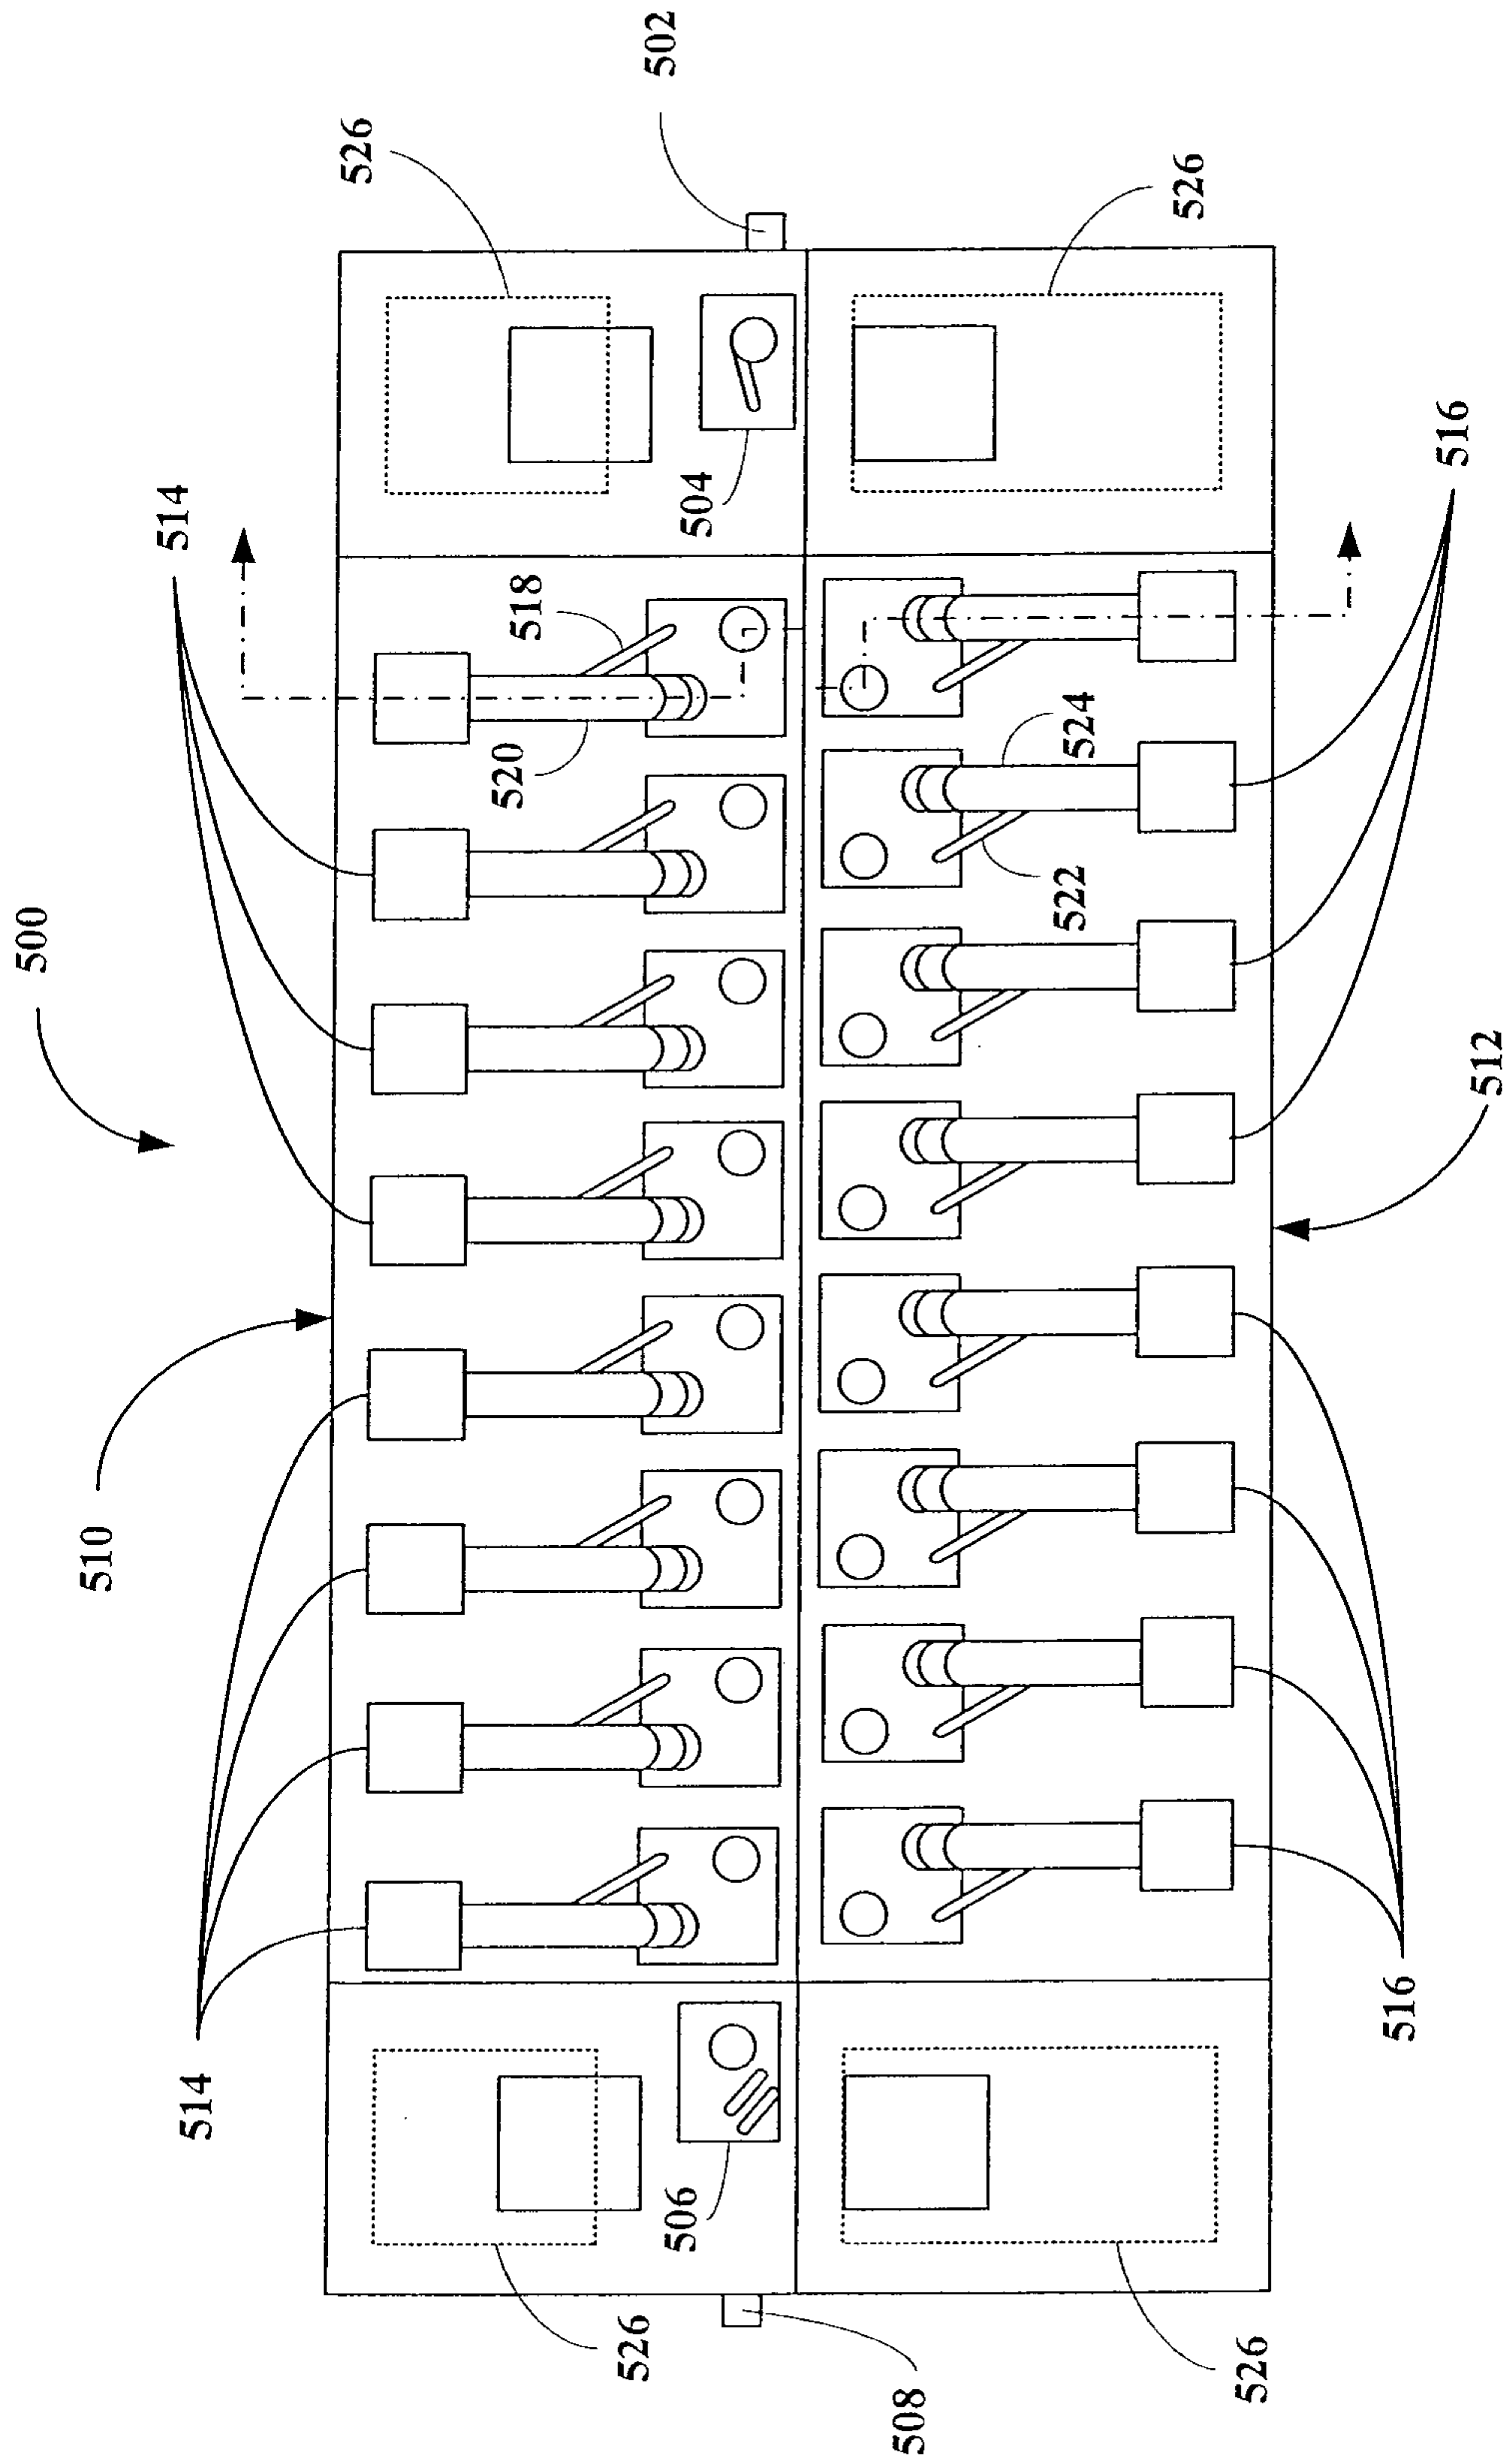


FIG. 5A

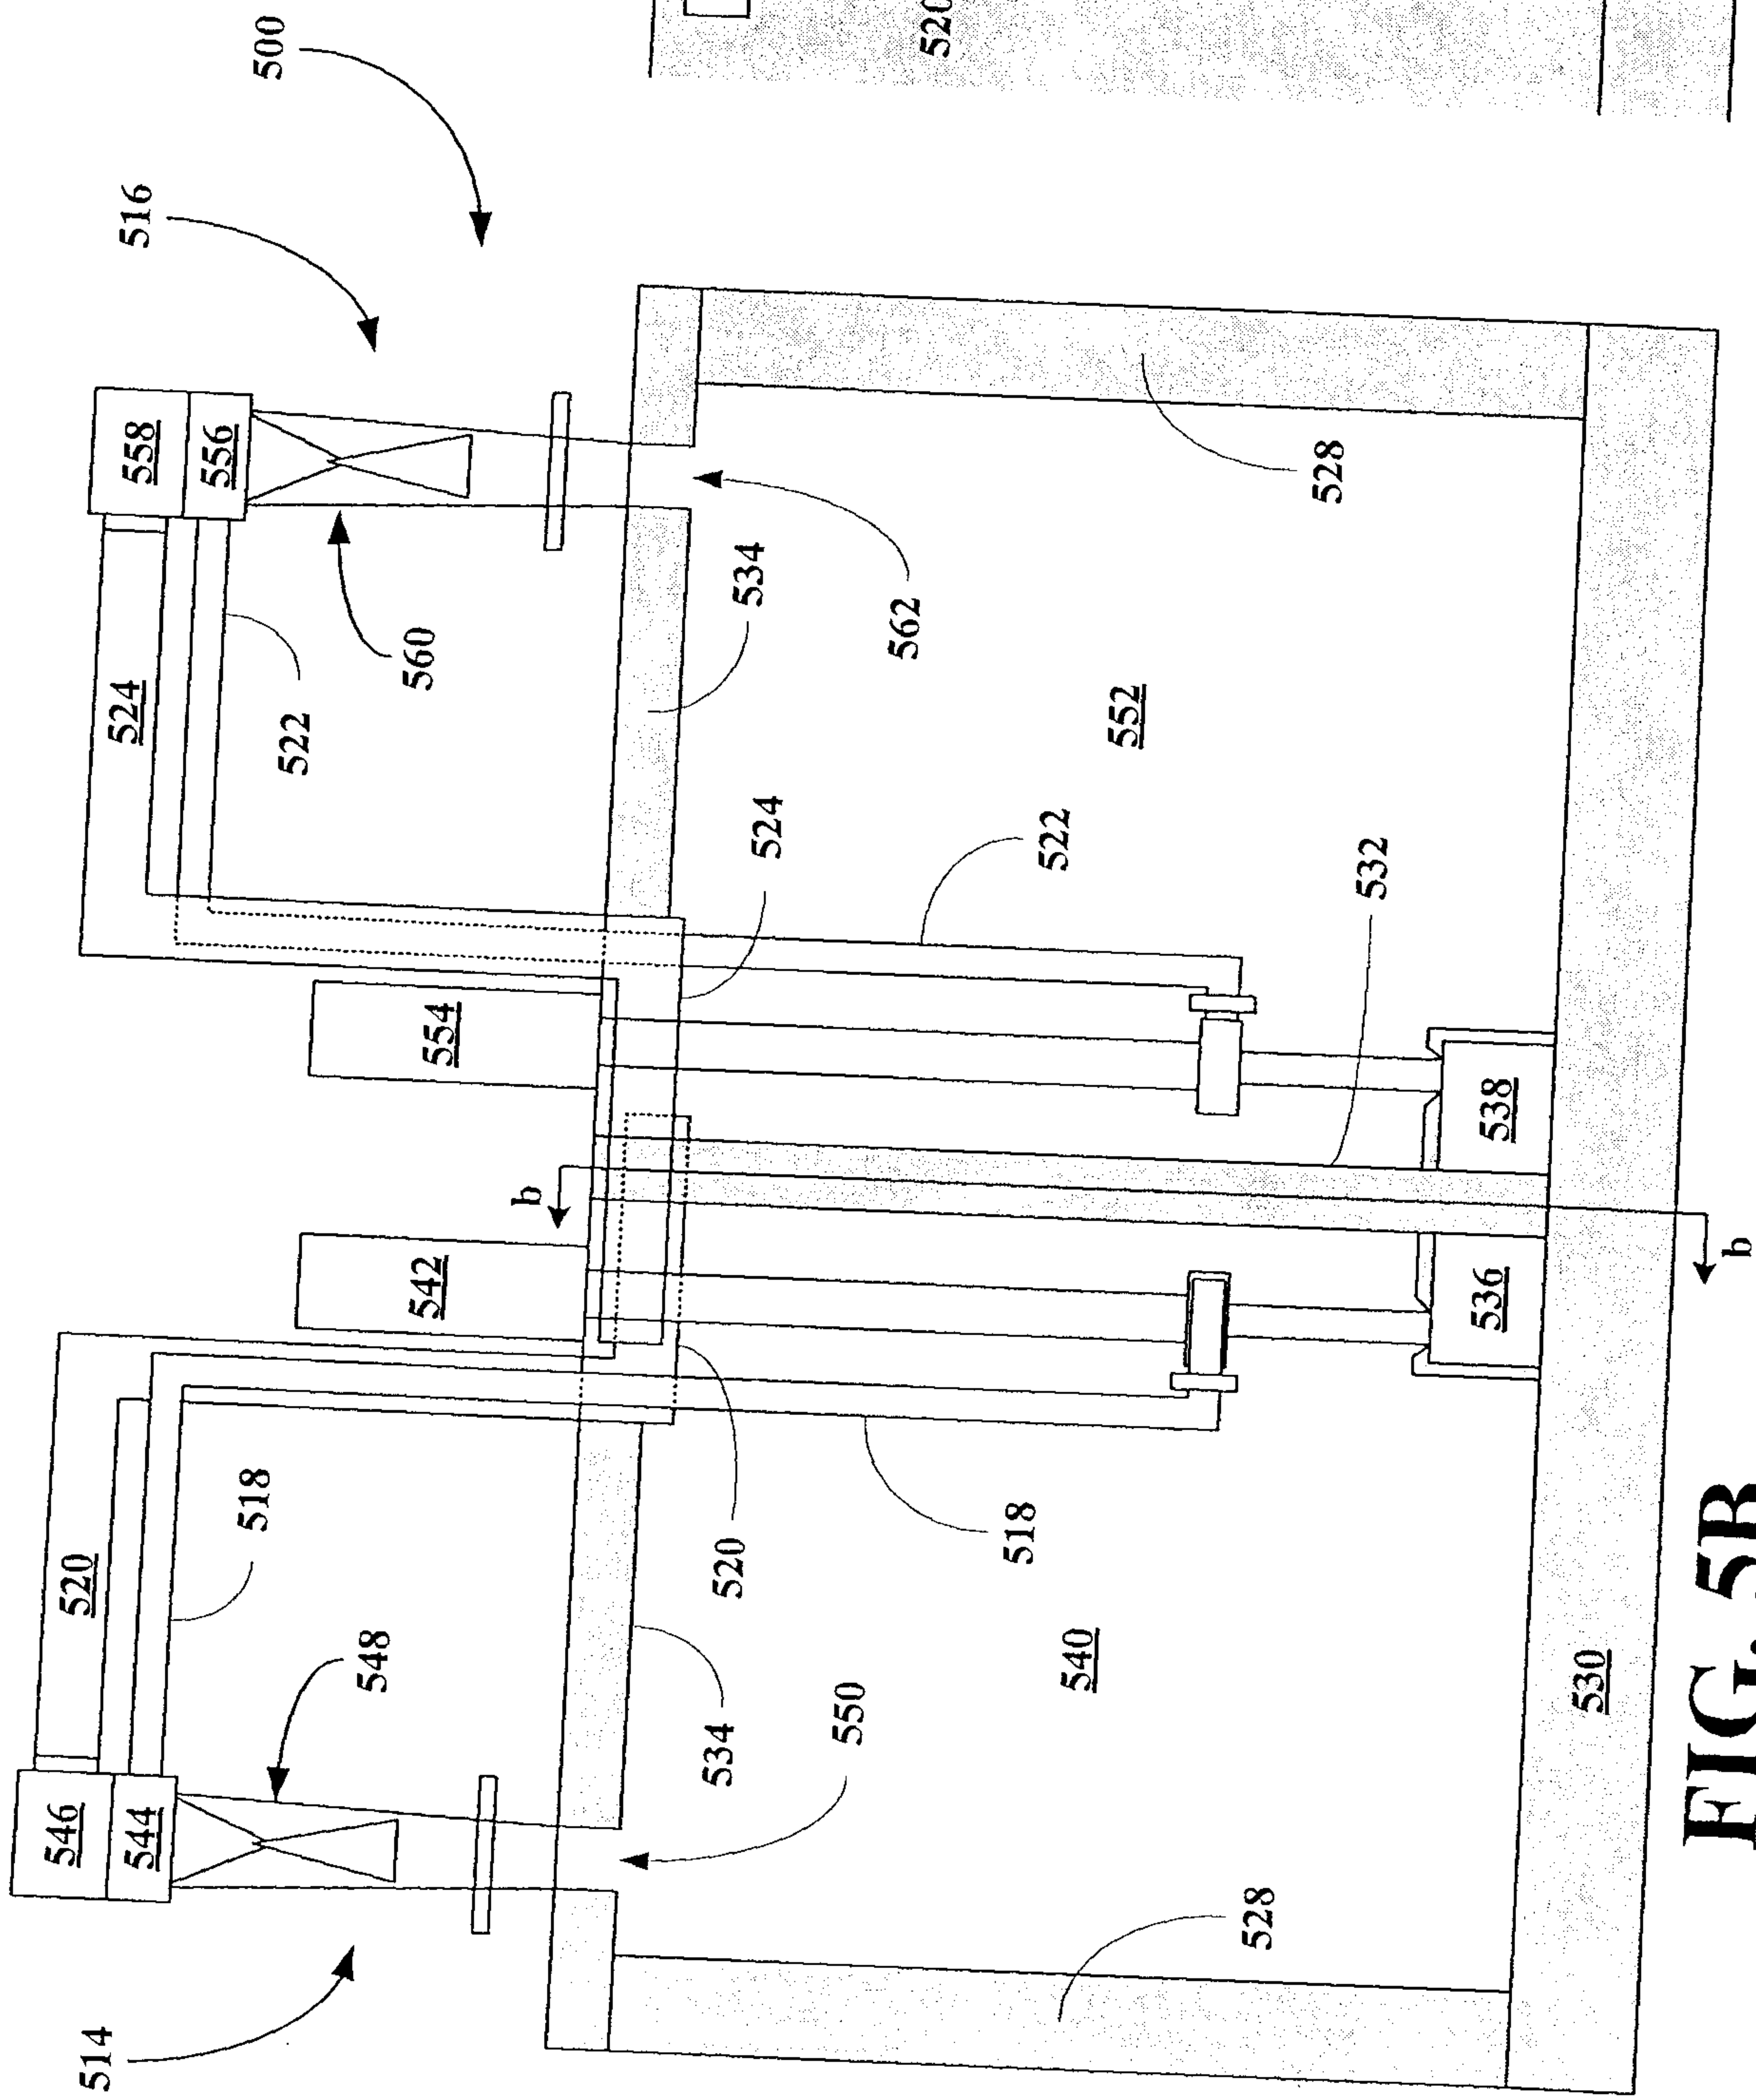


FIG. 5B

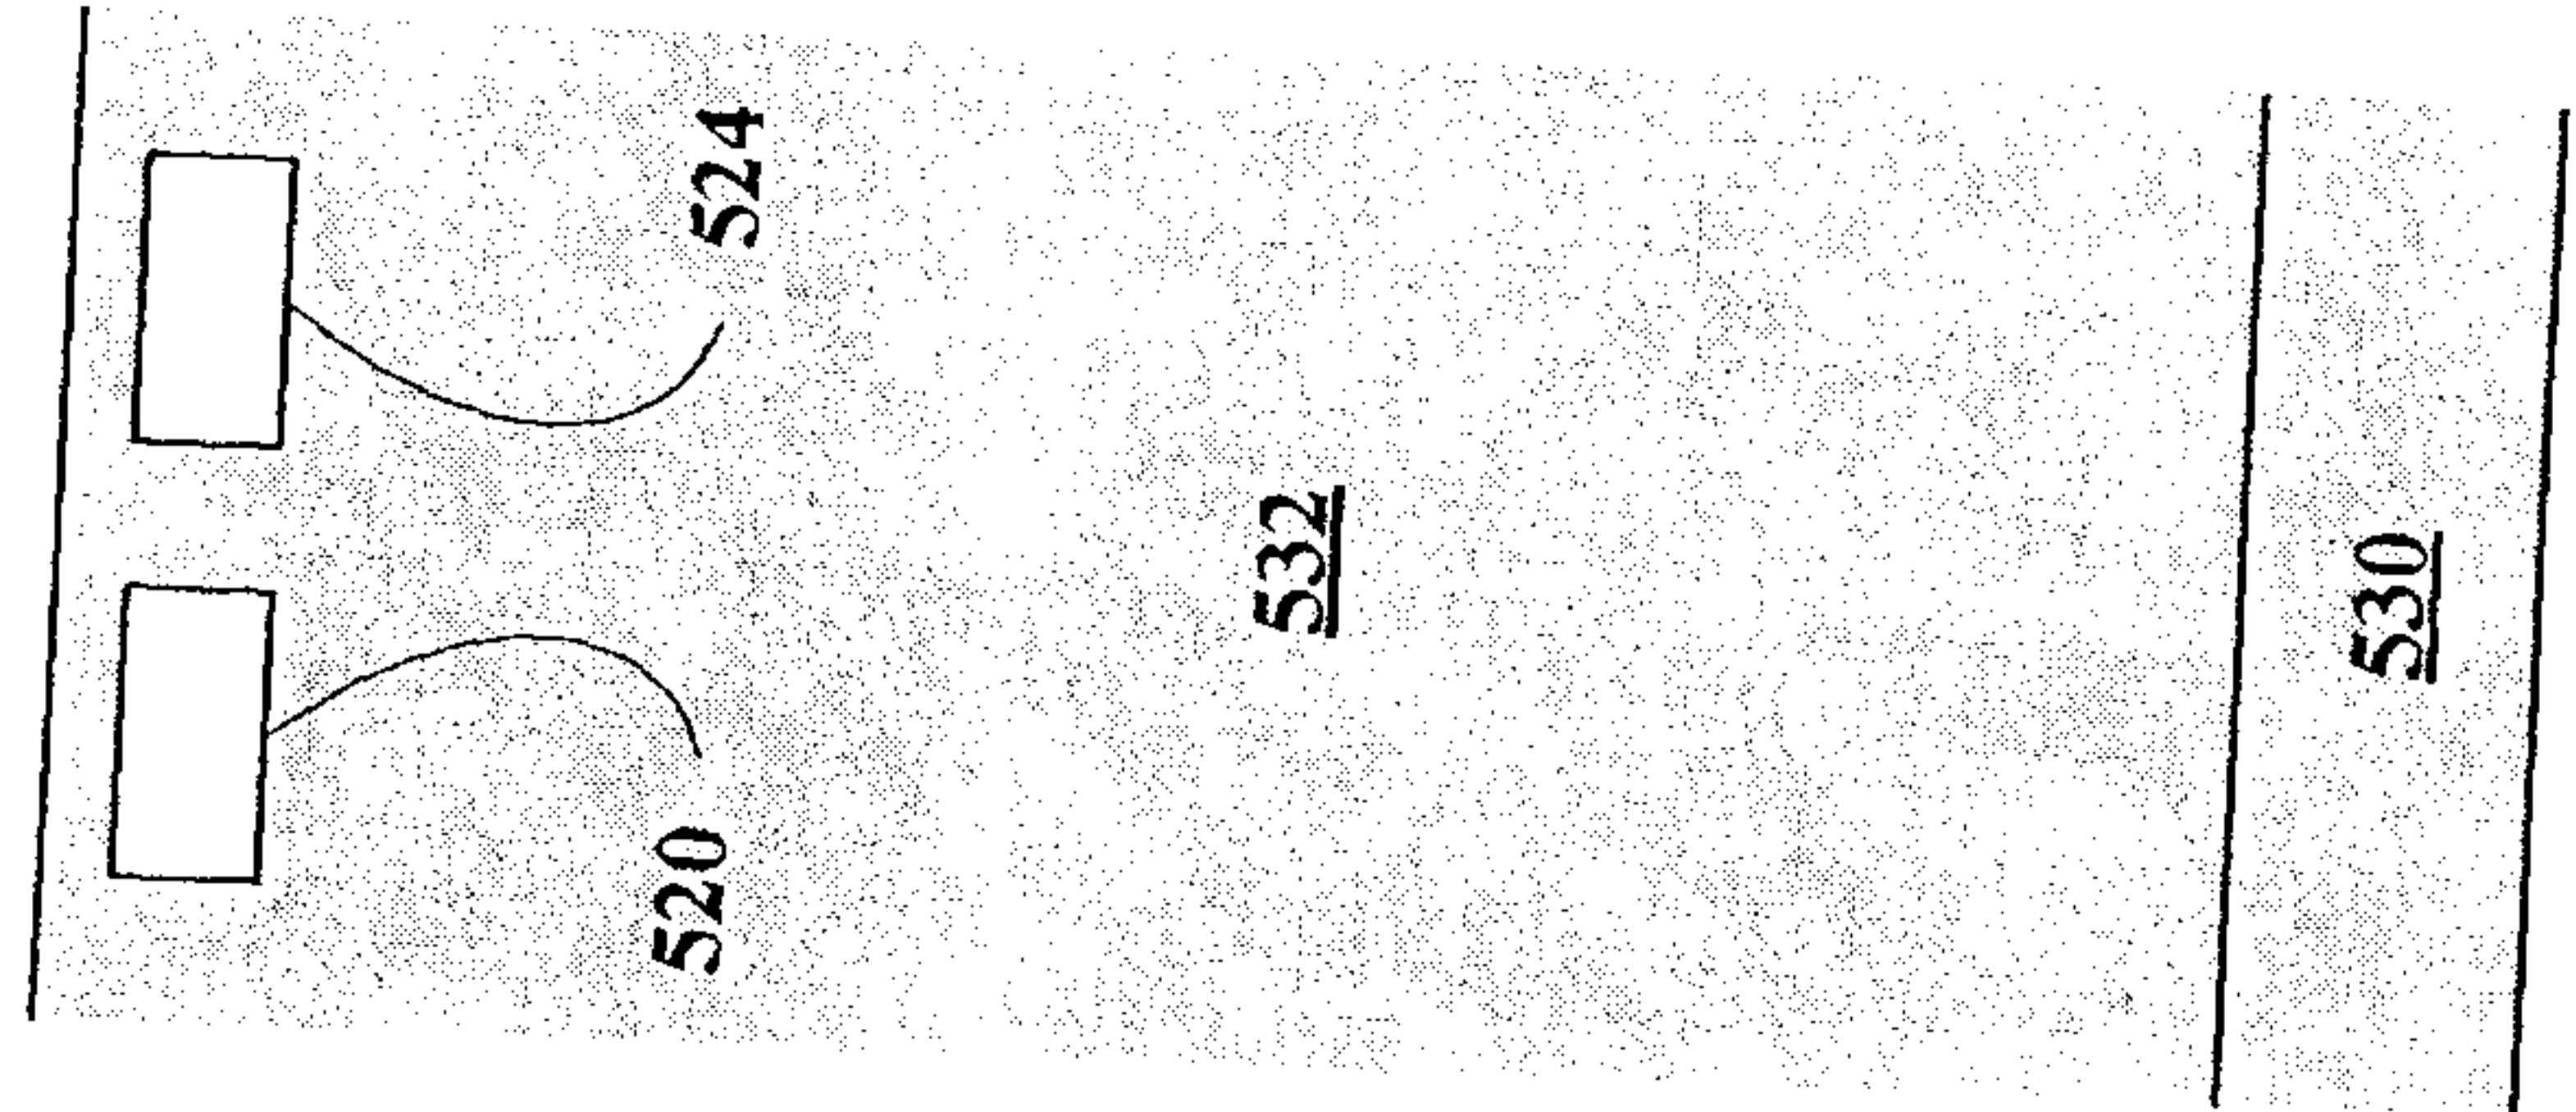


FIG. 5C

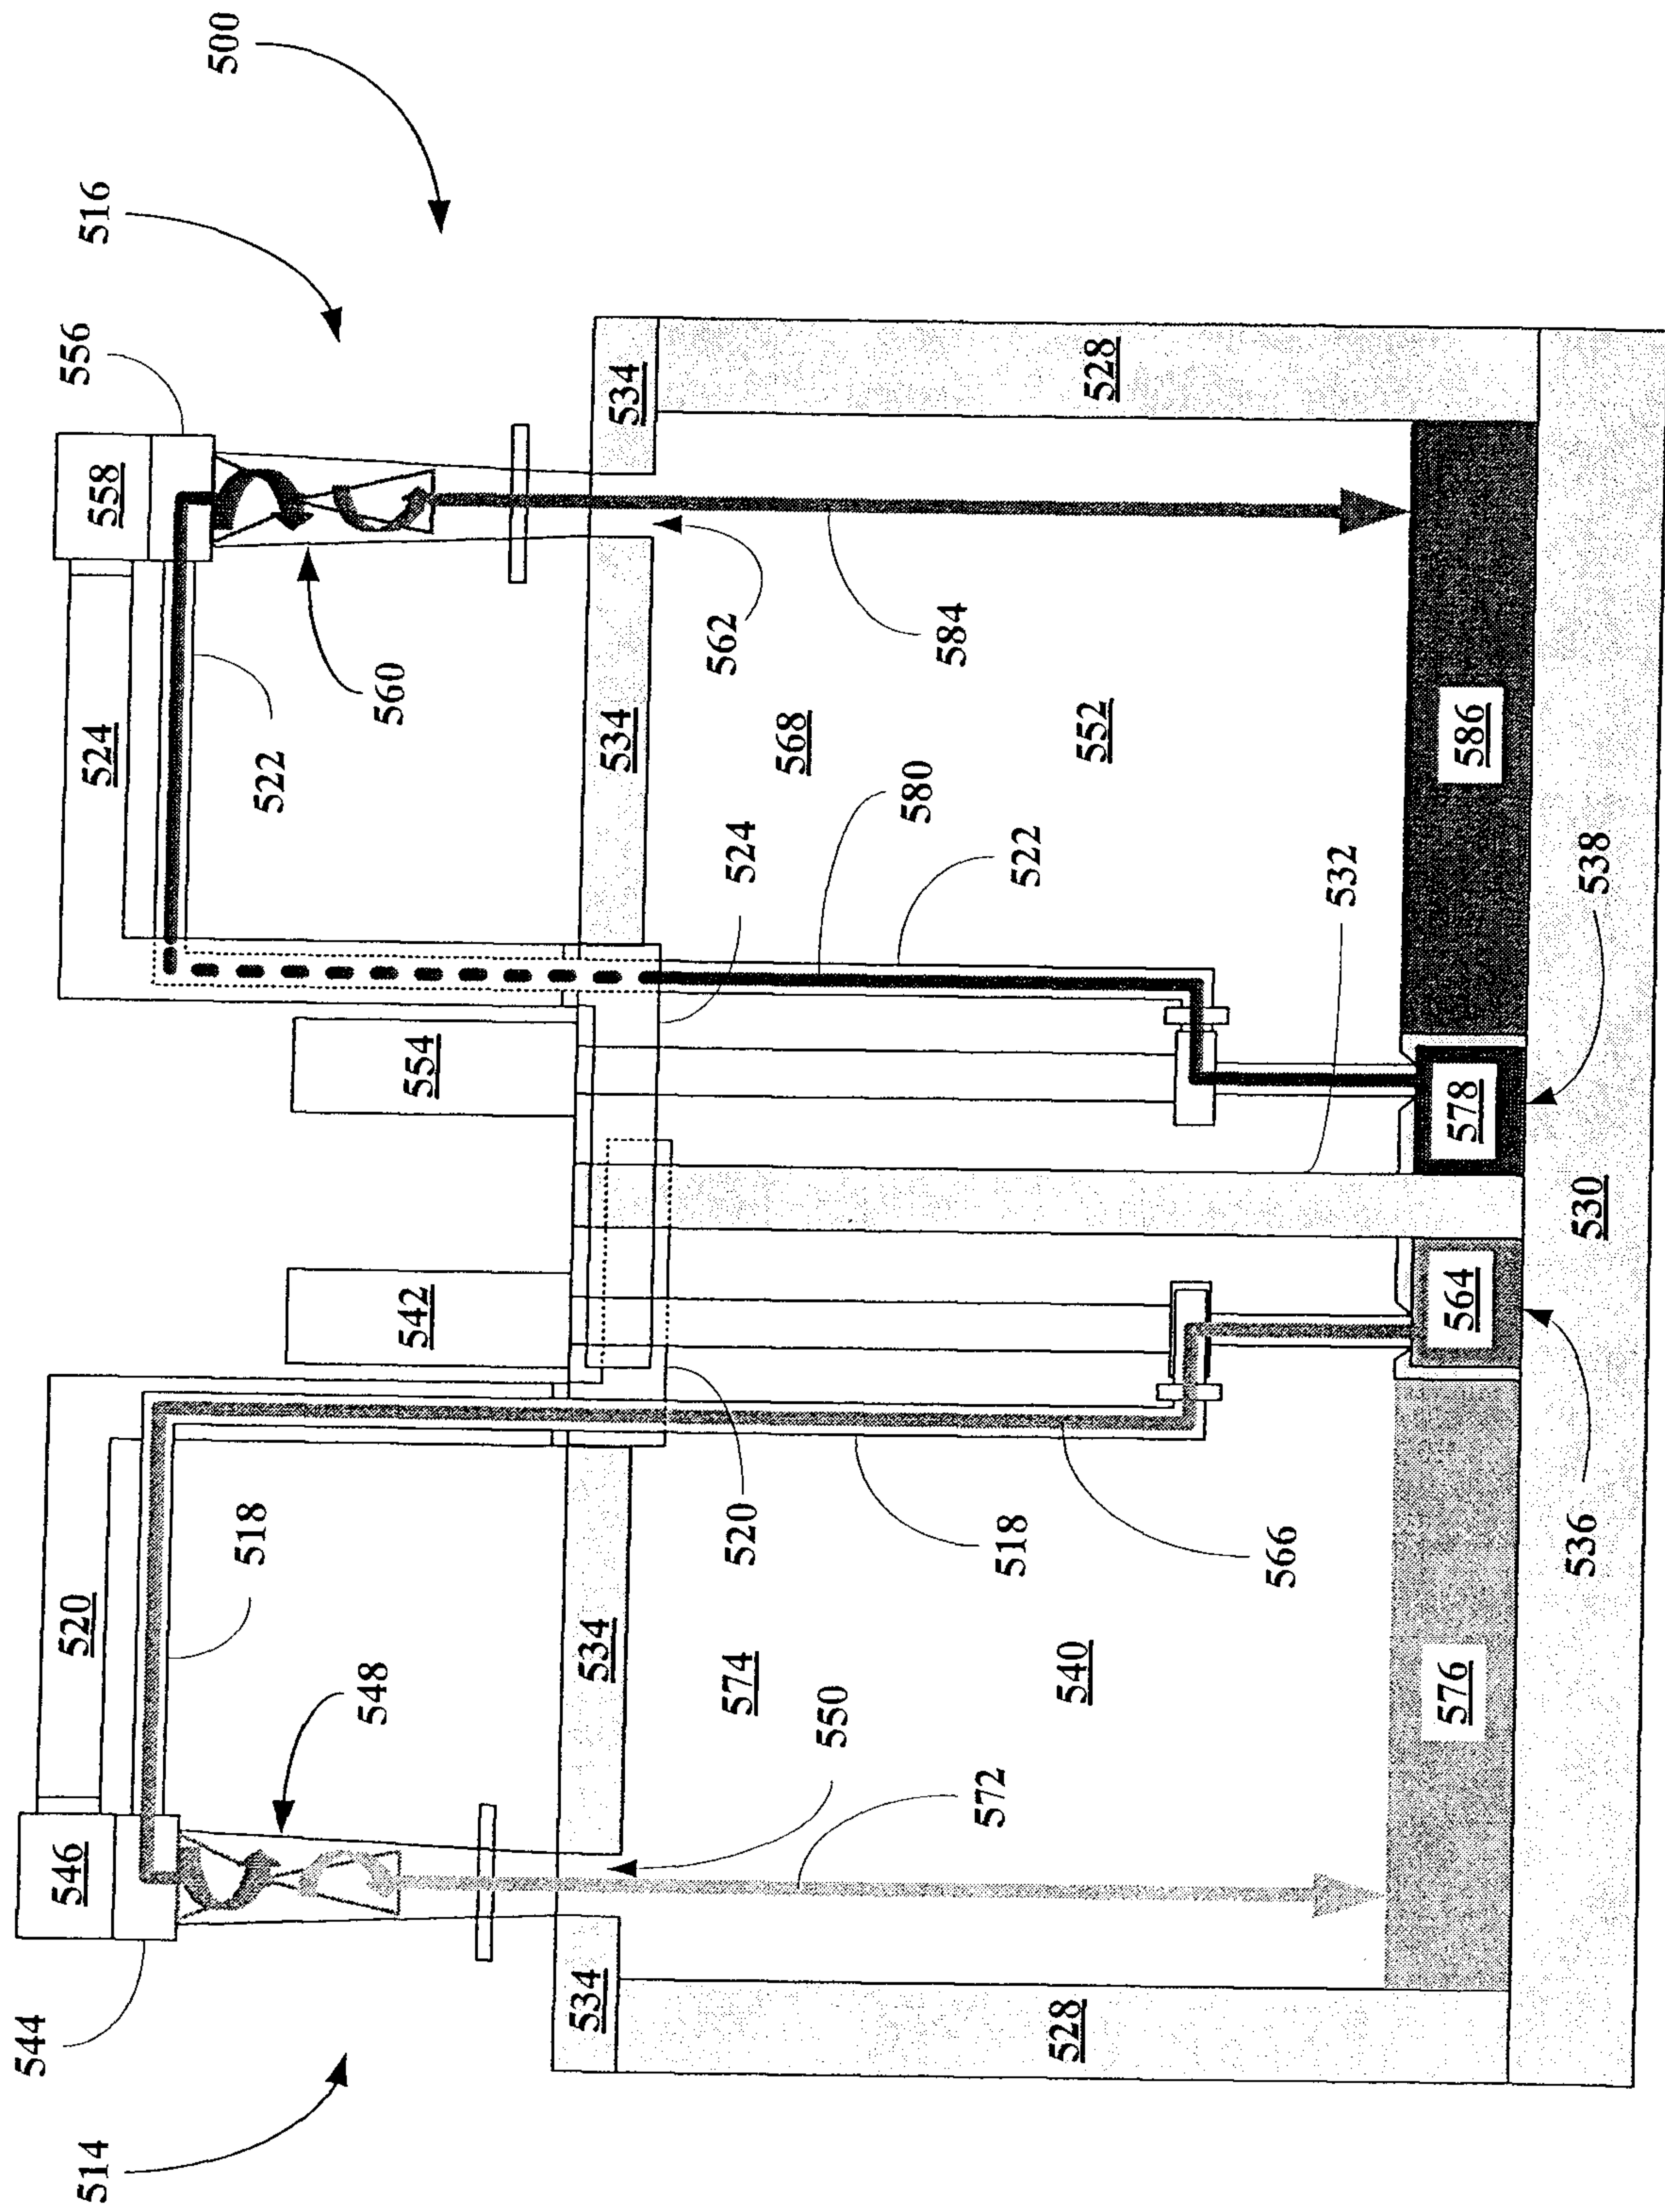


FIG. 5D

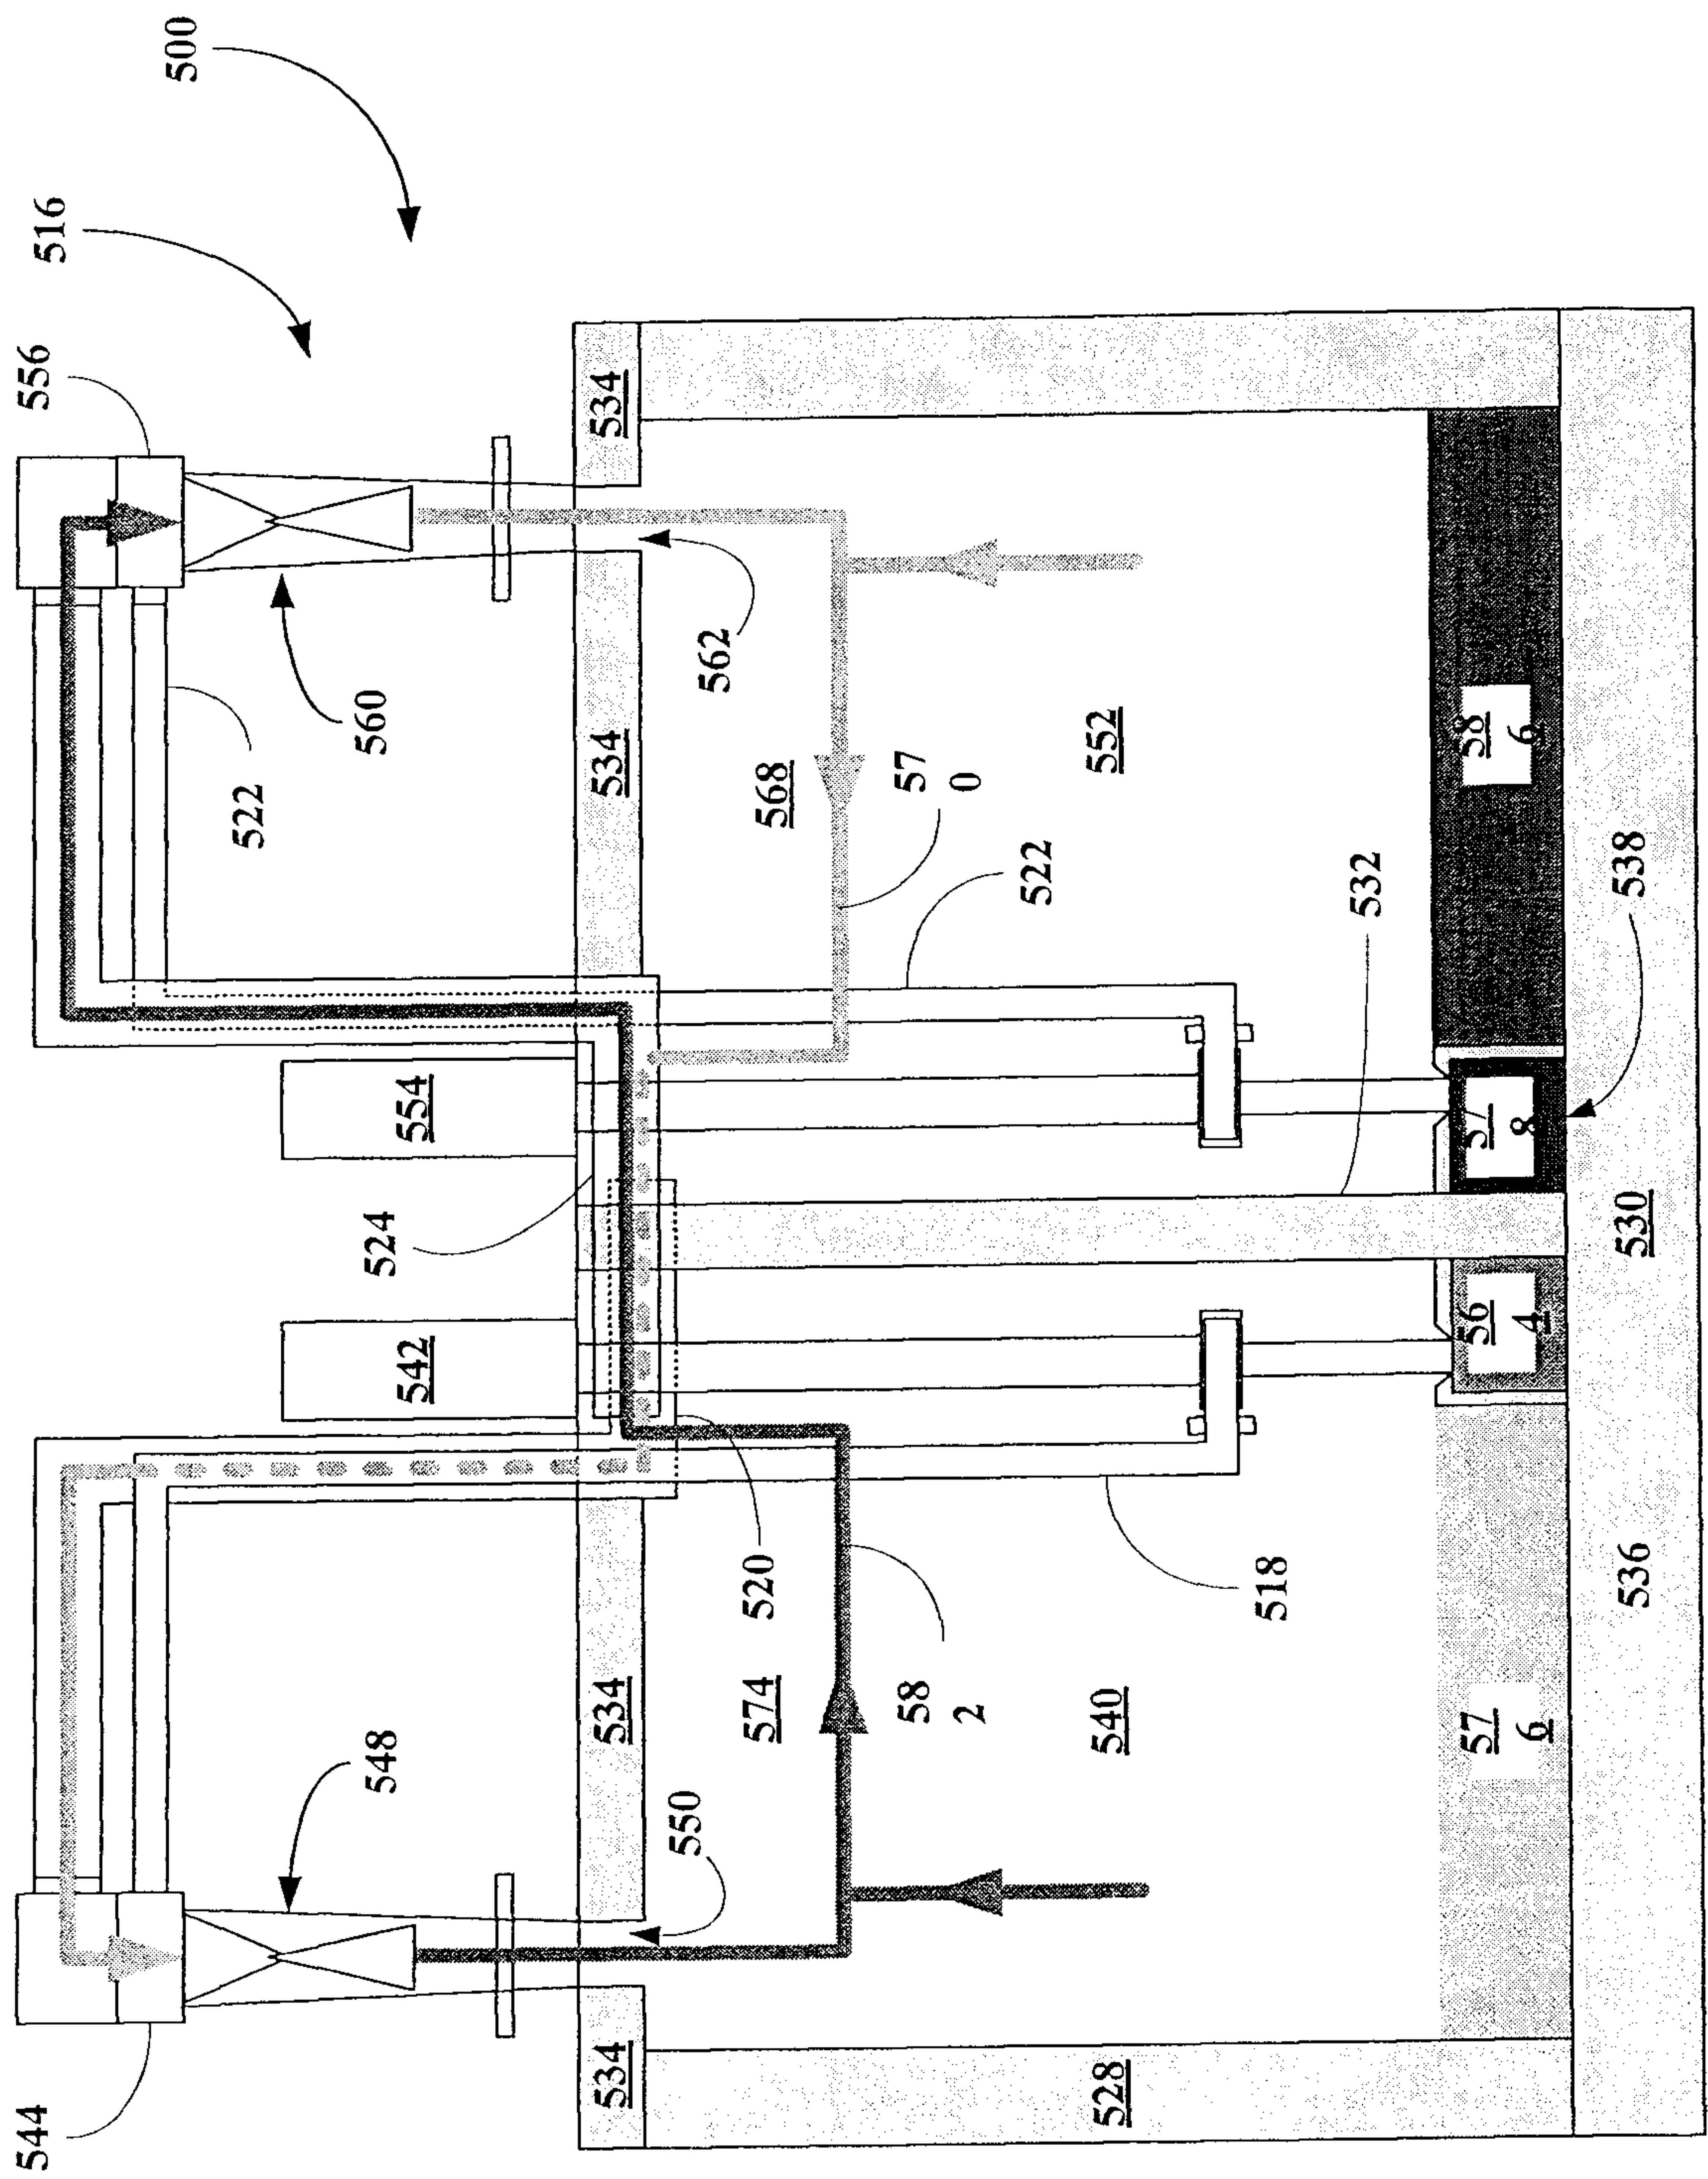


FIG. 5E

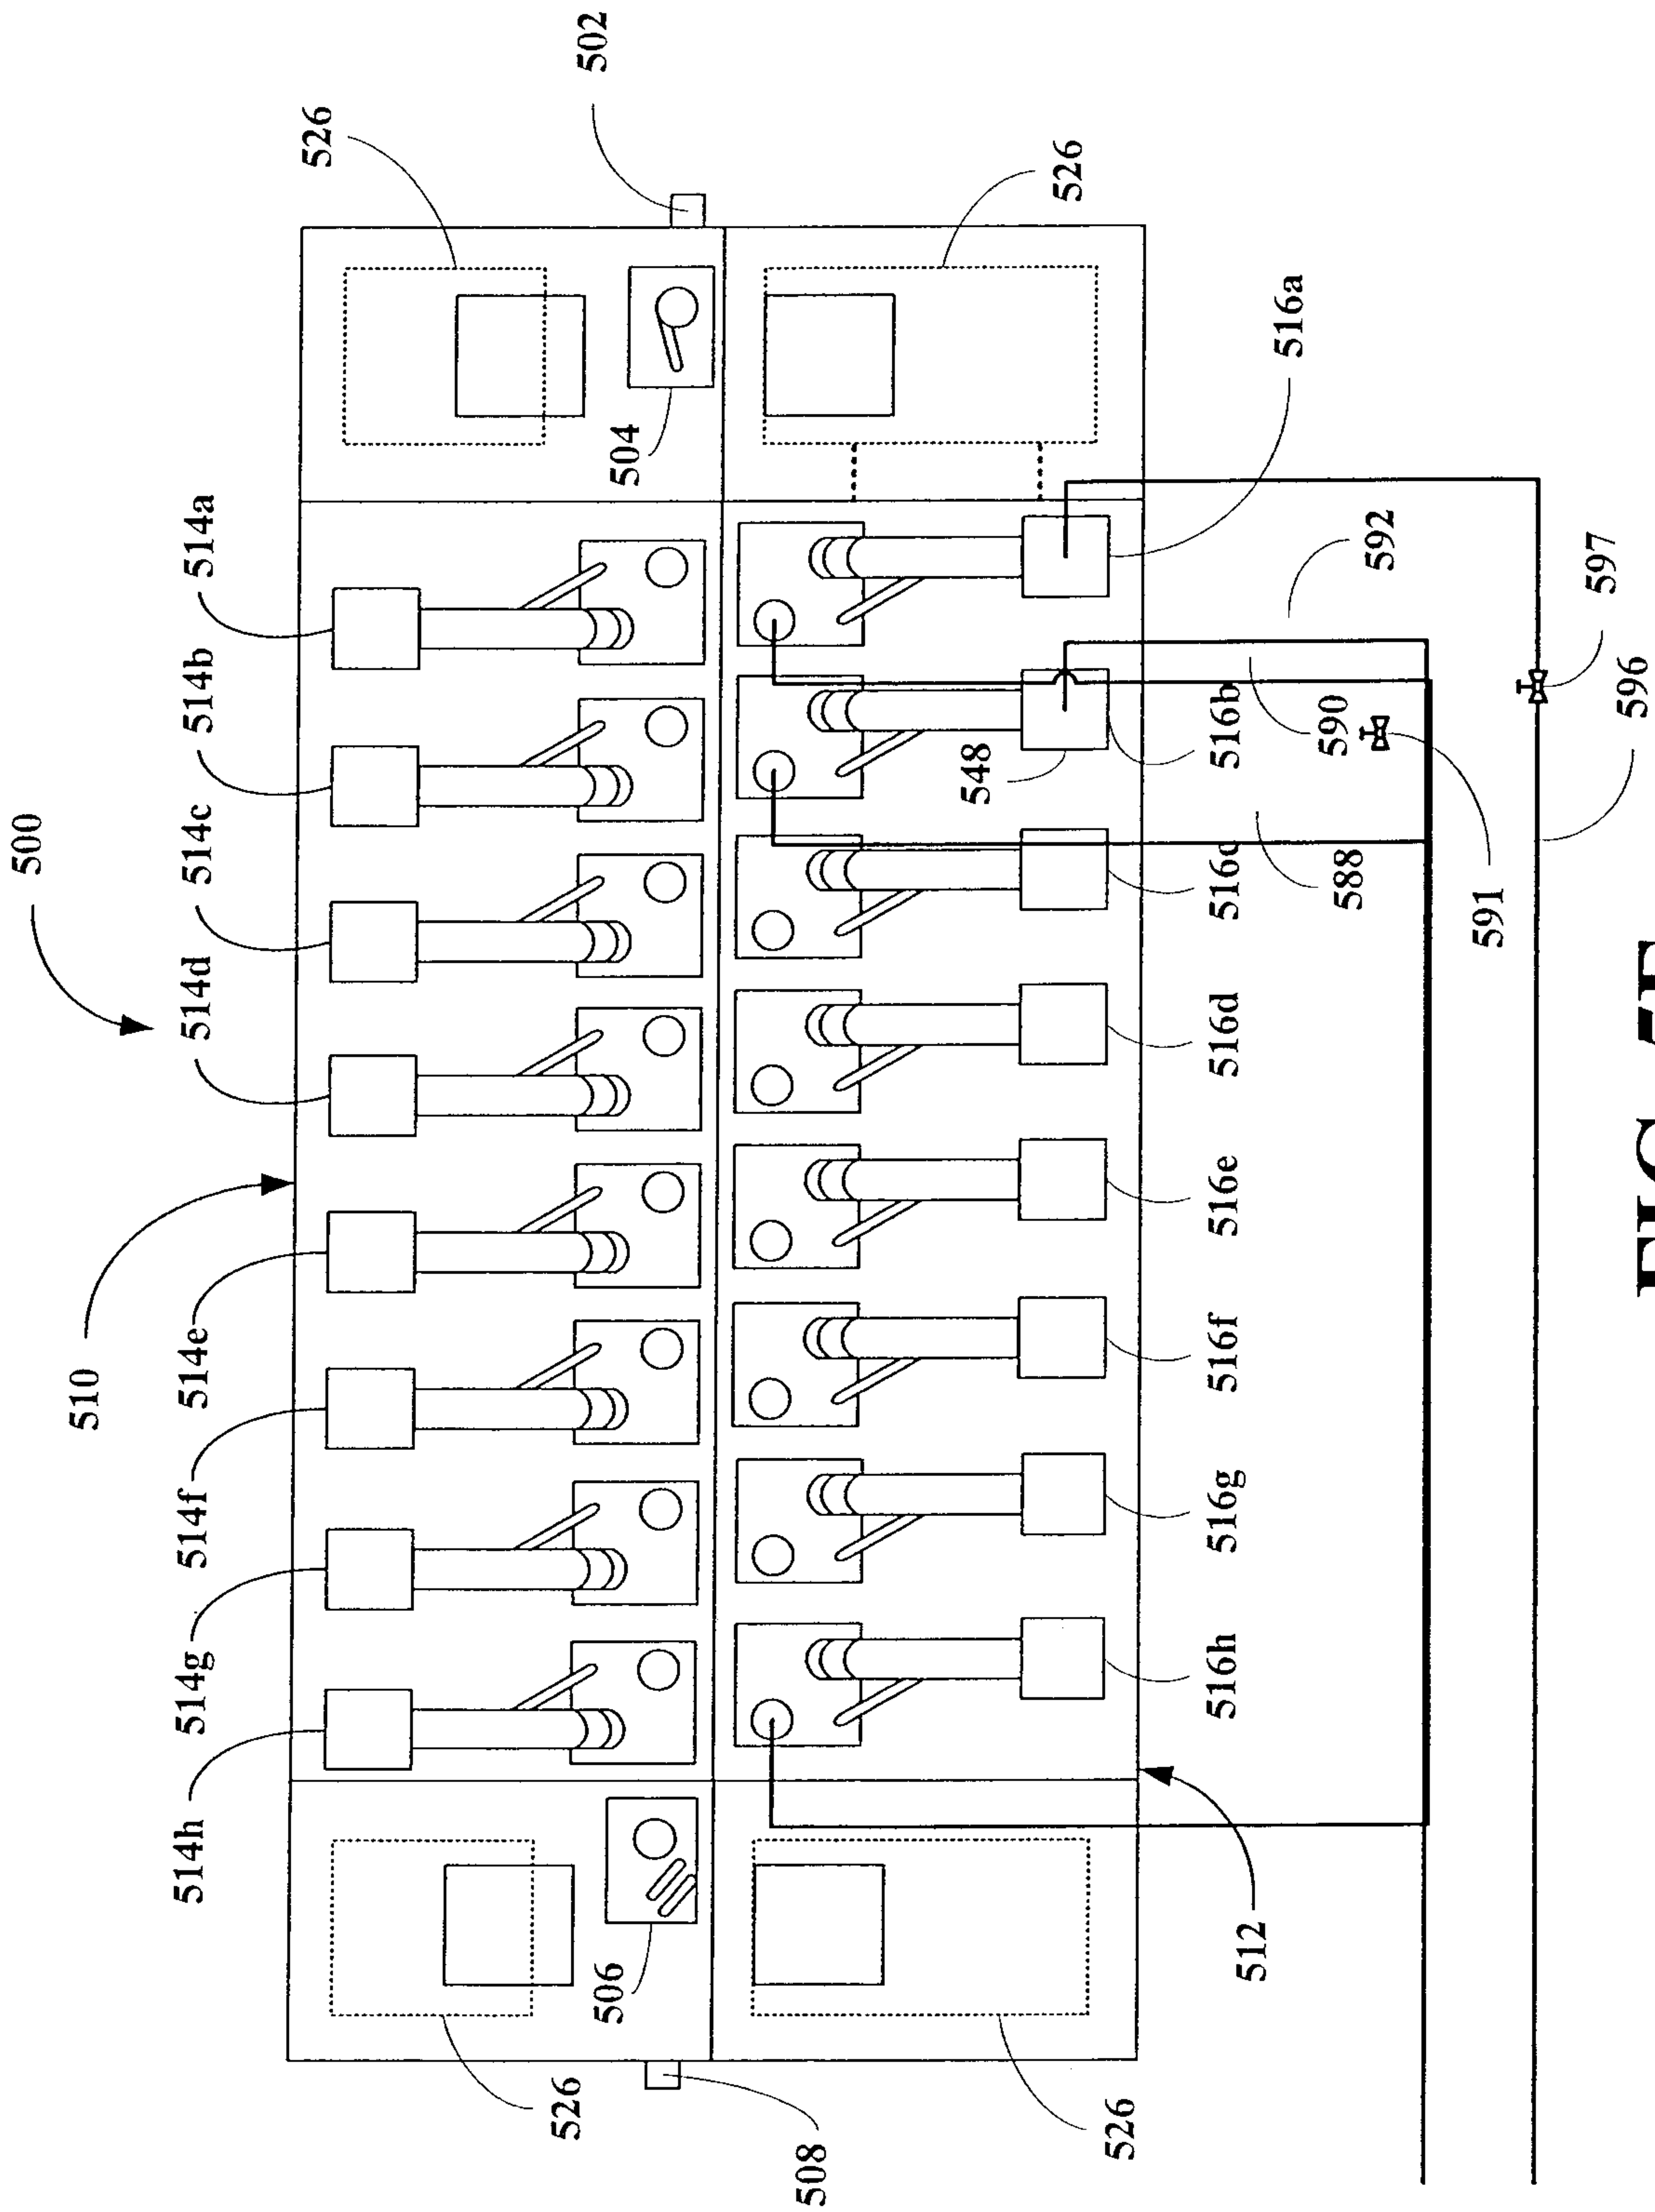


FIG. 5F

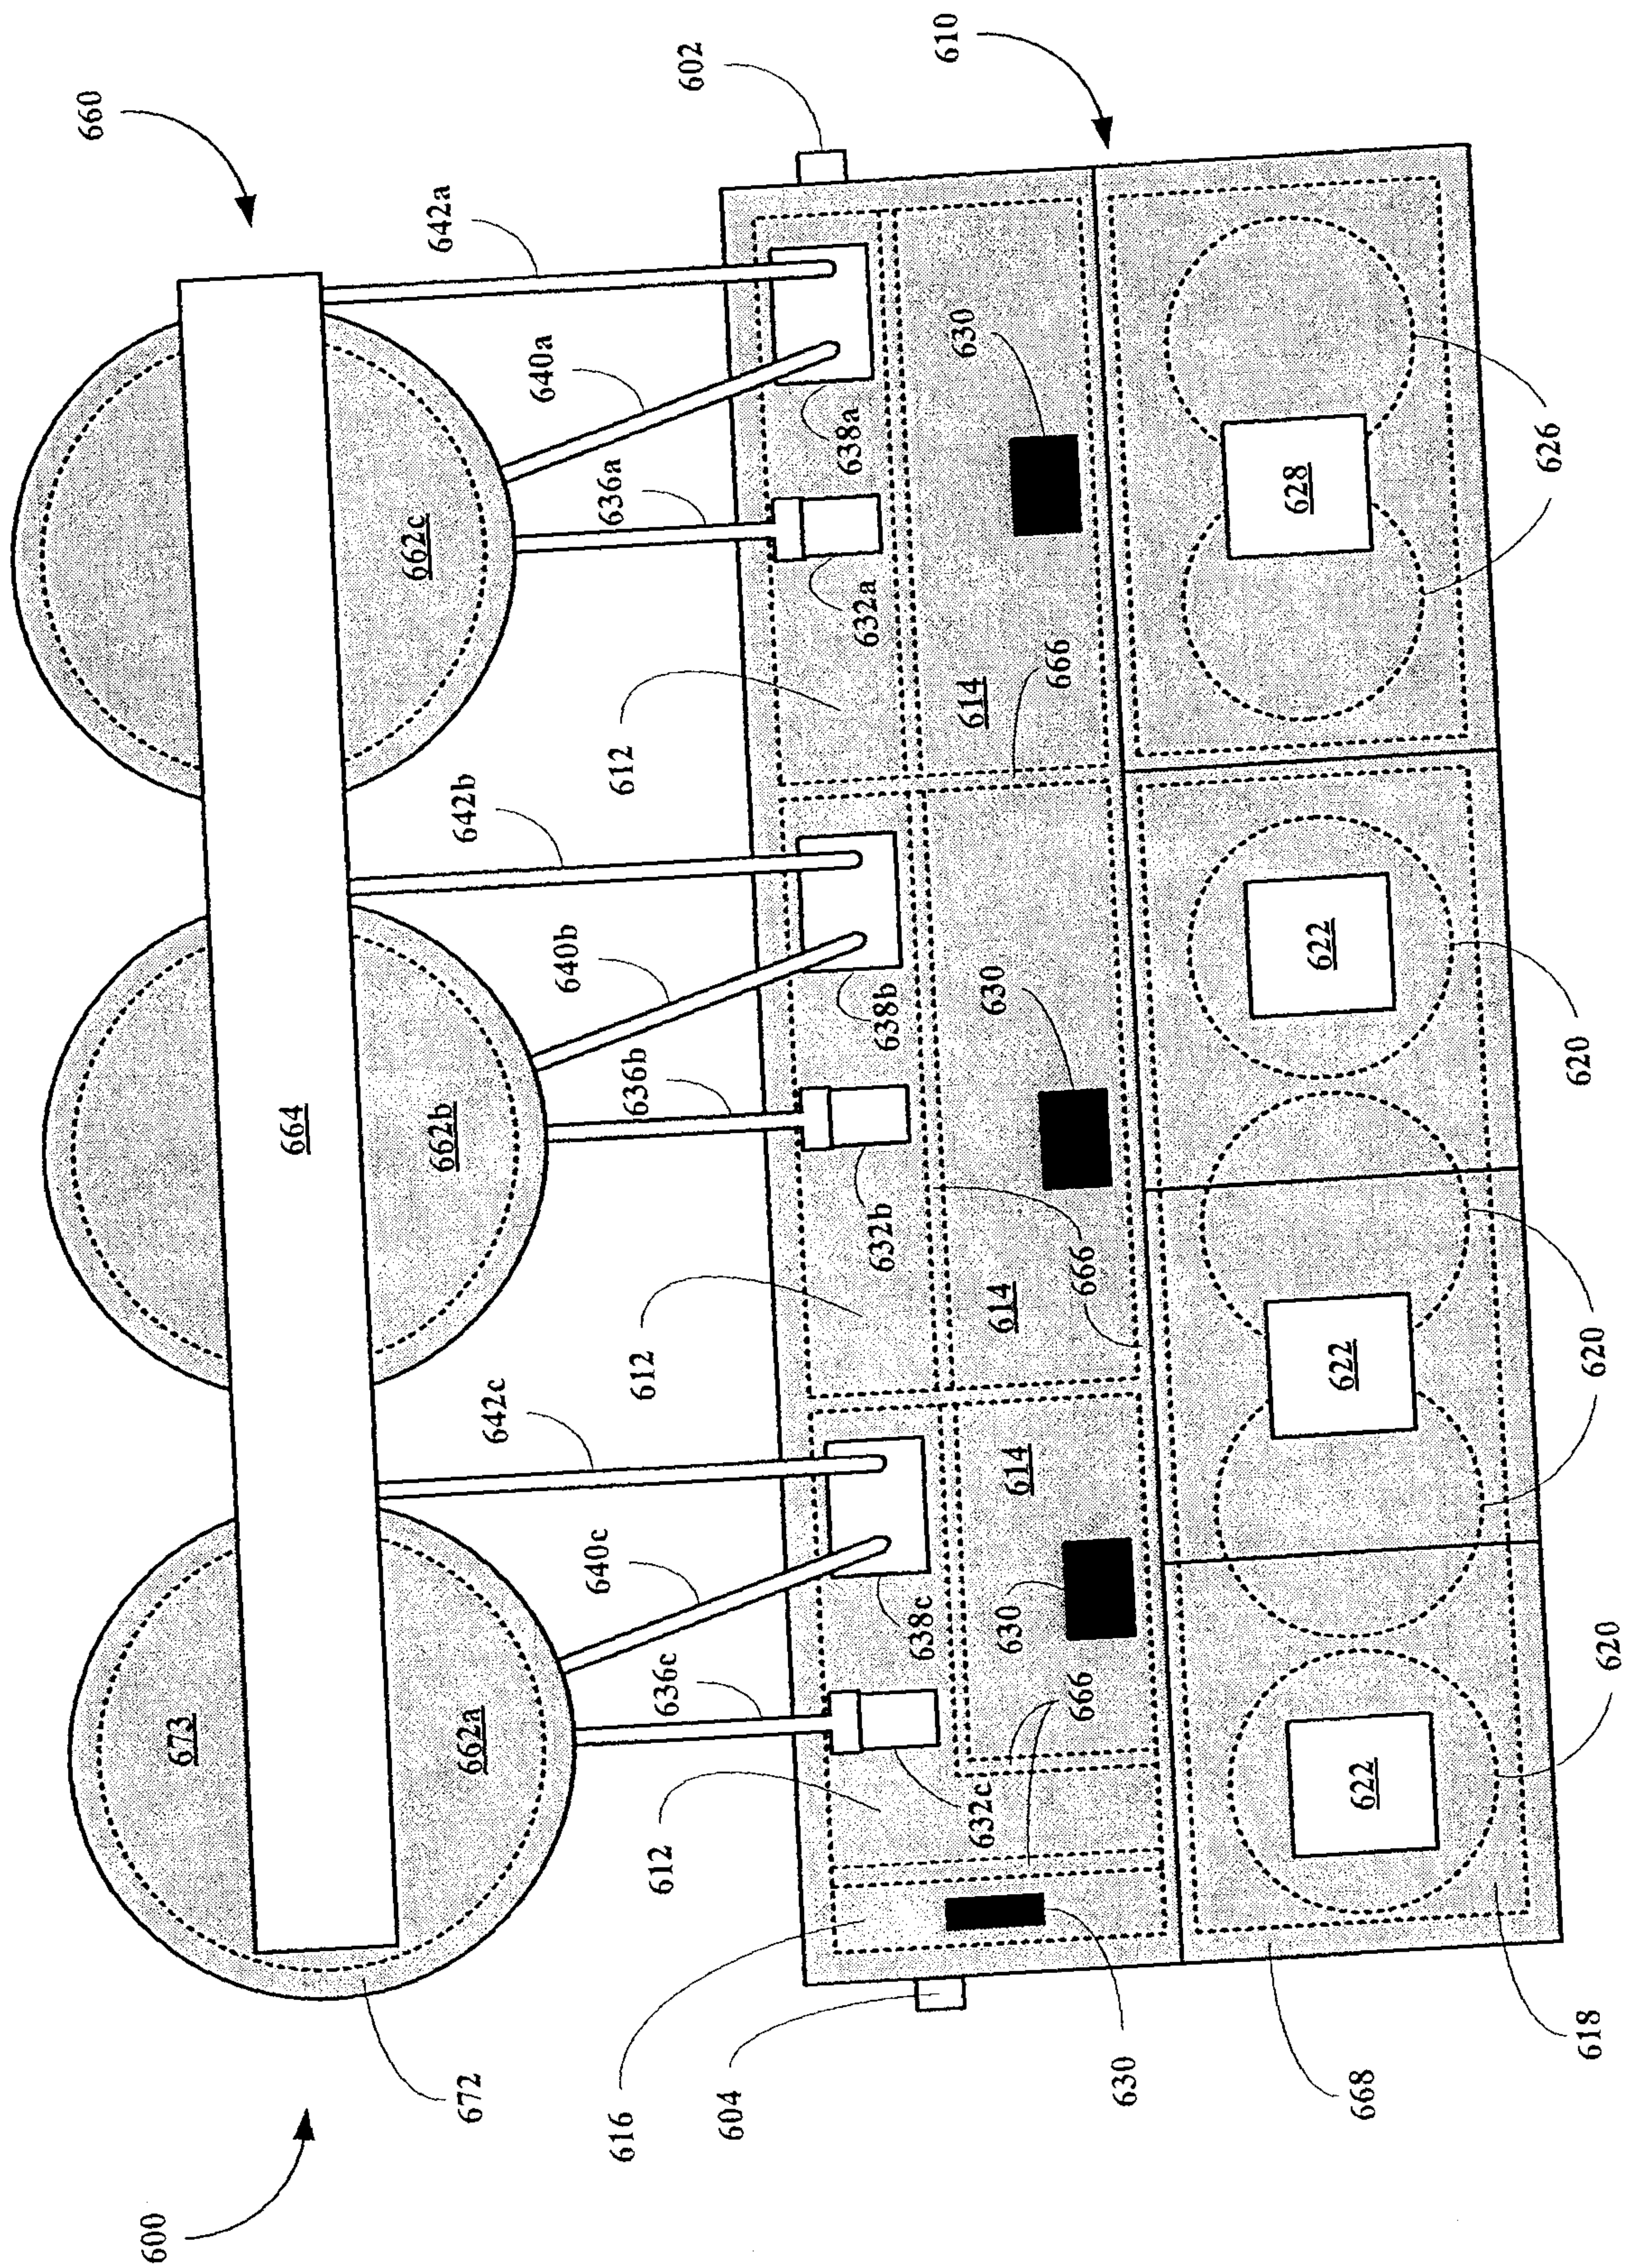


FIG. 6A

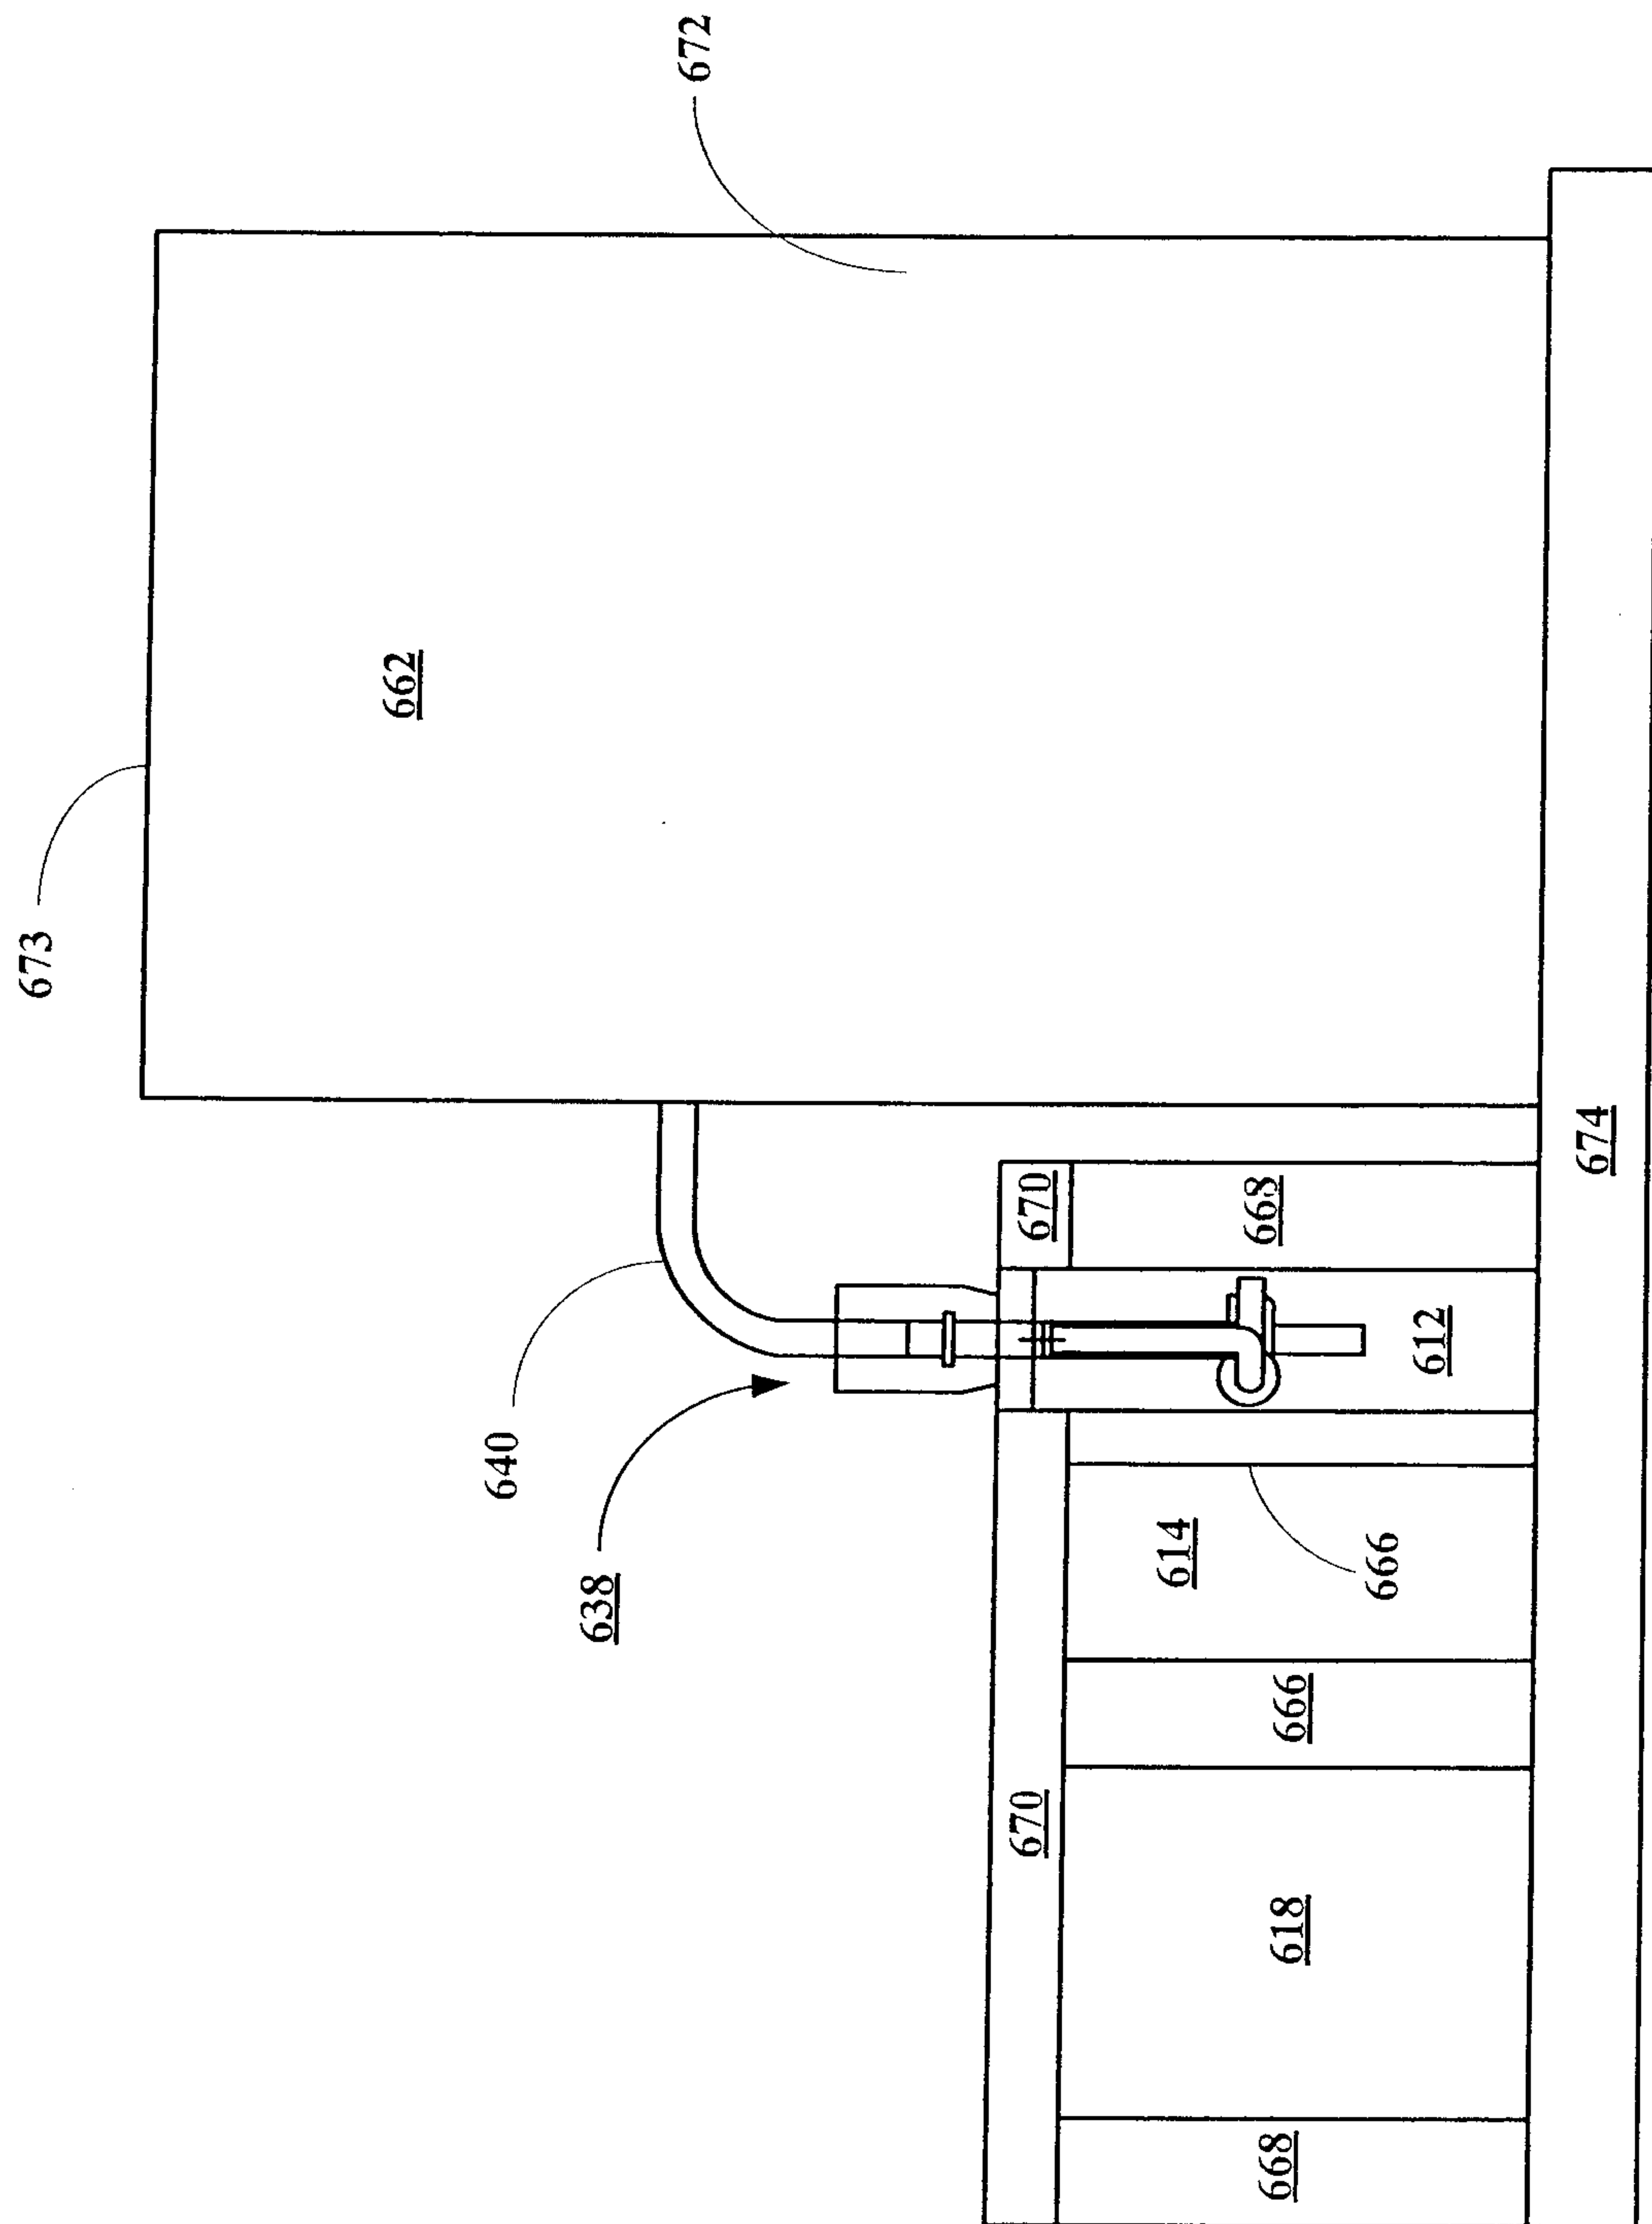


FIG. 6B

19/31

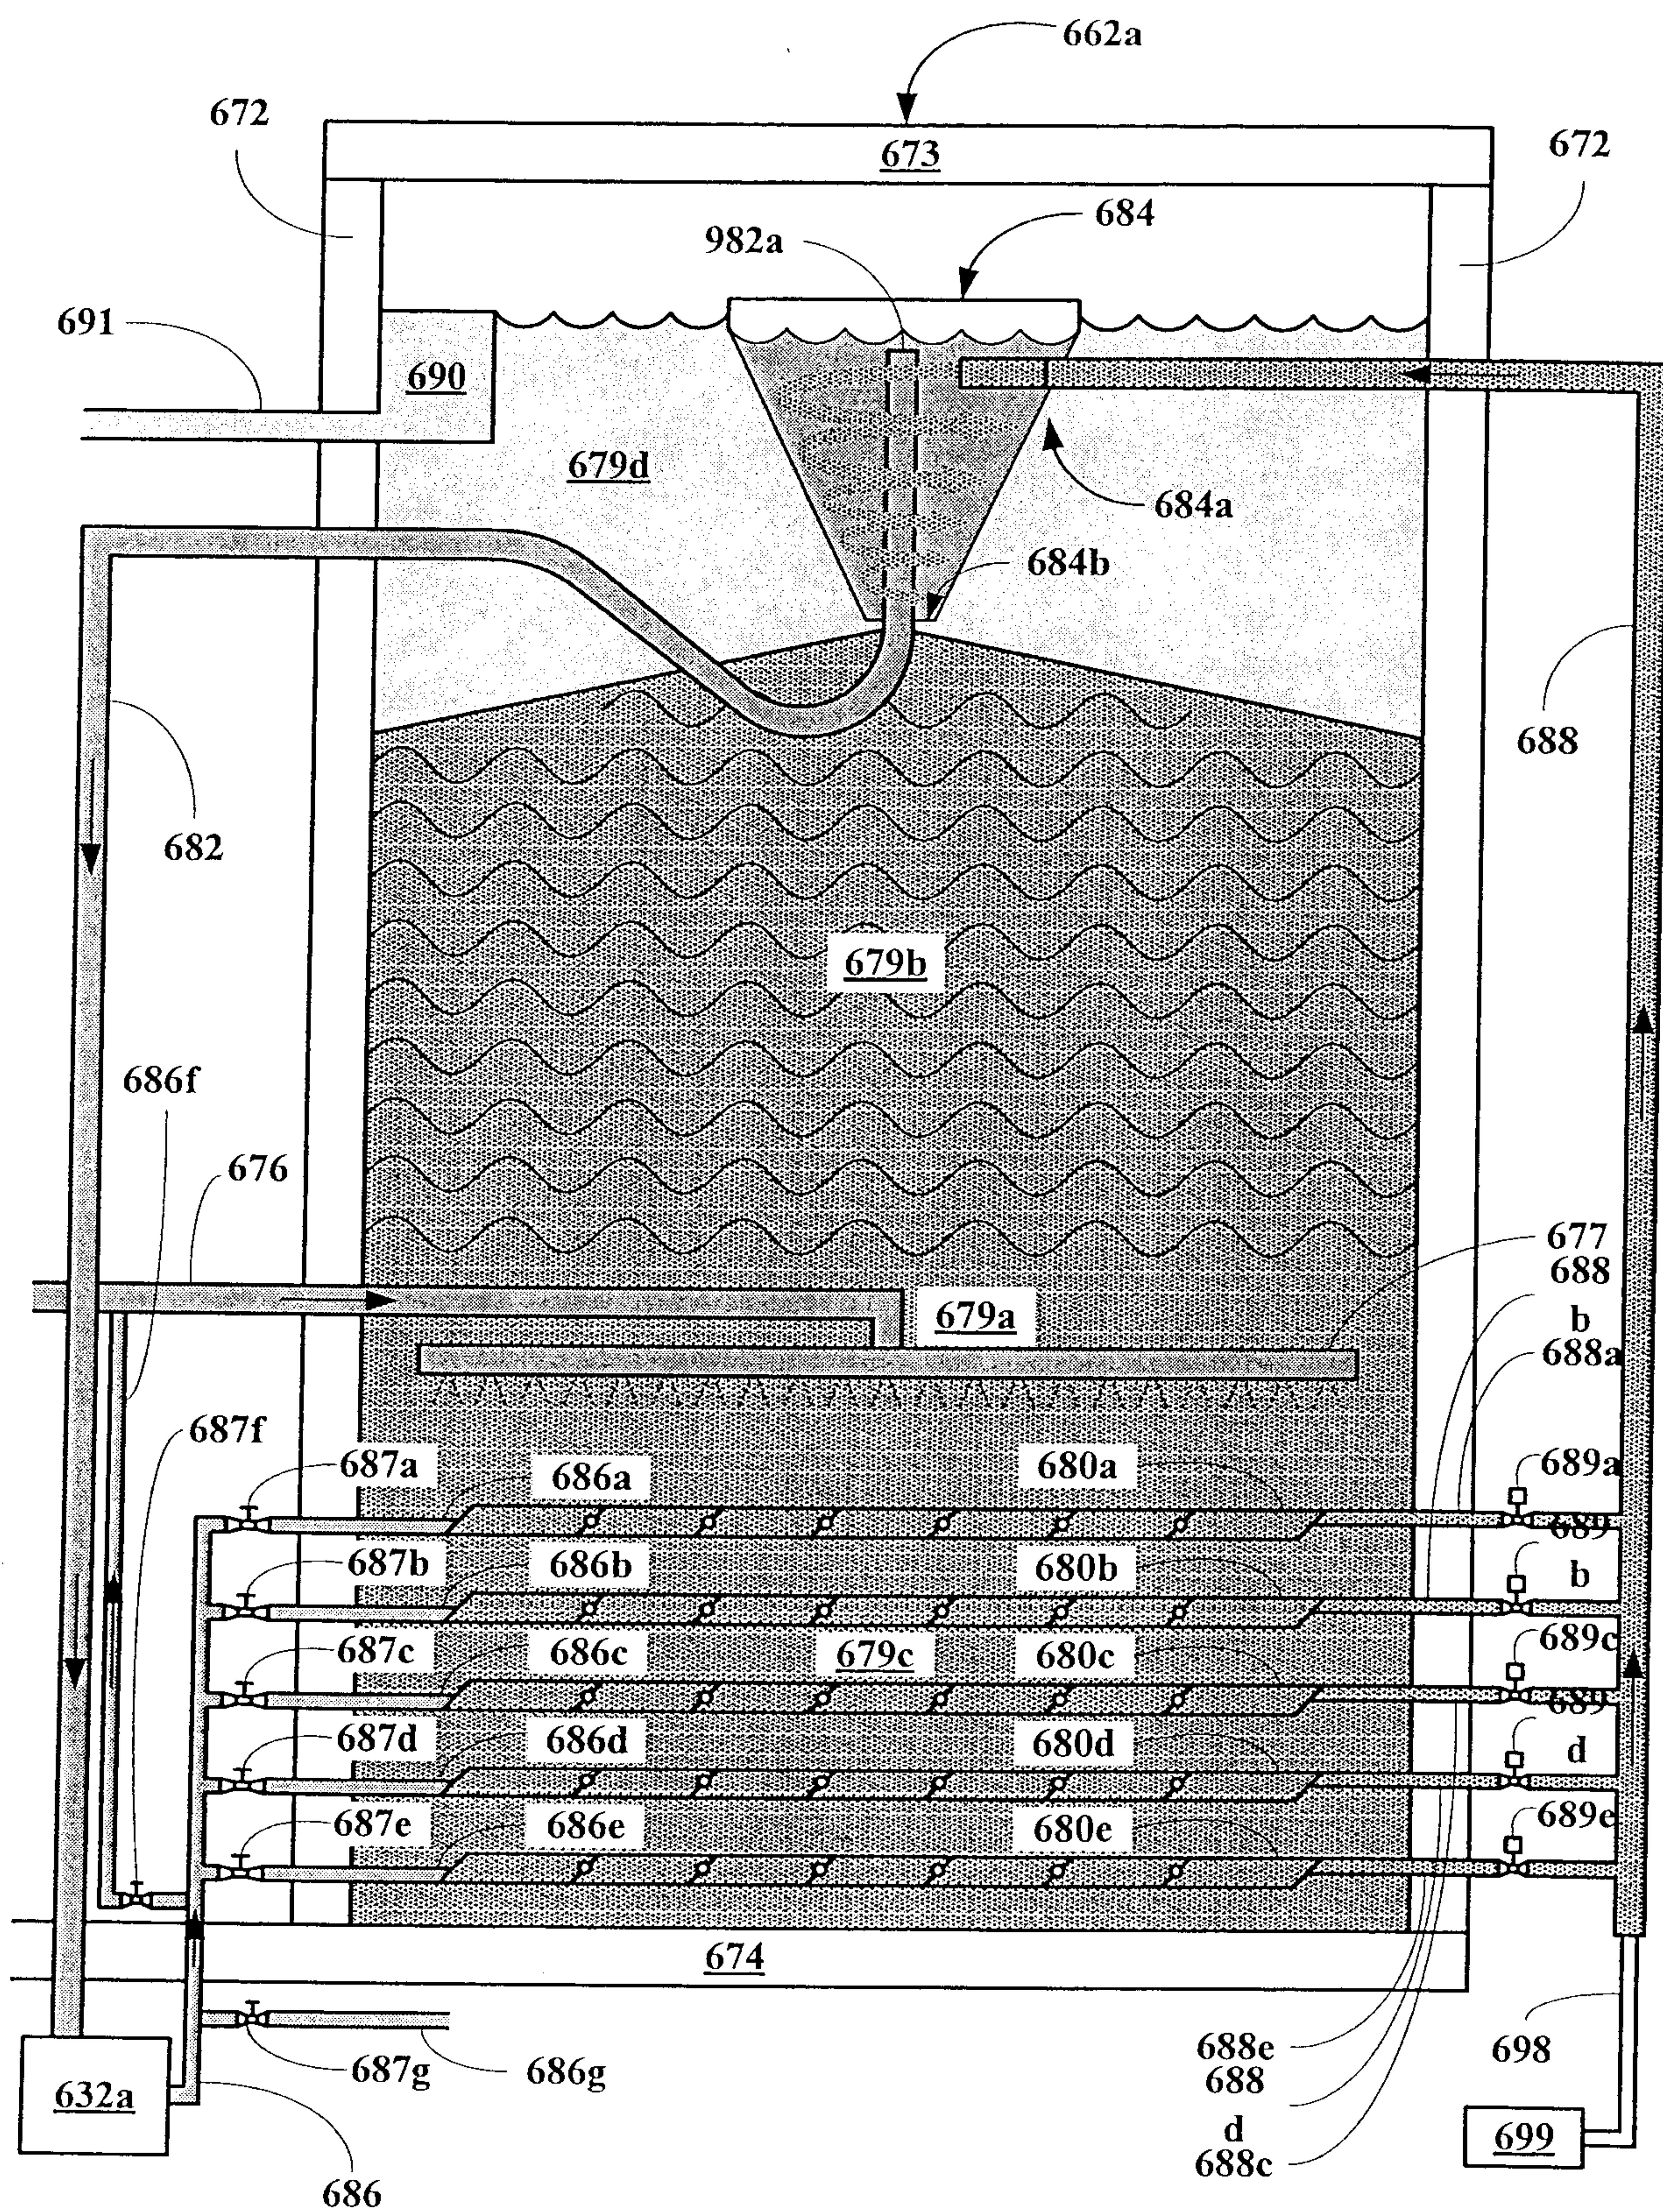


FIG. 6C

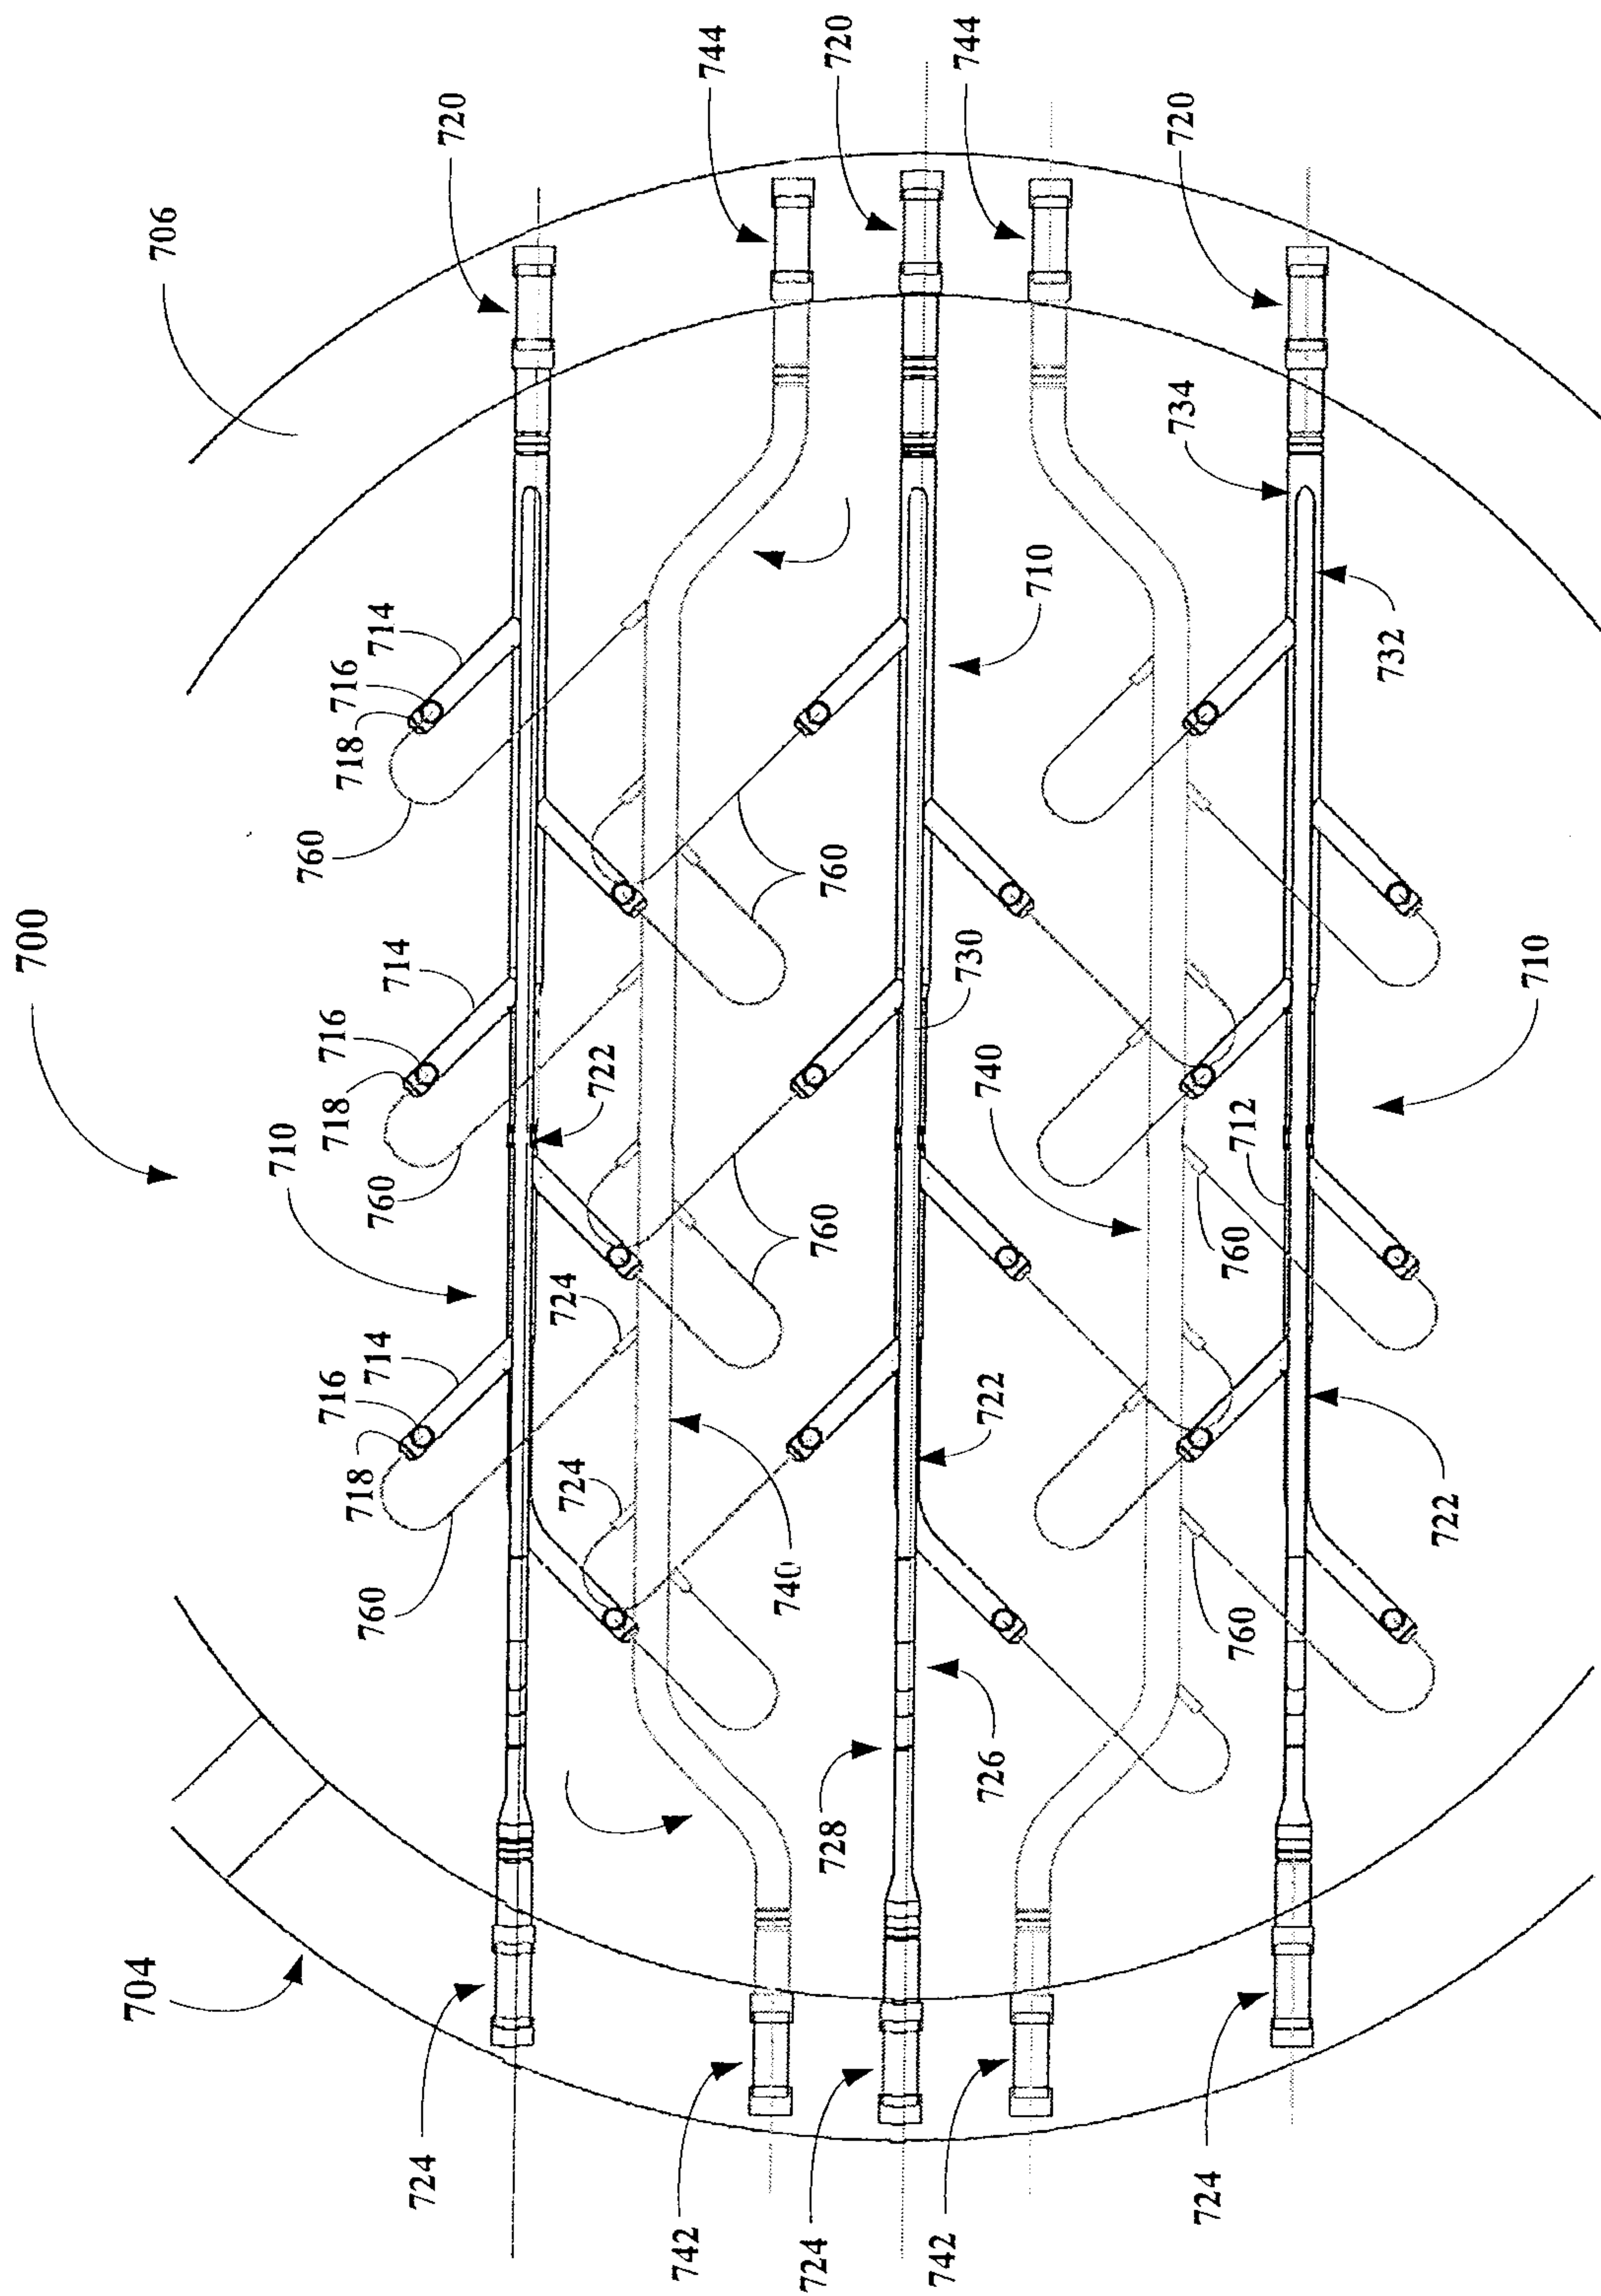


FIG. 7A

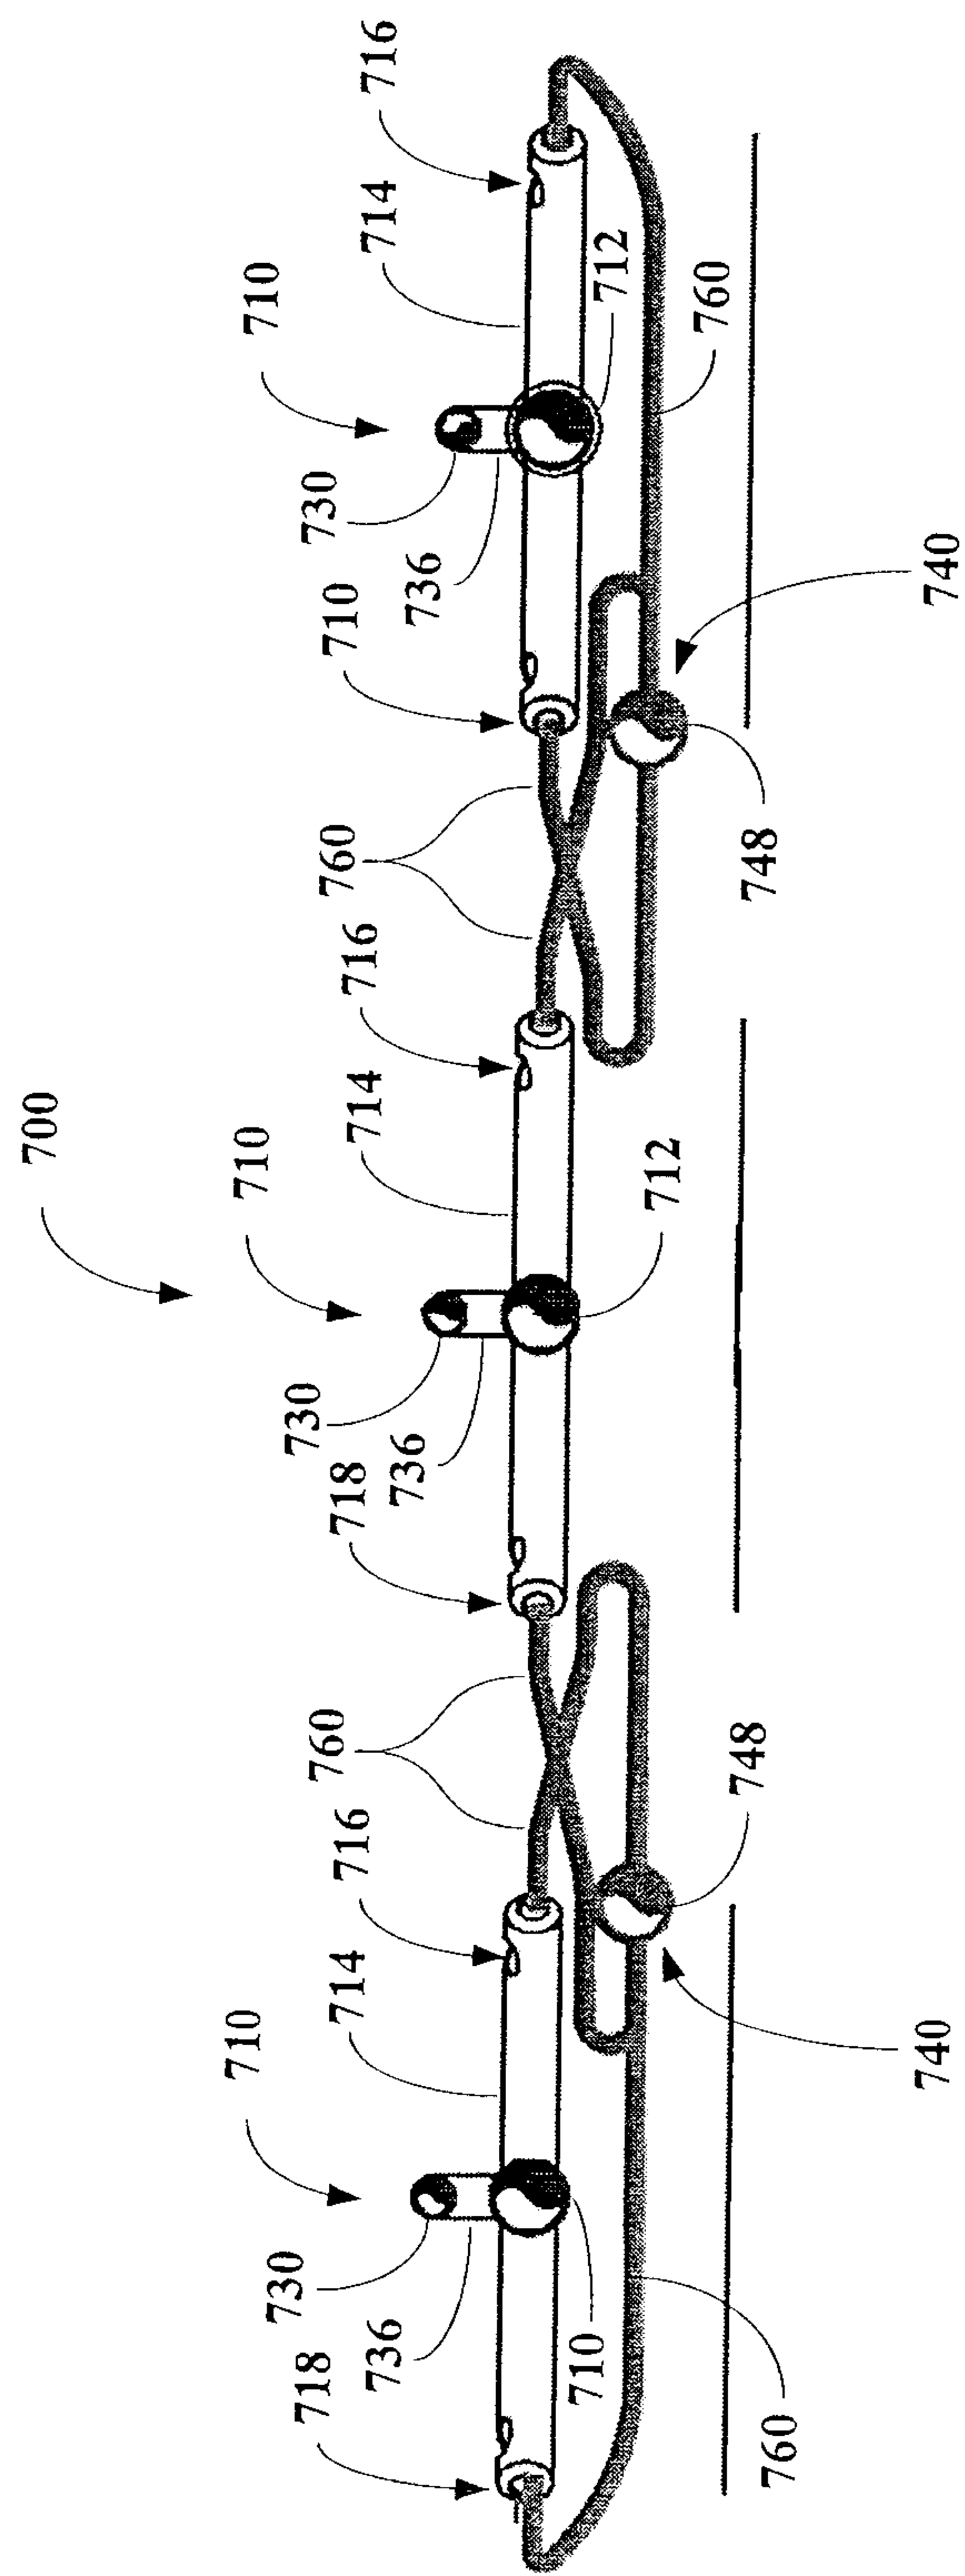


FIG. 7B

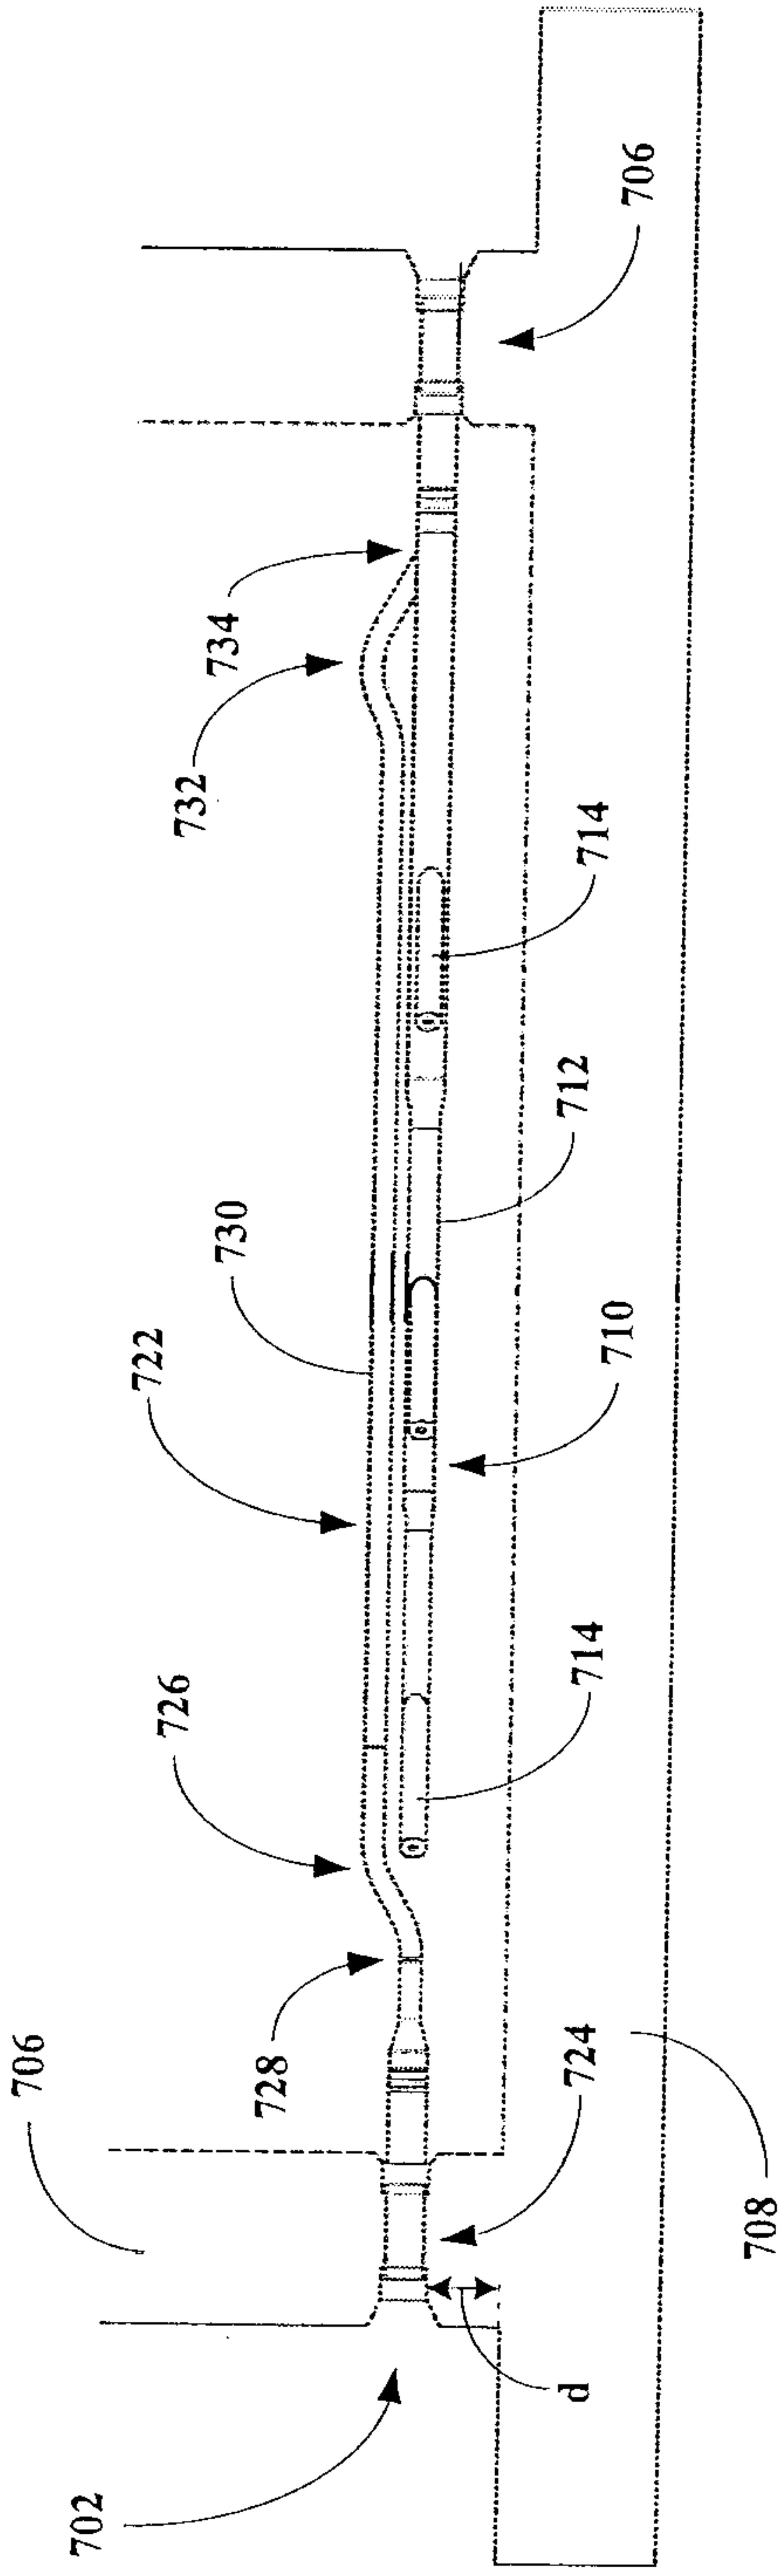


FIG. 7C

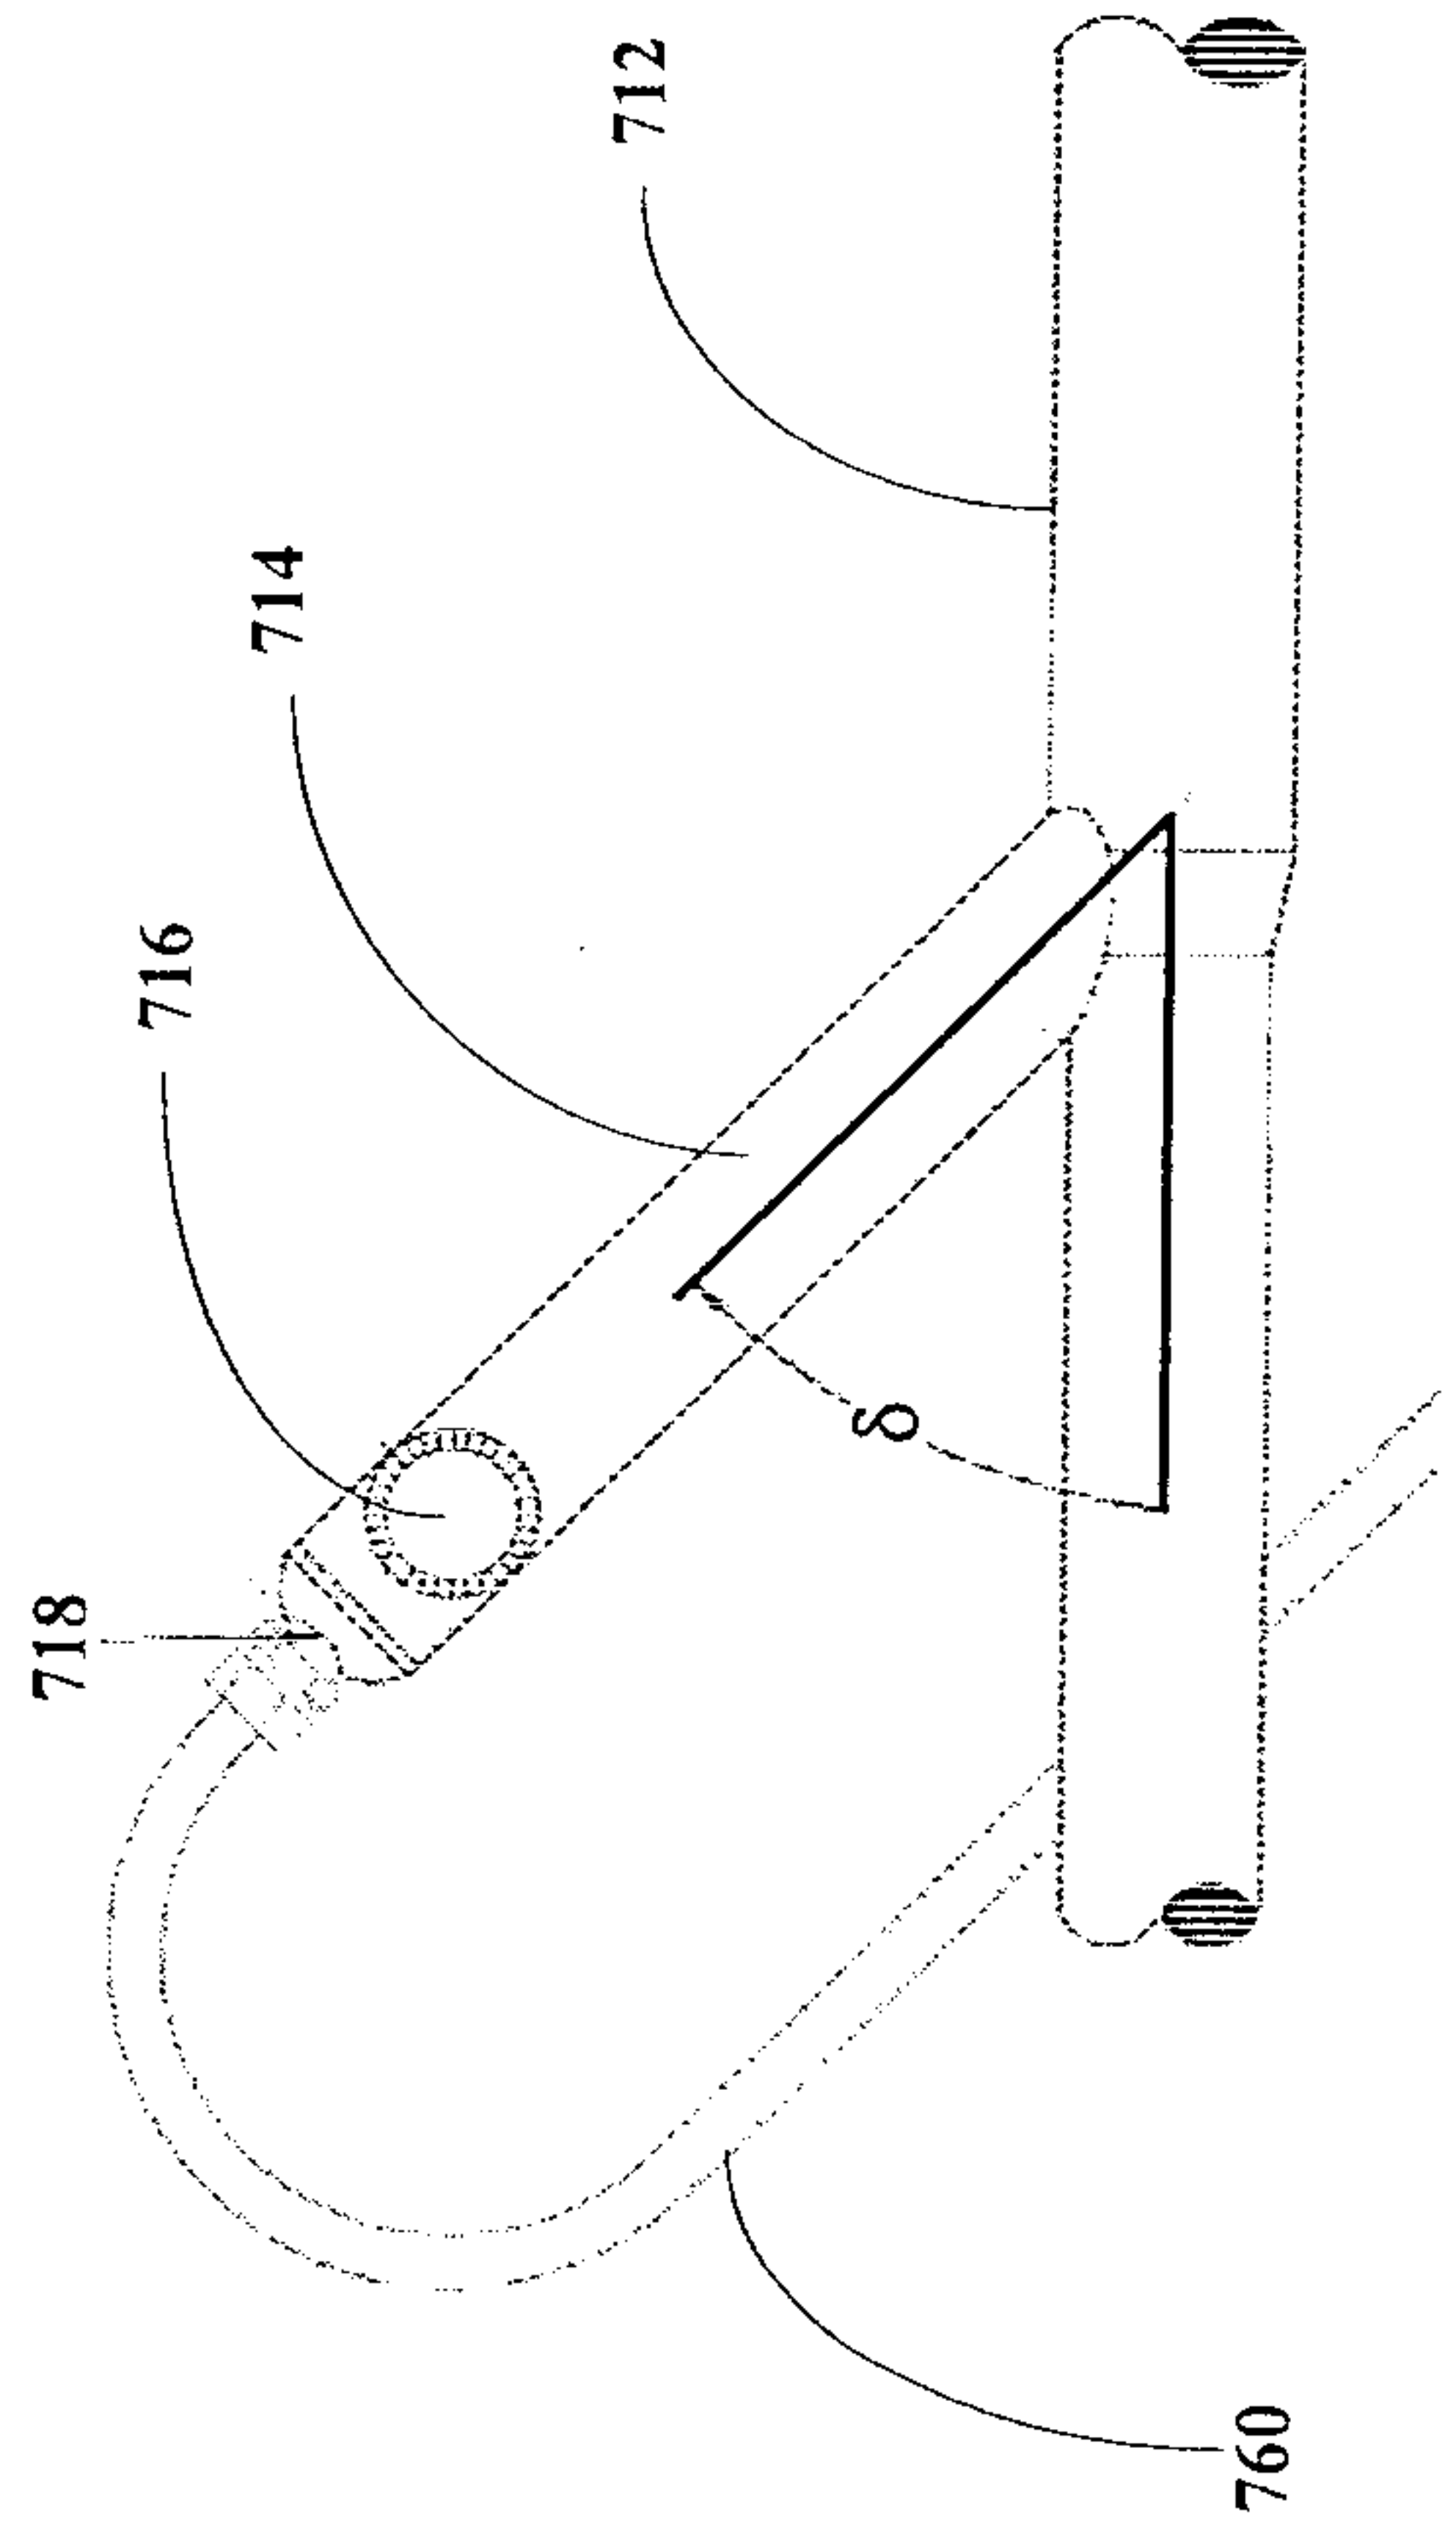
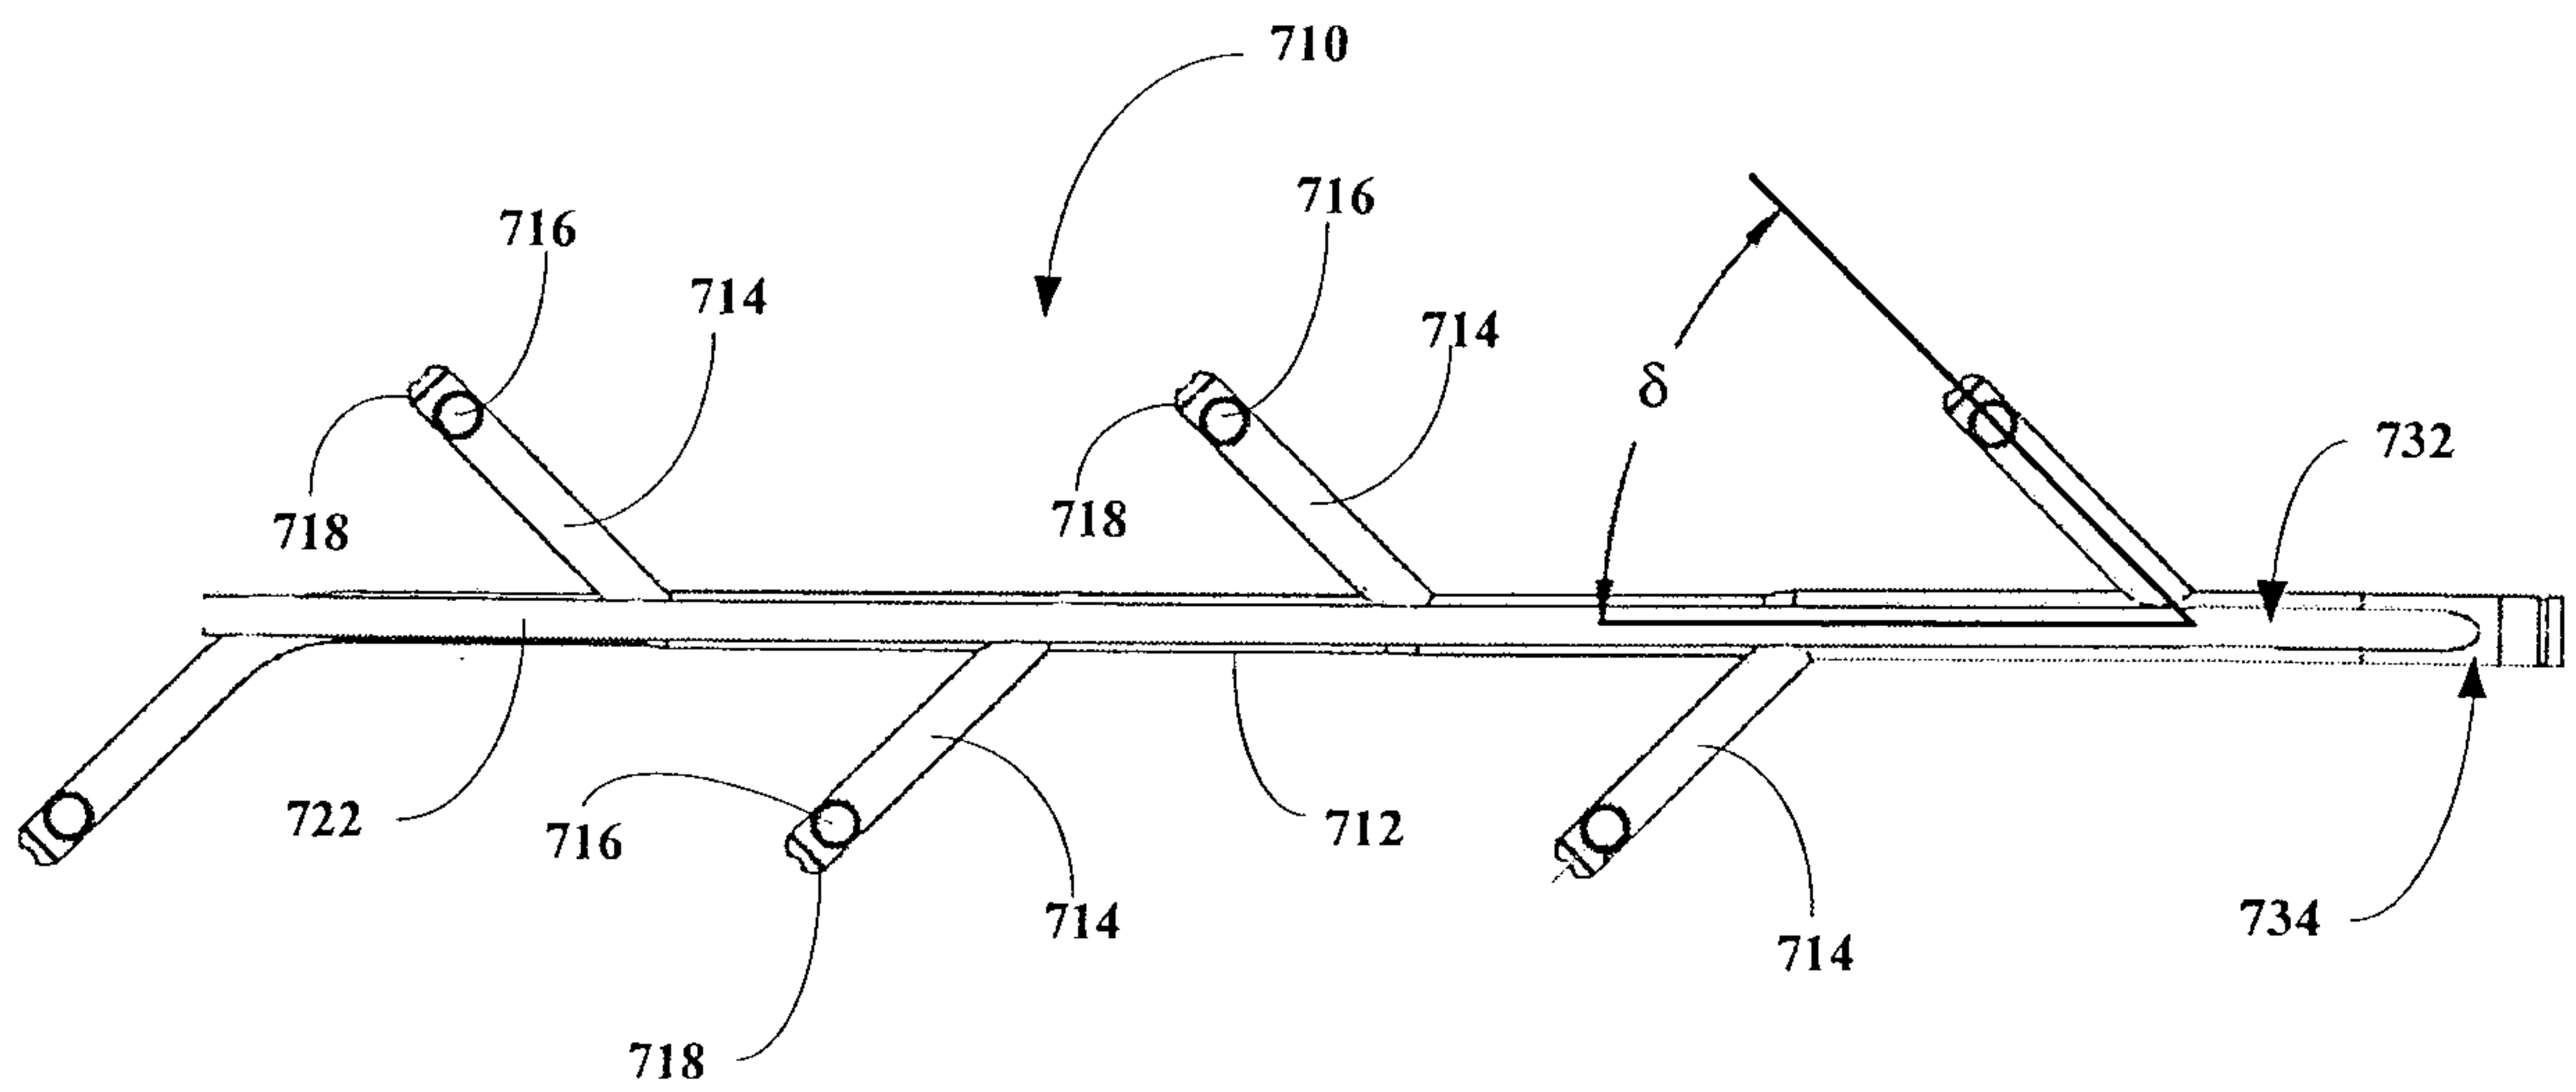
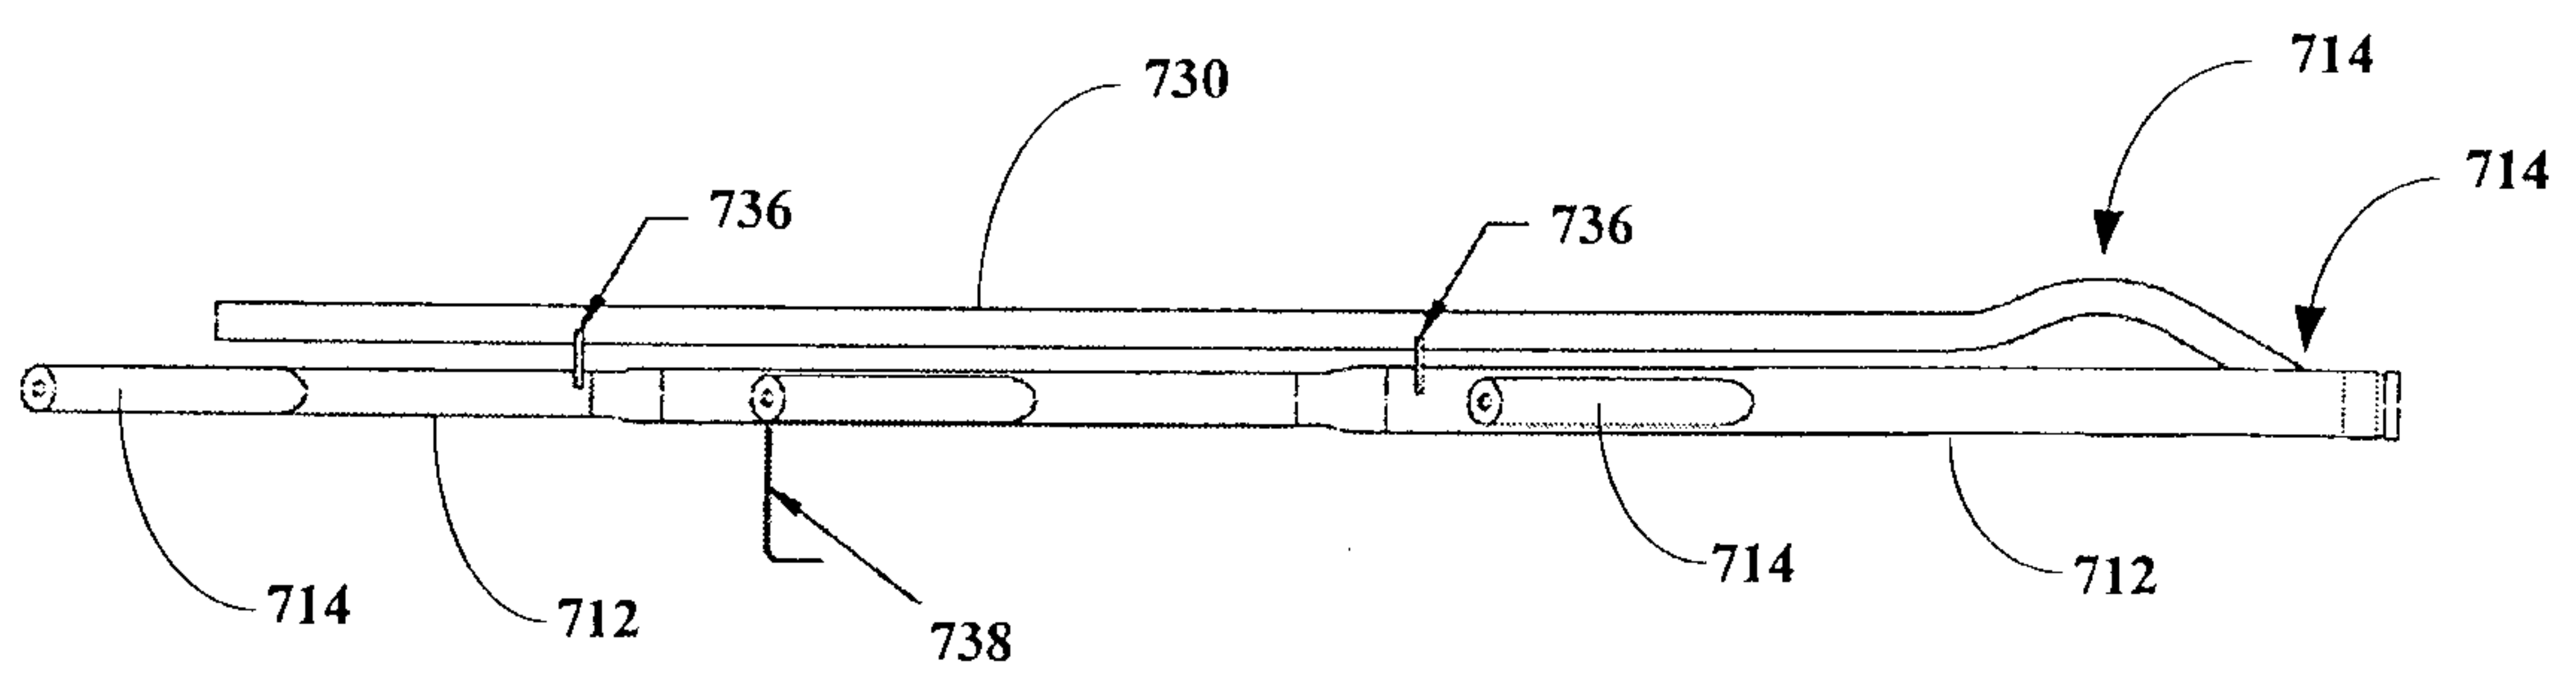
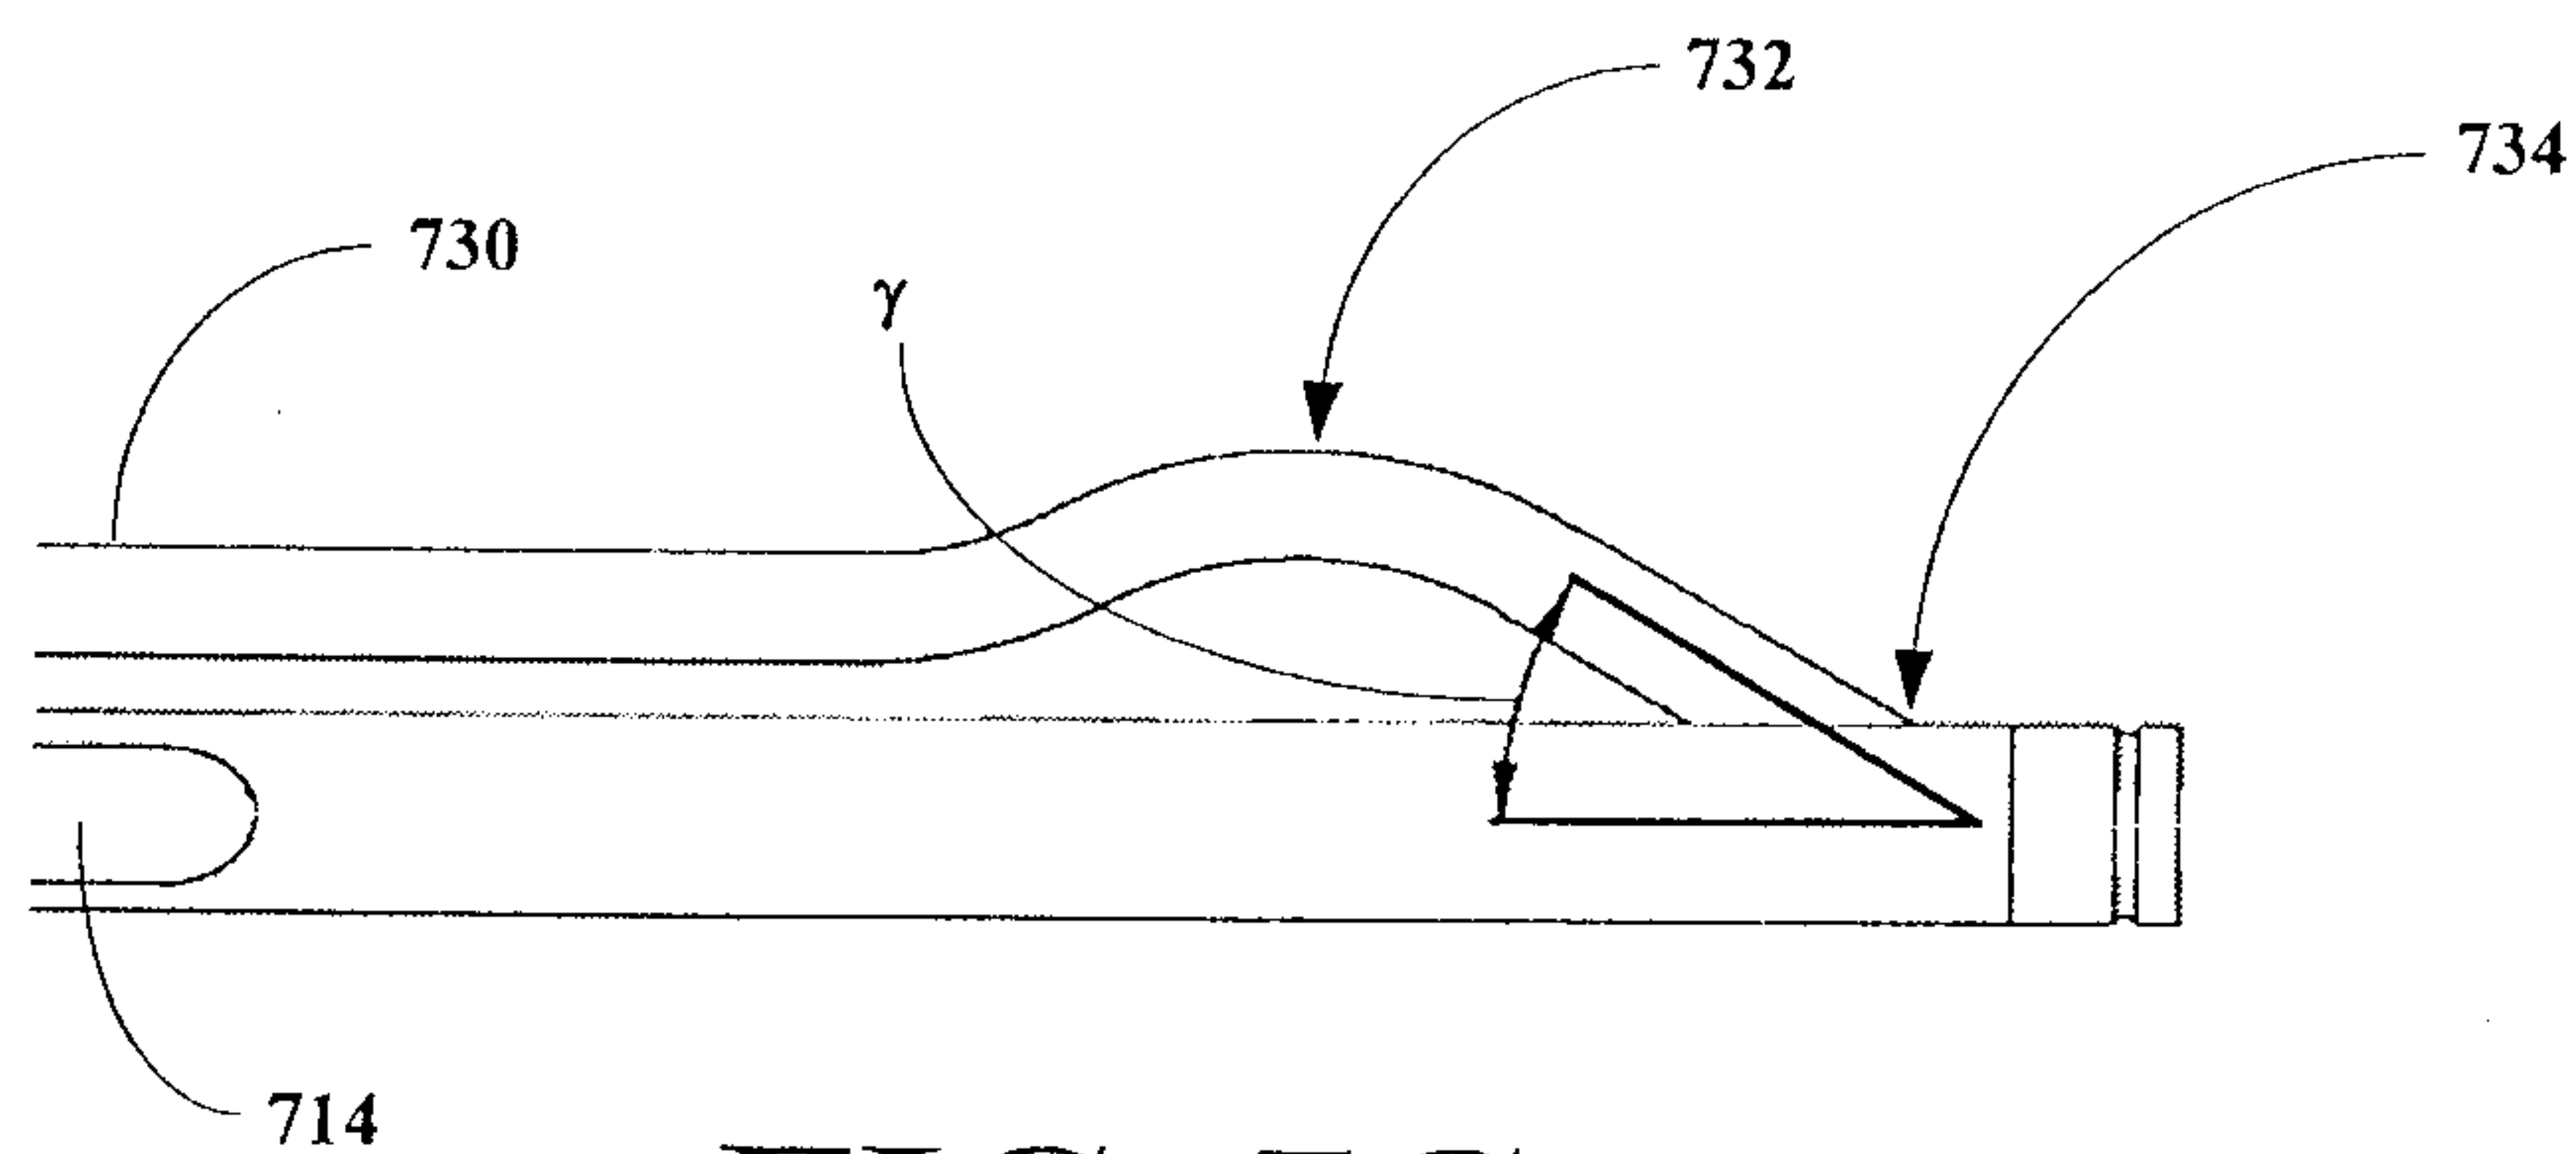


FIG. 7D

23/31

**FIG. 7E****FIG. 7F****FIG. 7G**

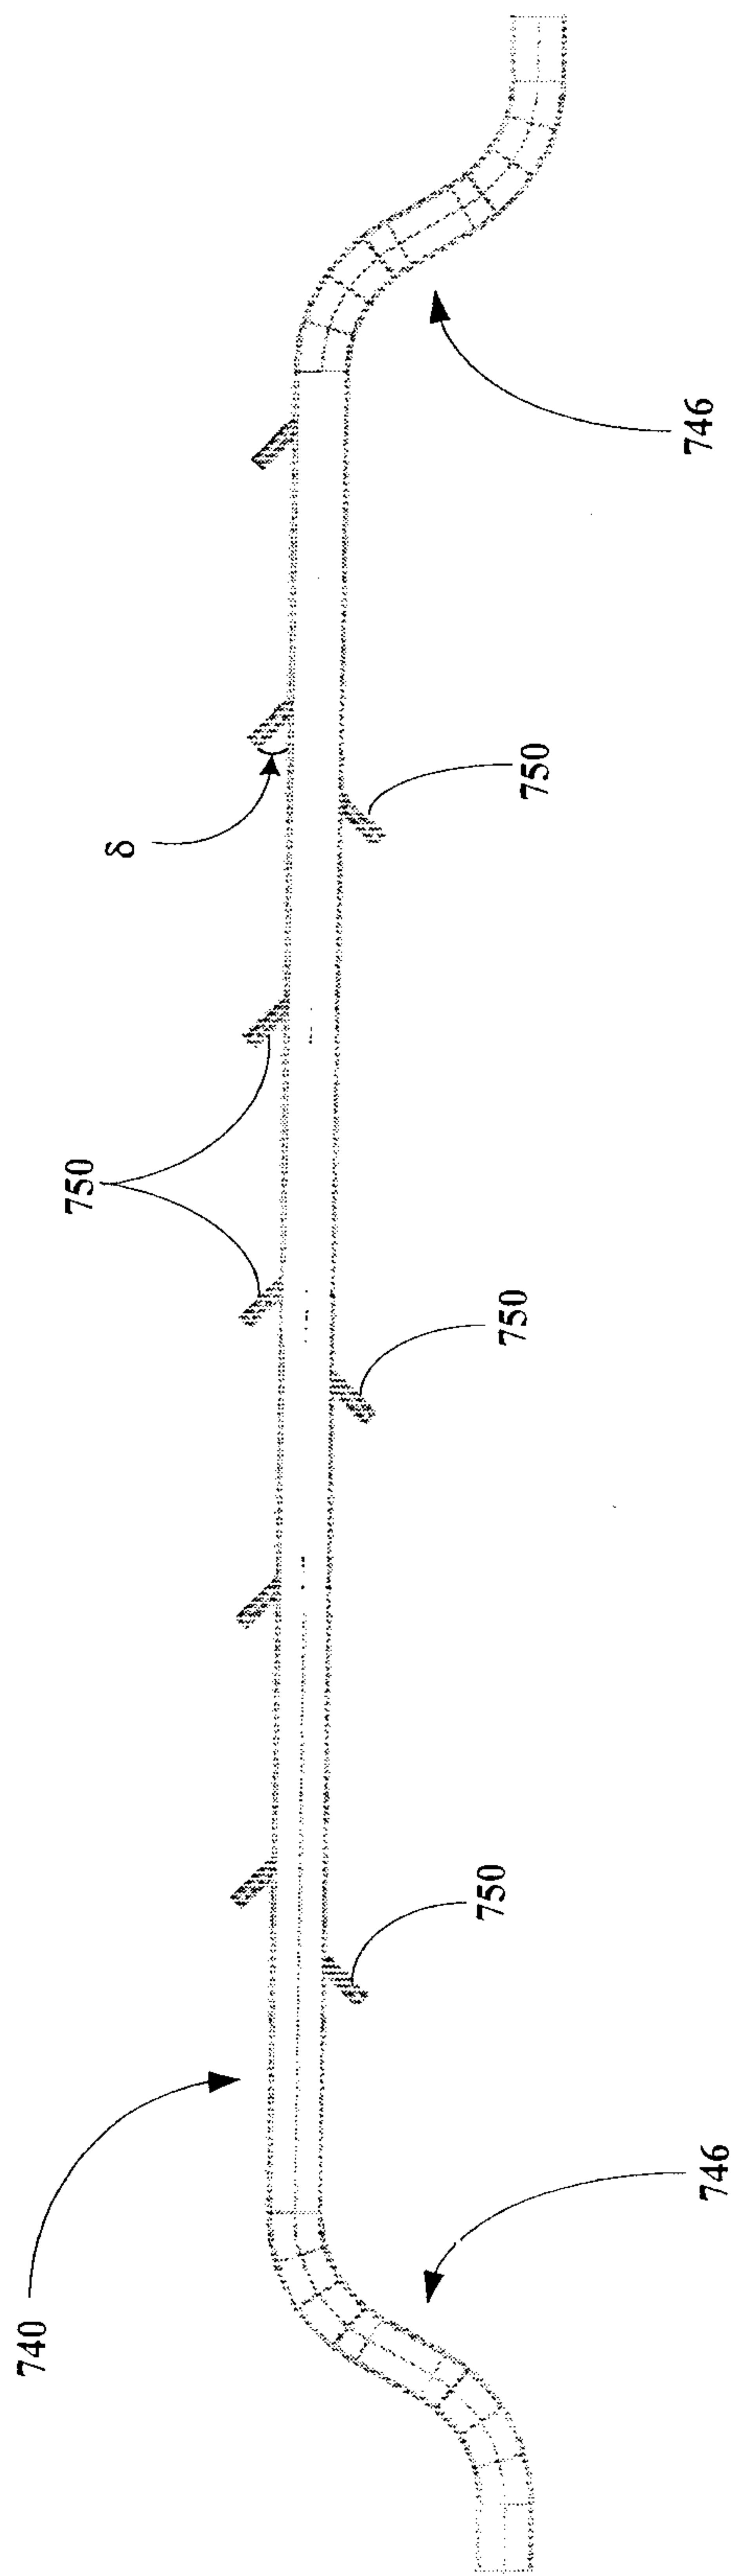
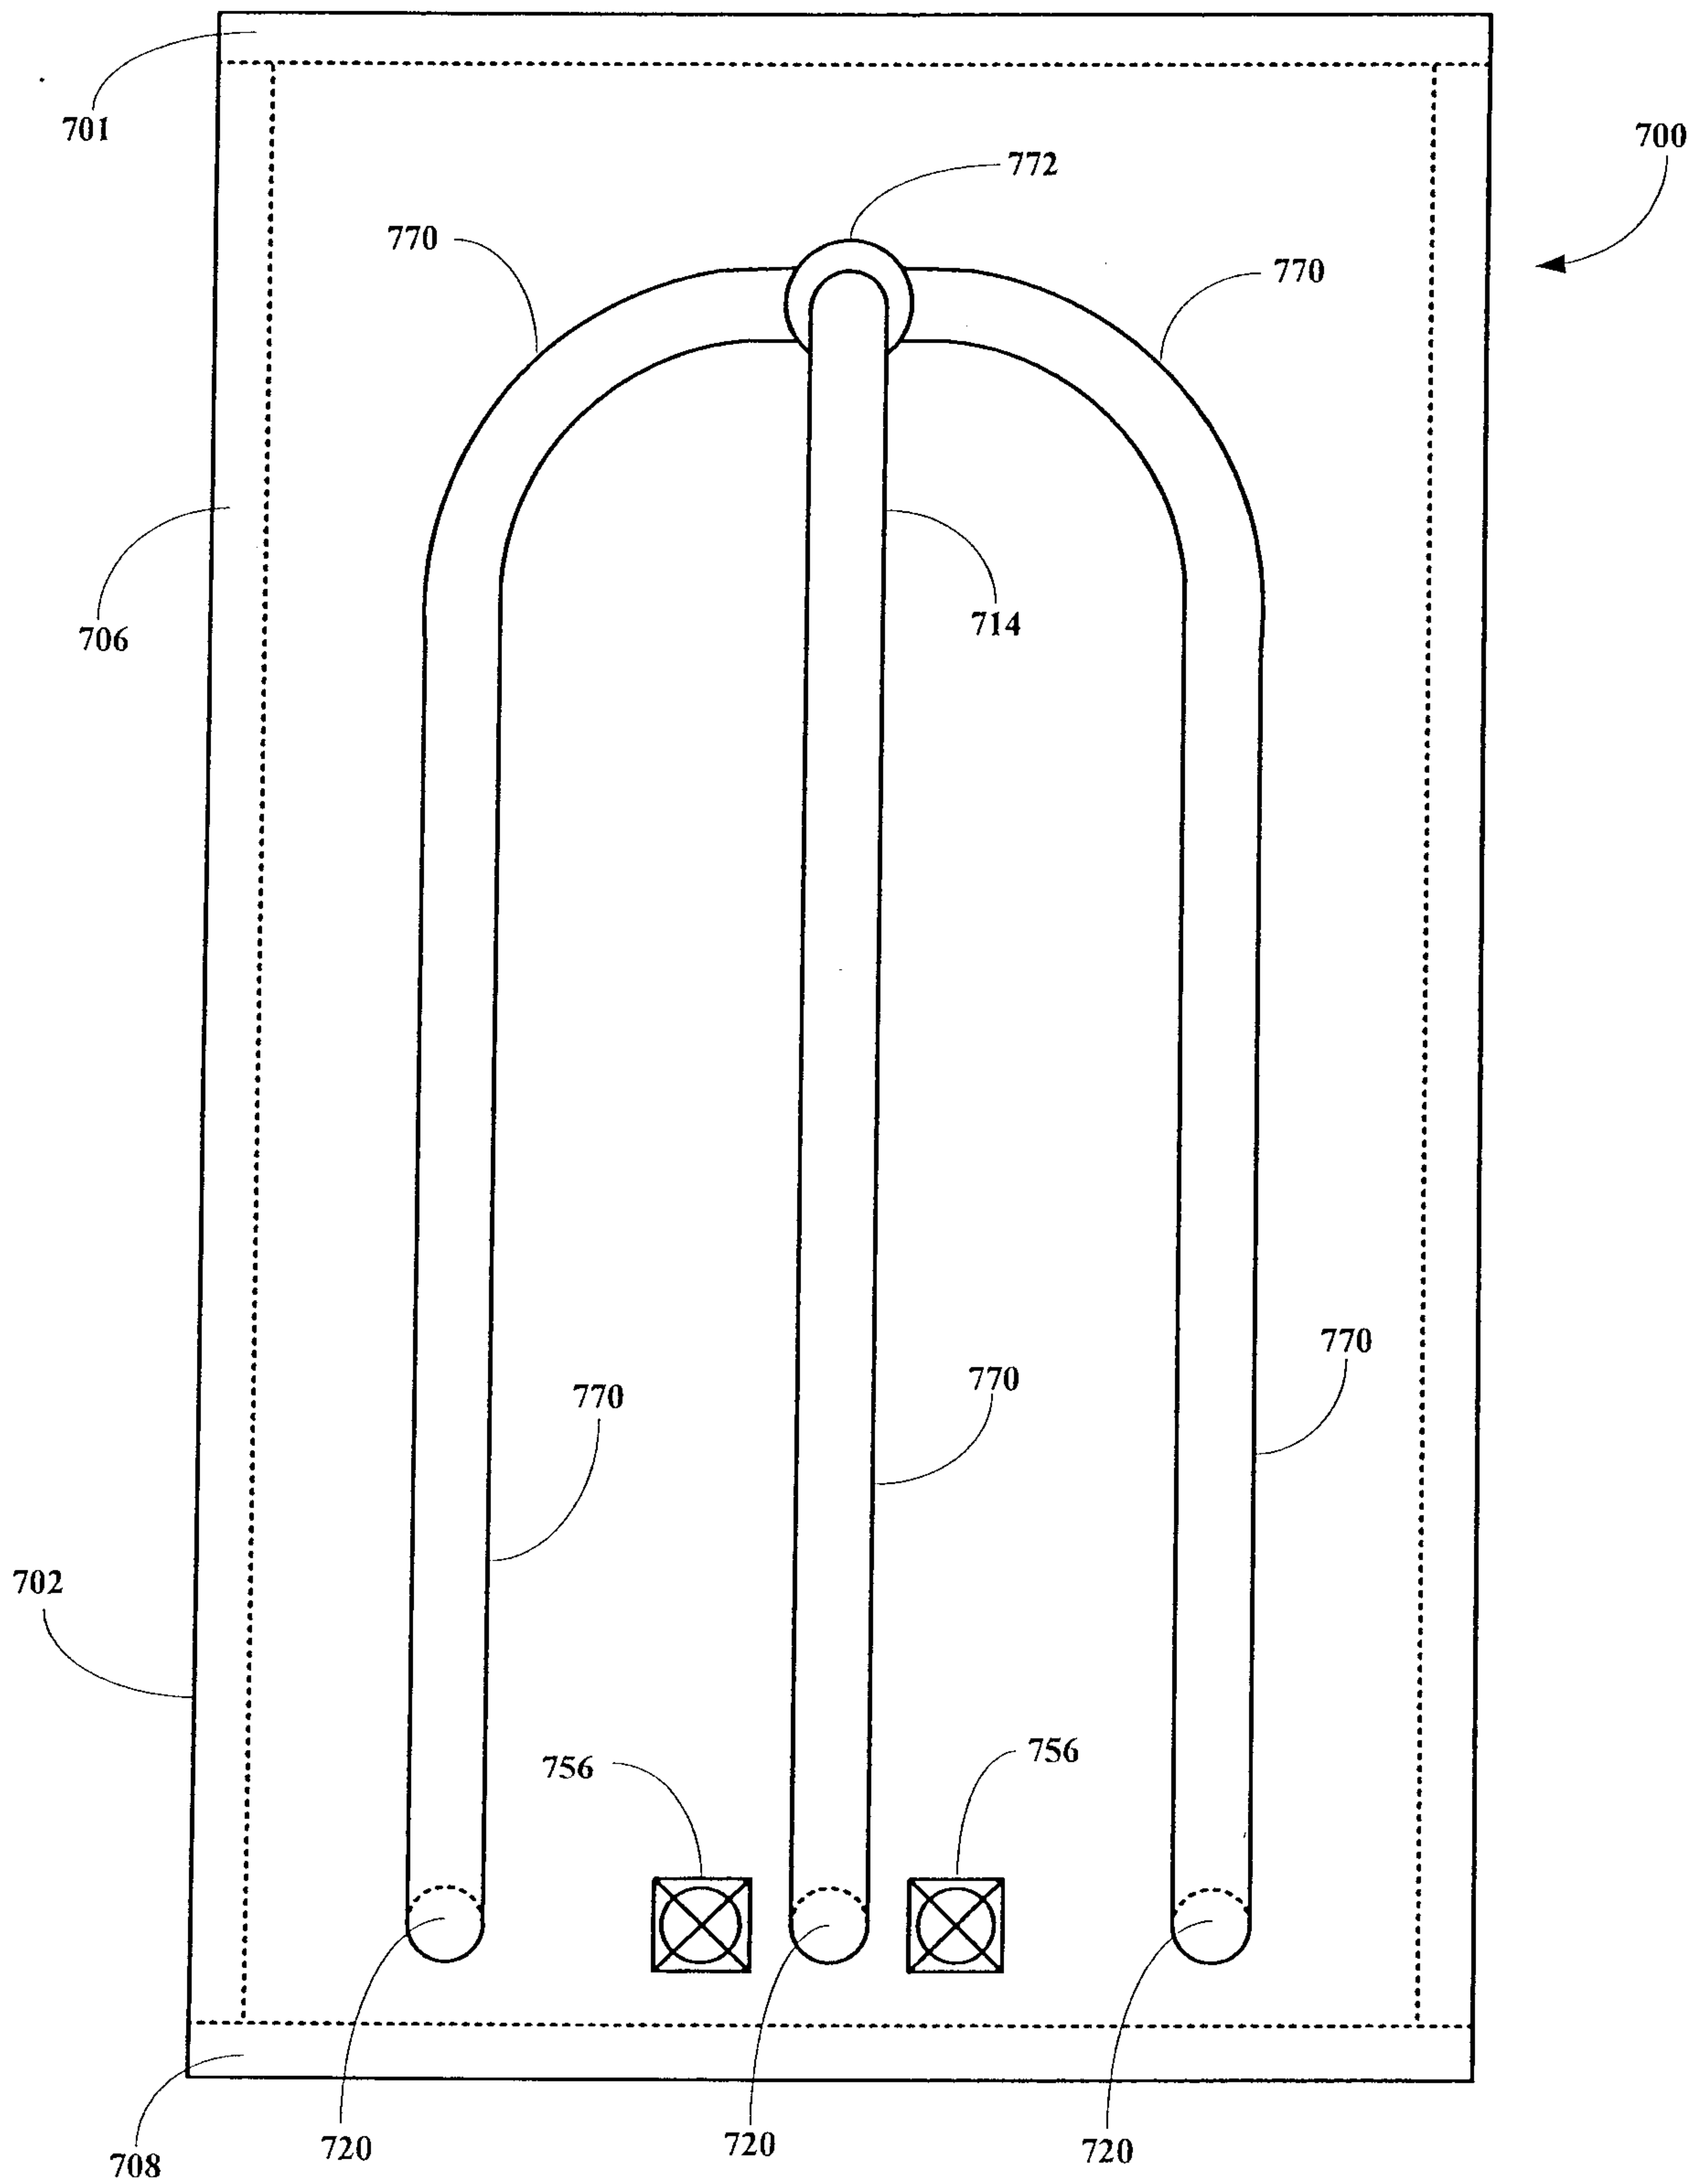


FIG. 7H

25/31

**FIG. 7I**

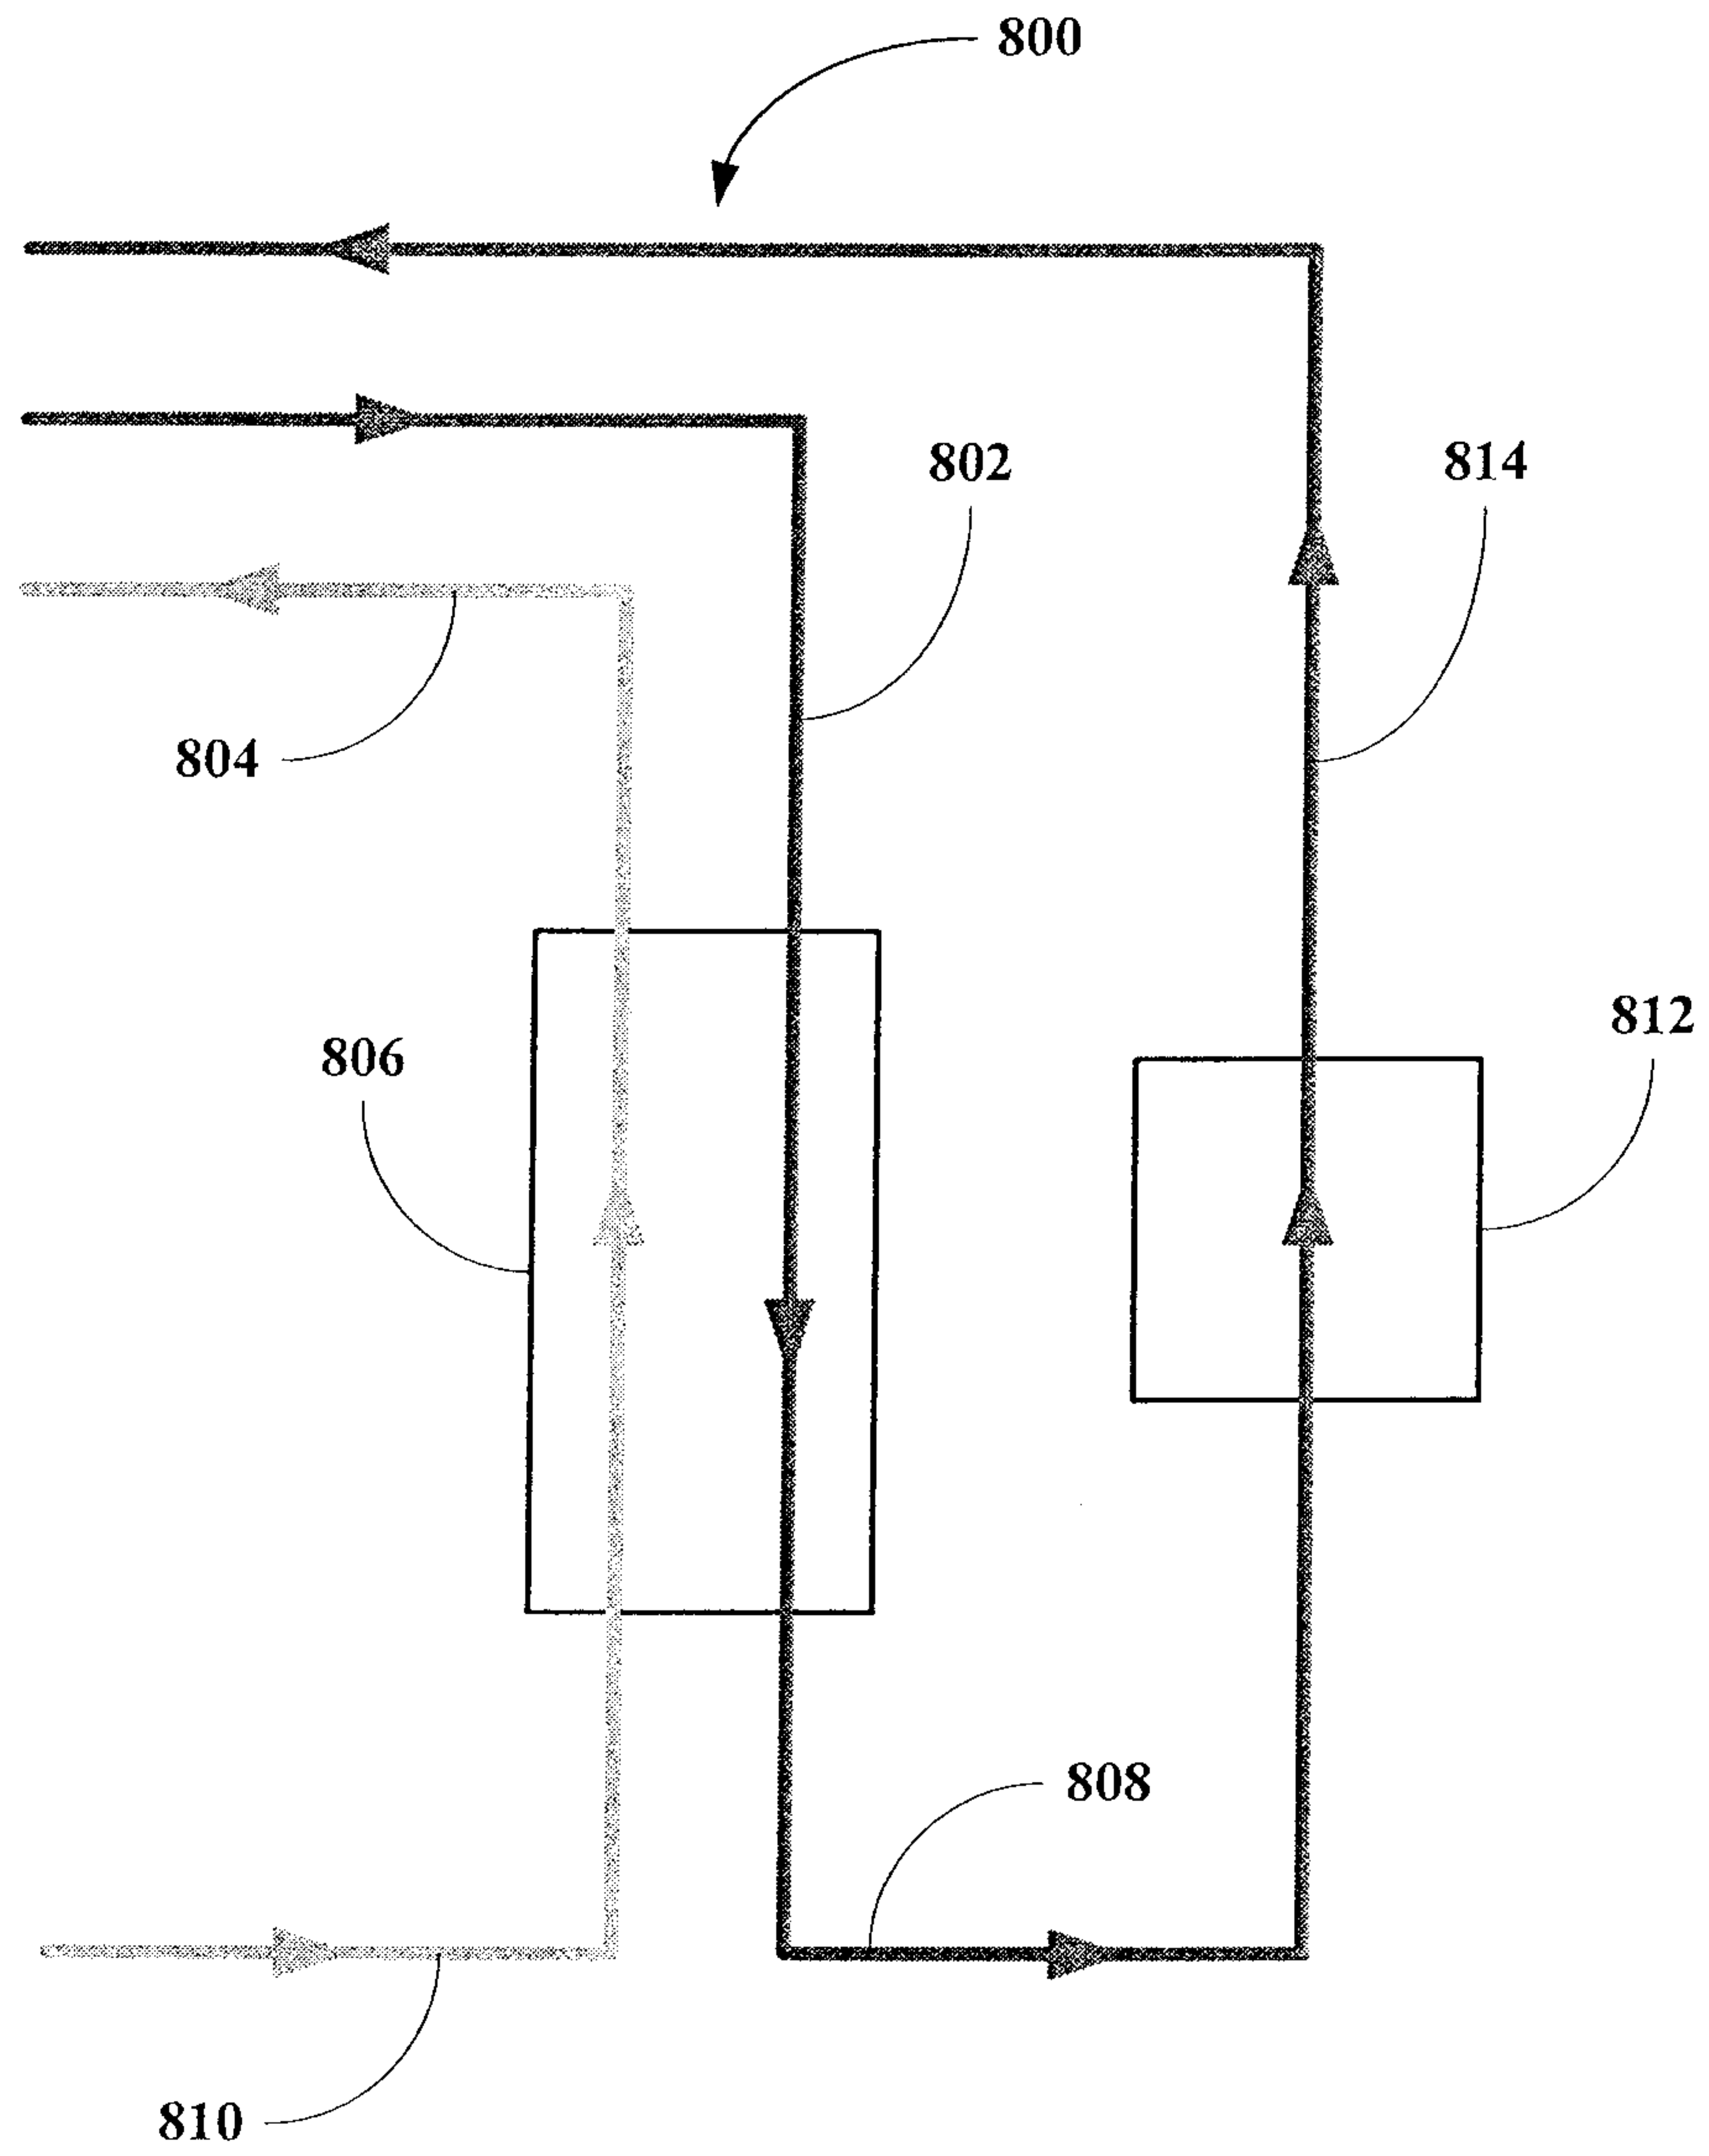


FIG. 8A

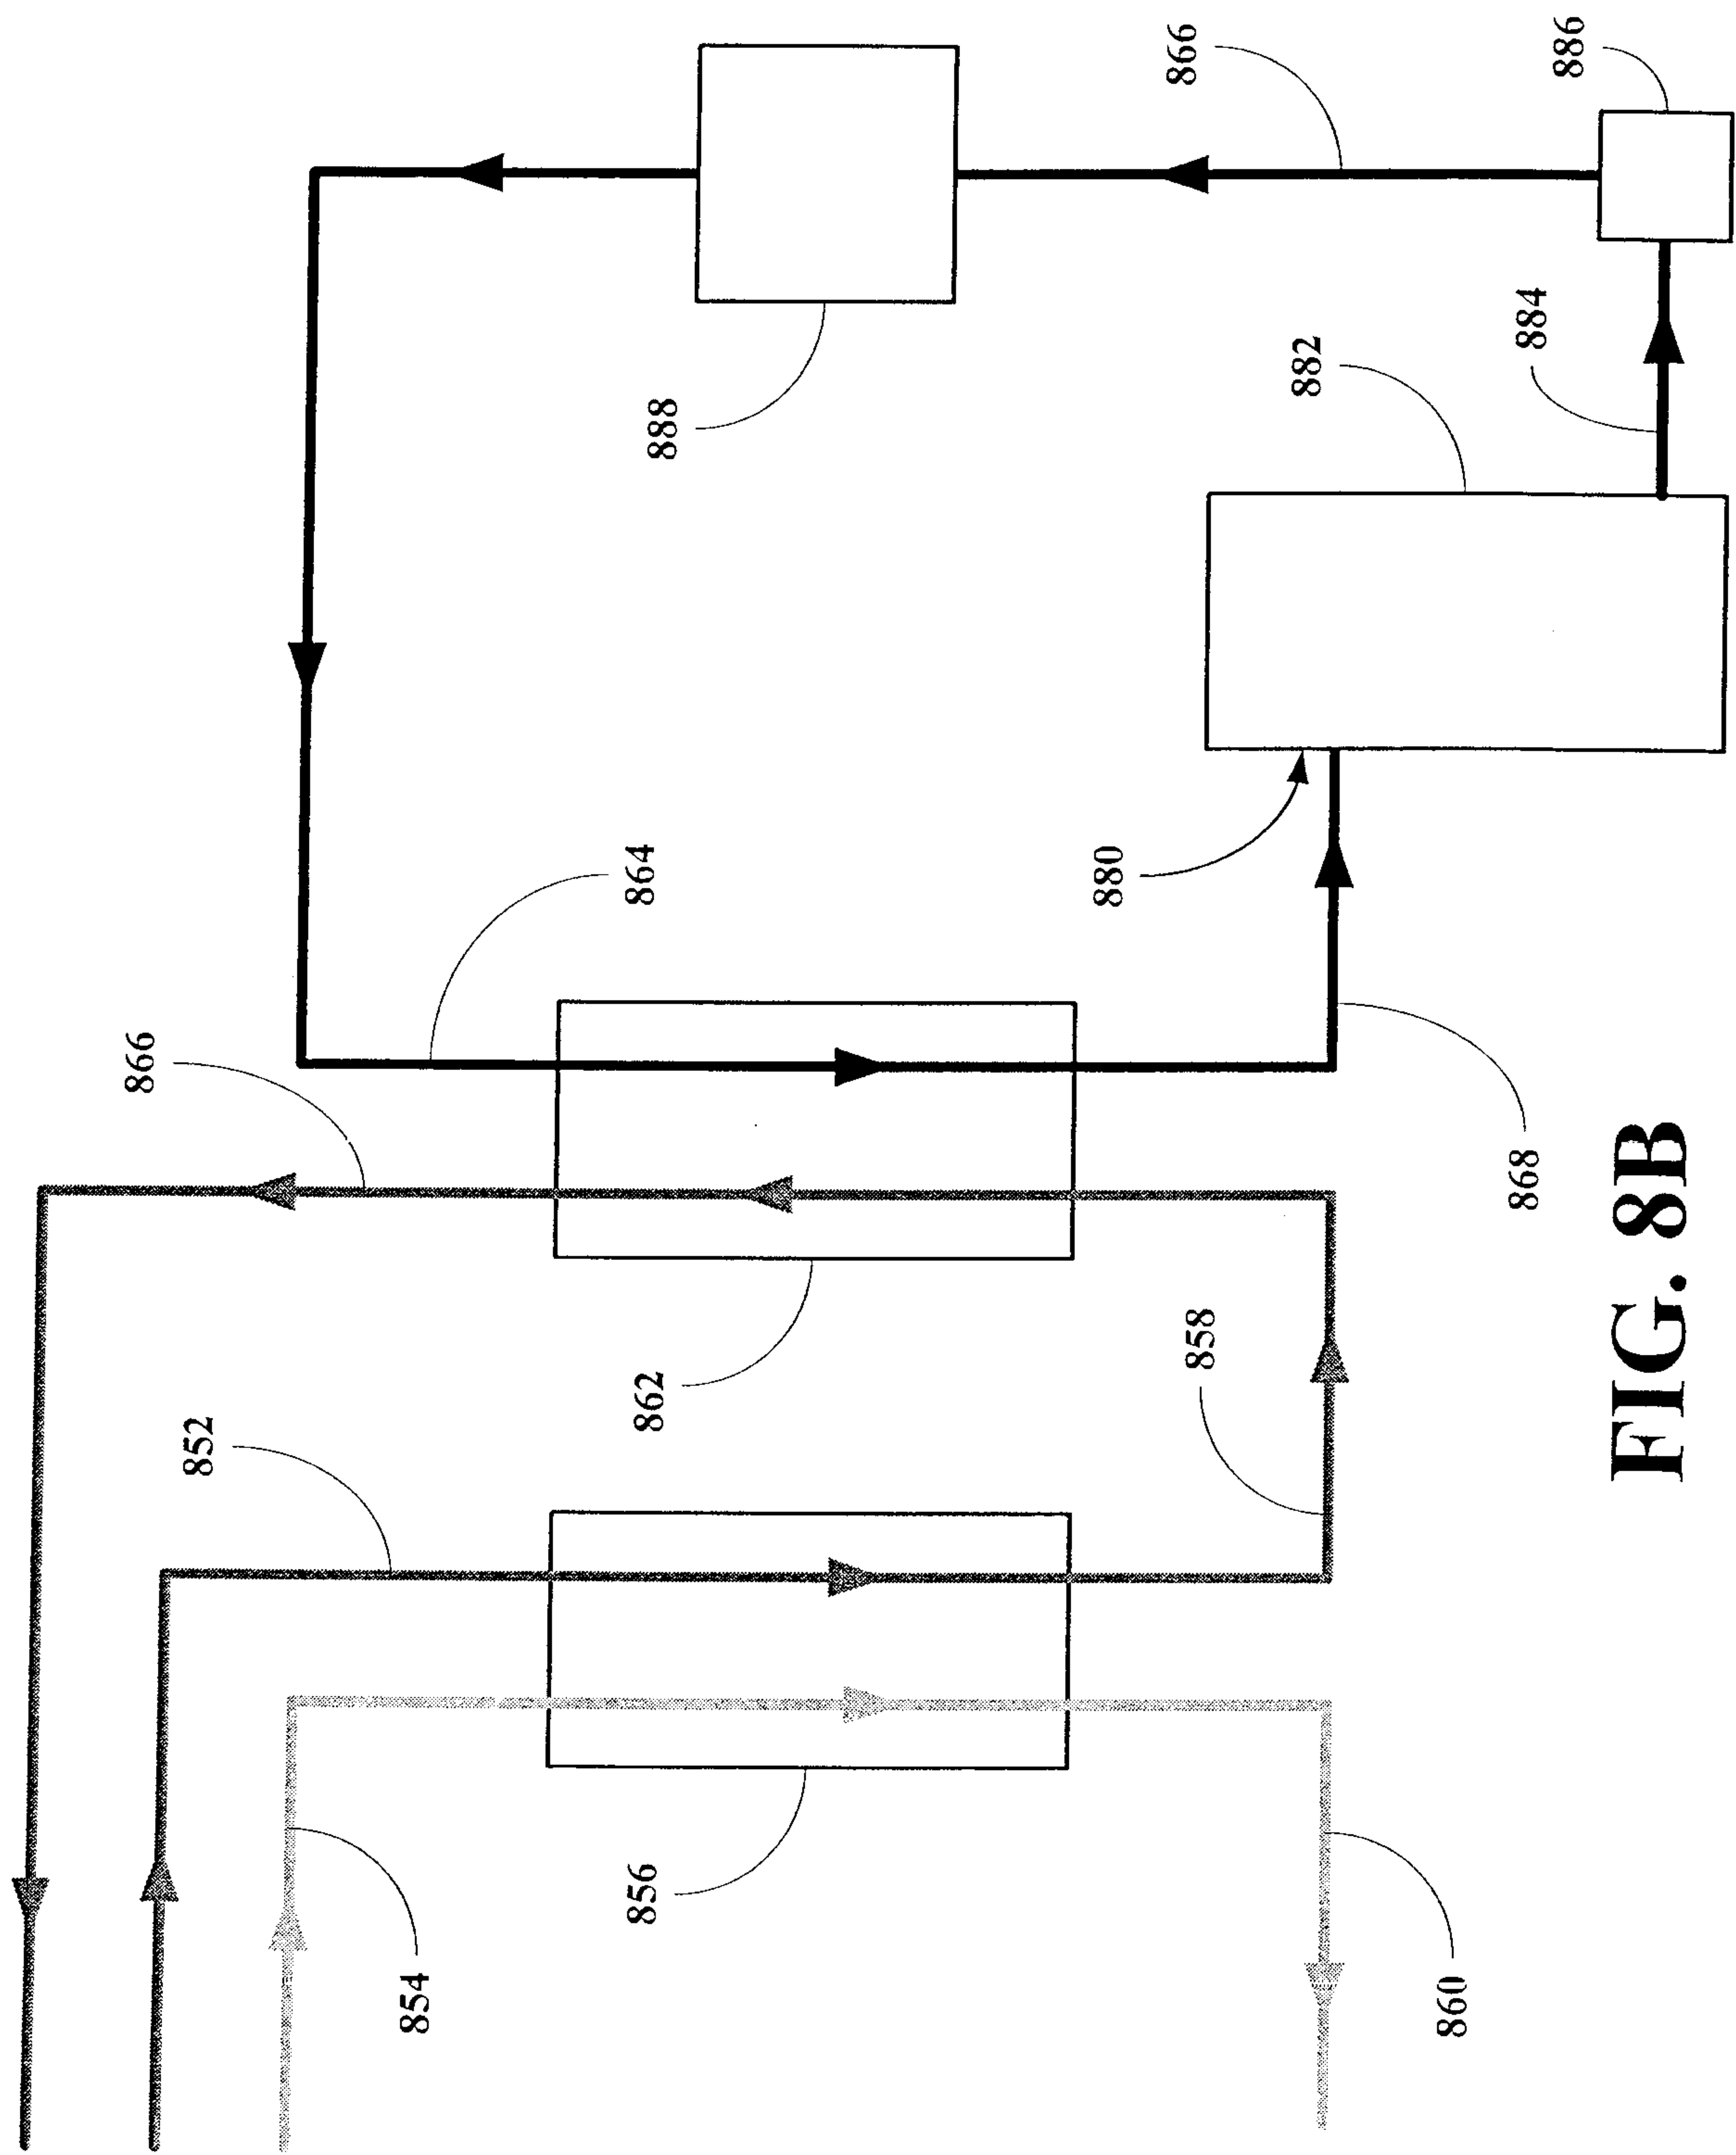
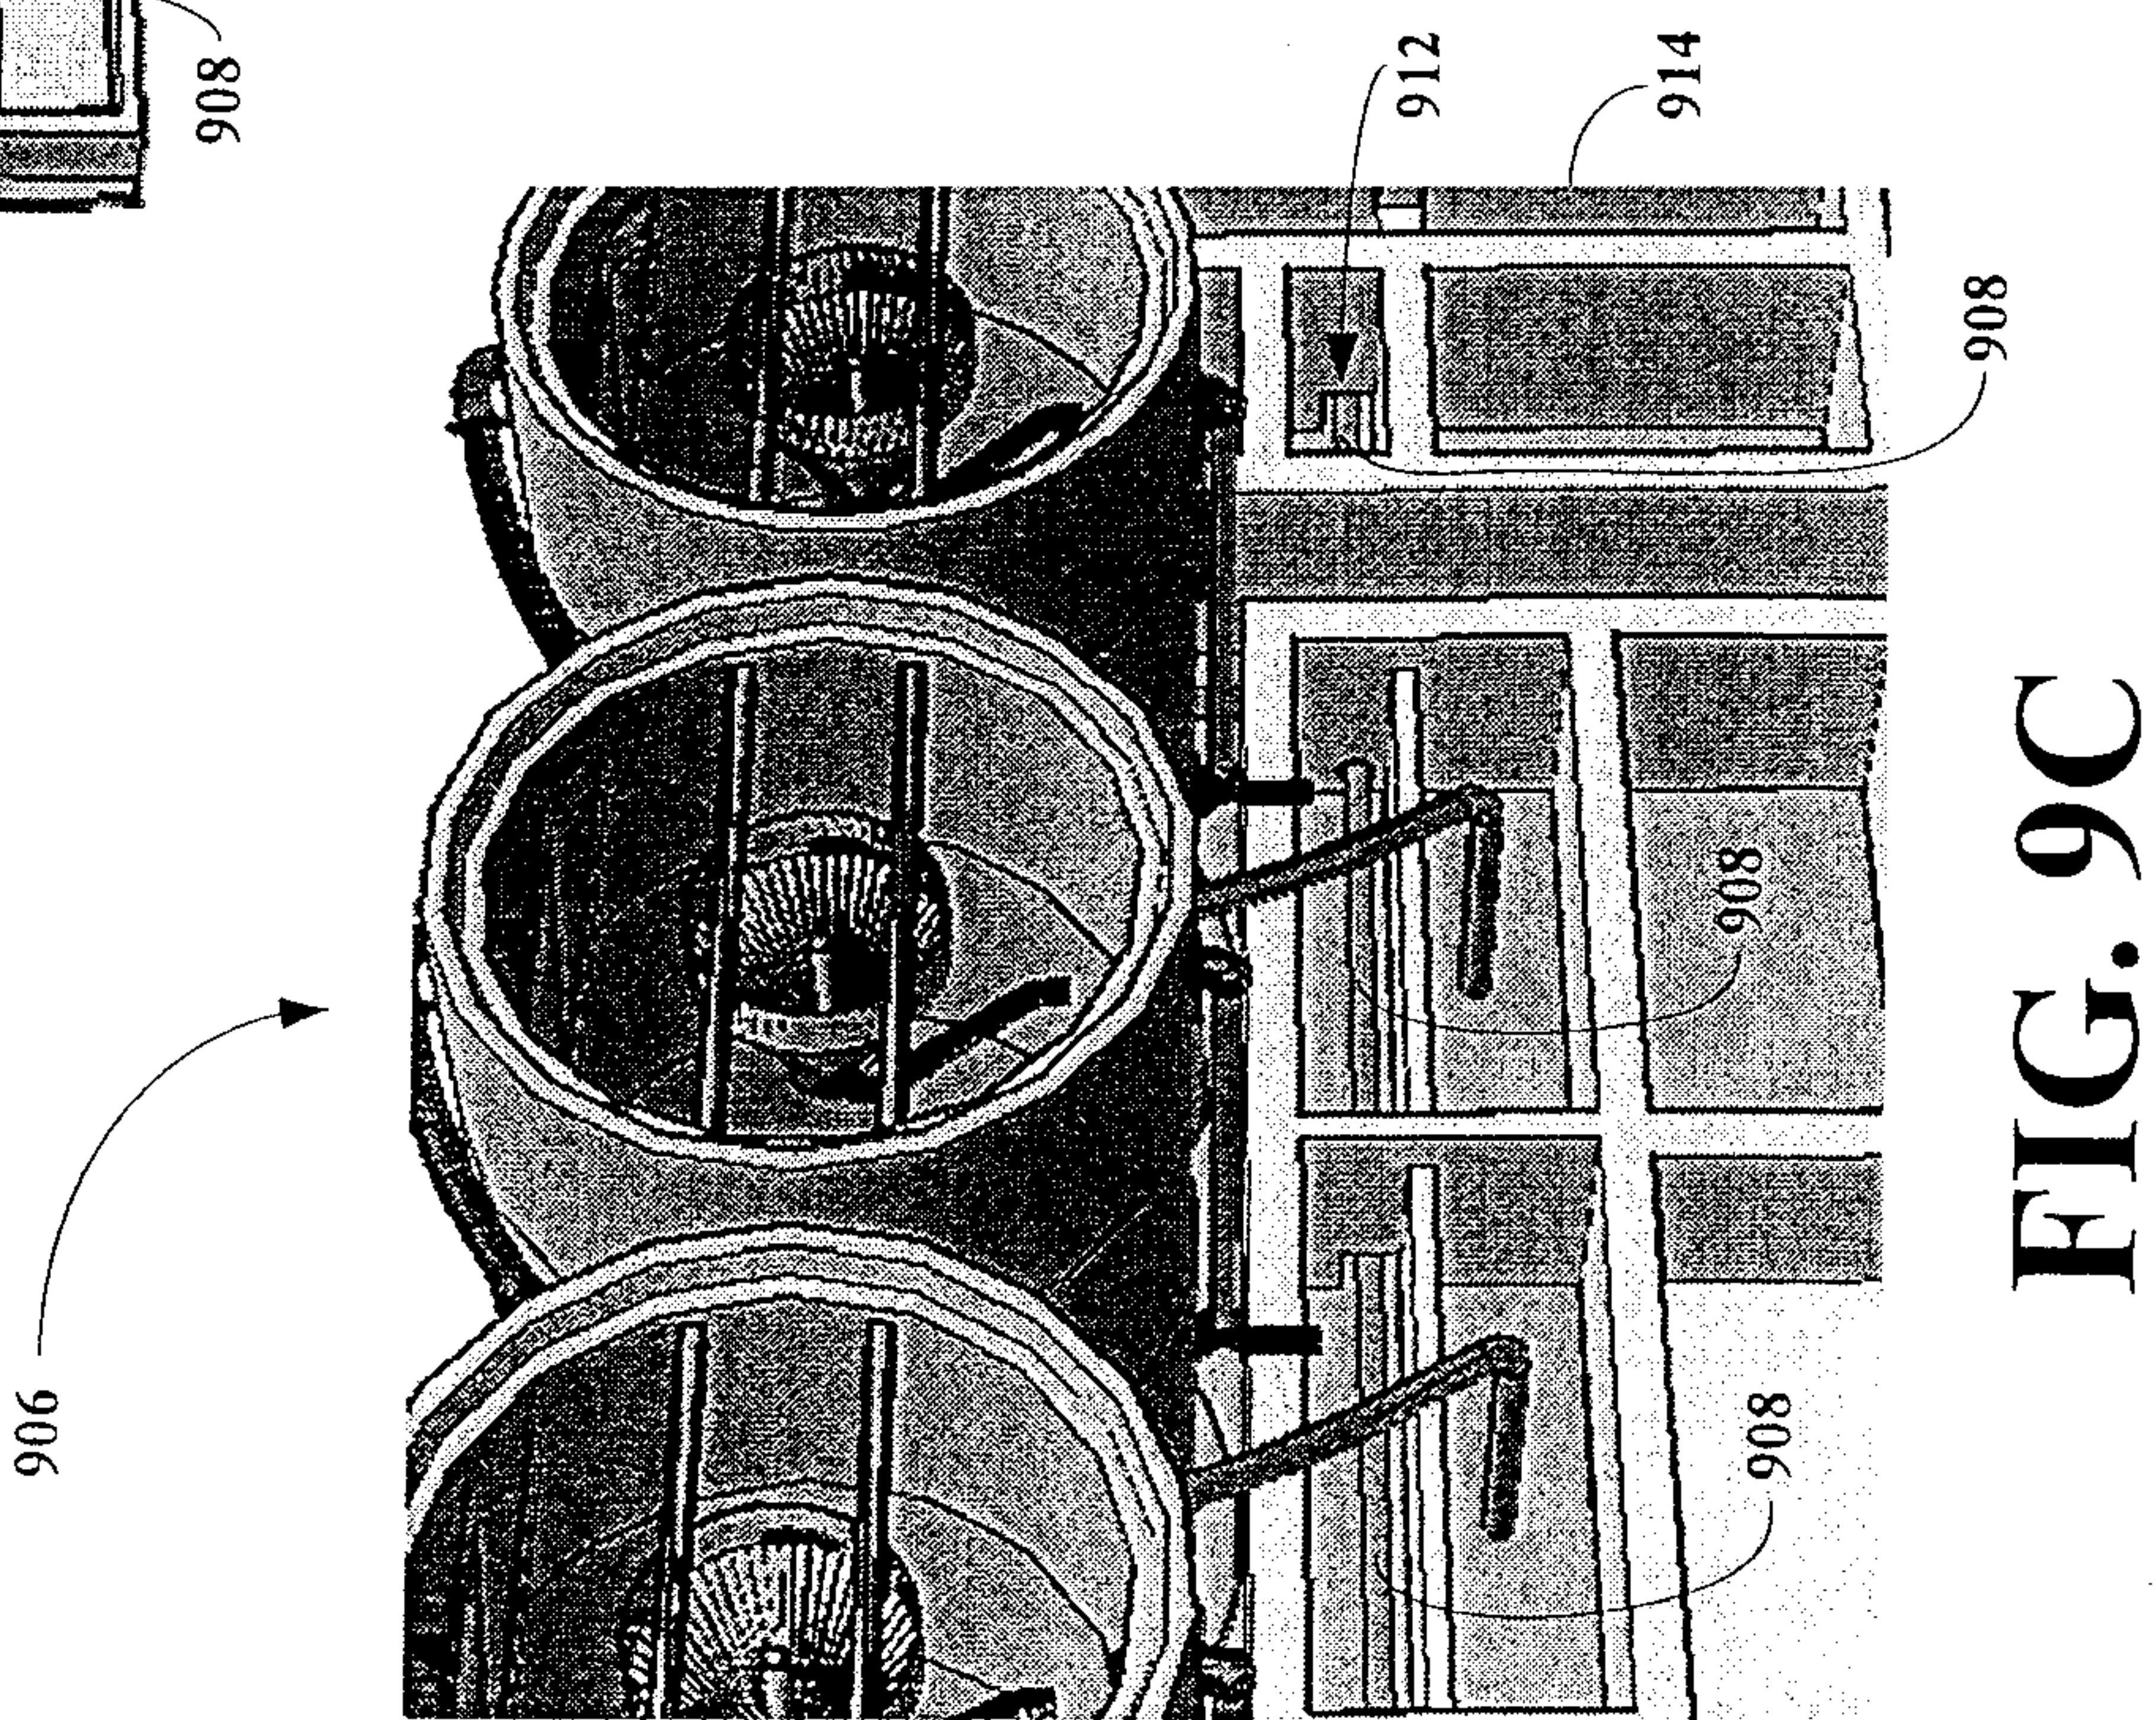
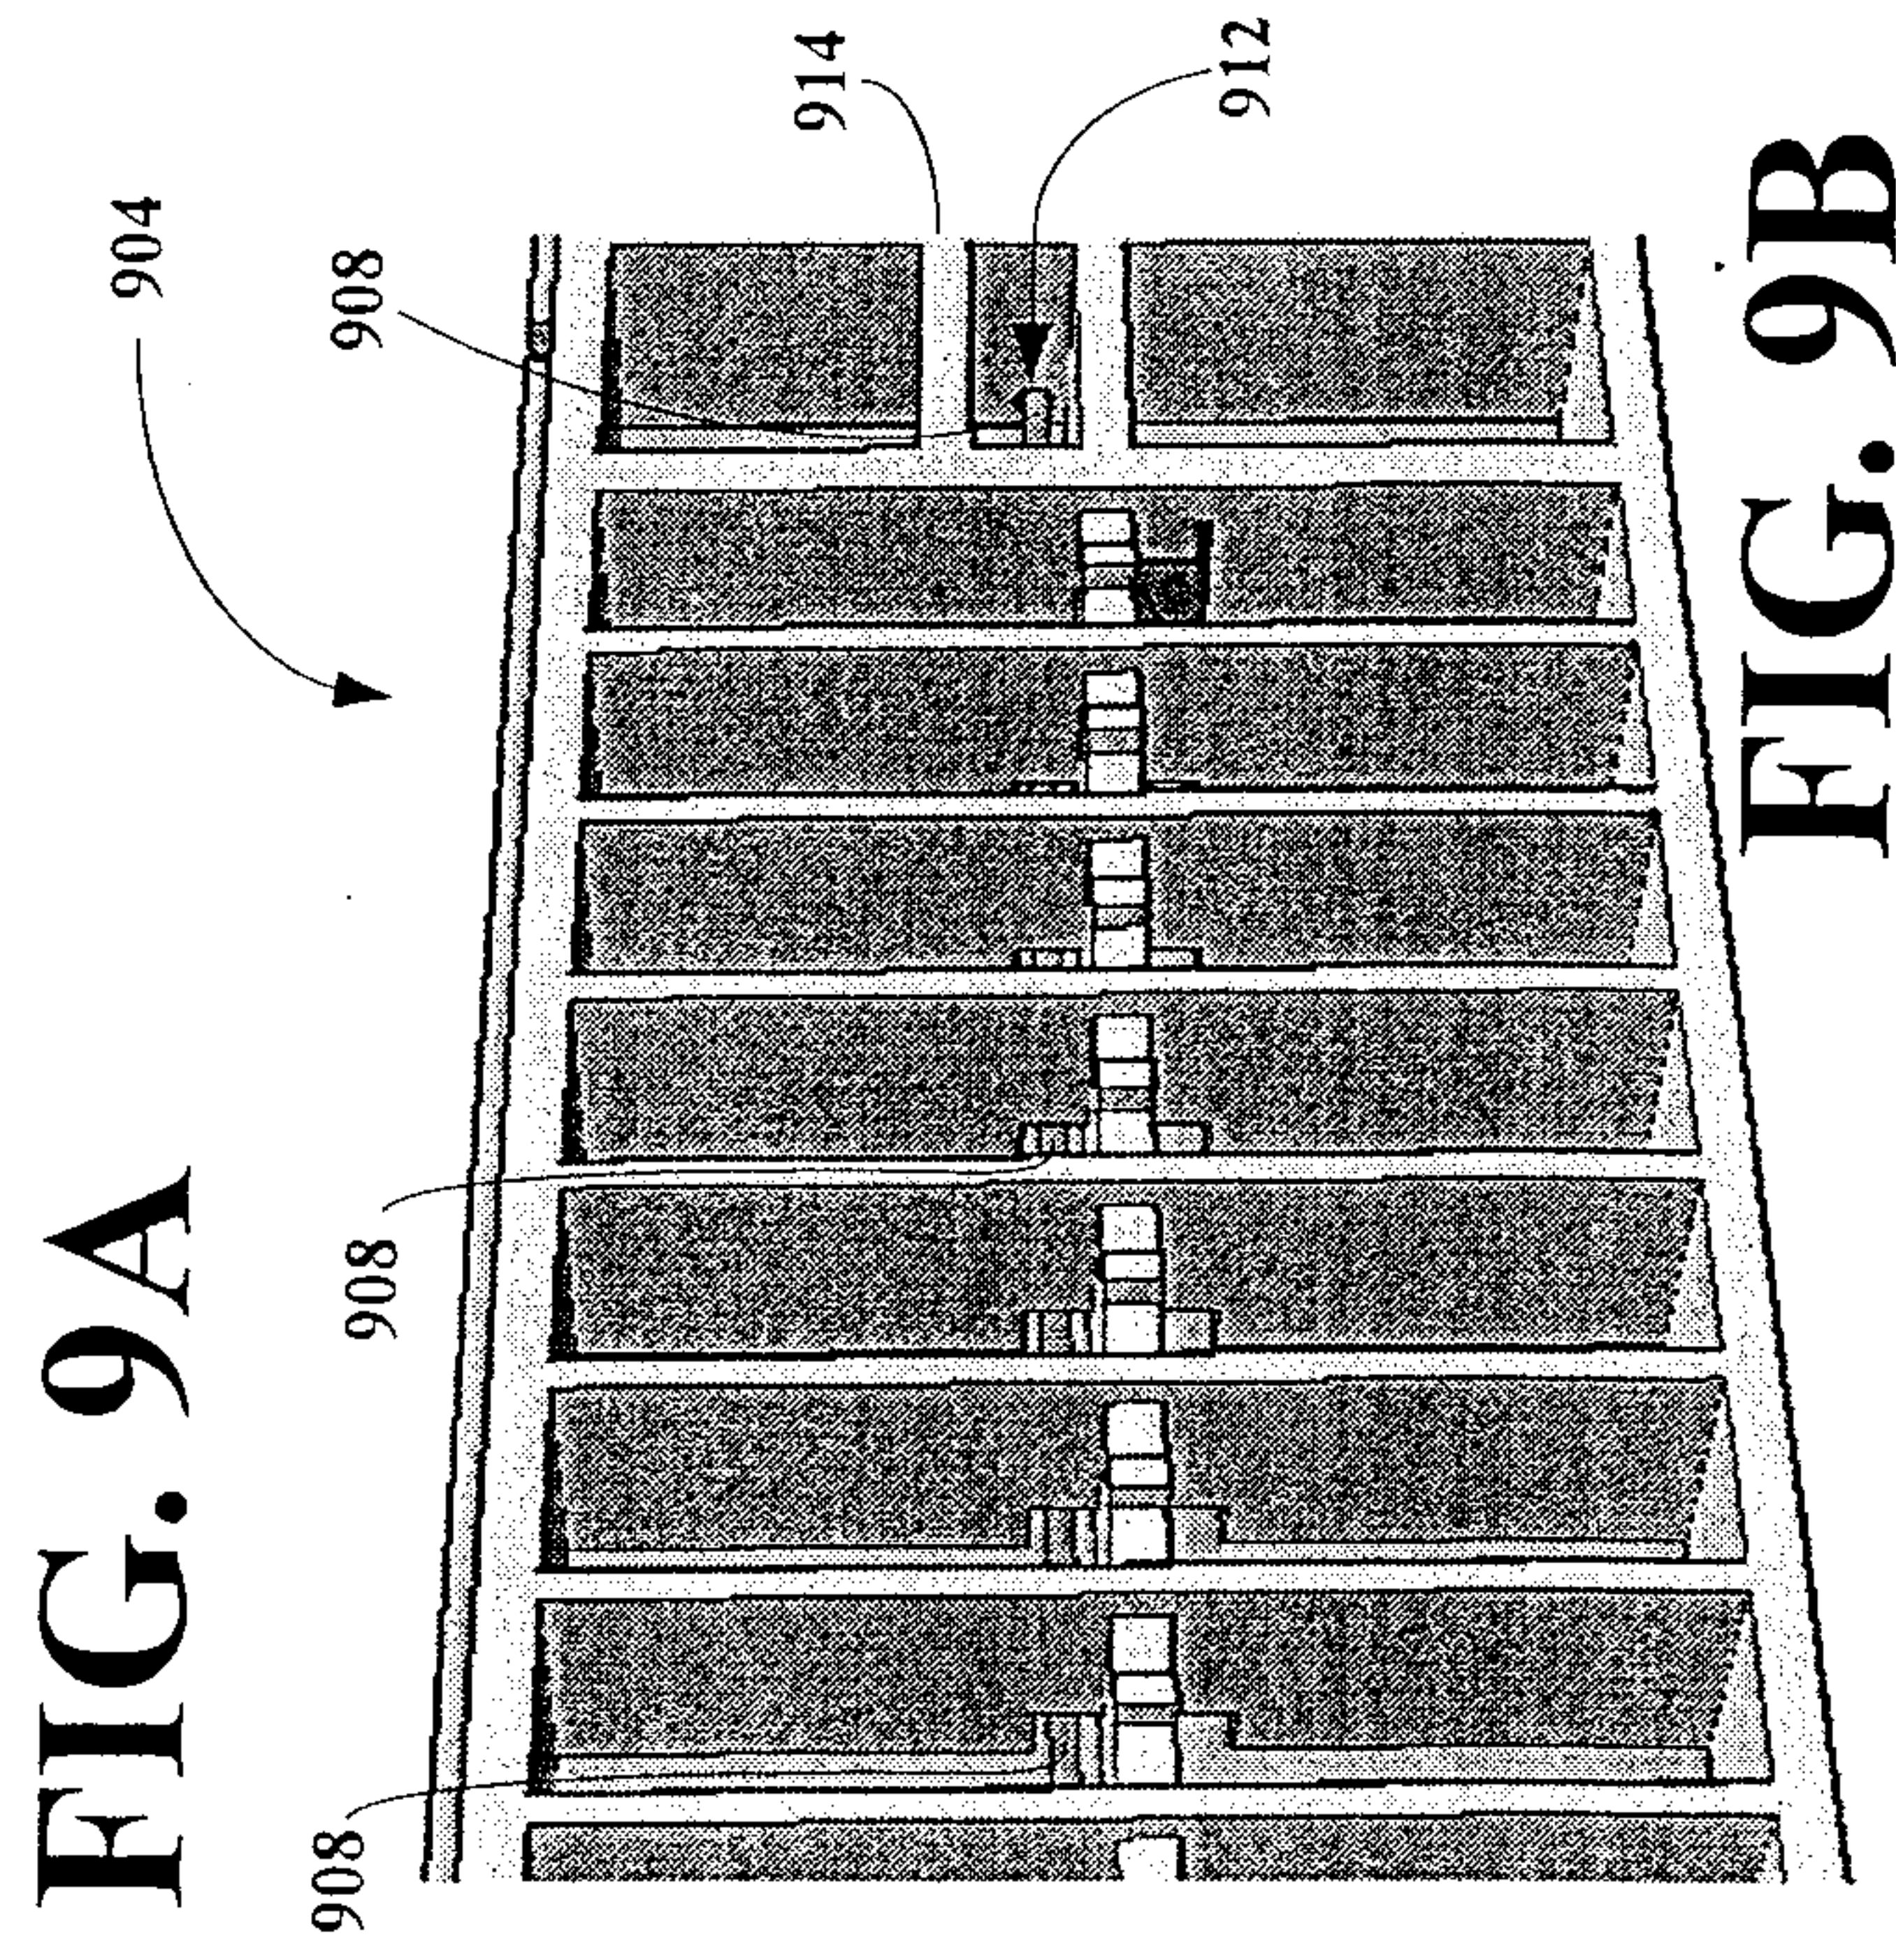
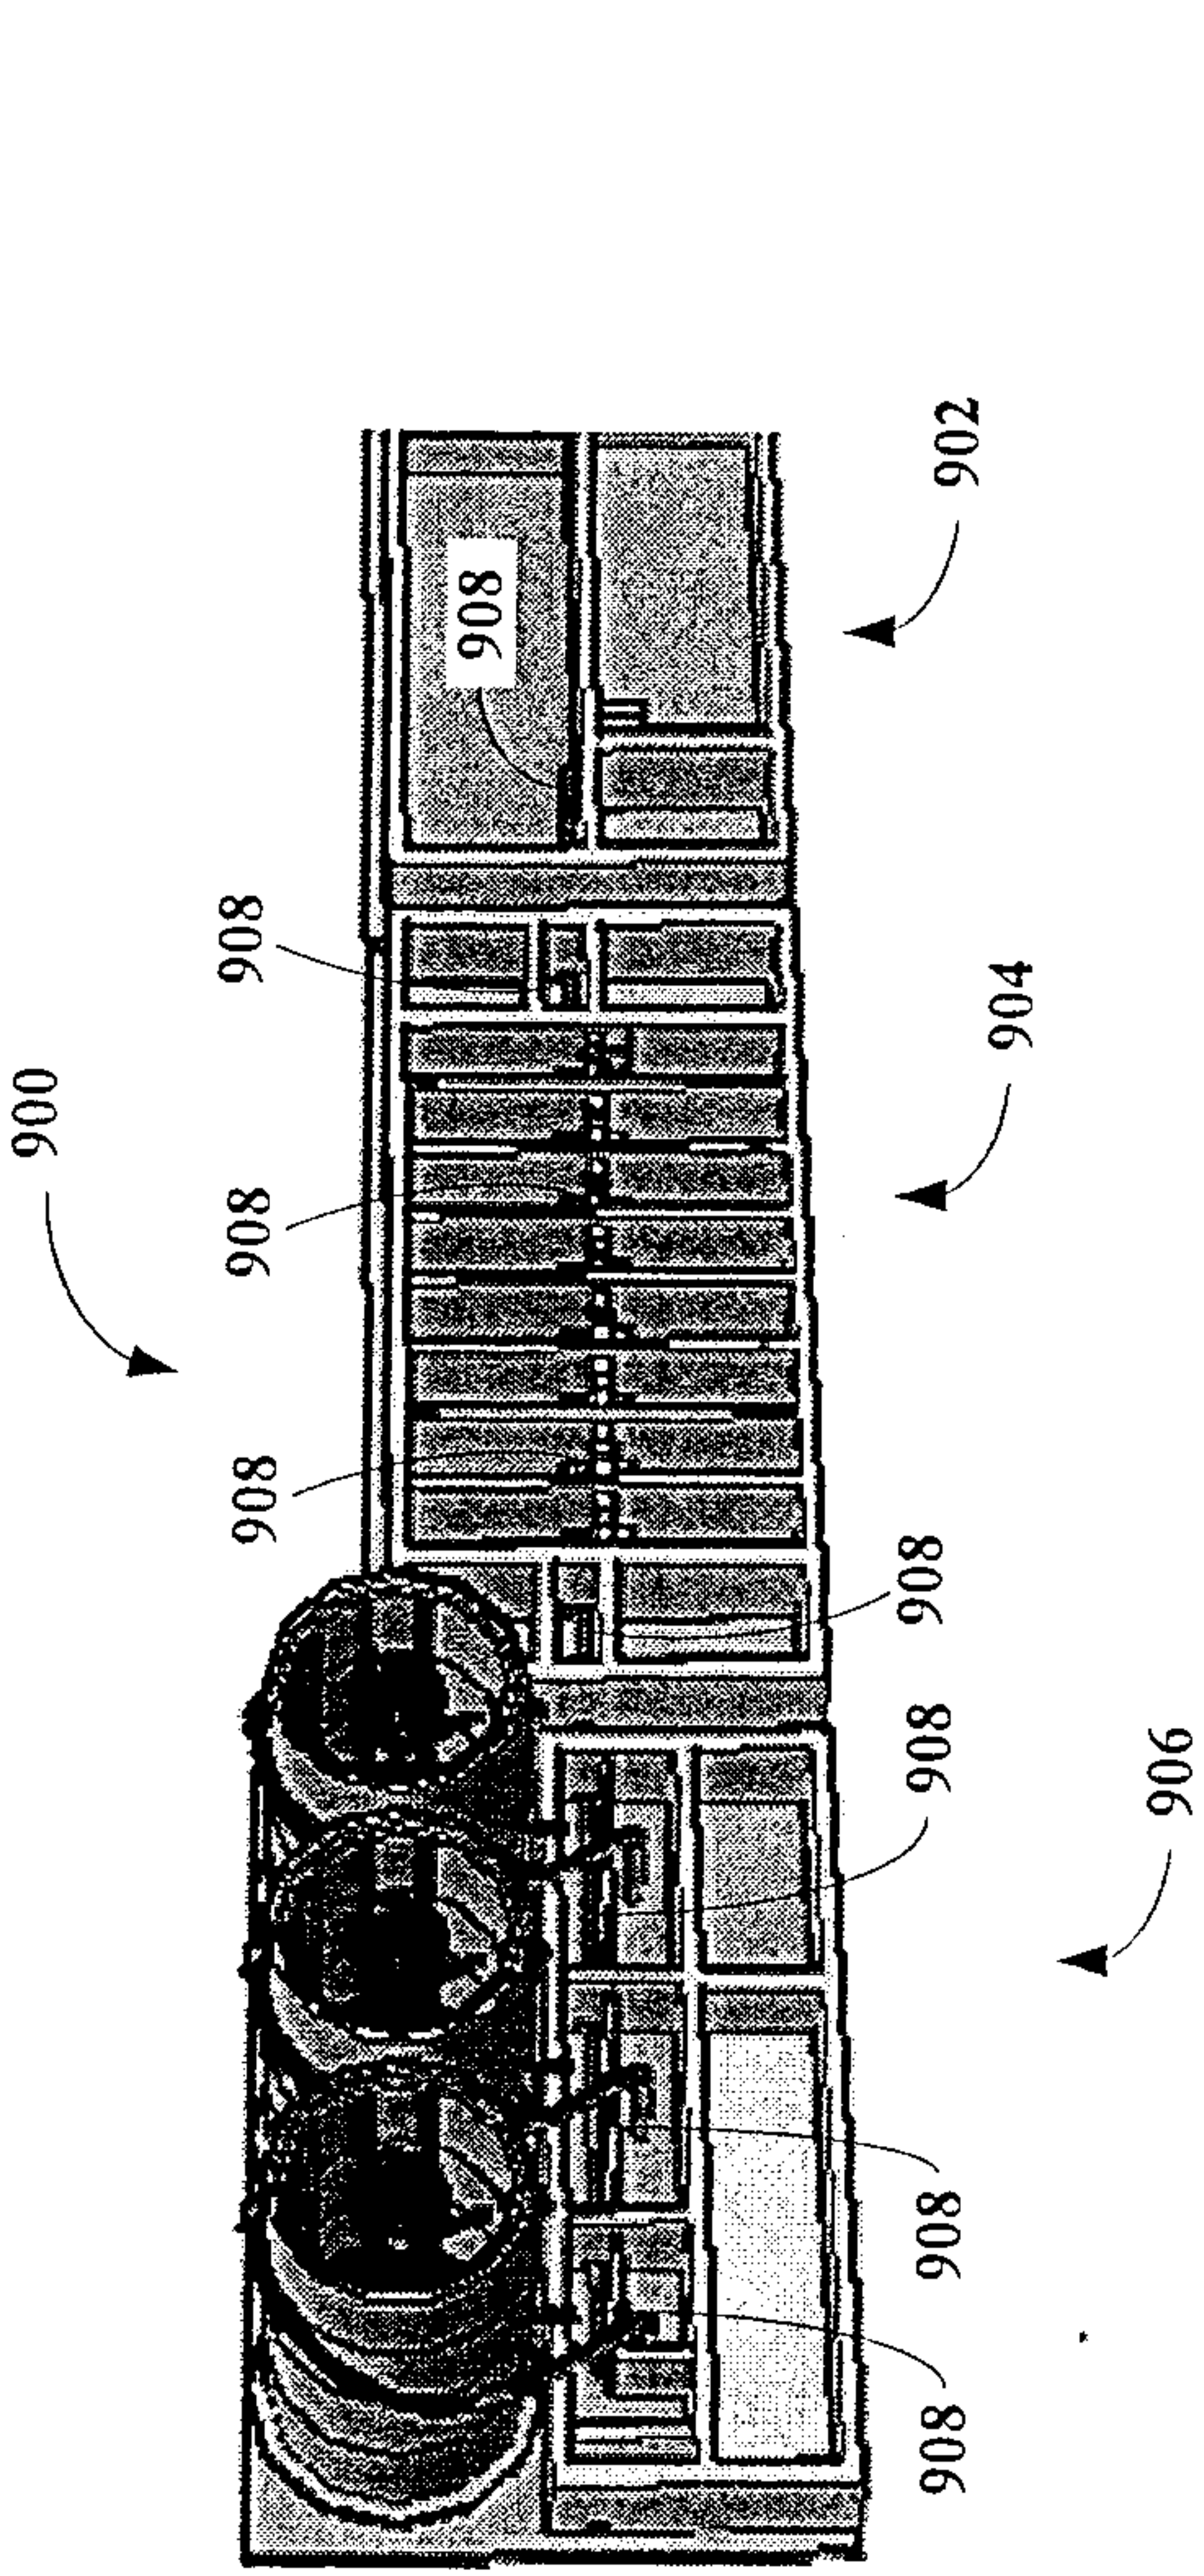


FIG. 8B



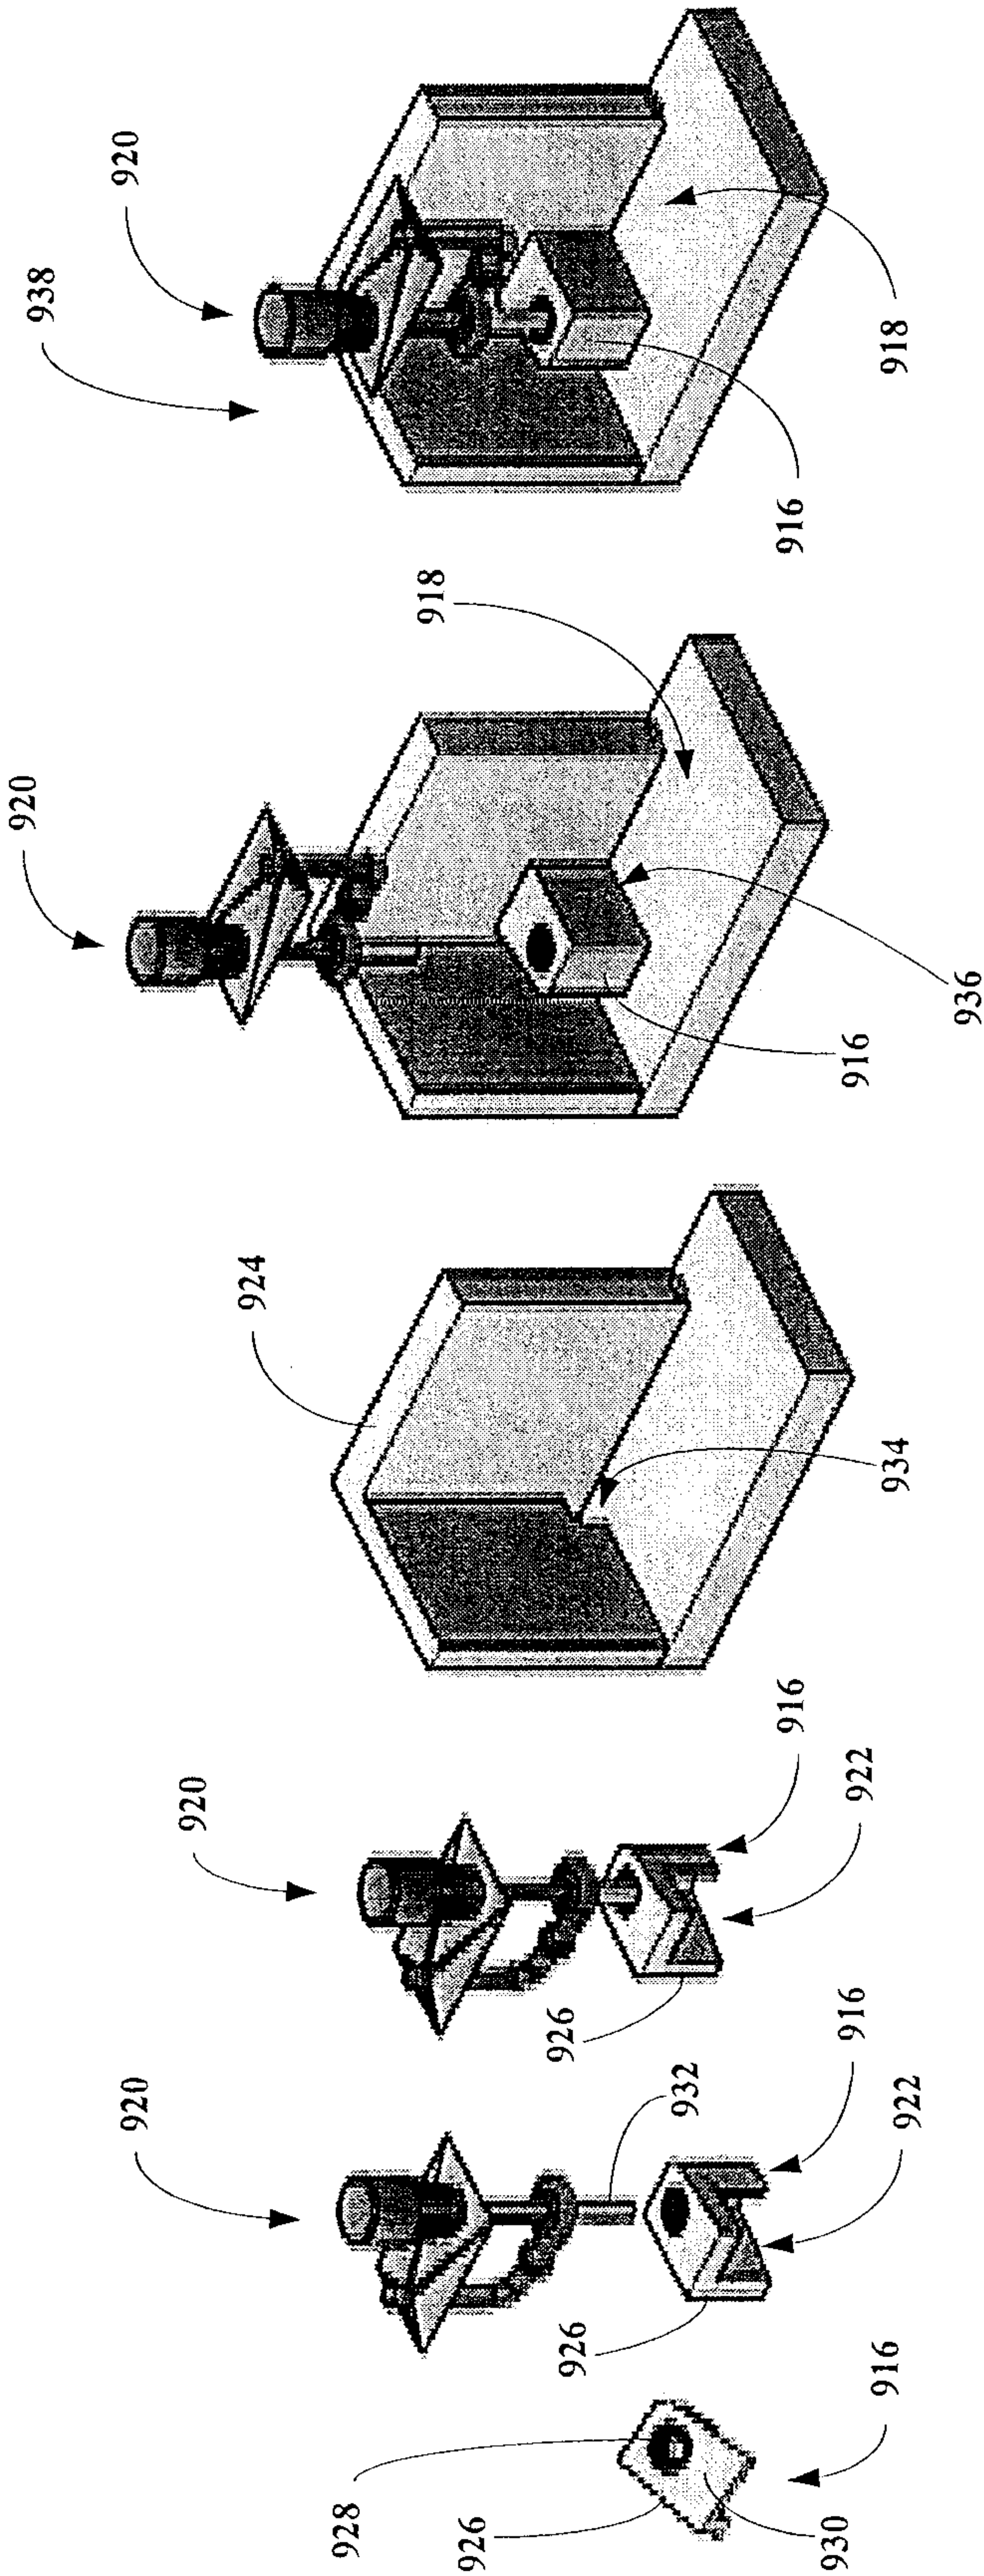


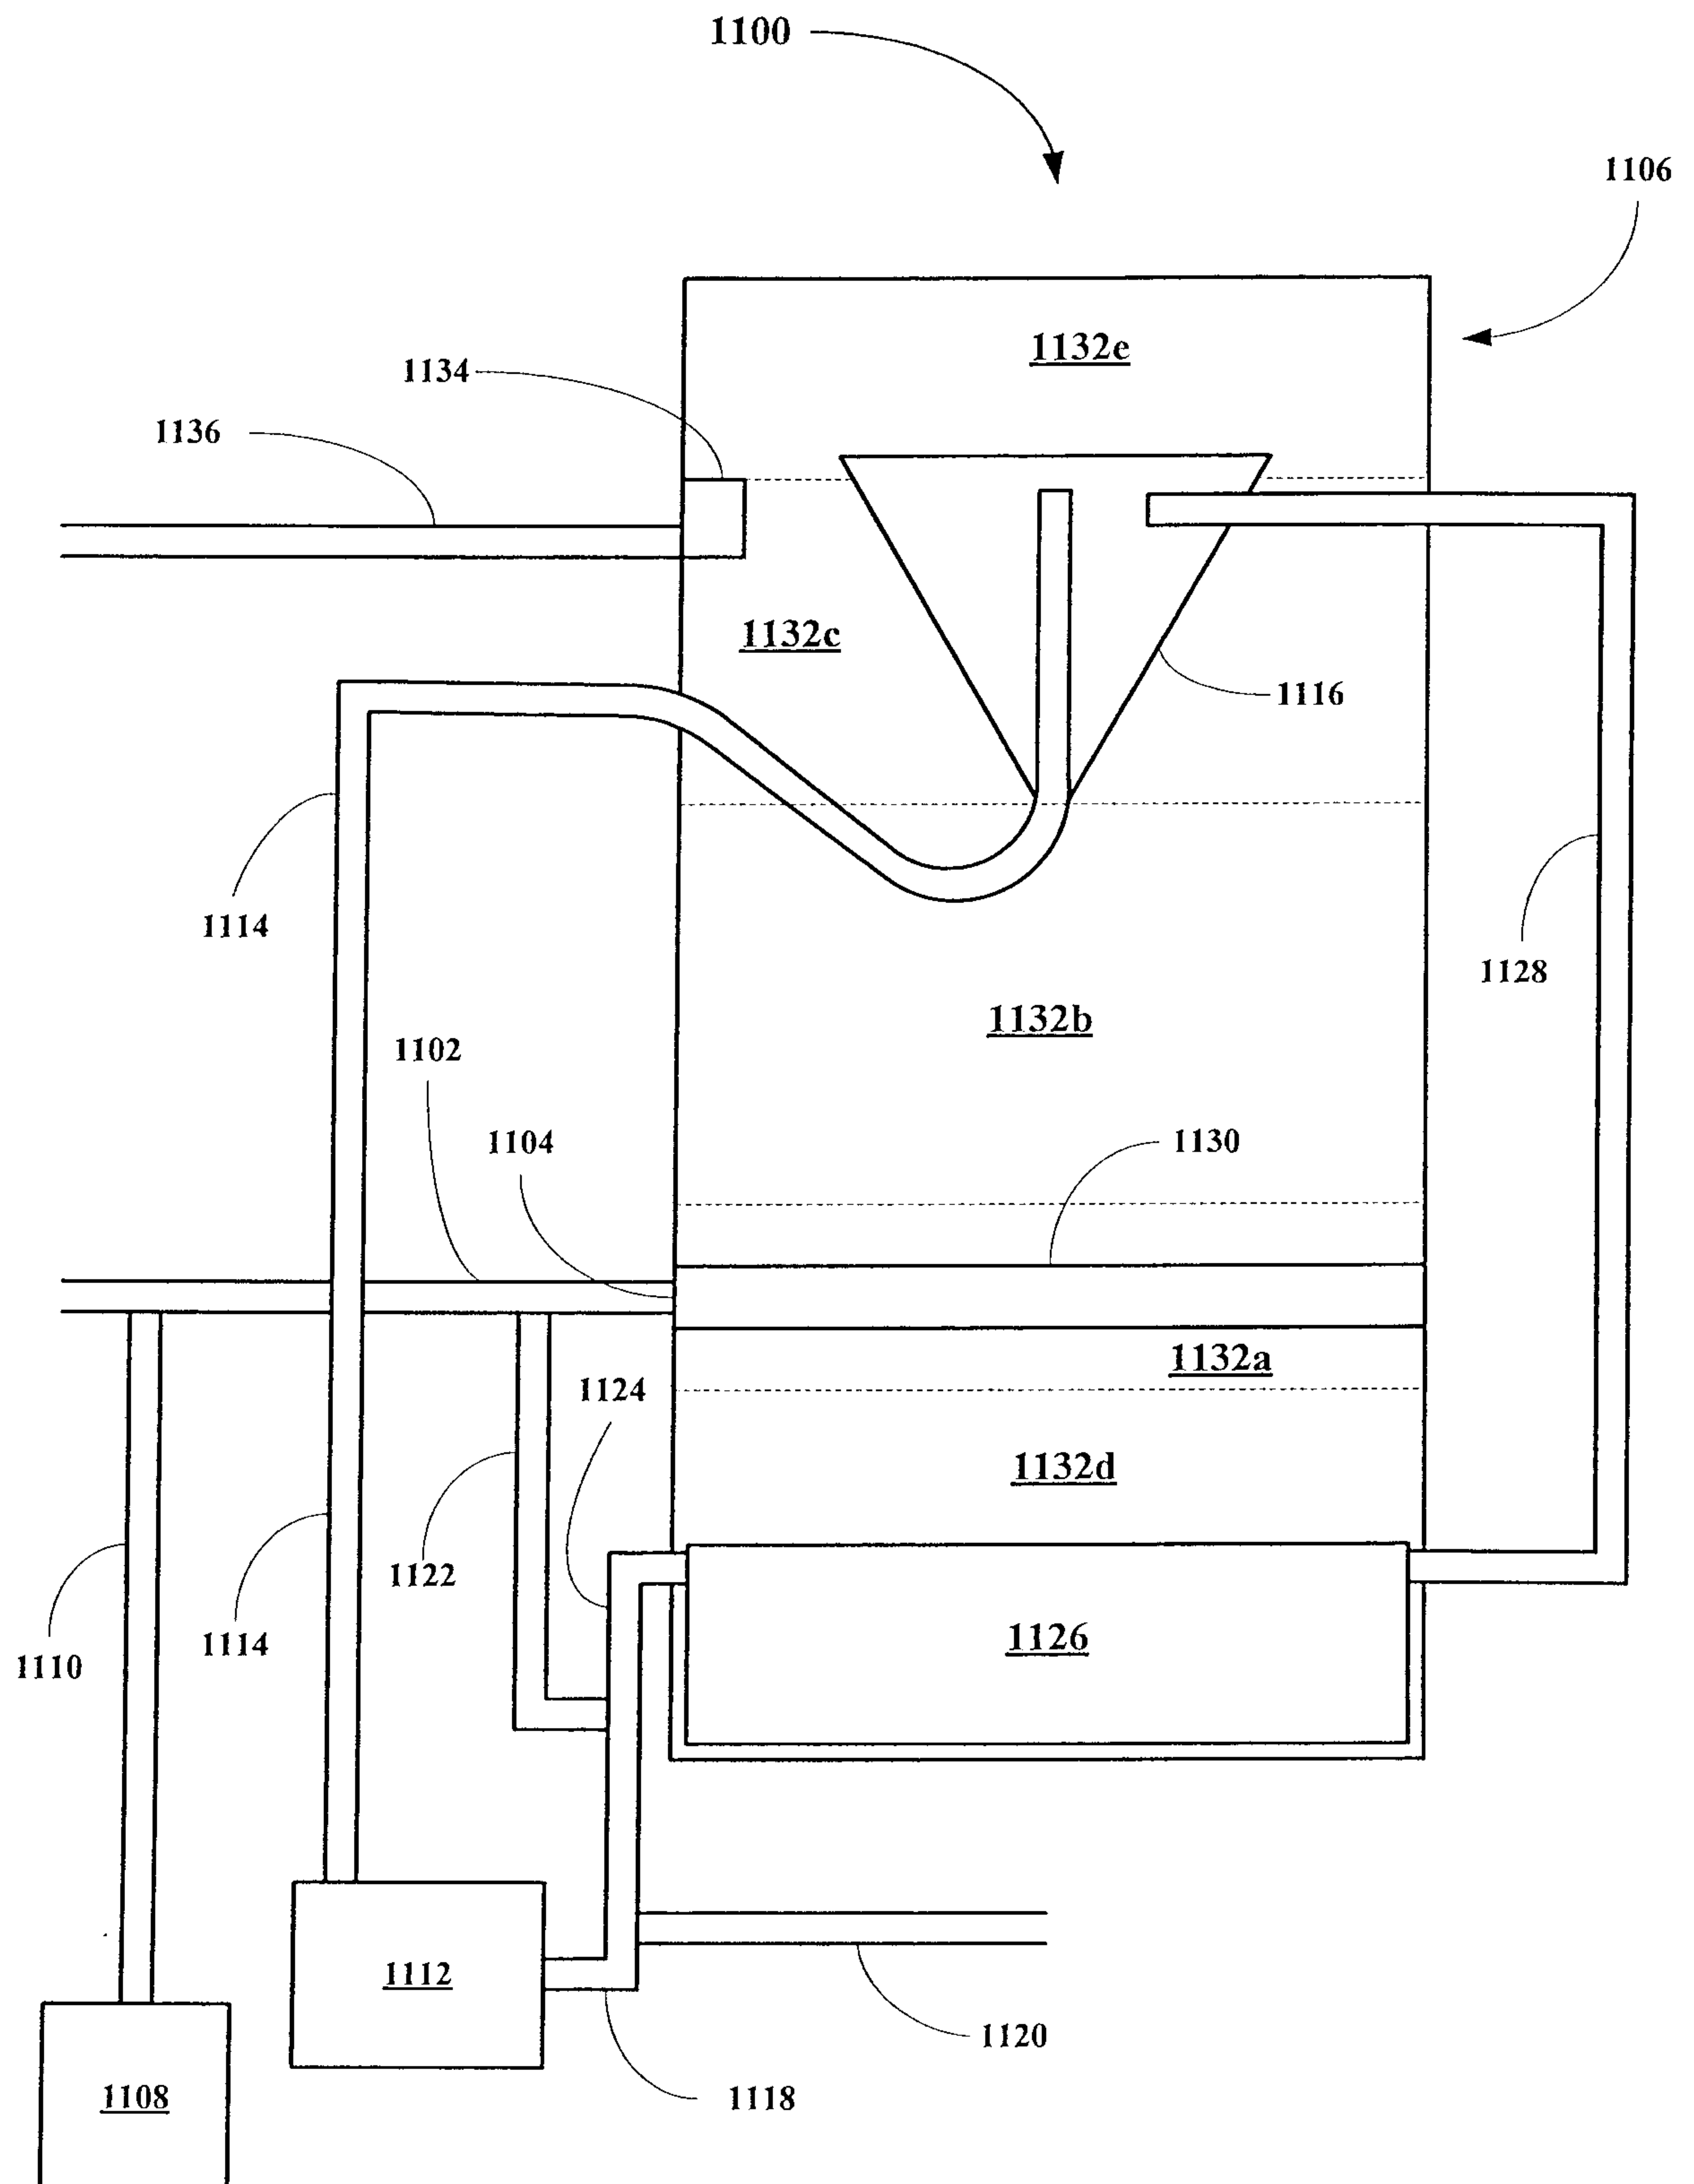
FIG. 9G

FIG. 9F

FIG. 9E

FIG. 9D

30/31

**FIG. 10**

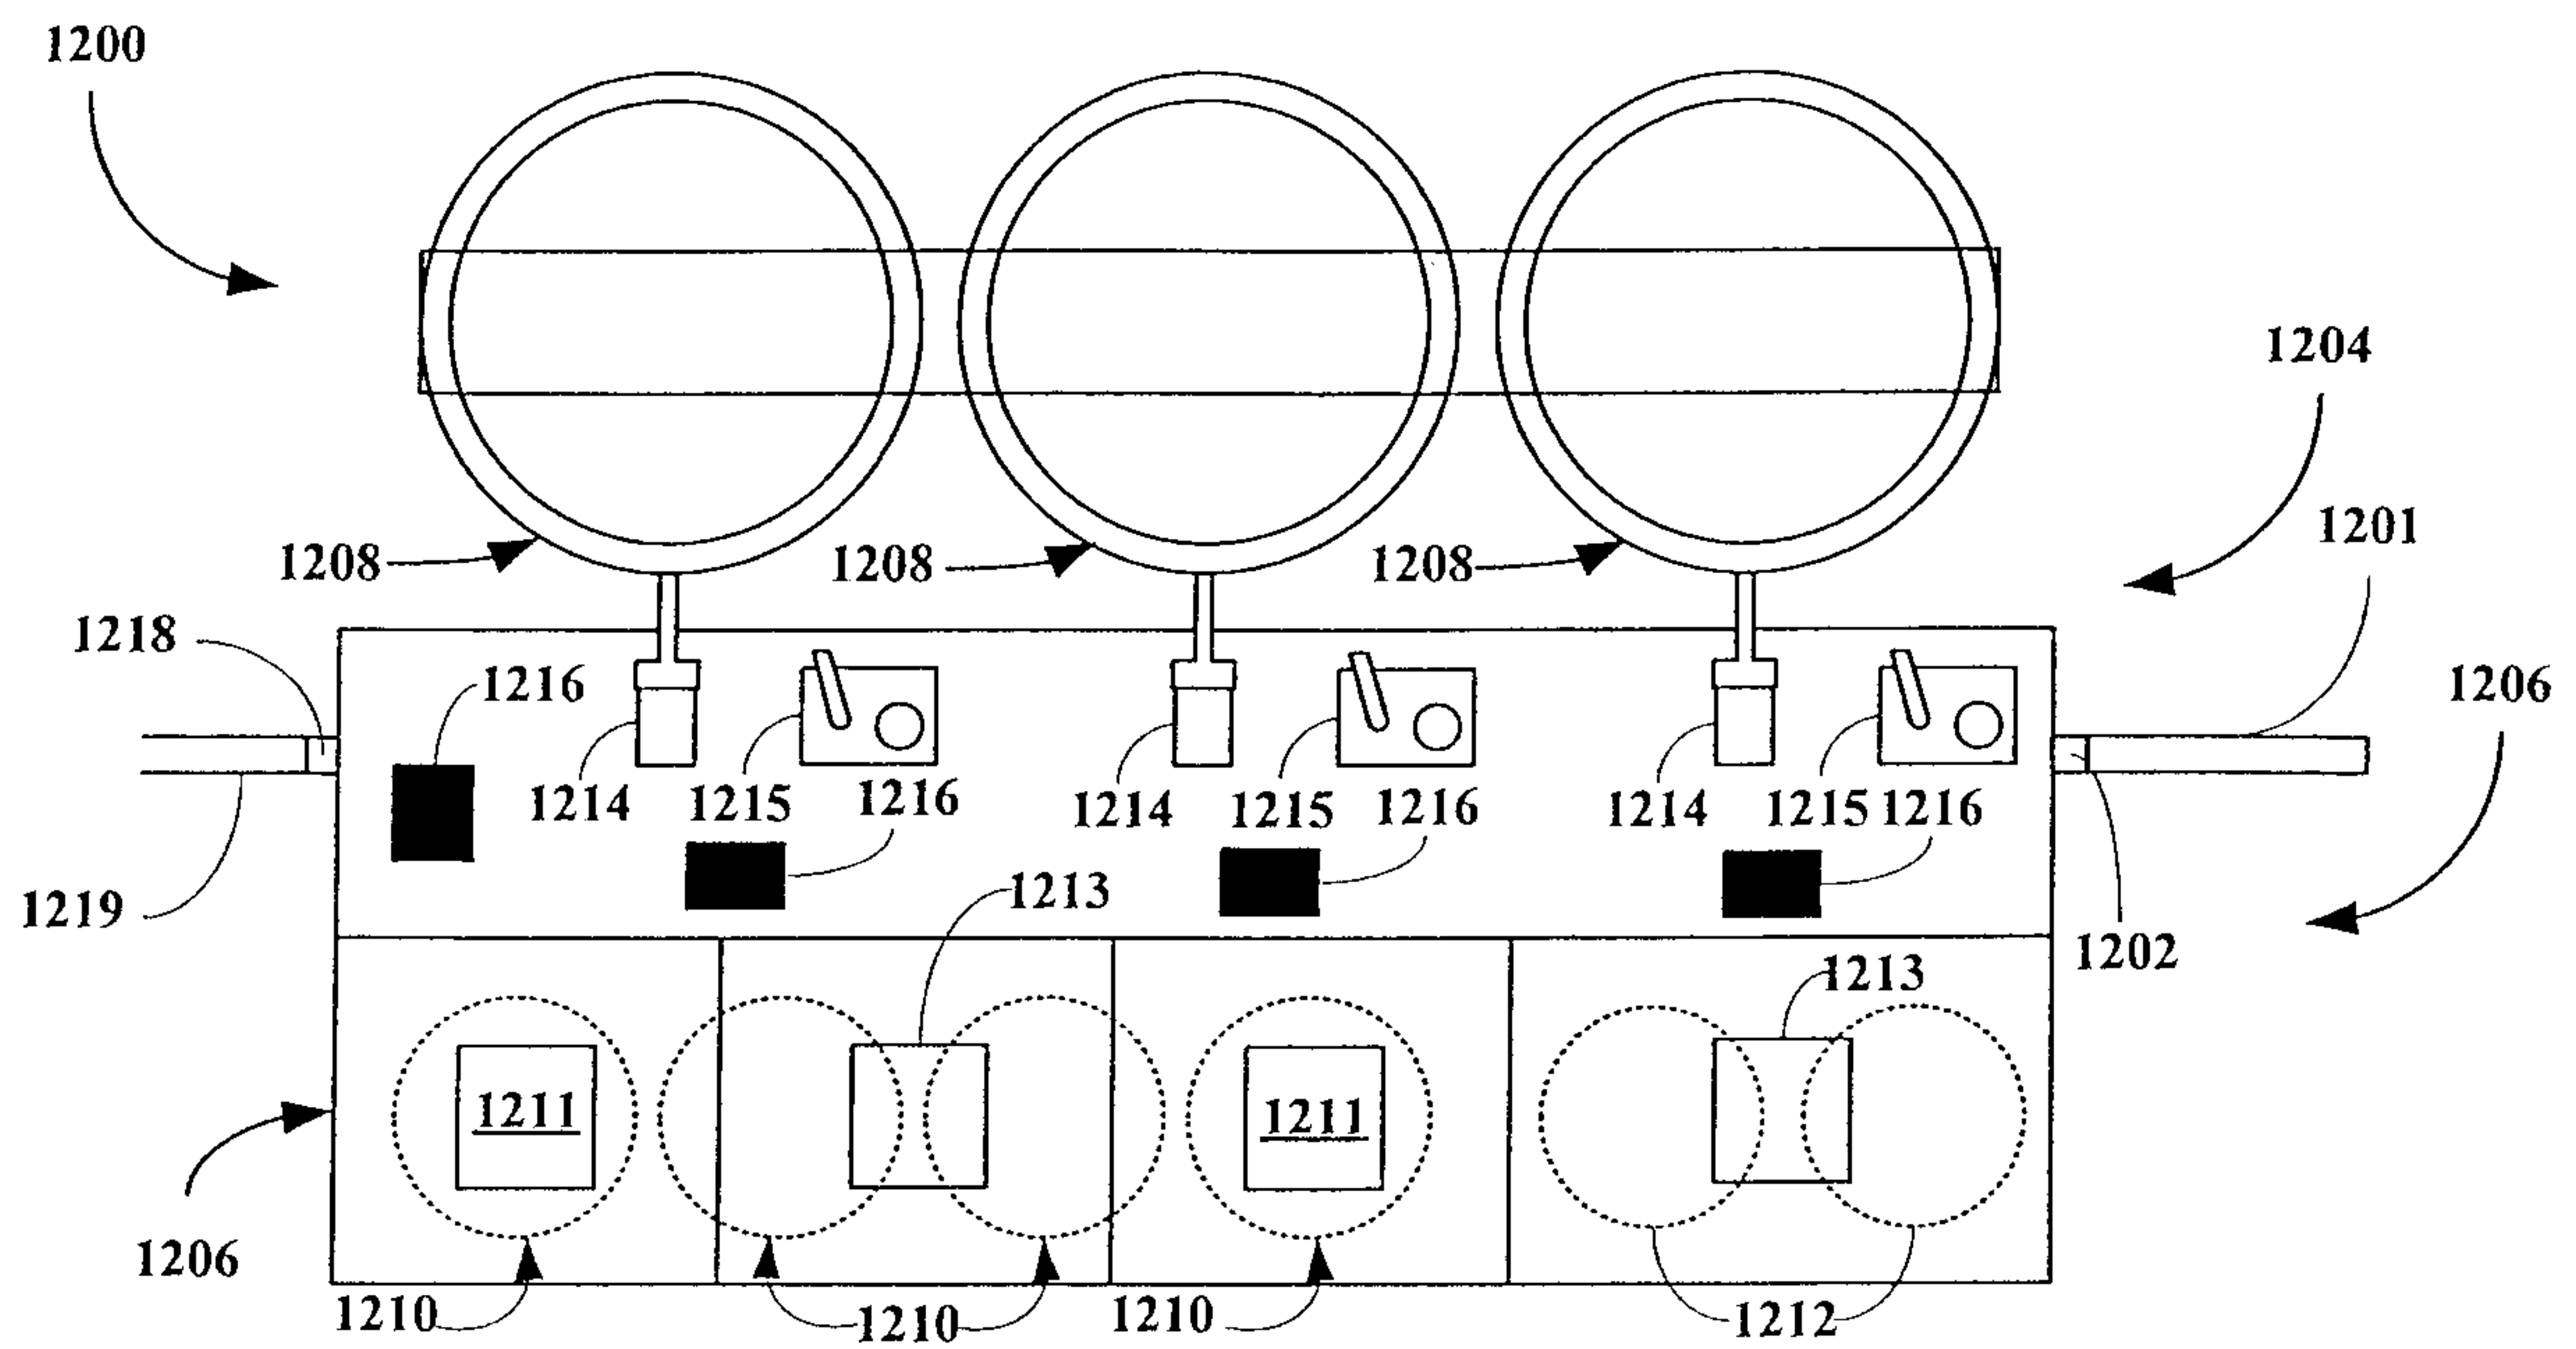


FIG. 11A

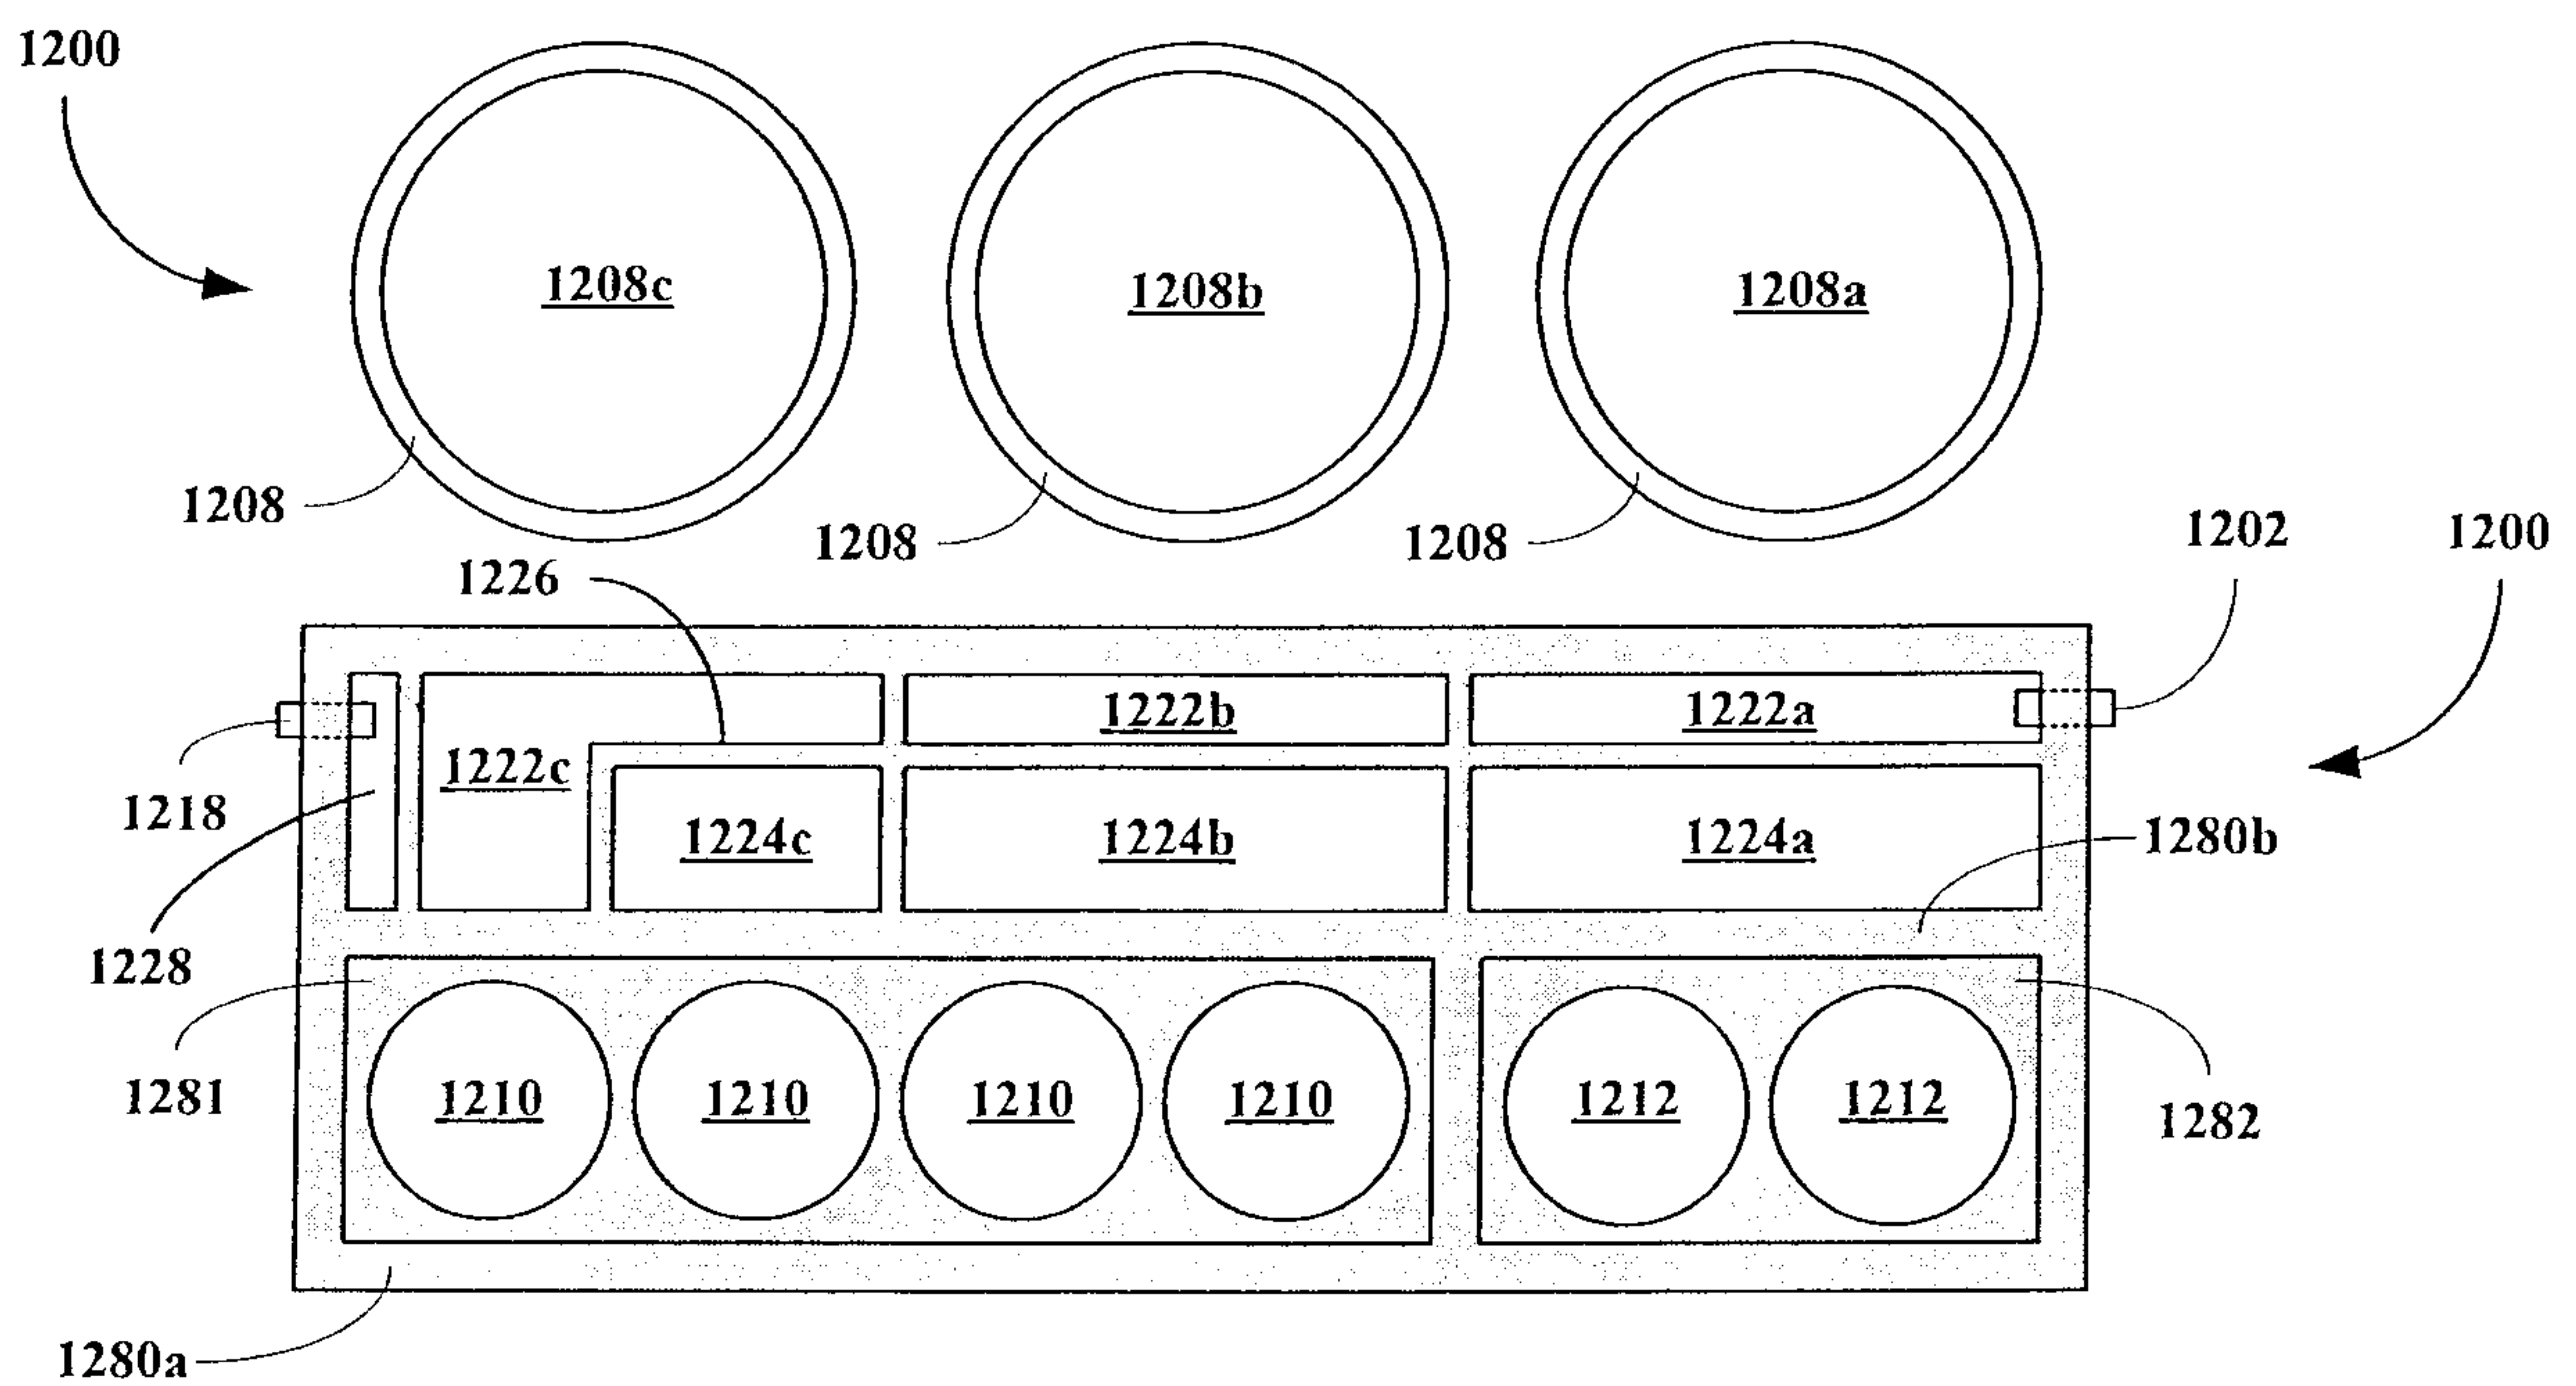


FIG. 11B

