




(86) Date de dépôt PCT/PCT Filing Date: 2017/12/20
(87) Date publication PCT/PCT Publication Date: 2018/06/28
(45) Date de délivrance/Issue Date: 2022/04/26
(85) Entrée phase nationale/National Entry: 2019/06/18
(86) N° demande PCT/PCT Application No.: IB 2017/058189
(87) N° publication PCT/PCT Publication No.: 2018/116194
(30) Priorité/Priority: 2016/12/20 (IB PCT/IB2016/001790)

(51) Cl.Int./Int.Cl. *C21D 11/00* (2006.01),
B21B 37/74 (2006.01), *B21B 37/76* (2006.01),
C21D 9/46 (2006.01), *C21D 9/48* (2006.01)
(72) Inventeur/Inventor:
BONNET, FREDERIC, FR
(73) Propriétaire/Owner:
ARCELORMITTAL, LU
(74) Agent: SMART & BIGGAR LLP

(54) Titre : PROCEDE DE REGLAGE DYNAMIQUE POUR LA FABRICATION D'UNE TOLE D'ACIER TRAITEE
THERMIQUEMENT
(54) Title: A METHOD OF DYNAMICAL ADJUSTMENT FOR MANUFACTURING A THERMALLY TREATED STEEL
SHEET

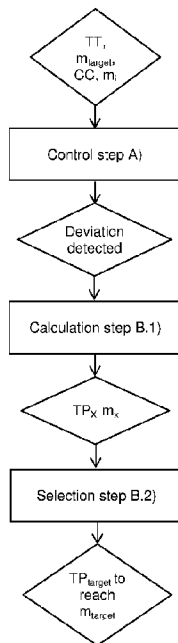

(57) Abrégé/Abstract:

During treatments performed in adapted furnace lines when manufacturing thermally treated steel sheet, some unplanned deviations can appear online. The present invention relates to a method of dynamical adjustment for manufacturing thermally treated steel sheet having a chemical steel composition and a microstructure m_{target} to reach in a heat treatment line, wherein a predefined thermal treatment TT is performed on the steel sheet.

Abstract

During treatments performed in adapted furnace lines when manufacturing thermally treated steel sheet, some unplanned deviations can appear online. The present invention relates to a method of dynamical adjustment for manufacturing thermally treated steel sheet having a chemical steel composition and a microstructure m_{target} to reach in a heat treatment line, wherein a predefined thermal treatment TT is performed on the steel sheet.

A method of dynamical adjustment for manufacturing a thermally treated steel sheet

The present invention relates to a method of dynamical adjustment for manufacturing a thermally treated steel sheet having a chemical steel composition and a microstructure m_{target} comprising from 0 to 100% of at least one phase chosen among: ferrite, martensite, bainite, pearlite, cementite and austenite, in a heat treatment line.

It is known to use coated or bare steel sheets for the manufacture of automotive vehicles. A multitude of steel grades are used to manufacture a vehicle. The choice of steel grade depends on the final application of the steel part. For example, IF (Interstitial-Free) steels can be produced for an exposed part, TRIP (Transformation-Induced Plasticity) steels can be produced for seat and floor cross members or A-pillars and DP (Dual Phase) steels can be produced for rear rails or roof cross member.

During the production of these steels, crucial treatments are performed on the steel in order to obtain the desired part having expected mechanical properties for one specific application. Such treatments can be, for example, a continuous annealing before deposition of a metallic coating or a quenching and partitioning treatment. These treatments are performed in an adapted furnace line.

During these treatments, some unplanned deviations can appear online. For example, a temperature in the furnace, the thickness of the steel sheet, the line speed can vary.

The patent application US4440583 relates to a method of controlled cooling for steel strip implemented by use of a cooling apparatus comprising a plurality of nozzles disposed in the direction in which strip travels, the nozzles spraying coolant against the hot running strip, and a flow-rate control valve attached to the pipe that supplies the coolant to the nozzles. By using an equation containing the thickness of strip, the cooling starting and finishing temperatures, and the desired cooling rate, the heat transfer rate needed to obtain the desired cooling rate is calculated, and the obtained heat transfer rate is corrected according to the effect of natural cooling in idle-pass zones preceding and following the coolant spray zone. Then the flow rate of the coolant is derived, and set, from its pre-established

relationship with the heat transfer rate. The length of the coolant spraying zone along the strip travel path is calculated using the running speed of the strip, the cooling starting and finishing temperatures, and the desired cooling rate. The nozzles are set to turn on and off so that coolant is sprayed from only such a number of nozzles as correspond to the calculated value. When strip thickness varies while controlled cooling is being effected, the heat transfer rate is re-calculated, on the basis of the above settings, to correct the coolant flow rate accordingly. When strip speed varies, the length of the coolant spraying region is re-calculated to correct the on-off pattern of the nozzles.

In this method, when a deviation appears, the heat transfer rate or the length of the coolant spraying region is re-calculated to correct the deviation. This method does not take into account the steel sheet characteristics comprising chemical composition, microstructure, properties, surface texture, etc. Thus, there is a risk that the same correction is applied to any kind of steel sheet even if each steel sheet has its own characteristics. The method allows for a non-personalized cooling treatment of a multitude of steel grades.

Consequently, the correction is not adapted to one specific steel and therefore at the end of the treatment, the desired properties are not obtained. Moreover, after the treatment, the steel can have a big dispersion of the mechanical properties. Finally, even if a wide range of steel grades can be manufactured, the quality of the treated steel is poor.

Thus, the object of the invention is to solve the above drawbacks by providing a method of dynamical adjustment for manufacturing a thermally treated steel sheet having a specific chemical steel composition and a specific microstructure m_{target} to reach in a heat treatment line. Another object is to adjust a thermal path online by providing a treatment adapted to each steel sheet, such treatment being calculated very precisely in the lowest calculation time possible. Another object is to provide a steel sheet having the expected properties, such properties having the minimum of properties dispersion possible.

This object is achieved by providing a method of dynamical adjustment for manufacturing a thermally treated steel sheet having a chemical steel composition and a microstructure m_{target} comprising at least one phase chosen among: ferrite, martensite, bainite, pearlite, cementite and austenite, in a heat treatment line wherein a predefined thermal treatment TT is performed on the steel sheet, such method comprising:

A. a control step wherein at least one sensor detects a deviation happening during the thermal treatment,

B. a calculation step performed when the deviation is detected during the thermal treatment such that a new thermal path TP_{target} is determined to reach m_{target} taking the deviation into account, such calculation step comprising:

1) a calculation sub step wherein at least two thermal paths, TP_x corresponding to one microstructure m_x obtained at the end of TP_x , are calculated based on TT and the microstructure m_i of the steel sheet to reach m_{target} ,

2) a selection sub step wherein one new thermal path TP_{target} to reach m_{target} is selected, TP_{target} being chosen from TP_x and being selected such that m_x is the closest to m_{target} ,

C. a new thermal treatment step wherein TP_{target} is performed online on the steel sheet

wherein in step A), the deviation is due to a variation of one process parameter chosen from among: a furnace temperature, a steel sheet temperature, an amount of gas, a gas composition, a gas temperature, a line speed, a failure in the heat treatment line, a variation of the hot-dip bath, a steel sheet emissivity and a variation of steel thickness,

and wherein the microstructure m_{target} comprises:

- 100% of austenite,

- from 5 to 95% of martensite, from 4 to 65% of bainite, the balance being ferrite,

- from 8 to 30% of residual austenite, from 0.6 to 1.5% of carbon in solid solution, the balance being ferrite, martensite, bainite, pearlite and/or cementite,
 - from 1% to 30% of ferrite and from 1% to 30% of bainite, from 5 and 25% of austenite, the balance being martensite,
 - from 5 to 20% of residual austenite, the balance being martensite,
 - ferrite and residual austenite,
 - residual austenite and intermetallic phases,
 - from 80 to 100% of martensite and from 0 to 20% of residual austenite
 - 100% martensite,
 - from 5 to 100% of pearlite and from 0 to 95% of ferrite, or
 - at least 75% of equiaxed ferrite, from 5 to 20% of martensite and bainite in amount less than or equal to 10%.
- In some implementations, the method of dynamical adjustment for manufacturing the thermally treated steel sheet may have one or more of the following features:
- the phases are defined by at least one element chosen from: size, shape and chemical composition
 - the steel sheet can be Dual Phase, Transformation Induced Plasticity, Quenched & Partitioned steel, Twins Induced Plasticity, Carbide Free Bainite, Press Hardening Steel, TRIPLEX, DUPLEX or Dual Phase High Ductility.
 - the differences between phases proportions of phase present in m_{target} and m_x is $\pm 3\%$
 - in step B.1), a thermal enthalpy H released or consumed between m_i and m_{target} is calculated such that:
- $$H_x = (X_{\text{ferrite}} * H_{\text{ferrite}}) + (X_{\text{martensite}} * H_{\text{martensite}}) + (X_{\text{bainite}} * H_{\text{bainite}}) + (X_{\text{pearlite}} * H_{\text{pearlite}}) + (H_{\text{cementite}} + X_{\text{cementite}}) + (H_{\text{austenite}} + X_{\text{austenite}})$$
- X being a phase fraction.
- in step B.1), the TP_x is calculated such that:

3b

$$T(t + \Delta t) = T(t) + \frac{(\varphi_{Convection} + \varphi_{radiance})}{\rho \cdot Ep \cdot C_{pe}} \Delta t \pm \frac{Hx}{C_{pe}}$$

with Cpe: specific heat of the phase (J.kg⁻¹.K⁻¹), ρ: density of the steel (g.m⁻³), Ep: thickness of the steel (m), ϕ: heat flux (convective + radiative in W), Hx (J.kg⁻¹), T: temperature (°C) and t: time (s).

5

- in step B.1), at least one intermediate steel microstructure m_{xint} corresponding to an intermediate thermal path TP_{xint} and a thermal enthalpy H_{xint} are calculated.

10

- in step B.1), TP_x is the sum of all TP_{xint} and H_x is the sum of all H_{xint}.
- before step B.1), at least one targeted mechanical property P_{target} chosen among yield strength YS, Ultimate Tensile Strength UTS, elongation hole expansion, and formability is selected.
- m_{target} is calculated based on P_{target}.

15

- in step B.1), the process parameters undergone by the steel sheet before entering the heat treatment line are taken into account to calculate TP_x.
- the process parameters comprise at least one element chosen from among: a cold rolling reduction rate, a coiling temperature, a run out table cooling path, a cooling temperature and a coil cooling rate.

20

- in step B.1), the process parameters of the heat treatment line that the steel sheet will undergo are taken into account to calculate TP_x.
- the process parameters comprise at least one element chosen from among: a specific thermal steel sheet temperature to reach, the line speed, cooling power of cooling sections, heating power of heating sections, an overaging temperature, a cooling temperature, a heating temperature and a soaking temperature.

25

- the thermal path, TP_x, TP_{xint}, TT or TP_{target} comprise at least one treatment chosen from: a heating, an isotherm and a cooling treatment.

every time a new steel sheet enters the heat treatment line, a new calculation step B.1) is automatically performed.

30

- an adaptation of the thermal path is performed as the steel sheet enters the heat treatment line on the first meters of the sheet.
- an automatic calculation is performed during the thermal treatment to check if the deviation had appeared.

5

Other characteristics and advantages of the invention will become apparent from the following detailed description of the invention.

To illustrate the invention, various embodiments and trials of non-limiting examples will be described, particularly with reference to the following Figures:

Figure 1 illustrates an example according to the present invention.

Figure 2 illustrates a continuous annealing of a steel sheet comprising a heating
10 step, a soaking step, a cooling step and an overaging step.

Figure 3 illustrates a preferred embodiment according to the present invention.

Figure 4 illustrates one example according to the invention wherein a continuous annealing is performed on a steel sheet before the deposition of a coating by hot-dip.

The following terms will be defined:

- 15 - CC: chemical composition in percentage in weight percent,
 - m_{target} : targeted value of the microstructure,
 - m_{standard} : the microstructure of the selected product,
 - P_{target} : targeted value of a mechanical property,
 - m_i : initial microstructure of the steel sheet,
 20 - X: phase fraction in weight percent,
 - T: temperature in degree Celsius ($^{\circ}\text{C}$),
 - t: time (s),
 - s: seconds,

- UTS: ultimate tensile strength (MPa),
- YS: yield stress (MPa),
- metallic coating based on zinc means a metallic coating comprising above 50% of zinc,
- 5 - metallic coating based on aluminum means a metallic coating comprising above 50% of aluminum and
- TT: thermal treatment and
- thermal path, TT, TP_{target} , TP_x and TP_{xint} comprises a time, a temperature of the thermal treatment and at least one rate chosen from: a cooling, an isotherm or a
- 10 heating rate . The isotherm rate means a rate having a constant temperature and
- nanofluids: fluid comprising nanoparticles.

The designation "steel" or "steel sheet" means a steel sheet, a coil, a plate having a composition allowing the part to achieve a tensile strength up to 2500 MPa and more preferably up to 2000MPa. For example, the tensile strength is

15 above or equal to 500 MPa, preferably above or equal to 1000 MPa, advantageously above or equal to 1500 MPa. A wide range of chemical composition is included since the method according to the invention can be applied to any kind of steel.

The invention relates to a method of dynamical adjustment for

20 manufacturing a thermally treated steel sheet having a chemical steel composition and a microstructure m_{target} comprising from 0 to 100% of at least one phase chosen among: ferrite, martensite, bainite, pearlite, cementite and austenite, in a heat treatment line wherein a predefined thermal treatment TT is performed on the steel sheet, such method comprising:

- 25 A. a control step wherein at least one sensor detects any deviation happening during the thermal treatment TT ,
- B. a calculation step performed when a deviation is detected during the thermal treatment such that a new thermal path TP_{target} is determined to reach m_{target} taking the deviation into account, such calculation step
- 30 comprising:
 - 1) a calculation sub step wherein at least two thermal path, TP_x corresponding to one microstructure m_x at the end of TP_x , are

calculated based on TT and the microstructure m_i of the steel sheet to reach m_{target} ,

- 2) a selection sub step wherein one new thermal path TP_{target} to reach m_{target} is selected, TP_{target} being chosen from TP_X and being selected such that m_X is the closest to m_{target} ,

C. a new thermal treatment step wherein TP_{target} is performed online on the steel sheet.

Without willing to be bound by any theory, it seems that when the method according to the present invention is applied, it is possible to correct any deviation happening during a thermal treatment by providing a personalized heat treatment depending on each steel sheet. To do so, a precise and specific new thermal path TP_{target} is calculated in a short calculation time taking into account m_{target} , in particular the proportion of all the phases along the treatment, m_i (including the microstructure dispersion along the steel sheet) and the deviation. Indeed, the method according to the present invention takes into account for the calculation the thermodynamically stable phases, i.e. ferrite, austenite, cementite and pearlite, and the thermodynamic metastable phases, i.e. bainite and martensite. Thus, a steel sheet having the expected properties with the minimum of properties dispersion possible is obtained.

Preferably, the microstructures m_X , m_{target} and m_i phases are defined by at least one element chosen from: the size, the shape and the chemical composition.

Preferably, the microstructure m_{target} to reach comprises:

- 100% of austenite,
- from 5 to 95% of martensite, from 4 to 65% of bainite, the balance being ferrite,
- from 8 to 30% of residual austenite, from 0.6 to 1.5% of carbon in solid solution, the balance being ferrite, martensite, bainite, pearlite and/or cementite,
- from 1% to 30% of ferrite and from 1% to 30% of bainite, from 5 and 25% of austenite, the balance being martensite ,
- from 5 to 20% of residual austenite, the balance being martensite,
- ferrite and residual austenite,
- residual austenite and intermetallic phases,
- from 80 to 100% of martensite and from 0 to 20% of residual austenite

- 100% martensite,
- from 5 to 100% of pearlite and from 0 to 95% of ferrite and
- at least 75% of equiaxed ferrite, from 5 to 20% of martensite and bainite in amount less than or equal to 10%.

5 Advantageously, the steel sheets can be any kind of steel grade including Dual Phase DP, Transformation Induced Plasticity (TRIP), Quenched & Partitioned steel (Q&P), Twins Induced Plasticity (TWIP), Carbide Free Bainite (CFB), Press Hardening Steel (PHS), TRIPLEX, DUPLEX and Dual Phase High Ductility (DP HD).

10 The chemical composition depends on each steel sheet. For example, the chemical composition of a DP steel can comprise:

$$0.05 < C < 0.3\%,$$

$$0.5 \leq Mn < 3.0\%,$$

$$S \leq 0.008\%,$$

15 $P \leq 0.080\%,$

$$N \leq 0.1\%,$$

$$Si \leq 1.0\%,$$

the remainder of the composition making up of iron and inevitable impurities resulting from the development.

20 Figure 1 illustrates an example according to the invention wherein a TT is performed on a steel sheet in a heat treatment line, such steel sheet having a chemical composition CC and m_{target} to reach.

 According to the present invention in step A), any deviation happening during the thermal treatment is detected. Preferably, the deviation is due to a variation of a process parameter chosen from among: a furnace temperature, a steel sheet temperature, an amount of gas, a gas composition, a gas temperature, a line speed, a failure in the heat treatment line, a variation of the hot-dip bath, a steel sheet emissivity and a variation of the steel thickness.

 A furnace temperature can be a heating temperature, a soaking temperature, a cooling temperature, an overaging temperature, in particular in a continuous annealing.

A steel sheet temperature can be measured at any time of the heat treatment in different positions of the heat treatment line, for example:

- in a heating section preferably being a direct flame furnace (DFF), a radiant tube furnace (RTF), an electrical resistance furnace or an induction furnace,
- 5 - in cooling section, in particular, in jets cooling, in a quenching system or in a snout and
- in isothermal section preferably being an electrical resistance furnace.

To detect a temperature variation, the sensor can be a pyrometer or a scanner.

- 10 Usually, heat treatments can be performed in an oxidizing atmosphere, i.e. an atmosphere comprising an oxidizing gas being for example: O_2 , CH_4 , CO_2 or CO . They also can be performed in a neutral atmosphere, i.e. an atmosphere comprising a neutral gas being for example: N_2 , Ar or He. Finally, they also can be performed in a reducing atmosphere, i.e. an atmosphere comprising a reducing
- 15 gas being for example: H_2 or HN_x .

The variation of gas amount can be detected by barometer.

The line speed can be detected by a laser sensor.

For example, a failure in the heat treatment line can be:

- in a direct flame furnace: a burner not working anymore,
- 20 - in a radiant tube furnace: a radiant tube not working anymore,
- in an electrical furnace: a resistance not working anymore or
- in a cooling section: one or several jets cooling not working anymore.

In such cases, sensor can be a pyrometer, a barometer, an electrical consumption or a camera.

- 25 The variation of the steel thickness can be detected by a laser or an ultrasound sensor.

- When a deviation is detected, at least two thermal path TP_x , corresponding to m_x , are calculated based on TT and m_i to reach m_{target} , such TP_x taking into account the deviation. The calculation of TP_x is based on the thermal behavior and
- 30 metallurgical behavior of the steel sheet compared to the conventional methods wherein only the thermal behavior is considered.

Figure 2 illustrates a continuous annealing of a steel sheet comprising a heating step, a soaking step, a cooling step and an overaging step. A deviation D due to a variation of T_{soaking} is detected. Thus, a multitude of TP_x is calculated to reach m_{target} as shown only for the first cooling step in Figure 2. In this example, the calculated TP_x also includes the second cooling step and the overaging step (not shown).

Preferably, at least 10 TP_x are calculated, more preferably at least 50, advantageously at least 100 and more preferably at least 1000. For example, the number of calculated TP_x is between 2 and 10000, preferably between 100 and 10000 and preferably between 1000 and 10000.

In step B.2), one new thermal path TP_{target} to reach m_{target} is selected. TP_{target} is chosen from TP_x and being selected such that m_x is the closest to m_{target} . Thus, in Figure 1, TP_{target} is chosen from a multitude of TP_x . Preferably, the differences between phases proportions of each phase present in m_{target} and m_x is $\pm 3\%$.

Advantageously, in step B.1), the thermal enthalpy H released or consumed between m_i and m_{target} is calculated such that:

$$H_x = (X_{\text{ferrite}} * H_{\text{ferrite}}) + (X_{\text{martensite}} * H_{\text{martensite}}) + (X_{\text{bainite}} * H_{\text{bainite}}) + (X_{\text{pearlite}} * H_{\text{pearlite}}) + (H_{\text{cementite}} + X_{\text{cementite}}) + (H_{\text{austenite}} + X_{\text{austenite}})$$

X being a phase fraction.

Without willing to be bound by any theory, H represents the energy released or consumed along the all thermal path when a phase transformation is performed. It is believed that some phase transformations are exothermic and some of them are endothermic. For example, the transformation of ferrite into austenite during a heating path is endothermic whereas the transformation of austenite into pearlite during a cooling path is exothermic. Preferably, H_x is taken in account in the calculation of TP_x .

In a preferred embodiment, in step B.1), the all thermal cycle TP_x is calculated such that:

$$T(t + \Delta t) = T(t) + \frac{(\varphi_{\text{Convection}} + \varphi_{\text{radiance}})}{\rho \cdot Ep \cdot C_{pe}} \Delta t \pm \frac{Hx}{C_{pe}}$$

with C_{pe} : the specific heat of the phase ($J \cdot kg^{-1} \cdot K^{-1}$), ρ : the density of the steel ($g \cdot m^{-3}$), E_p : the thickness of the steel (m), ϕ : the heat flux (convective and radiative in W), H_x ($J \cdot kg^{-1}$), T : temperature ($^{\circ}C$) and t : time (s).

5 Preferably in step B.1), at least one intermediate steel microstructure m_{xint} corresponding to an intermediate thermal path TP_{xint} and the thermal enthalpy H_{xint} are calculated. In this case, the calculation of TP_x is obtained by the calculation of a multitude of TP_{xint} . Thus preferably, TP_x is the sum of all TP_{xint} and H_x is the sum of all H_{xint} . In this preferred embodiment, TP_{xint} is calculated periodically. For
10 example, it is calculated every 0.5 seconds, preferably 0.1 seconds or less.

Figure 3 illustrates a preferred embodiment wherein in step B.1), m_{int1} and m_{int2} corresponding respectively to TP_{xint1} and TP_{xint2} as well as H_{xint1} and H_{xint2} are calculated. H_x during the all thermal path is determined to calculate TP_x . according to the present invention, a multitude, i.e more than 2, of TP_{xint} , m_{xint} and H_{xint} are
15 calculated to obtain TP_x (not shown).

In a preferred embodiment, before step B.2), at least one targeted mechanical property P_{target} chosen among yield strength YS, Ultimate Tensile Strength UTS, elongation hole expansion, formability is selected. In this embodiment, preferably, m_{target} is calculated based on P_{target} .

20 Without willing to be bound by any theory, it is believed that the characteristics of the steel sheet are defined by the process parameters applied during the steel production. Thus, advantageously, in step B.1), the process parameters undergone by the steel sheet before entering the heat treatment line are taken into account to calculate TP_x . For example, the process parameters
25 comprise at least one element chosen from among: a cold rolling reduction rate, a coiling temperature, a run out table cooling path, a cooling temperature and a coil cooling rate.

In another embodiment, the process parameters of the treatment line that the steel sheet will undergo in the heat treatment line are taken into account to
30 calculate TP_x . For example, the process parameters comprise at least one element chosen from among: a specific thermal steel sheet temperature to reach, the line speed, cooling power of the cooling sections, heating power of the heating

sections, an overaging temperature, a cooling temperature, a heating temperature and a soaking temperature.

Preferably, the thermal path, TP_x , TP_{xint} , TT or TP_{target} comprise at least one treatment chosen from: a heating, an isotherm or a cooling treatment. For example, the thermal path can be a recrystallization annealing, a press hardening path, a recovery path, an intercritical or full austenitic annealing, a tempering path, a partitioning path, isothermal path or a quenching path.

Preferably, a recrystallization annealing is performed. The recrystallization annealing comprises optionally a pre-heating step, a heating step, a soaking step, a cooling step and optionally an equalizing step. In this case, it is performed in a continuous annealing furnace comprising optionally a pre-heating section, a heating section, a soaking section, a cooling section and optionally an equalizing section. Without willing to be bound by any theory, it is believed that the recrystallization annealing is the thermal path the more difficult to handle since it comprises many steps to take into account comprising cooling and heating steps.

Advantageously, every time a new steel sheet enters into the heat treatment line, a new calculation step B.1) is automatically performed. Indeed, the method according to the present invention adapts the thermal path TP_{target} to each steel sheet even if the same steel grade enters in the heat treatment line since the real characteristics of each steel often differs. The new steel sheet can be detected and the new characteristics of the steel sheet are measured and are pre-selected beforehand. For example, a sensor detects the welding between two coils.

Preferably, the adaptation of the thermal path is performed as the steel sheet entries into the heat treatment line on the first meters of the sheet in order to avoid strong process variation.

Preferably, an automatic calculation is performed during the thermal treatment to check if any deviation had appeared. In this embodiment, periodically, a calculation is realized to verify if a slight deviation had occurred. Indeed, the detection threshold of sensor is sometimes too high which means that a slight deviation is not always detected. The automatic calculation, performed for example every few seconds, is not based on a detection threshold. Thus, if the

calculation leads to the same thermal treatment, i.e. the thermal treatment performs online, TT will not change. If the calculation leads to a different treatment due to a slight deviation, the treatment will change.

Figure 4 illustrates one example according to the invention wherein a continuous annealing is performed on a steel sheet before the deposition of a coating by hot-dip. With the method according to the present invention, when a deviation D appears, TP_x is calculated based on m_i , the selected product, TT and m_{target} . In this example, intermediate thermal paths TP_{xint1} to TP_{xint4} , corresponding respectively m_{xint1} to m_{xint4} , and H_{xint1} to H_{xint4} are calculated. H_x is determined in order to obtain TP_x . In this Figure, the represented TP_{target} has been chosen from TP_x .

With the method according to the present invention, when a deviation appears, a new thermal treatment step comprising TP_{target} is performed on the steel sheet in order to reach m_{target} .

Thus, a coil made of a steel sheet including said predefined product types include DP, TRIP, Q&P, TWIP, CFB, PHS, TRIPLEX, DUPLEX, DP HD is obtained, such coil having a standard variation of mechanical properties below or equal to 25MPa, preferably below or equal to 15MPa, more preferably below or equal to 9 MPa, between any two points along the coil. Indeed, without willing to be bound by any theory, it is believed that the method including the calculation step B.1) takes into account the microstructure dispersion of the steel sheet along the coil. Thus, TP_{target} applied on the steel sheet allows for a homogenization of the microstructure and also of the mechanical properties.

The low value of standard variation is due to the precision of TP_{target} . Preferably, the mechanical properties are chosen from YS, UTS or elongation.

Preferably, the coil is covered by a metallic coating based on zinc or based on aluminum.

Preferably, in an industrial production, the standard variation of mechanical properties between 2 coils made of a steel sheet including said predefined product types include DP, TRIP, Q&P, TWIP, CFB, PHS, TRIPLEX, DUPLEX, DP HD measured successively produced on the same line is below or equal to 25MPa, preferably below or equal to 15MPa, more preferably below or equal to 9 MPa.

A thermally treatment line for the implementation of a method according to the present invention is used to perform TP_{target} . For example, the thermally treatment line is a continuous annealing furnace, a press hardening furnace, a batch annealing or a quenching line.

5 Finally, the present invention relates to a Computer program product comprising at least a metallurgical module, a thermal module and an optimization module that cooperate together to determine TP_{target} such modules comprising software instructions that when implemented by a computer implement the method according to the present invention.

10 The metallurgical module predicts the microstructure (m_x , m_{target} including metastable phases: bainite and martensite and stables phases: ferrite, austenite, cementite and pearlite) and more precisely the proportion of phases all along the treatment and predicts the kinetic of phases transformation.

The thermal module predicts the steel sheet temperature depending on the
15 installation used for the thermal treatment, the installation being for example a continuous annealing furnace, the geometric characteristics of the band, the process parameters including the power of cooling, heating or isotherm power, the dynamic thermal enthalpy H released or consumed along the all thermal path when a phase transformation is performed.

20 The optimization module determines the best thermal path to reach m_{target} , i.e. TP_{target} following the method according to the present invention using the metallurgical and thermal modules.

Examples

25 In the following examples, DP780GI having the following chemical composition was chosen:

C (%)	Mn (%)	Si (%)	Cr (%)	Mo (%)	P (%)	Cu (%)	Ti (%)	N (%)
0.145	1.8	0.2	0.2	0.0025	0.015	0.02	0.025	0.06

The cold-rolling had a reduction rate of 55% to obtain a thickness of 1.2mm.
 m_{target} to reach comprised 12% of martensite, 58% of ferrite and 30% of
 30 bainite, corresponding to the following P_{target} : YS of 460MPa and UTS of 790MPa.
 A cooling temperature T_{cooling} of 460°C has also to be reached in order to perform

a hot-dip coating with a zinc bath. This temperature must be reached with an accuracy of $\pm 2^{\circ}\text{C}$ to guarantee good coatability in the Zn bath.

The thermal treatment TT to perform on the steel sheet is as follows:

- a pre-heating step wherein the steel sheet is heated from ambient temperature to 680°C during 37.5 seconds,
- a heating step wherein the steel sheet is heated from 680°C to 780°C during 40 seconds,
- soaking step wherein the steel sheet is heated at a soaking temperature T_{soaking} of 780°C during 24.4seconds,
- a cooling step wherein the steel sheet is cooled with 11 jets cooling spraying HN_x as follows:

Jets	Jet 1	Jet 2	Jet 3	Jet 4	Jet 5	Jet 6	Jet 7	Jet 8	Jet 9	Jet 10	Jet 11
Cooling rate ($^{\circ}\text{C/s}$)	10	10	9	5	9	22	50	18	18	21	11
Time (s)	1.89	1.89	1.89	1.89	1.68	1.8	1.8	1.63	1.63	1.63	1.63
$T(^{\circ}\text{C})$	754	734	718	708	693	653	563	533	504	481	463
Cooling power(%)	0	0	0	0	0	0	28	100	100	100	100

- a hot-dip coating in a zinc bath at 460°C ,
- the cooling of the steel sheet until the top roll during 27.8s at 300°C and
- the cooling of the steel sheet at ambient temperature.

Example 1: deviation of T_{soaking}

When the soaking temperature T_{soaking} decreased from 780°C to 765°C , a new thermal path $\text{TP}_{\text{target1}}$ is determined to reach m_{target} taking the deviation into account. To this end, a multitude of thermal path TP_x was calculated based on TT, m_i of DP780GI to reach m_{target} and the deviation.

After the calculation of TP_x , one new thermal path $\text{TP}_{\text{target1}}$ to reach m_{target} was selected, $\text{TP}_{\text{target1}}$ being chosen from TP_x and being selected such that m_x is the closest to m_{target} . $\text{TP}_{\text{target1}}$ is as follows:

- a soaking step wherein the steel sheet is heated at a soaking temperature T_{soaking} of 765°C during 24.4 seconds due to a deviation in the soaking section of the heat treatment line,

- a cooling step wherein the steel sheet is cooled with 11 jets cooling spraying HN_x as follows:

Jets	Jet 1	Jet 2	Jet 3	Jet 4	Jet 5	Jet 6	Jet 7	Jet 8	Jet 9	Jet 10	Jet 11
Cooling rate (°C/s)	9	9	10	15	32	28	31	11	10	7	8
Time (s)	1.89	1.89	1.89	1.89	1.68	1.8	1.8	1.63	1.63	1.63	1.63
T(°C)	742	725	706	679	625	574	518	500	483	472	459
Cooling power(%)	0	0	0	25	50	50	45	45	45	45	45

- a hot-dip coating in a zinc bath at 460°C,

- the cooling of the steel sheet until the top roll during 27.8s at 300°C and

- the cooling of the steel sheet at ambient temperature.

Example 2: steel sheet having a different composition

A new steel sheet DP780GI entered into the heat treatment line so a calculation step was automatically performed based on the following new CC:

C(%)	Mn(%)	Si(%)	Cr(%)	Mo(%)	P(%)	Cu(%)	Ti(%)	N(%)
0.153	1.830	0.225	0.190	0.0025	0.015	0.020	0.025	0.006

The new thermal path TP_{target2} was determined to reach m_{target} taking the new CC into account. TP_{target2} is as follows:

- a pre-heating step wherein the steel sheet is heated from ambient temperature to 680°C during 37.5 seconds,

- a heating step wherein the steel sheet is heated from 680°C to 780°C during 40 seconds,

- a soaking step wherein the steel sheet is heated at a soaking temperature T_{soaking} of 780°C during 24.4 seconds,

- a cooling step wherein the steel sheet is cooled with 11 jets cooling spraying HN_x

Jets	Jet 1	Jet 2	Jet 3	Jet 4	Jet 5	Jet 6	Jet 7	Jet 8	Jet 9	Jet 10	Jet 11
Cooling rate (°C/s)	17	17	9	6	6	6	38	30	18	17	10
Time (s)	2.2	2.2	2.2	2.2	1.96	2.1	2.1	1.9	1.9	1.9	1.9
T(°C)	737	705	688	677	667	655	586	537	508	481	464
Cooling power(%)	100	100	30	0	0	0	100	100	100	100	100

- a hot-dip coating in a zinc bath at 460°C,
- the cooling of the steel sheet until the top roll during 26.8s at 300°C and
- the cooling of the steel sheet at ambient temperature.

5

Table 1 shows the steel properties obtained with TT, TP_{target1} and TP_{target2}:

	TT	TP _{target1}	TP _{target2}	Expected properties
T _{cooling} obtained (°C)	461	458	462	460
Microstructure obtained at the end of the thermal path	X _{martensite} : 12% X _{ferrite} : 55% X _{bainite} : 33%	X _{martensite} : 12% X _{ferrite} : 61% X _{bainite} : 27%	X _{martensite} : 14% X _{ferrite} : 55% X _{bainite} : 32%	X _{martensite} : 12% X _{ferrite} : 58% X _{bainite} : 30%
Deviation (écart) with respect to m _{target}	X _{martensite} : 0% X _{ferrite} : 3% X _{bainite} : 3%	X _{martensite} : 0% X _{ferrite} : 3% X _{bainite} : 3%	X _{martensite} : 2% X _{ferrite} : 3% X _{bainite} : 2%	-
YS (MPa)	453.5	465	462	460
YS deviation with respect to P _{target} (MPa)	6.5	5	2	-
UTS (MPa)	786.8	790	804	790
UTS deviation with respect to P _{target} (MPa)	3.2	0	14	-

With the method according to the present invention, it is possible to adjust a thermal TT when a deviation appears or when a new steel sheet having a different CC enters into the heat treatment line. By applying the new thermal paths TP_{target1} and TP_{target2} , it is possible to obtain a steel sheet having the desired expected
5 properties, each TP_{target} being precisely adapted to each deviation.

CLAIMS

1. A method of dynamical adjustment for manufacturing a thermally treated steel sheet having a chemical steel composition and a microstructure m_{target} comprising at least one phase chosen among: ferrite, martensite, bainite, pearlite, cementite and austenite, in a heat treatment line wherein a predefined thermal treatment TT is performed on the steel sheet, such method comprising:
 - A. a control step wherein at least one sensor detects a deviation happening during the thermal treatment,
 - 10 B. a calculation step performed when the deviation is detected during the thermal treatment such that a new thermal path TP_{target} is determined to reach m_{target} taking the deviation into account, such calculation step comprising:
 - 1) a calculation sub step wherein at least two thermal paths, TP_x corresponding to one microstructure m_x obtained at the end of TP_x , are calculated based on TT and the microstructure m_i of the steel sheet to reach m_{target} ,
 - 15 2) a selection sub step wherein one new thermal path TP_{target} to reach m_{target} is selected, TP_{target} being chosen from TP_x and being selected such that m_x is the closest to m_{target} ,
 - 20 C. a new thermal treatment step wherein TP_{target} is performed online on the steel sheet

wherein in step A), the deviation is due to a variation of one process parameter chosen from among: a furnace temperature, a steel sheet temperature, an amount of gas, a gas composition, a gas temperature, a line speed, a failure in the heat treatment line, a variation of the hot-dip bath, a steel sheet emissivity and a variation of steel thickness,

25 and wherein the microstructure m_{target} comprises:

 - 100% of austenite,
 - from 5 to 95% of martensite, from 4 to 65% of bainite, the balance being ferrite,

30

- from 8 to 30% of residual austenite, from 0.6 to 1.5% of carbon in solid solution, the balance being ferrite, martensite, bainite, pearlite and/or cementite,
 - from 1% to 30% of ferrite and from 1% to 30% of bainite, from 5 and 25% of austenite, the balance being martensite,
 - 5 - from 5 to 20% of residual austenite, the balance being martensite,
 - ferrite and residual austenite,
 - residual austenite and intermetallic phases,
 - from 80 to 100% of martensite and from 0 to 20% of residual austenite
 - 100% martensite,
 - 10 - from 5 to 100% of pearlite and from 0 to 95% of ferrite, or
 - at least 75% of equiaxed ferrite, from 5 to 20% of martensite and bainite in amount less than or equal to 10%.
2. The method according to claim 1, wherein the phases are defined by at least

15 one element chosen from: size, shape and chemical composition.
 3. The method according to claim 1 or 2, wherein the steel sheet can be Dual Phase, Transformation Induced Plasticity, Quenched & Partitioned steel, Twins Induced Plasticity, Carbide Free Bainite, Press Hardening Steel, TRIPLEX,

20 DUPLEX or Dual Phase High Ductility.
 4. The method according to any one of claims 1 to 3, wherein the differences between phases proportions of phase present in m_{target} and m_x is $\pm 3\%$.
 - 25 5. The method according to any one of claims 1 to 4, wherein in step B.1), a thermal enthalpy H released or consumed between m_i and m_{target} is calculated such that:

$$H_x = (X_{\text{ferrite}} * H_{\text{ferrite}}) + (X_{\text{martensite}} * H_{\text{martensite}}) + (X_{\text{bainite}} * H_{\text{bainite}}) + (X_{\text{pearlite}} * H_{\text{pearlite}}) + (H_{\text{cementite}} + X_{\text{cementite}}) + (H_{\text{austenite}} + X_{\text{austenite}})$$

 X being a phase fraction.

30
 6. The method according to claim 5, wherein in step B.1), the TP_x is calculated such that:

$$T(t + \Delta t) = T(t) + \frac{(\varphi_{Convection} + \varphi_{radiance})}{\rho \cdot Ep \cdot C_{pe}} \Delta t \pm \frac{Hx}{C_{pe}}$$


with Cpe: specific heat of the phase (J·kg⁻¹·K⁻¹), ρ: density of the steel (g·m⁻³),
 Ep: thickness of the steel (m), ϕ: heat flux (convective + radiative in W), H_x (J·kg⁻¹),
 5 T: temperature (°C) and t: time (s).

7. The method according to claim 5 or 6, wherein in step B.1), at least one intermediate steel microstructure m_{xint} corresponding to an intermediate thermal path TP_{xint} and a thermal enthalpy H_{xint} are calculated.
- 10 8. The method according to claim 7, wherein in step B.1), TP_x is the sum of all TP_{xint} and H_x is the sum of all H_{xint}.
9. The method according to any one of claims 1-8, wherein before step B.1), at
 15 least one targeted mechanical property P_{target} is selected from yield strength YS, Ultimate Tensile Strength UTS, elongation hole expansion, and formability.
10. The method according to claim 9, wherein m_{target} is calculated based on P_{target}.
- 20 11. The method according to any one of claims 1-10 wherein in step B.1), the process parameters undergone by the steel sheet before entering the heat treatment line are taken into account to calculate TP_x.
12. The method according to claim 11, wherein the process parameters comprise at
 25 least one element chosen from among: a cold rolling reduction rate, a coiling temperature, a run out table cooling path, a cooling temperature and a coil cooling rate.
13. The method according to any one of claims 1-12, wherein in step B.1), the
 30 process parameters of the heat treatment line that the steel sheet will undergo are taken into account to calculate TP_x.


14. The method according to claim 13, wherein the process parameters comprise at least one element chosen from among: a specific thermal steel sheet temperature to reach, the line speed, cooling power of cooling sections, heating power of heating sections, an overaging temperature, a cooling temperature, a heating temperature and a soaking temperature.
15. The method according to any one of claims 1-14, wherein the thermal path, TP_x , TP_{xint} , TT or TP_{target} comprise at least one treatment chosen from: a heating, an isotherm and a cooling treatment.
16. The method according to any one of claims 1-15, wherein every time a new steel sheet enters the heat treatment line, a new calculation step B.1) is automatically performed.
17. The method according to claim 16, wherein an adaptation of the thermal path is performed as the steel sheet enters the heat treatment line on the first meters of the sheet.
18. The method according to any one of claims 1-17, wherein an automatic calculation is performed during the thermal treatment to check if the deviation had appeared.

1 / 4

Figure 1

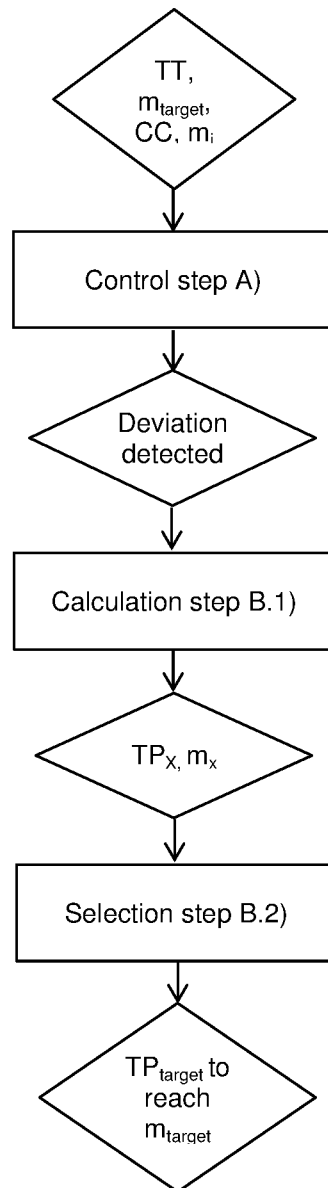


2 / 4
Figure 2

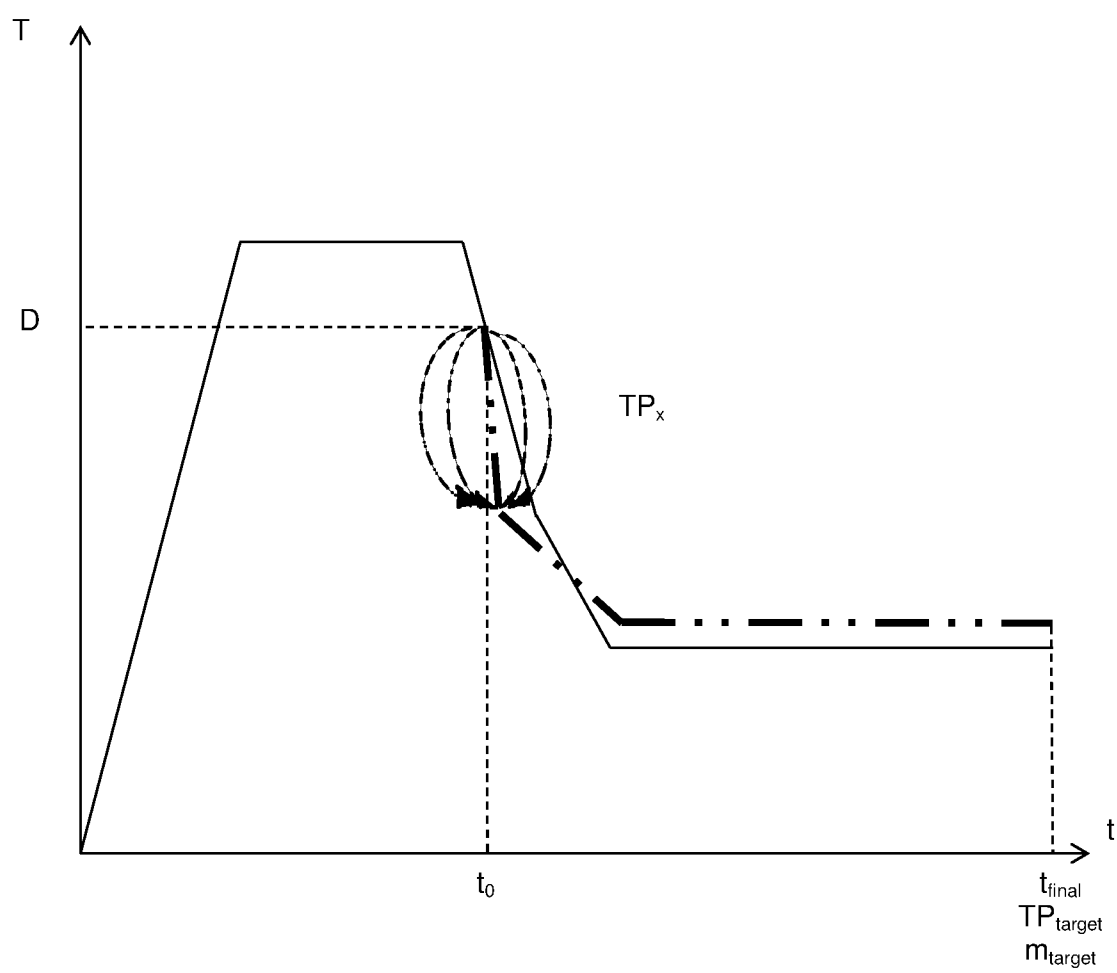

3/ 4

Figure 3

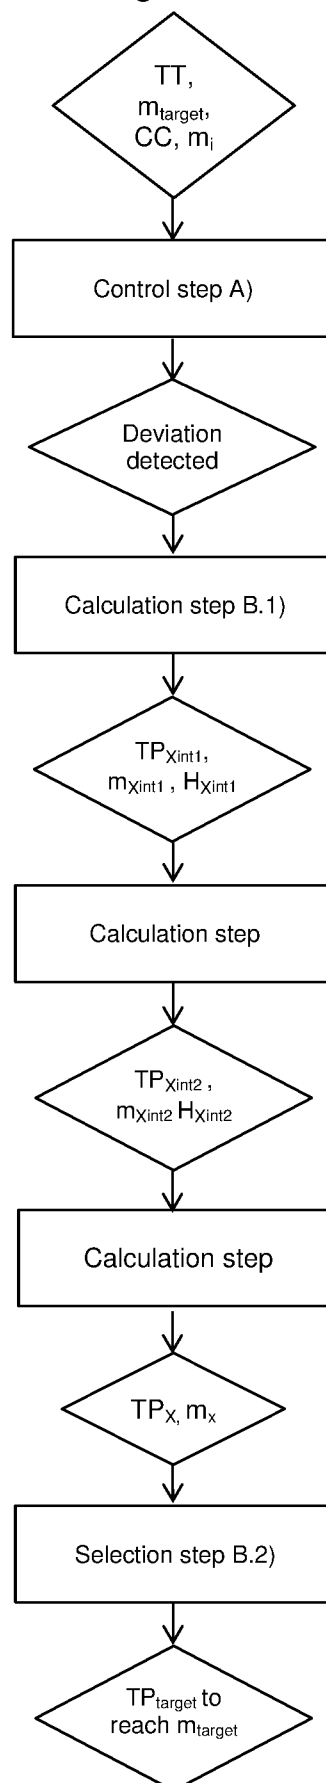

4 / 4

Figure 4

